

LP5922 具有低输入和输出电压能力的 2A 低噪声可调 LDO

1 特性

- 宽输入电压范围：1.3V 至 6V
- 支持低 V_{IN} 电压，无需额外的偏置电源
- 可调节输出电压：0.5V 至 5V
- 低压降：200mA（2A 负载时）
- 低输出电压噪声：25 μ V_{RMS}
- 输出电流：2A
- 运行结温范围：-40°C 至 +125°C
- 可编程软启动，可限制浪涌电流
- 3mm x 3mm x 0.75mm 10 引脚晶圆级小外形无引线 (WSON) 封装
- 热过载保护和短路保护
- 输出电压容差： $\pm 1.5\%$
- 关断电源电流：0.1 μ A
- 电源抑制比 (PSRR)：70dB（1kHz 频率时）
- 电源正常输出

2 应用

- 空间受限型 应用
- 噪声敏感型和纹波敏感型高电流模拟或射频系统
- 目标领域
 - 医疗、测试和测量设备
 - 便携式消费类电子产品
 - 电信和网卡
 - 无线基础设施
 - 工业 应用
- 典型系统
 - 无线电收发器、功率放大器、锁相环 (PLL)/合成器、定时、压控振荡器 (VCO)、通用分组无线业务 (GPRS)、3G 模块、现场可编程门阵列 (FPGA)、数字信号处理器 (DSP)、图形处理单元 (GPU) 等等

3 说明

LP5922 是一款 2A 低压降 (LDO) 线性稳压器，在最大电流情况下的典型压降为 200mV。LP5922 器件支持的工作电源轨低至 1.3V，无需额外的偏置电源。凭借低压降和低 V_{IN} 能力，有效确保了最大的系统效率和最小功耗。该器件还具有低静态电流和超低关断电流。

LP5922 器件的设计旨在追求高 PSRR 和低输出噪声，以期在没有额外滤波功能的情况下为敏感型模拟应用提供支持。甚至只需在 SS/NR 引脚连接一个小电容即可使输出噪声进一步得到降低。


输出电压可通过外部电阻分压器调节，范围为 0.5V 到 5V。使能引脚、可调软启动和可选电源正常特性有助于实施系统电源排序。浪涌电流可通过软启动加以控制，而且器件还具有短路保护和热保护。

器件信息⁽¹⁾

器件型号	封装	封装尺寸 (标称值)
LP5922	WSON (10)	3.00mm x 3.00mm


(1) 要了解所有可用封装，请见数据表末尾的可订购产品附录。

简化电路原理图

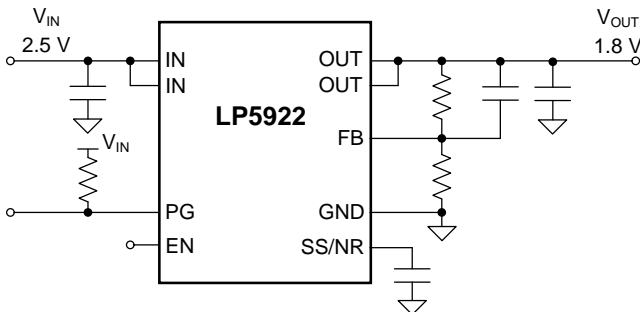

Copyright © 2016, Texas Instruments Incorporated



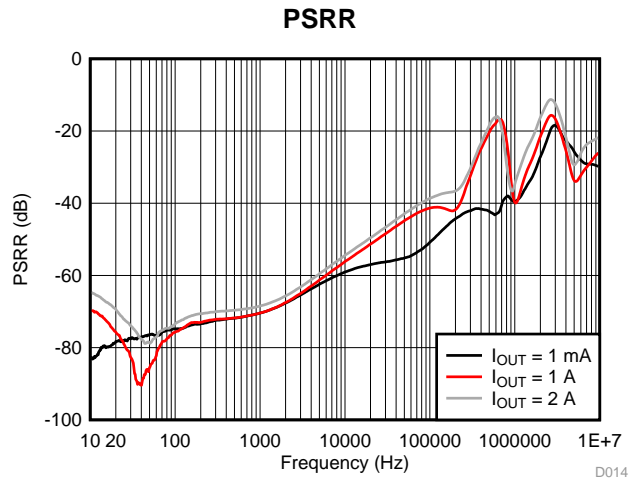

目录


1	特性	1	7.4	Device Functional Modes	13
2	应用	1	8	Applications and Implementation	14
3	说明	1	8.1	Application Information	14
4	修订历史记录	3	8.2	Typical Application	14
5	Pin Configuration and Functions	4	9	Power Supply Recommendations	19
6	Specifications	5	10	Layout	20
6.1	Absolute Maximum Ratings	5	10.1	Layout Guidelines	20
6.2	ESD Ratings	5	10.2	Layout Example	20
6.3	Recommended Operating Conditions	5	11	器件和文档支持	21
6.4	Thermal Information	5	11.1	相关文档	21
6.5	Electrical Characteristics	6	11.2	接收文档更新通知	21
6.6	Input and Output Capacitors	7	11.3	社区资源	21
6.7	Typical Characteristics	8	11.4	商标	21
7	Detailed Description	11	11.5	静电放电警告	21
7.1	Overview	11	11.6	Glossary	21
7.2	Functional Block Diagram	11	12	机械、封装和可订购信息	21
7.3	Feature Description	11			

4 修订历史记录

日期	修订版本	注释
2016 年 11 月	*	最初发布。

5 Pin Configuration and Functions

**DSC Package
10-Pin WSON With Thermal Pad
Top View**

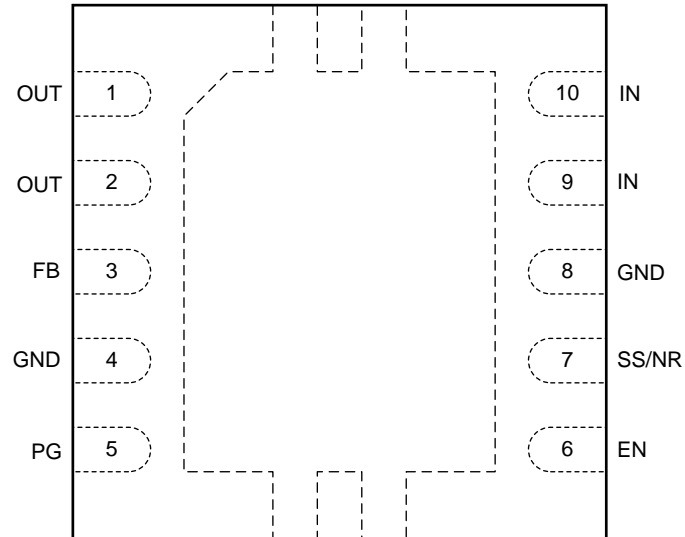

Pin Functions

PIN		I/O	DESCRIPTION
NUMBER	NAME		
1	OUT	O	Regulated output voltage, connect directly to pin 2
2	OUT	O	Regulated output voltage, connect directly to pin 1
3	FB	I	Voltage feedback input to the internal error amplifier
4	GND	Ground	Ground; connect to device pin 8.
5	PG	O	Power Good to indicate the status of output voltage. Requires an external pull-up resistor. When PG pin voltage is high the output voltage is considered good.
6	EN	I	Enable
7	SS/NR	I/O	Soft-start and noise reduction pin
8	GND	Ground	Ground —connect to device pin 4.
9	IN	I	Supply voltage input — connect directly to pin 10.
10	IN	I	Supply voltage input —connect directly to pin 9.
Exposed pad	Thermal Pad	—	The exposed thermal pad on the bottom of the package must be connected to a copper area under the package on the PCB. Connect to ground potential. Do not connect to any potential other than the same ground potential seen at device pins 4 and 8 (GND). See Power Dissipation for more information.

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾⁽²⁾

	MIN	MAX	UNIT
IN pin voltage, V_{IN}	-0.3	7	V
OUT pin voltage, V_{OUT}		See ⁽³⁾	
EN pin voltage, V_{EN}	-0.3	7	V
PG pin voltage, V_{PG}	-0.3	7	V
SS/NR pin voltage, $V_{SS/NR}$	-0.3	3.6	V
FB pin voltage, V_{FB}	-0.3	3.6	V
Junction temperature, T_J		150	°C
Continuous power dissipation ⁽⁴⁾		Internally limited	
Storage temperature, T_{stg}	-65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltages are with respect to the potential at the GND pin.
- (3) Absolute maximum V_{OUT} is the lesser of $V_{IN} + 0.3$ V, or 7 V.
- (4) Internal thermal shutdown circuitry protects the device from permanent damage.

6.2 ESD Ratings

		VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±2000
		Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	±1000

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

	MIN	NOM	MAX	UNIT
Input voltage, V_{IN}	1.3		6	V
Output voltage, V_{OUT}	0.5		5	V
FB voltage, V_{FB}		0.5		V
EN input voltage, V_{EN}	0		V_{IN}	V
Recommended load current, I_L	0		2	A
Operating junction temperature, $T_{J-MAX-OP}$	-40		125	°C

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		LP5922	UNIT
		DSC (WSO)	
		10 PINS	
$R_{\theta JA}$ ⁽²⁾	Junction-to-ambient thermal resistance, High K	49.5 ⁽³⁾	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	38.2	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	24.0	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	0.5	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	24.1	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	6.0	°C/W

- (1) For more information about traditional and new thermal metrics, see *Semiconductor and IC Package Thermal Metrics*.
- (2) Thermal resistance value $R_{\theta JA}$ is based on the EIA/JEDEC High-K printed circuit board defined by *JESD51-7 - High Effective Thermal Conductivity Test Board for Leaded Surface Mount Packages*.
- (3) The PCB for the WSON/DSC package $R_{\theta JA}$ includes four (4) thermal vias, in a 2 × 2 array, under the exposed thermal pad per EIA/JEDEC JESD51-5.

6.5 Electrical Characteristics

$V_{IN} = V_{OUT(NOM)} + 0.5 \text{ V}$ or 1.3 V , whichever is greater; $V_{EN} = 1.2 \text{ V}$, $C_{IN} = 22 \mu\text{F}$, $C_{OUT} = 22 \mu\text{F}$, OUT connected to 50Ω to GND, $V_{FB} = 0.5 \text{ V}$, $C_{SS/NR} = 0.12 \mu\text{F}$, $C_{FF} = 0.01 \mu\text{F}$, and PG pin pulled up to V_{IN} by $100\text{-k}\Omega$ resistor (unless otherwise noted).⁽¹⁾⁽²⁾⁽³⁾

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
SUPPLY VOLTAGE						
V_{IN}	Input voltage range		1.3		6	V
UVLO	Undervoltage lock-out threshold	V_{IN} Rising (\uparrow) until output is ON		1.2	1.25	V
Δ UVLO	UVLO hysteresis	V_{IN} Falling (\downarrow) from UVLO threshold until output is OFF		160		mV
OUTPUT VOLTAGE AND REGULATION						
V_{OUT}	Output voltage range		0.5		5	V
Δ V_{OUT}	Line regulation	$I_{OUT} = 5 \text{ mA}$, $1.3 \text{ V} \leq V_{IN} \leq 6 \text{ V}$		0.02		%/V
	Load regulation	$5 \text{ mA} \leq I_{OUT} \leq 2 \text{ A}$		0.1		%/A
V_{DO}	Dropout voltage ⁽⁴⁾	$V_{IN} = 1.4 \text{ V}$, $I_{OUT} = 2 \text{ A}$		220	400	mV
		$V_{IN} = 2.5 \text{ V}$, $I_{OUT} = 2 \text{ A}$		100	180	
		$V_{IN} = 5.3 \text{ V}$, $I_{OUT} = 2 \text{ A}$		90	160	
FB						
V_{FB}	FB voltage	$I_{OUT} = 5 \text{ mA}$ to 2 A	492.5	500	507.5	mV
I_{FB}	FB pin input current	$V_{FB} = 0.5 \text{ V}$	-100		100	nA
CURRENT LEVELS						
I_L	Maximum load current	$V_{IN} \geq 1.3 \text{ V}$	2			A
I_{SC}	Short-circuit current limit ⁽⁵⁾		2.2	3	3.8	A
I_{GND}	Ground-current minimum load ⁽⁶⁾	$V_{IN} = 6 \text{ V}$, $I_{OUT} = 0 \text{ mA}$		0.7		mA
	Ground-current maximum load ⁽⁶⁾	$V_{IN} = 1.3 \text{ V}$, $I_{OUT} = 2 \text{ A}$		1	4	
$I_{GND(SD)}$	Shutdown current ⁽⁷⁾	$V_{IN} = 6 \text{ V}$, $V_{EN} = 0 \text{ V}$, $V_{PG} = 0 \text{ V}$		0.1	15	μA
V_{IN} to V_{OUT} RIPPLE REJECTION ⁽⁸⁾						
PSRR	Power-supply rejection ratio	$V_{IN} \geq 1.4 \text{ V}$, $f = 1 \text{ kHz}$, $I_{OUT} = 2 \text{ A}$		70		dB
		$V_{IN} \geq 1.4 \text{ V}$, $f = 10 \text{ kHz}$, $I_{OUT} = 2 \text{ A}$		55		
		$V_{IN} \geq 1.4 \text{ V}$, $f = 100 \text{ kHz}$, $I_{OUT} = 2 \text{ A}$		40		
		$V_{IN} \geq 1.4 \text{ V}$, $f = 1 \text{ MHz}$, $I_{OUT} = 2 \text{ A}$		30		
OUTPUT NOISE VOLTAGE						
e_N	Noise voltage ⁽⁸⁾	$V_{IN} = 2.5 \text{ V}$, $V_{OUT} = 1.8 \text{ V}$ BW = 10 Hz to 100 kHz		25		μV_{RMS}

- (1) All voltages are with respect to the GND pin.
- (2) Minimum and maximum limits are design targeted limits over the junction temperature (T_J) range of -40°C to $+125^\circ\text{C}$, unless otherwise stated. Typical values represent the most likely parametric norm at $T_J = 25^\circ\text{C}$, and are provided for reference purposes only.
- (3) C_{IN} , C_{OUT} : Low-ESR surface-mount-ceramic capacitors (MLCCs) used in setting electrical characteristics.
- (4) Dropout voltage is the voltage difference between the input and the output at which the FB voltage drops to 97% of its nominal value.
- (5) Short-circuit current (I_{SC}) is equivalent to current limit. To minimize thermal effects during testing, I_{SC} is measured with V_{OUT} pulled to 100 mV below its nominal voltage.
- (6) Ground current is defined here as the total current flowing to ground as a result of all voltages applied to the device
 $I_{GND} = (I_{IN} - I_{OUT}) + I_{EN} + I_{LKG(PG)}$
- (7) Ground current in shutdown mode, $I_{GND(SD)}$, does NOT include current from PG pin.
- (8) This specification is verified by design.

Electrical Characteristics (continued)

$V_{IN} = V_{OUT(NOM)} + 0.5\text{ V}$ or 1.3 V , whichever is greater; $V_{EN} = 1.2\text{ V}$, $C_{IN} = 22\text{ }\mu\text{F}$, $C_{OUT} = 22\text{ }\mu\text{F}$, OUT connected to $50\text{ }\Omega$ to GND, $V_{FB} = 0.5\text{ V}$, $C_{SS/NR} = 0.12\text{ }\mu\text{F}$, $C_{FF} = 0.01\text{ }\mu\text{F}$, and PG pin pulled up to V_{IN} by $100\text{-k}\Omega$ resistor (unless otherwise noted).⁽¹⁾⁽²⁾⁽³⁾

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
LOGIC INPUT THRESHOLDS						
$V_{IL(EN)}$	EN pin low threshold	V_{EN} falling (↓) until output is OFF			0.35	V
$V_{IH(EN)}$	EN pin high threshold	V_{EN} rising (↑) until output is ON	1.2			V
I_{EN}	Input current at EN pin ⁽⁹⁾	$V_{IN} = 6\text{ V}$, $V_{EN} = 6\text{ V}$		3		μA
$PG_{H_{TH}}$	PG high threshold (% of nominal V_{OUT})	V_{OUT} rising (↑) until PG goes high		94%		
$PG_{L_{TH}}$	PG low threshold (% of nominal V_{OUT})	V_{OUT} falling (↓) until PG goes low		90%		
$V_{OL(PG)}$	PG pin low-level output voltage	$V_{OUT} < PG_{L_{TH}}$, sink current = 1 mA			400	mV
$I_{LKG(PG)}$	PG pin leakage current	$V_{OUT} > PG_{H_{TH}}$, $V_{PG} = 6\text{ V}$			1	μA
SOFT START						
I_{SS}	SS/NR pin charging current			6.2		μA
THERMAL SHUTDOWN						
T_{SD}	Thermal shutdown temperature			165		$^{\circ}\text{C}$
ΔT_{SD}	Thermal shutdown hysteresis			15		$^{\circ}\text{C}$
TRANSITION CHARACTERISTICS						
ΔV_{OUT}	Line transients	$\Delta V_{IN} = 0.5\text{ V}$, $V_{OUT} = 2.8\text{ V}$, $t_{RISE} = t_{FALL} = 5\text{ }\mu\text{s}$		3		mV
	Load transients	$V_{OUT} = 3.3\text{ V}$, $I_{OUT} = 10\text{ mA}$ to 2 A to 10 mA $t_{RISE} = t_{FALL} = 1\text{ V}/\mu\text{s}$		25		
R_{AD}	Output discharge pull-down resistance	$V_{EN} = 0\text{ V}$, $V_{IN} = 2.3\text{ V}$		400		Ω

(9) There is a $2\text{-M}\Omega$ resistor between EN and ground (pulldown) on the device.

6.6 Input and Output Capacitors

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
C_{IN}	Input capacitance ⁽¹⁾			22		μF
C_{OUT}	Output capacitance	$V_{OUT} \leq 0.8\text{ V}$	34	47		μF
		$V_{OUT} > 0.8\text{ V}$	15	22		

(1) Typically input capacitance placed close to the device is in the same order as output capacitance. See also [Input Capacitor, \$C_{IN}\$](#) .

6.7 Typical Characteristics

$V_{IN} = V_{OUT} + 0.5\text{ V}$, $V_{EN} = 1.2\text{ V}$, $C_{IN} = 22\text{ }\mu\text{F}$, $C_{OUT} = 22\text{ }\mu\text{F}$, OUT connected to $50\text{ }\Omega$ to GND, $V_{FB} = 0.5\text{ V}$, $C_{SS/NR} = 0.12\text{ }\mu\text{F}$, $C_{FF} = 0.01\text{ }\mu\text{F}$, and PG pin pulled up to V_{IN} by $100\text{-k}\Omega$ resistor and $T_J = 25^\circ\text{C}$, unless otherwise stated.

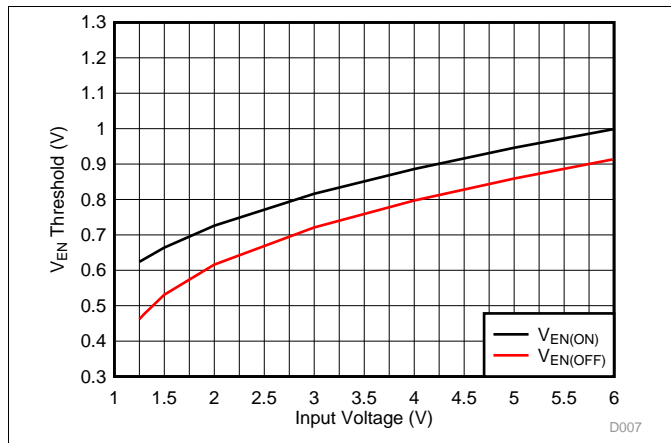


Figure 1. V_{EN} Thresholds vs Input Voltage

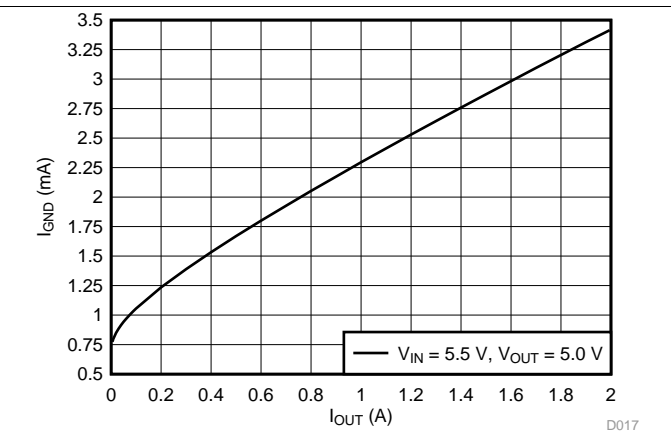


Figure 2. Ground Current vs Output Current

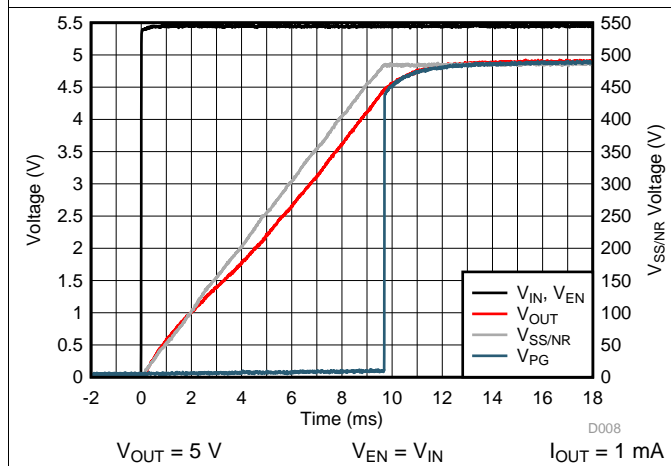


Figure 3. Power Up

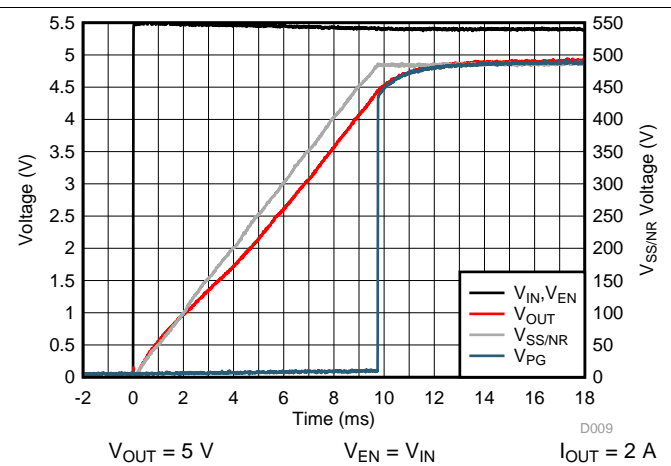


Figure 4. Power Up

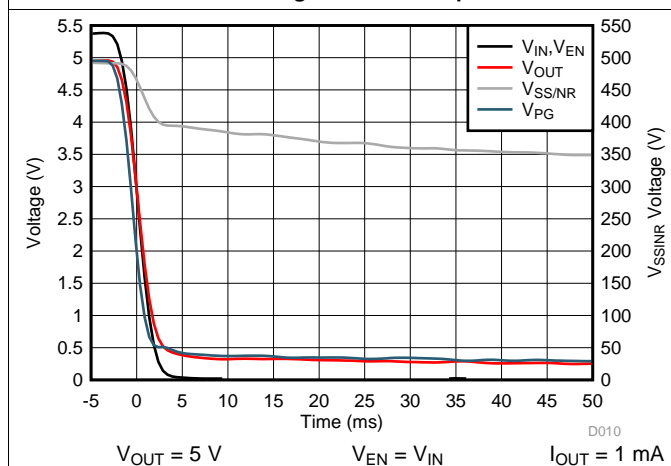


Figure 5. Power Down

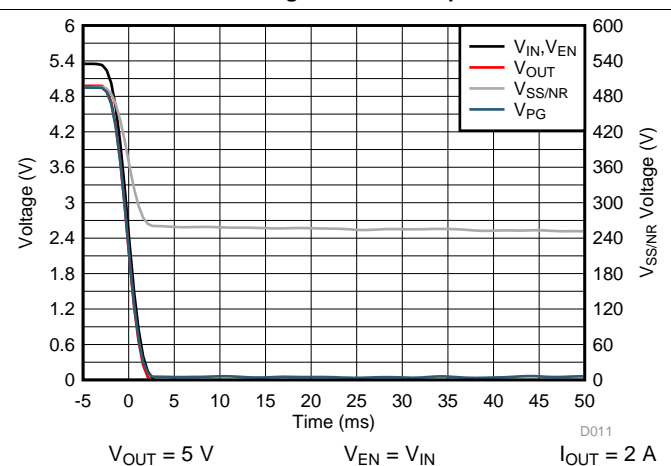


Figure 6. Power Down

Typical Characteristics (continued)

$V_{IN} = V_{OUT} + 0.5\text{ V}$, $V_{EN} = 1.2\text{ V}$, $C_{IN} = 22\text{ }\mu\text{F}$, $C_{OUT} = 22\text{ }\mu\text{F}$, OUT connected to $50\text{ }\Omega$ to GND, $V_{FB} = 0.5\text{ V}$, $C_{SS/NR} = 0.12\text{ }\mu\text{F}$, $C_{FF} = 0.01\text{ }\mu\text{F}$, and PG pin pulled up to V_{IN} by 100-k Ω resistor and $T_J = 25^\circ\text{C}$, unless otherwise stated.

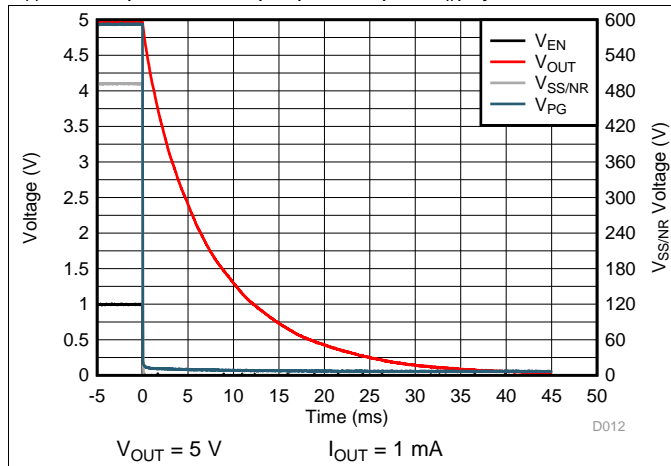


Figure 7. Power Down

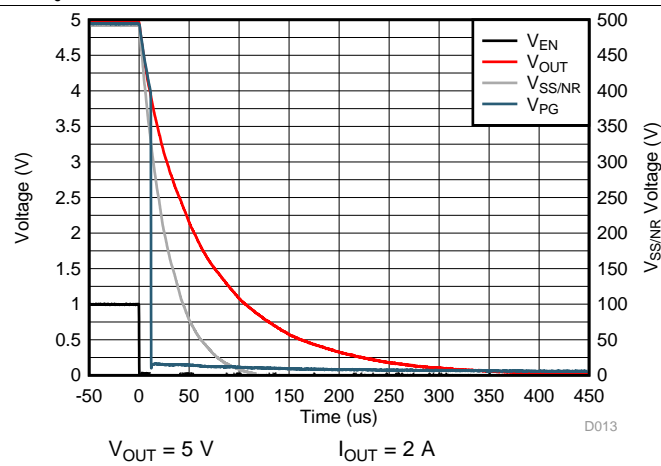


Figure 8. Power Down

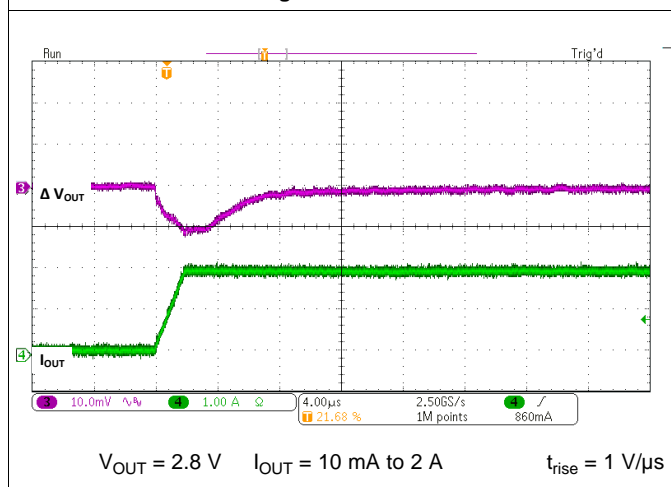


Figure 9. Load Transient Response

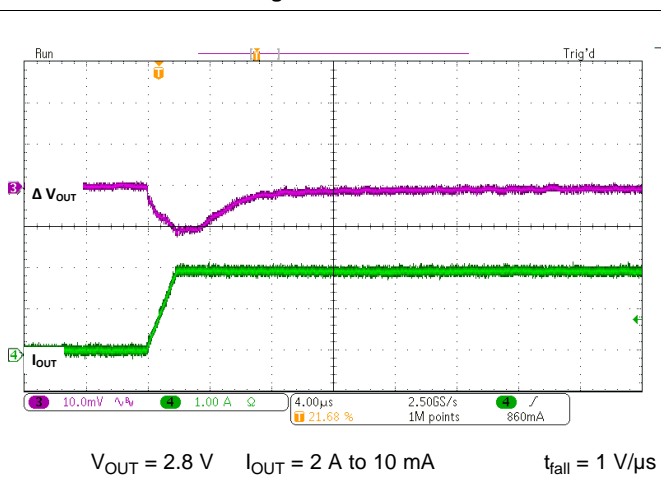


Figure 10. Load Transient Response

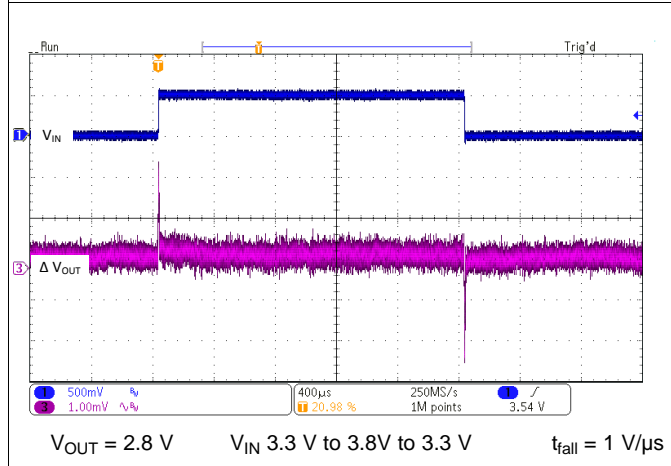


Figure 11. Line Transient Response



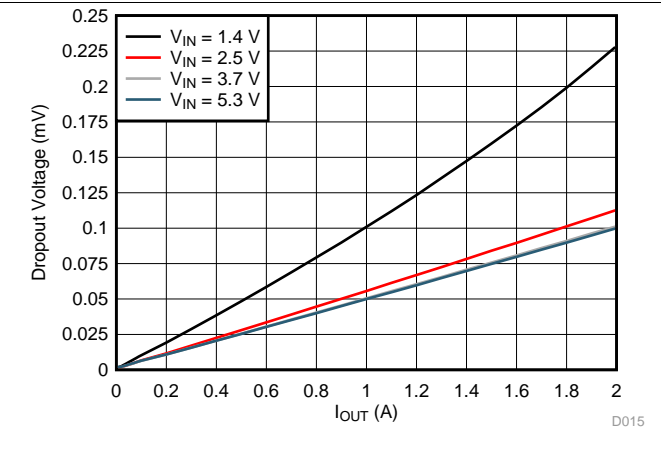


Figure 12. Dropout Voltage (V_{DO}) vs Load Current

Typical Characteristics (continued)

$V_{IN} = V_{OUT} + 0.5\text{ V}$, $V_{EN} = 1.2\text{ V}$, $C_{IN} = 22\text{ }\mu\text{F}$, $C_{OUT} = 22\text{ }\mu\text{F}$, OUT connected to $50\text{ }\Omega$ to GND, $V_{FB} = 0.5\text{ V}$, $C_{SS/NR} = 0.12\text{ }\mu\text{F}$, $C_{FF} = 0.01\text{ }\mu\text{F}$, and PG pin pulled up to V_{IN} by $100\text{-k}\Omega$ resistor and $T_J = 25^\circ\text{C}$, unless otherwise stated.

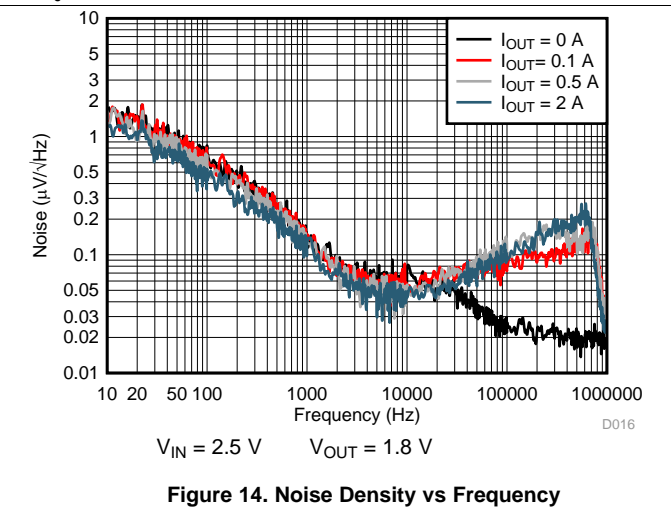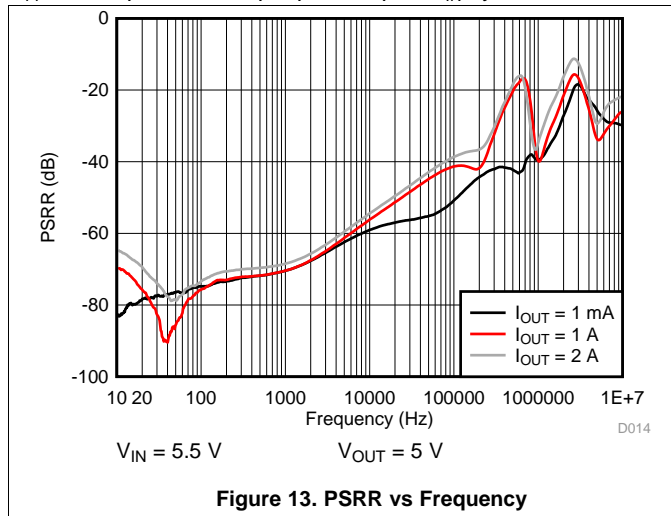

7 Detailed Description


7.1 Overview

The LP5922 is a low-noise, high PSRR, low-dropout regulator capable of sourcing a 2-A load. The LP5922 can operate down to 1.3-V input voltage and 0.5-V output voltage. This combination of low noise, high PSRR, and low output voltage makes the device an ideal low dropout (LDO) regulator to power a multitude of loads from noise-sensitive communication components to battery-powered system.

The LP5922 block diagram contains several features, including:

- Low-noise, 0.5-V reference
- Internal protection circuit, such as current limit and thermal shutdown
- Programmable soft-start circuit
- Power Good output

7.2 Functional Block Diagram

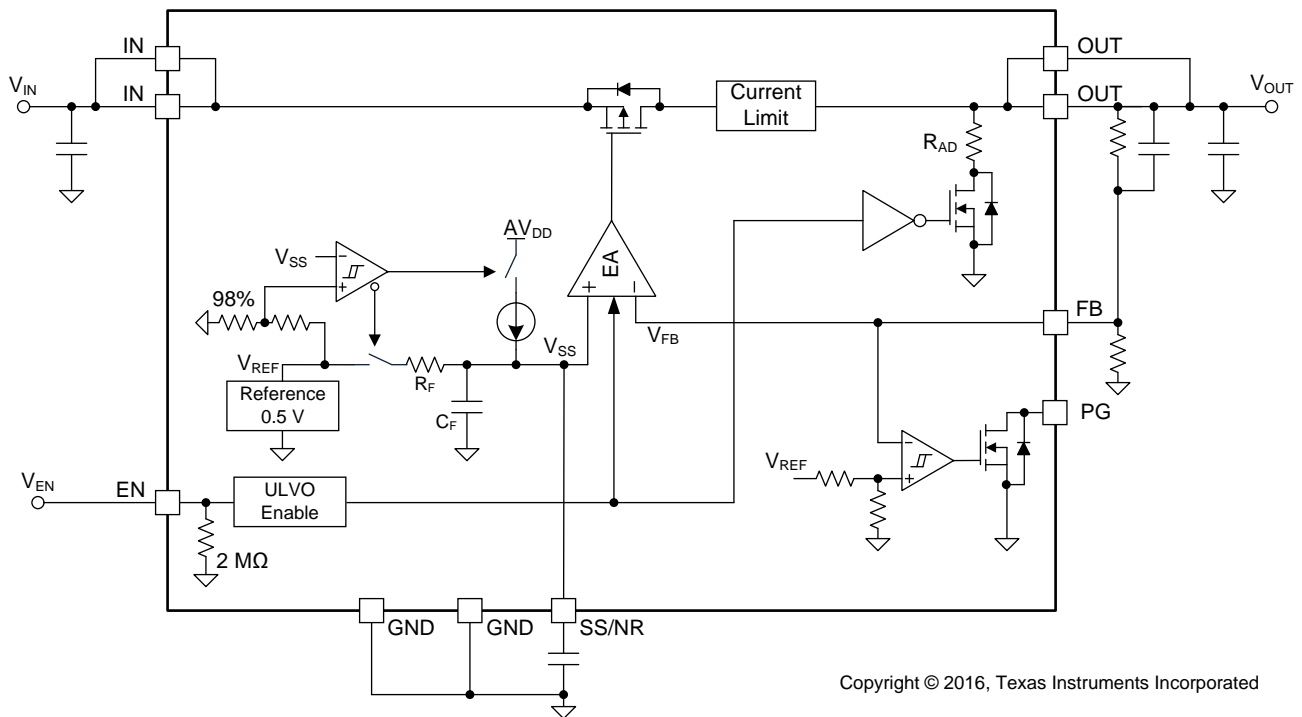

7.3 Feature Description

7.3.1 Output Voltage

The LP5922 output voltage can be set to any value from 0.5 V to 5 V using two external resistors shown as R_{UPPER} and R_{LOWER} in Figure 15. The value for the R_{LOWER} should be less than or equal to 100 k Ω for good loop compensation. R_{UPPER} can be selected for a given V_{OUT} using Equation 1:

$$R_{UPPER} = \frac{(V_{OUT} - V_{FB}) \times R_{LOWER}}{V_{FB}}$$

where

- $V_{FB} = 0.5 \text{ V}$

(1)

Feature Description (continued)

7.3.2 Enable

The LP5922 EN pin is internally held low by a 2-M Ω resistor to GND. The EN pin voltage must be higher than the V_{IH} threshold to ensure that the device is fully enabled under all operating conditions. The EN pin voltage must be lower than the V_{IL} threshold to ensure that the device is fully disabled and the automatic output discharge is activated.

7.3.3 Output Automatic Discharge

The LP5922 output employs an internal 400- Ω (typical) pulldown resistance to discharge the output capacitor when the EN pin is low, and the device is disabled.

7.3.4 Programmable Soft Start and Noise Reduction

The output voltage of LP5922 ramps up linearly in a constant slew rate until reaching the target regulating voltage after a stable V_{IN} (greater than $V_{OUT} + V_{DO}$) is supplied and EN pin is pulled high. The slew rate of V_{OUT} ramping is programmable by an external capacitor on the SS/NR pin; therefore, the duration for soft-start period is programmable as well. Once the LP5922 is enabled, the SS/NR pin sources a constant 6- μ A current to charge the external $C_{SS/NR}$ capacitor until the voltage at the SS/NR pin reaches 98% of the internal reference voltage (V_{REF}) of 500 mV typical. The final 2% of $C_{SS/NR}$ charge is determined by a RC time constant. During the soft-start period, the current flowing into the IN pin primarily consists of the sum of the load current at the LDO output and the charging current into the output capacitor. The soft-start period can be calculated by [Equation 2](#):

$$t_{SS} = \frac{C_{SS/NR} \times V_{FB}}{I_{SS}}$$

where

- $V_{FB} = 0.5$ V - this is the voltage that $C_{SS/NR}$ charges to;
- $C_{SS/NR}$ is the value of the capacitor connected between the SS/NR pin and ground; and
- $I_{SS} = 6.2$ μ A is the typical charging current to the SS/NR pin during start-up period. (2)

The recommended value for $C_{SS/NR}$ is 100 nF or larger. [Equation 2](#) is most accurate for these values. The $C_{SS/NR}$ capacitor is also the filter capacitor for internal reference for noise reduction purpose. An integrated resistor and the $C_{SS/NR}$ capacitor structure a RC low-pass filter to remove the noise on the internal reference voltage.

7.3.5 Internal Current Limit

The internal current limit circuit is used to protect the LDO against high-load current faults or shorting events. The LDO is not designed to operate in a steady-state current limit. During a current-limit event, the LDO sources constant current. Therefore, the output voltage falls when load impedance decreases. Note also that if a current limit occurs and the resulting output voltage is low, excessive power may be dissipated across the LDO, resulting in a thermal shutdown of the output.

7.3.6 Thermal Overload Protection

Thermal shutdown disables the output when the junction temperature rises to T_{SD} level, which allows the device to cool. When the junction temperature cools by ΔT_{SD} , the output circuitry enables. Based on power dissipation, thermal resistance, and ambient temperature, the thermal protection circuit may cycle on and off. This thermal cycling limits the dissipation of the regulator and protects it from damage as a result of overheating.

The internal protection circuitry of the LP5922 is designed to protect against thermal overload conditions. The circuitry is not intended to replace proper heat sinking. Continuously running the LP5922 into thermal shutdown degrades device reliability.

Feature Description (continued)

7.3.7 Power Good Output

The LP5922 has a Power-Good function that works by toggling the state of the PG output pin. When the output voltage falls below the PG threshold voltage (PG_{LTH}), the PG pin open-drain output engages (low impedance to GND). When the output voltage rises above the PG threshold voltage (PG_{HTH}), the PG pin becomes high-impedance. By connecting a pullup resistor to an external supply, any downstream device can receive PG as a logic signal. User must make sure that the external pullup supply voltage results in a valid logic signal for the receiving device or devices; use a pullup resistor from 10 k Ω to 100 k Ω for best results.

In Power-Good function, the PG output pin pulled high immediately after output voltage rises above the PG threshold voltage.

7.4 Device Functional Modes

7.4.1 Enable (EN)

The LP5922 enable (EN) pin is internally held low by a 2-M Ω resistor to GND. If the EN pin is open the output is OFF. The EN pin voltage must be higher than the V_{IH} threshold to ensure that the device is fully enabled under all operating conditions. When the EN pin is pulled low, and the output is disabled, the output automatic discharge circuit is activated. Any charge on the OUT pin is discharged to GND through the internal pulldown resistance.

7.4.2 Undervoltage Lockout (UVLO)

The LP5922 incorporates UVLO. The UVLO circuit monitors the input voltage and keeps the LP5922 disabled while a rising V_{IN} is less than 1.2 V (typical). The rising UVLO threshold is approximately 100 mV below the recommended minimum operating V_{IN} of 1.3 V.

7.4.3 Minimum Operating Input Voltage

The LP5922 internal circuit is not fully functional until V_{IN} is at least 1.3 V. The output voltage is not regulated until V_{IN} has reached at least the greater of 1.3 V or ($V_{OUT} + V_{DO}$).

8 Applications and Implementation

NOTE


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

The LP5922 is designed to meet the requirements of RF and analog circuits, by providing low noise, high PSRR, low quiescent current, and low line or load transient response figures. The device offers excellent noise performance without the need for a noise bypass capacitor and is stable with input and output capacitors with a value of 22 μF . The LP5922 delivers this performance in an industry-standard WSON package which, for this device, is specified with an operating junction temperature (T_J) of -40°C to $+125^\circ\text{C}$.

8.2 Typical Application

Figure 15 shows the typical application circuit for the LP5922. Input and output capacitances may need to be increased above 22 μF minimum for some applications.

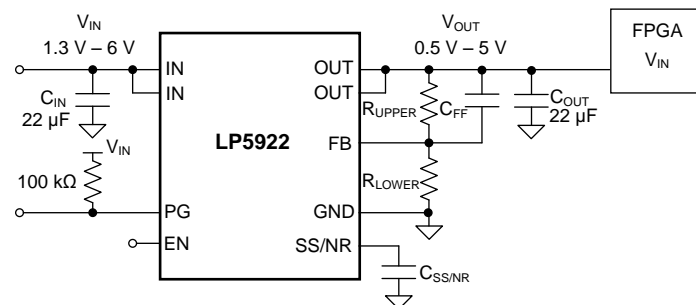

Copyright © 2016, Texas Instruments Incorporated

Figure 15. LP5922 Typical Application

8.2.1 Design Requirements

For typical LP5922 applications, use the parameters listed in Table 1.

Table 1. Design Parameters

DESIGN PARAMETER	EXAMPLE VALUE
Input voltage	2.25 V to 2.75 V
Output voltage	1.8 V
Output current	2000 mA
Output capacitor range	22 μF to 47 μF
Output capacitor ESR range	2 m Ω to 500 m Ω

8.2.2 Detailed Design Procedure

8.2.2.1 External Capacitors

The LP5922 is designed to be stable using low equivalent series resistance (ESR) ceramic capacitors at the input, output, and the noise-reduction pin (SS/NR). Multilayer ceramic capacitors have become the industry standard for these types of applications and are recommended, but must be used with good judgment. Ceramic capacitors that employ X7R-, X5R-, and COG-rated dielectric materials provide relatively good capacitive stability across temperature, whereas the use of Y5V-rated capacitors is discouraged because of large variations in capacitance. Additionally, the case size has a direct impact on the capacitance versus applied voltage derating.

Regardless of the ceramic capacitor type selected, the actual capacitance varies with the applied operating voltage and temperature. As a rule of thumb, derate ceramic capacitors by at least 50%. The input and output capacitors recommended herein account for a effective capacitance derating of approximately 50%, but at high applied voltage conditions the capacitance derating can be greater than 50% and must be taken into consideration. The minimum capacitance values declared in [Input and Output Capacitors](#) must be met across the entire expected operating voltage range and temperature range.

8.2.2.2 Input Capacitor, C_{IN}

An input capacitor is required for stability. A capacitor with a value of at least 22 μF must be connected between the LP5922 IN pin and ground for stable operation over full load current range. It is acceptable to have more output capacitance than input, as long as the input is at least 22 μF .

The input capacitor must be located as close as possible to, but at a distance not more than 1 cm from, the IN pin and returned to the device GND pin with a clean analog ground. This will minimize the trace inductance between the capacitor and the device. Any good quality ceramic or tantalum capacitor may be used at the input.

8.2.2.3 Output Capacitor, C_{OUT}

The LP5922 is designed to work specifically with a low ESR ceramic (MLCC) output capacitor, typically 22 μF . A ceramic capacitor (dielectric types X5R or X7R) in the 22- μF to 100- μF range, with an ESR not exceeding 500 m Ω , is suitable in the LP5922 application circuit having an output voltage greater than 0.8 V. For output voltages of 0.8 V or less, the output capacitance must be increased to typically 47 μF . The output capacitor must be connected between the device OUT and GND pins. The output capacitor must meet the requirement for the minimum value of capacitance and have an ESR value that does not exceed 500 m Ω to ensure stability.

It is possible to use tantalum capacitors at the device output, but these are not as attractive for reasons of size, cost, and performance.

A combination of multiple output capacitors in parallel boosts the high-frequency PSRR. The combination of one 0805-sized, 47- μF ceramic capacitor in parallel with two 0805-sized, 10- μF ceramic capacitors with a sufficient voltage rating optimizes PSRR response in the frequency range of 400 kHz to 700 kHz (which is a typical range for dc-dc supply switching frequency). This 47- μF || 10- μF || 10- μF combination also ensures that at high input voltage and high output voltage configurations, the minimum effective capacitance is met. Many 0805-sized, 47- μF ceramic capacitors have a voltage derating of approximately 60% to 75% at 5 V, so the addition of the two 10- μF capacitors ensures that the capacitance is at or above 22 μF .

8.2.2.4 Soft-Start and Noise-Reduction Capacitor, $C_{SS/NR}$

Recommended value for $C_{SS/NR}$ is 100 nF or larger. The soft-start period can be calculated by [Equation 2](#). The $C_{SS/NR}$ capacitor is also the filter capacitor for internal reference for noise reduction purpose.

8.2.2.5 Feed-Forward Capacitor, C_{FF}

Although a feed-forward capacitor (C_{FF}) from the FB pin to the OUT pin is not required to achieve stability, a 10-nF external C_{FF} optimizes the transient, noise, and PSRR performance. A higher capacitance C_{FF} value can be used; however, the start-up time may be longer and the Power-Good signal may incorrectly indicate that the output voltage is settled. The maximum recommended value is 100 nF

To ensure proper PGx functionality, the time constant defined by CNR/SSx must be greater than or equal to the time constant from CFFx. For a detailed description, see the application report [Pros and Cons of Using a Feed-Forward Capacitor with a Low Dropout Regulator](#) (SBVA042).

8.2.2.6 No-Load Stability

The LP5922 remains stable, and in regulation, with no external load.

8.2.2.7 Power Dissipation

Knowing the device power dissipation and proper sizing of the thermal plane connected to the exposed thermal pad is critical to ensuring reliable operation. Device power dissipation depends on input voltage, output voltage, and load conditions and can be calculated with [Equation 3](#).

$$P_{D(MAX)} = (V_{IN(MAX)} - V_{OUT}) \times I_{OUT} \quad (3)$$

Power dissipation can be minimized, and greater efficiency can be achieved, by using the lowest available voltage drop option that is greater than the dropout voltage (V_{DO}). However, keep in mind that higher voltage drops result in better dynamic (that is, PSRR and transient) performance.

On the WSON (DSC) package, the primary conduction path for heat is through the exposed thermal pad into the PCB. To ensure the device does not overheat, connect the exposed thermal pad, through multiple thermal vias, to an internal ground plane with an appropriate amount of PCB copper area.

Power dissipation and junction temperature are most often related by the junction-to-ambient thermal resistance ($R_{\theta JA}$) of the combined PCB and device package and the temperature of the ambient air (T_A), according to [Equation 4](#) or [Equation 5](#):

$$T_{J(MAX)} = T_{A(MAX)} + (R_{\theta JA} \times P_{D(MAX)}) \quad (4)$$

$$P_D = (T_{J(MAX)} - T_{A(MAX)}) / R_{\theta JA} \quad (5)$$

If the V_{IN} - V_{OUT} voltage is known, the maximum allowable output current can be calculated with [Equation 6](#)

$$I_{OUT(MAX)} = ((125^\circ\text{C} - T_A) / R_{\theta JA}) / (V_{IN} - V_{OUT}) \quad (6)$$

Unfortunately, the $R_{\theta JA}$ value is highly dependent on the heat-spreading capability of the particular PCB design, and therefore varies according to the PCB size, total copper area, copper weight, any thermal vias, and location of the planes. The $R_{\theta JA}$ recorded in [Thermal Information](#) is determined by the specific EIA/JEDEC JESD51-7 standard for PCB and copper spreading area, and is to be used only as a relative measure of package thermal performance. For a well designed thermal layout, $R_{\theta JA}$ is actually the sum of the package junction-to-case (bottom) thermal resistance ($R_{\theta JC(bot)}$) plus the thermal resistance contribution by the PCB copper area acting as a heat sink.

8.2.2.8 Estimating Junction Temperature

The JEDEC standard now recommends the use of psi (Ψ) thermal metrics to estimate the junction temperatures of the LDO when in-circuit on a typical PCB board application. These metrics are not strictly speaking thermal resistances, but rather offer practical and relative means of estimating junction temperatures. These psi metrics are determined to be significantly independent of the copper-spreading area. The key thermal metrics (Ψ_{JT} and Ψ_{JB}) are given in the [Thermal Information](#) table and are used in accordance with [Equation 7](#) and [Equation 8](#).

$$T_{J(MAX)} = T_{TOP} + (\Psi_{JT} \times P_{D(MAX)})$$

where

- T_{TOP} is the temperature measured at the center-top of the device package.

- $P_{D(MAX)}$ is described at [Equation 3](#) (7)

$$T_{J(MAX)} = T_{BOARD} + (\Psi_{JB} \times P_{D(MAX)})$$

where

- T_{BOARD} is the PCB surface temperature measured 1 mm from the device package and centered on the package edge.
- $P_{D(MAX)}$ is described at [Equation 3](#) (8)

For more information about the thermal characteristics Ψ_{JT} and Ψ_{JB} , see [Semiconductor and IC Package Thermal Metrics](#); for more information about measuring T_{TOP} and T_{BOARD} , see [Using New Thermal Metrics](#); and for more information about the EIA/JEDEC JESD51 PCB used for validating $R_{\theta JA}$, see the [TI Application Report Thermal Characteristics of Linear and Logic Packages Using JEDEC PCB Designs](#). These application notes are available at www.ti.com.

8.2.2.9 Recommended Continuous Operating Area

The continuous operational area of an LDO is limited by the input voltage (V_{IN}), the output voltage (V_{OUT}), the dropout voltage (V_{DO}), the output current (I_{OUT}), and the junction temperature (T_J). The recommended area for continuous operation for a linear regulator can be separated into the following steps, and is shown in [Figure 16](#).

- Limited by dropout: Dropout voltage limits the minimum differential voltage between the input and the output ($V_{IN} - V_{OUT}$) at a given output current level.
- Limited by the rated output current: The rated output current limits the maximum recommended output current level. Exceeding this rating causes the device to fall out of specification.
- Limited by thermals: This portion of the boundary is defined by [Equation 6](#). The slope is nonlinear because the junction temperature of the LDO is controlled by the power dissipation (P_D) across the LDO; therefore, when $V_{IN} - V_{OUT}$ increases, the output current must decrease in order to ensure that the rated maximum operating junction temperature of the device is not exceeded. Exceeding the maximum operating junction temperature rating can cause the device to fall out of specifications, reduces long-term reliability, and may activate the thermal shutdown protection circuitry.
- Limited by V_{IN} range: The rated operating input voltage range governs both the minimum and maximum of $V_{IN} - V_{OUT}$.

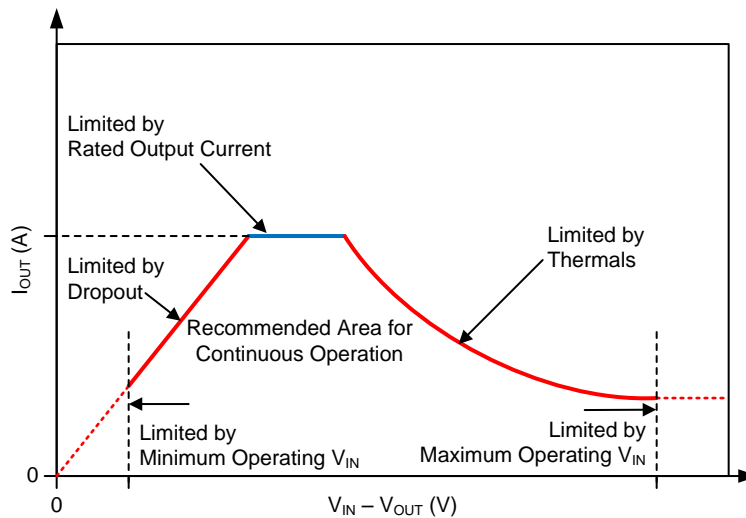


Figure 16. Recommended Continuous Operating Area

[Figure 17](#) to [Figure 22](#) show the recommended continuous operating area boundaries for this device in the WSON (DSC) package mounted to a EIA/JEDEC High-K printed circuit board, as defined by JESD51-7, with an $R_{\theta JA}$ rating of 49.5°C/W.

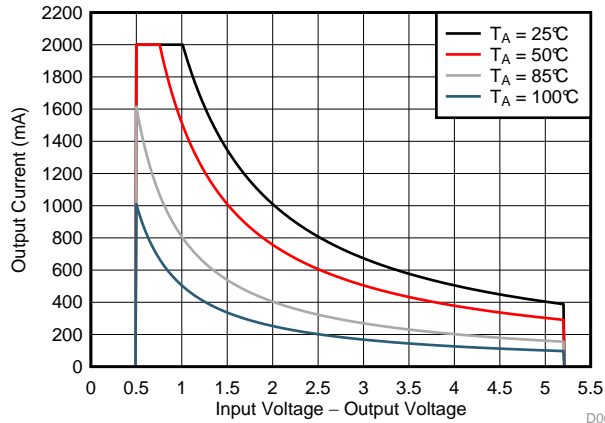


Figure 17. Recommended Continuous Operating Area for $V_{OUT} = 0.8\text{ V}$

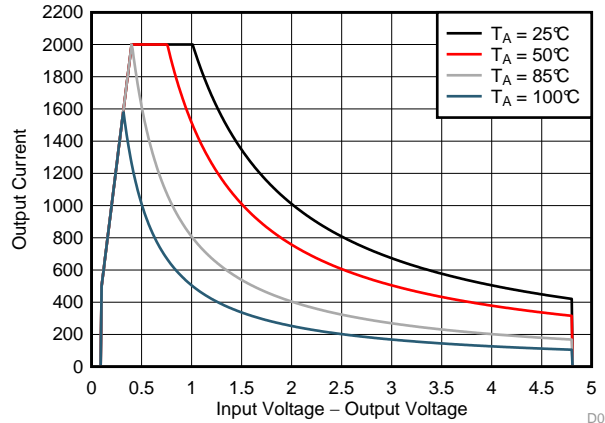


Figure 18. Recommended Continuous Operating Area for $V_{OUT} = 1.2\text{ V}$

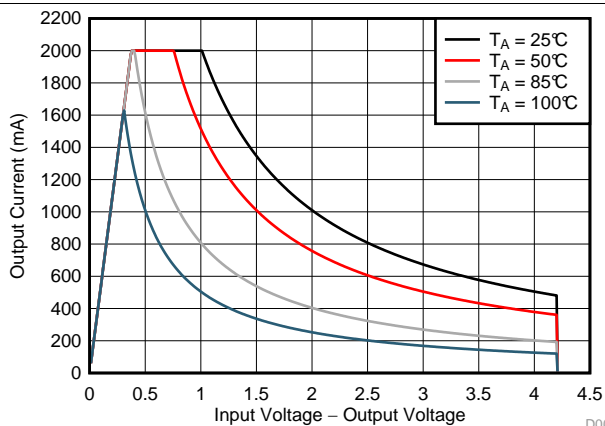


Figure 19. Recommended Continuous Operating Area for $V_{OUT} = 1.8\text{ V}$

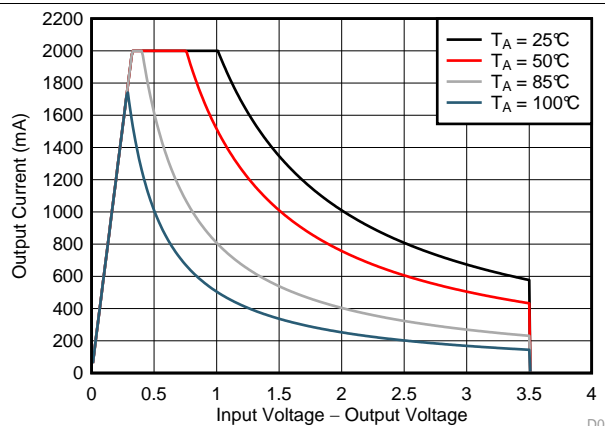


Figure 20. Recommended Continuous Operating Area for $V_{OUT} = 2.5\text{ V}$

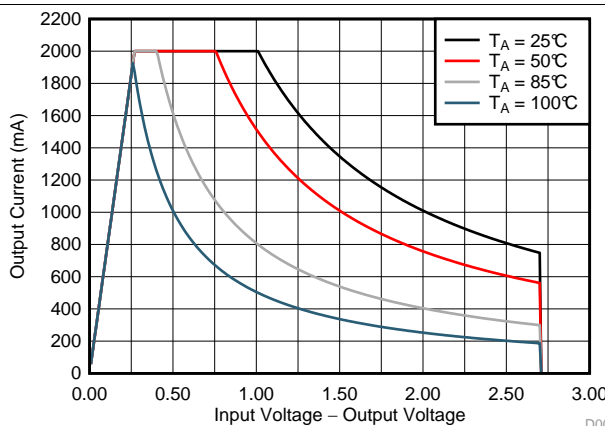


Figure 21. Recommended Continuous Operating Area for $V_{OUT} = 3.3\text{ V}$



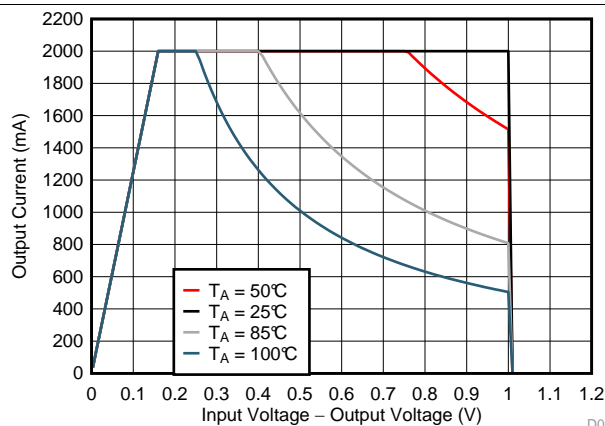


Figure 22. Recommended Continuous Operating Area for $V_{OUT} = 5\text{ V}$

8.2.3 Application Curves

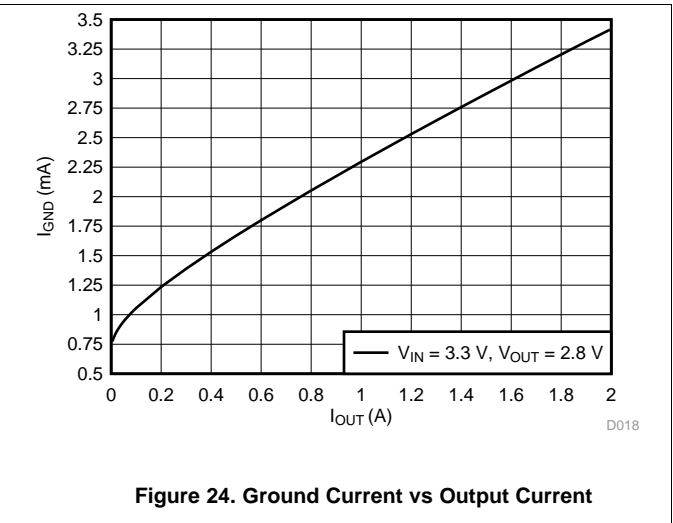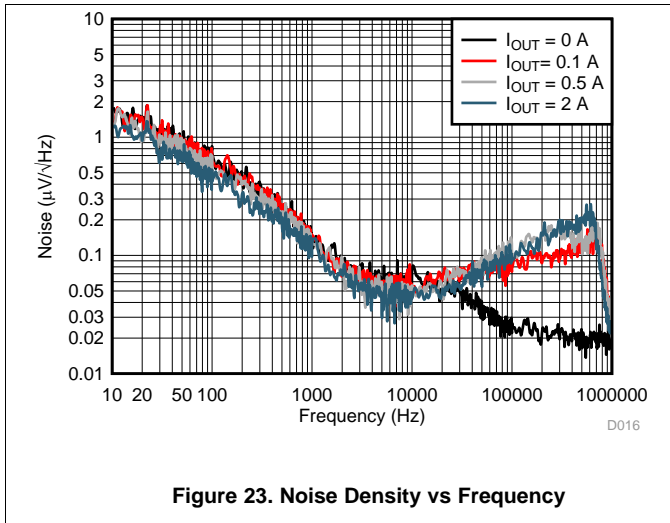

9 Power Supply Recommendations

This device is designed to operate from an input supply voltage range of 1.3 V to 6 V. The input supply should be well regulated and free of spurious noise. To ensure that the LP5922 output voltage is well regulated and dynamic performance is optimum, the input supply must be at least $V_{OUT} + 1$ V. A minimum capacitor value of 22 μ F is required to be within 1 cm of the IN pin.

10 Layout

10.1 Layout Guidelines

The dynamic performance of the LP5922 is dependant on the layout of the PCB. PCB layout practices that are adequate for typical LDOs may degrade the PSRR, noise, or transient performance of the LP5922.

Best performance is achieved by placing C_{IN} and C_{OUT} on the same side of the PCB as the LP5922 device, and as close as is practical to the package. The ground connections for C_{IN} and C_{OUT} must be back to the LP5922 GND pin using as wide and as short of a copper trace as is practical.

Avoid connections using long trace lengths, narrow trace widths, or connections through vias. These add parasitic inductances and resistance that results in inferior performance especially during transient conditions

10.2 Layout Example

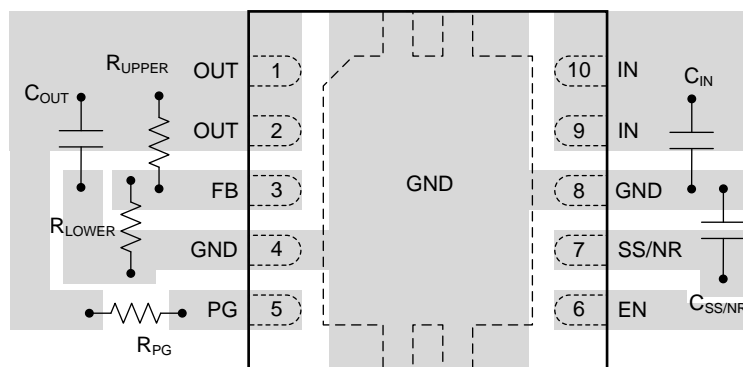


Figure 25. LP5922 Typical Layout

11 器件和文档支持

11.1 相关文档

更多信息，请参见以下文档：

- 《使用热指标》
- 《采用 JEDEC PCB 设计的线性和逻辑封装散热特性》

11.2 接收文档更新通知

如需接收文档更新通知，请访问 www.ti.com.cn 网站上的器件产品文件夹。点击右上角的提醒我 (Alert me) 注册后，即可每周定期收到已更改的产品信息。有关更改的详细信息，请查阅已修订文档中包含的修订历史记录。

11.3 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

11.4 商标

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

11.5 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

11.6 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

12 机械、封装和可订购信息

以下页中包括机械、封装和可订购信息。这些信息是针对指定器件可提供的最新数据。这些数据会在无通知且不对本文档进行修订的情况下发生改变。欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

重要声明

德州仪器(TI)及其下属子公司有权根据 JESD46 最新标准,对所提供的产品和服务进行更正、修改、增强、改进或其它更改,并有权根据 JESD48 最新标准中止提供任何产品和服务。客户在下订单前应获取最新的相关信息,并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的组件的性能符合产品销售时 TI 半导体产品销售条件与条款的适用规范。仅在 TI 保证的范围内,且 TI 认为有必要时才会使用测试或其它质量控制技术。除非适用法律做出了硬性规定,否则没有必要对每种组件的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险,客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 组件或服务的组合设备、机器或流程相关的 TI 知识产权中授予的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息,不能构成从 TI 获得使用这些产品或服务的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可,或是 TI 的专利权或其它知识产权方面的许可。

对于 TI 的产品手册或数据表中 TI 信息的重要部分,仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况下才允许进行复制。TI 对此类篡改过的文件不承担任何责任或义务。复制第三方的信息可能需要服从额外的限制条件。

在转售 TI 组件或服务时,如果对该组件或服务参数的陈述与 TI 标明的参数相比存在差异或虚假成分,则会失去相关 TI 组件或服务的所有明示或暗示授权,且这是不正当的、欺诈性商业行为。TI 对任何此类虚假陈述均不承担任何责任或义务。

客户认可并同意,尽管任何应用相关信息或支持仍可能由 TI 提供,但他们将独立负责满足与其产品及其在应用中使用的 TI 产品相关的所有法律、法规和安全相关要求。客户声明并同意,他们具备制定与实施安全措施所需的全部专业技术和知识,可预见故障的危险后果、监测故障及其后果、降低有可能造成人身伤害的故障的发生机率并采取适当的补救措施。客户将全额赔偿因在此类安全关键应用中使用任何 TI 组件而对 TI 及其代理造成的任何损失。

在某些场合中,为了推进安全相关应用有可能对 TI 组件进行特别的促销。TI 的目标是利用此类组件帮助客户设计和创立其特有的可满足适用的功能安全性标准和要求的终端产品解决方案。尽管如此,此类组件仍然服从这些条款。

TI 组件未获得用于 FDA Class III (或类似的生命攸关医疗设备)的授权许可,除非各方授权官员已经达成了专门管控此类使用的特别协议。

只有那些 TI 特别注明属于军用等级或“增强型塑料”的 TI 组件才是设计或专门用于军事/航空应用或环境的。购买者认可并同意,对并非指定面向军事或航空航天用途的 TI 组件进行军事或航空航天方面的应用,其风险由客户单独承担,并且由客户独立负责满足与此类使用相关的所有法律和法规要求。

TI 已明确指定符合 ISO/TS16949 要求的产品,这些产品主要用于汽车。在任何情况下,因使用非指定产品而无法达到 ISO/TS16949 要求, TI 不承担任何责任。

	产品		应用
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	www.ti.com.cn/dataconverters	消费电子	www.ti.com.cn/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com.cn/energy
DSP - 数字信号处理器	www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	www.ti.com.cn/microcontrollers		
RFID 系统	www.ti.com.cn/rfidsys		
OMAP应用处理器	www.ti.com/omap		
无线连通性	www.ti.com.cn/wirelessconnectivity	德州仪器在线技术支持社区	www.deyisupport.com

邮寄地址: 上海市浦东新区世纪大道1568号, 中建大厦32楼邮政编码: 200122
Copyright © 2016, 德州仪器半导体技术(上海)有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
LP592201DSCR	ACTIVE	WSON	DSC	10	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 125	592201	Samples
LP592201D SCT	ACTIVE	WSON	DSC	10	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 125	592201	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.



(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

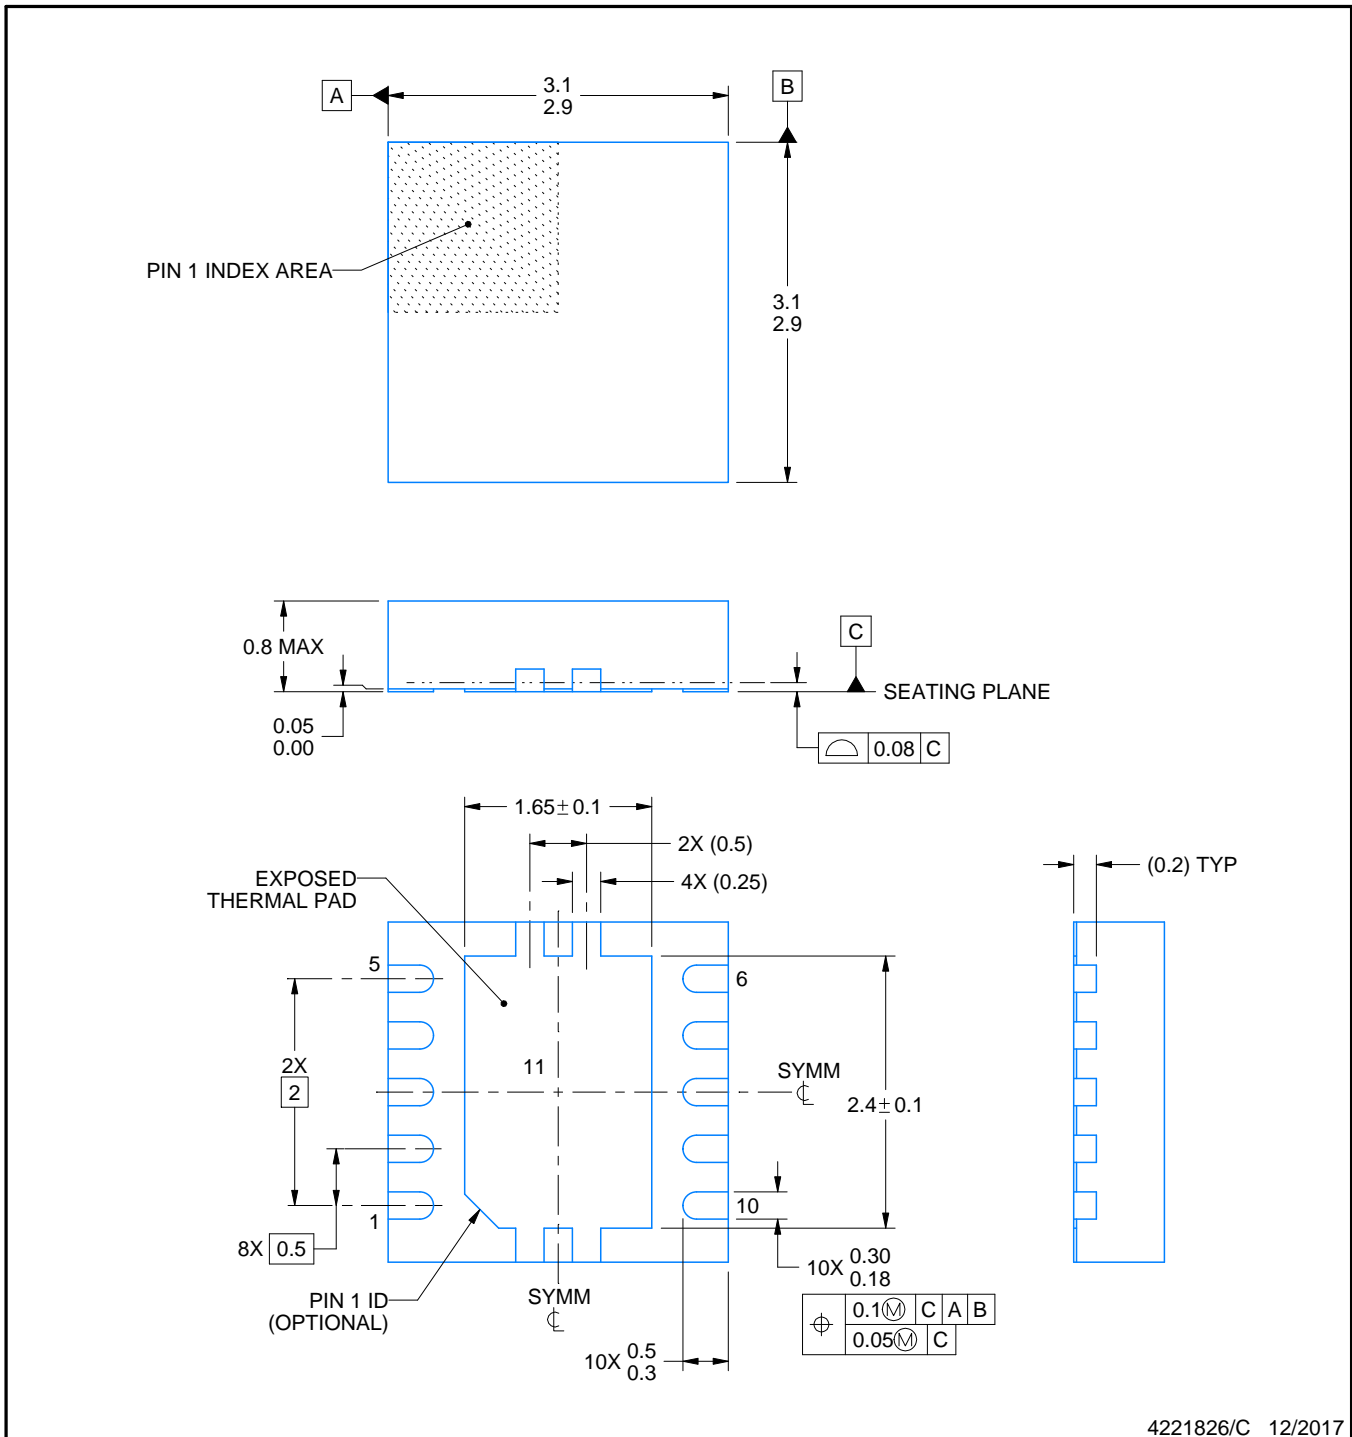

4221826/C 12/2017

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

EXAMPLE STENCIL DESIGN

DSC0010J

WSON - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

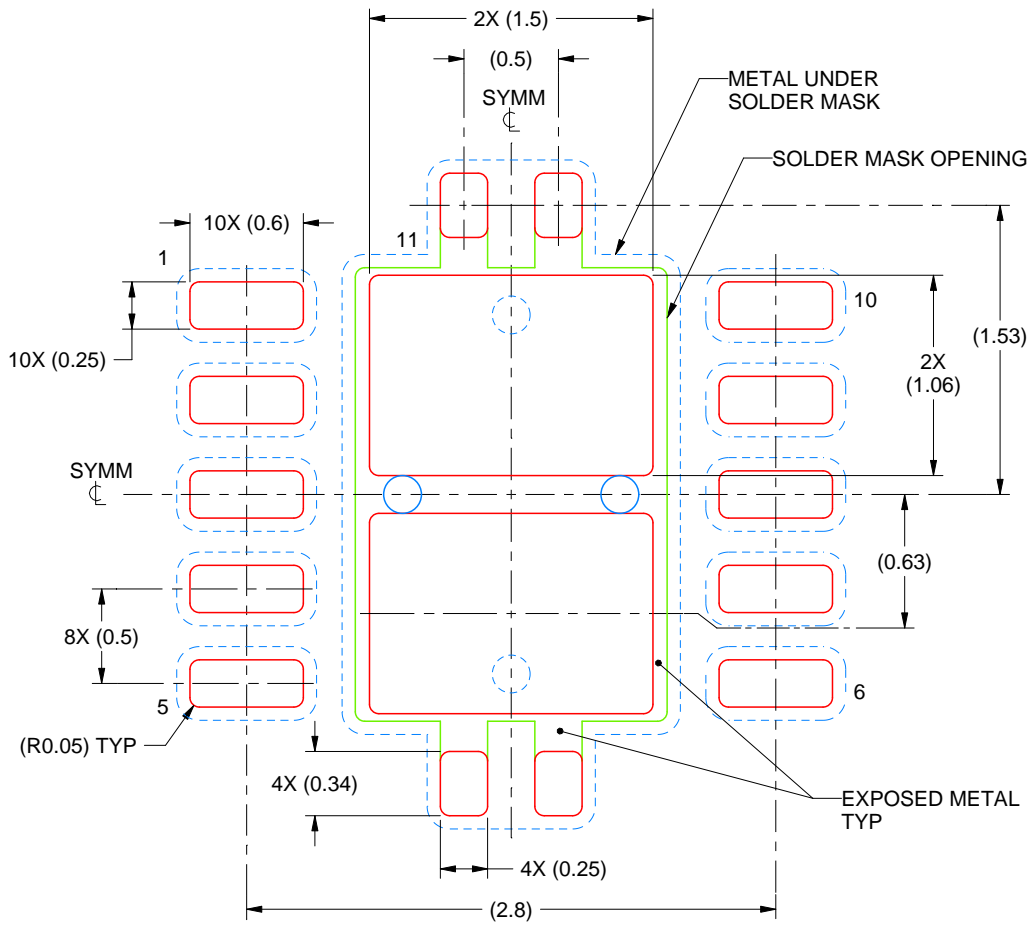

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 11:
80% PRINTED SOLDER COVERAGE BY AREA
SCALE:25X

4221826/C 12/2017

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要声明

德州仪器 (TI) 公司有权按照最新发布的 JESD46 对其半导体产品和服务进行纠正、增强、改进和其他修改，并不再按最新发布的 JESD48 提供任何产品和服务。买方在下订单前应获取最新的相关信息，并验证这些信息是否完整且是最新的。

TI 公布的半导体产品销售条款 (<http://www.ti.com/sc/docs/stdterms.htm>) 适用于 TI 已认证和批准上市的已封装集成电路产品的销售。另有其他条款可能适用于其他类型 TI 产品及服务的使用或销售。

复制 TI 数据表上 TI 信息的重要部分时，不得变更该等信息，且必须随附所有相关保证、条件、限制和通知，否则不得复制。TI 对该等复制文件不承担任何责任。第三方信息可能受到其它限制条件的制约。在转售 TI 产品或服务时，如果存在对产品或服务参数的虚假陈述，则会失去相关 TI 产品或服务的明示或暗示保证，且构成不公平的、欺诈性商业行为。TI 对此类虚假陈述不承担任何责任。

买方和在系统中整合 TI 产品的其他开发人员（总称“设计人员”）理解并同意，设计人员在设计应用时应自行实施独立的分析、评价和判断，且应全权负责并确保应用的安全性，及设计人员的应用（包括应用中使用的 TI 产品）应符合所有适用的法律法规及其他相关要求。设计人员就自己设计的应用声明，其具备制订和实施下列保障措施所需的一切必要专业知识，能够 (1) 预见故障的危险后果，(2) 监视故障及其后果，以及 (3) 降低可能导致危险的故障几率并采取适当措施。设计人员同意，在使用或分发包含 TI 产品的任何应用前，将彻底测试该等应用和该等应用中所用 TI 产品的功能。

TI 提供技术、应用或其他设计建议、质量特点、可靠性数据或其他服务或信息，包括但不限于与评估模块有关的参考设计和材料（总称“TI 资源”），旨在帮助设计人员开发整合了 TI 产品的应用，如果设计人员（个人，或如果是代表公司，则为设计人员的公司）以任何方式下载、访问或使用任何特定的 TI 资源，即表示其同意仅为该等目标，按照本通知的条款使用任何特定 TI 资源。

TI 所提供的 TI 资源，并未扩大或以其他方式修改 TI 对 TI 产品的公开适用的质保及质保免责声明；也未导致 TI 承担任何额外的义务或责任。TI 有权对其 TI 资源进行纠正、增强、改进和其他修改。除特定 TI 资源的公开文档中明确列出的测试外，TI 未进行任何其他测试。

设计人员只有在开发包含该等 TI 资源所列 TI 产品的应用时，才被授权使用、复制和修改任何相关 TI 资源。但并未依据禁止反言原则或其他法律授予您任何 TI 知识产权的任何其他明示或默示的许可，也未授予您 TI 或第三方的任何技术或知识产权的许可，该等许可包括但不限于任何专利权、版权、屏蔽作品权或与美国 TI 产品或服务的任何整合、机器制作、流程相关的其他知识产权。涉及或参考了第三方产品或服务的信息不构成使用此类产品或服务的许可或与其相关的保证或认可。使用 TI 资源可能需要您向第三方获得对该等第三方专利或其他知识产权的许可。

TI 资源系“按原样”提供。TI 兹免除对资源及其使用作出所有其他明确或默示的保证或陈述，包括但不限于对准确性或完整性、产权保证、无屡发故障保证，以及适销性、适合特定用途和不侵犯任何第三方知识产权的任何默认保证。TI 不负责任何申索，包括但不限于因组合产品所致或与之有关的申索，也不为或对设计人员进行辩护或赔偿，即使该等产品组合已列于 TI 资源或其他地方。对因 TI 资源或其使用引起或与之有关的任何实际的、直接的、特殊的、附带的、间接的、惩罚性的、偶发的、从属或惩戒性损害赔偿，不管 TI 是否获悉可能会产生上述损害赔偿，TI 概不负责。

除 TI 已明确指出特定产品已达到特定行业标准（例如 ISO/TS 16949 和 ISO 26262）的要求外，TI 不对未达到任何该等行业标准要求而承担任何责任。

如果 TI 明确宣称产品有助于功能安全或符合行业功能安全标准，则该等产品旨在帮助客户设计和创作自己的符合相关功能安全标准和要求的的应用。在应用内使用产品的行为本身不会配有安全特性。设计人员必须确保遵守适用于其应用的相关安全要求和标准。设计人员不可将任何 TI 产品用于关乎性命的医疗设备，除非已由各方获得授权的管理人员签署专门的合同对此类应用专门作出规定。关乎性命的医疗设备是指出现故障会导致严重身体伤害或死亡的医疗设备（例如生命保障设备、心脏起搏器、心脏除颤器、人工心脏泵、神经刺激器以及植入设备）。此类设备包括但不限于，美国食品药品监督管理局认定为 III 类设备的设备，以及在美国以外的其他国家或地区认定为同等类别设备的所有医疗设备。

TI 可能明确指定某些产品具备某些特定资格（例如 Q100、军用级或增强型产品）。设计人员同意，其具备一切必要专业知识，可以为自己的应用选择适合的产品，并且正确选择产品的风险由设计人员承担。设计人员单方面负责遵守与该等选择有关的所有法律或监管要求。

设计人员同意向 TI 及其代表全额赔偿因其不遵守本通知条款和条件而引起的任何损害、费用、损失和/或责任。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2017 德州仪器半导体技术（上海）有限公司