

Surge arrester

2-Electrode arrester

Series/Type: DG2R2500L

Customer:

Version/Date: Issue 01/2017-10-19

Surge arrester

2-Electrode arrester

DG2R2500L

| Features | Applications |
|---|---|
| <ul style="list-style-type: none"> ● Extremely small size ● Extremely fast response time ● Stable performance over life ● Very low capacitance ● High insulation resistance ● RoHS-compatible | <ul style="list-style-type: none"> ● Consumer electronics ● AC Power line devices ● Power supplier |

Electrical specifications

| | | |
|--|------------------|----|
| DC breakdown voltage ¹⁾²⁾ | 2500 | V |
| Tolerance | ±20 | % |
| Min. | 2000 | V |
| Max. | 3000 | V |
| Impulse breakdown voltage | | |
| -For 99% measure values | ≤3500 | |
| at 1kv/us -Typical values of distribution | ≤3300 | V |
| Service life | | |
| 10 operations 50Hz,1S | 5 | A |
| 10 operations 8/20us | 5 | KA |
| Insulation resistance at DC 100V | ≥1 | GΩ |
| Capacitance at 1MHz | ≤1.5 | pF |
| AC withstand voltage | | |
| 1 S | 1250 | V |
| Weight | 1.5 | g |
| Storage and operations temperature | -40...+90 | °C |
| Climatic category (IEC60068-1) | 40/90/21 | |
| Marking,Blue positive | DG2R2500L | |




Tel: +86-510-81707285

Fax: +86-510-81707277

www.jsdgame.com

DC breakdown voltage

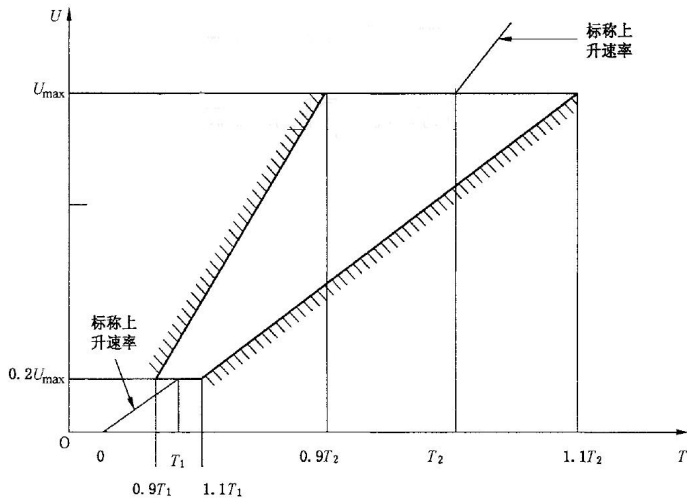

8/20us, Test wave

$$T1=1.25T=8\mu s \pm 20\%$$

$$T2=20\mu s \pm 20\%$$

10/700us, Test Wave


$$T1=1.67T=10\mu s \pm 20\%$$

$$T2=700\mu s \pm 20\%$$


10/1000us, Test Wave

$$T1=1.67T=10\mu s \pm 20\%$$

$$T2=1000\mu s \pm 20\%$$

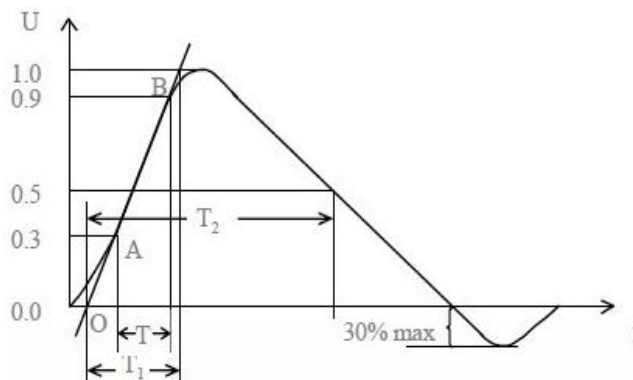

Recommended wave soldering profile

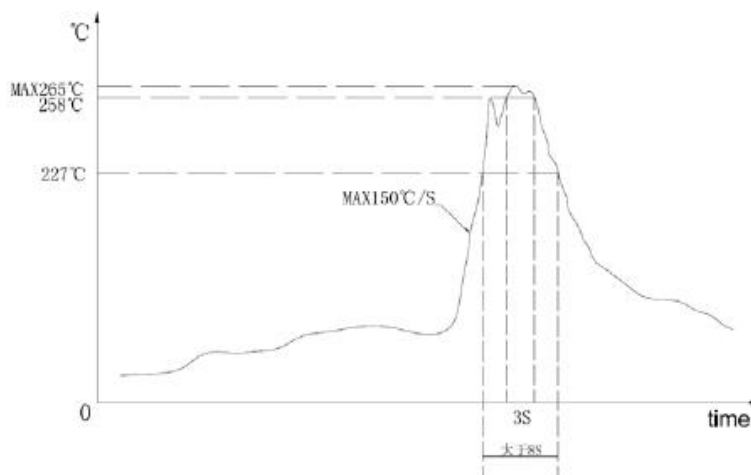


Surge arrester

2-Electrode arrester

DG2R2500L


- 1) Sampling size in accordance to AQL(C=0)
- 2) In ionized mode
- 3) Tests according to ITU-T Rec. K. 12 IEC61663-2 and IEC61643-311

Dimensions

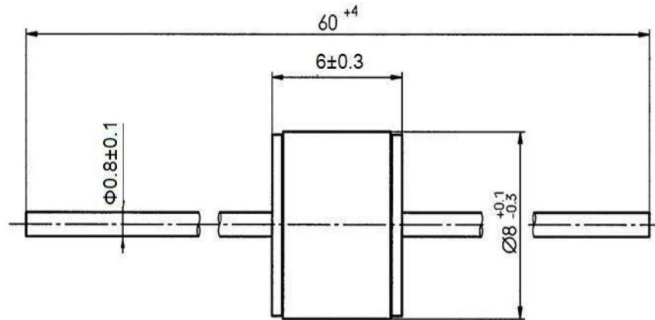

Wire Tin-plated

Packaging

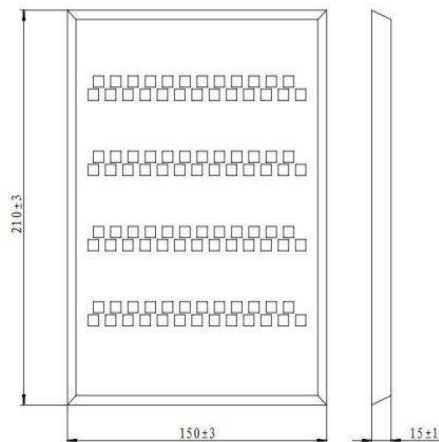

100pcs/box

Cautions and warnings

- Surge arresters must not be operated directly in power supply networks, whose maximum operating voltage exceeds the minimum spark-over voltage of the surge arresters.
- Surge arresters may become hot in case of longer periods of current stress (danger of burning).
- If the contacts of the surge arrester are defective, current stress can lead to the formation of sparks and Ic
- Surge arresters may be used only within their specified values. In case of overload, the head contacts may fail or the component may be destroyed.
- Damaged surge arresters must not be re-used.

DC Elec.

Issue 01/2017-10-19

Please read Cautions and warnings and important notes at the end of this document.

Page 4 of 4