

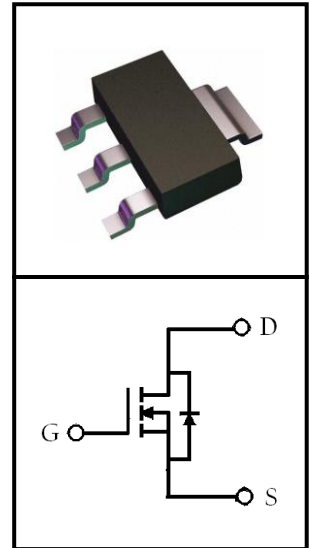
60V N-Channel Trench MOSFET

FEATURES

- Trench Power MOSFET Technology
- Low $R_{DS(ON)}$
- Low Gate Charge
- Optimized For Fast-switching Applications

APPLICATIONS

- High frequency DC-DC converters
- Power switching application



Device Marking and Package Information

| Device | Package | Marking |
|-----------|---------|---------|
| CTQ06N085 | SOT223 | 602 |

Absolute Maximum Ratings at $T_j = 25^\circ\text{C}$ unless otherwise noted

| Parameter | Symbol | Value | Unit |
|--|----------------|----------|------------------|
| Drain-Source Voltage ($V_{GS} = 0\text{V}$) | V_{DSS} | 60 | V |
| Continuous Drain Current $T_C = 25^\circ\text{C}$ (note1) | I_D | 5 | A |
| Continuous Drain Current $T_C = 100^\circ\text{C}$ (note1) | | 4 | |
| Pulsed Drain Current (note2) | I_{DM} | 12 | A |
| Gate Source Voltage | V_{GSS} | ± 20 | V |
| Power Dissipation $T_C = 25^\circ\text{C}$ (note4) | P_D | 1.25 | W |
| Operating Junction and Storage Temperature Range | T_J, T_{stg} | -55~+175 | $^\circ\text{C}$ |

Thermal Characteristics

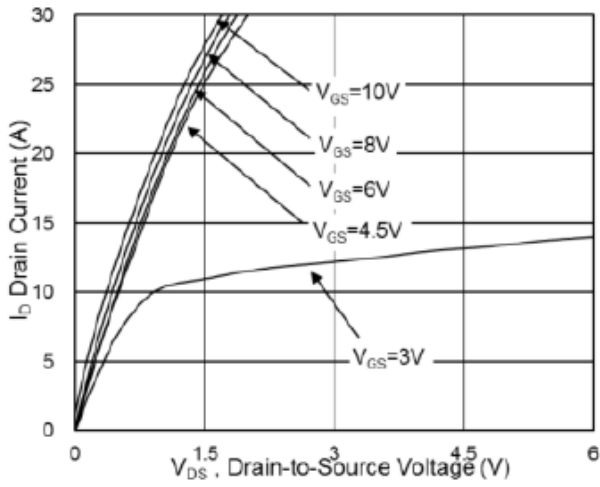
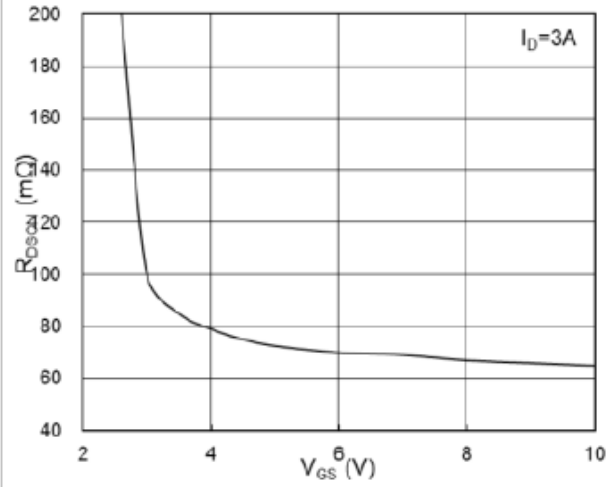
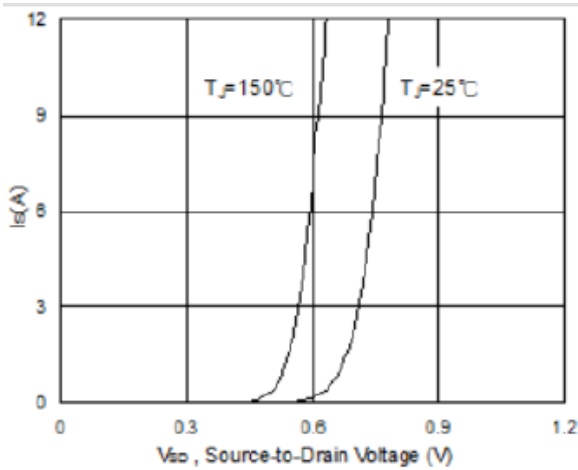
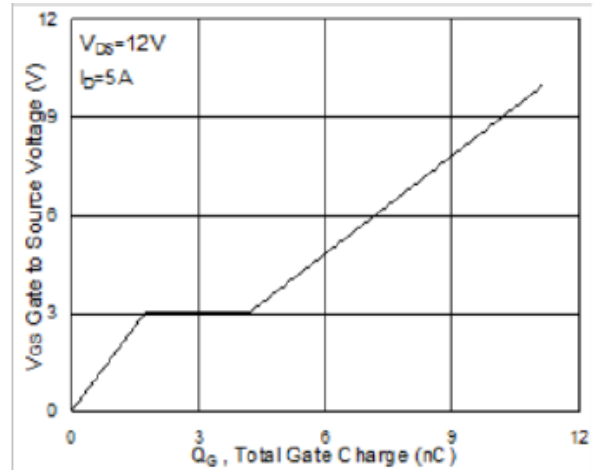
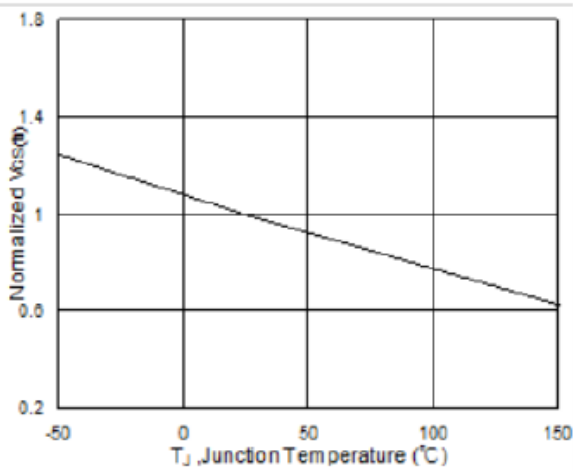
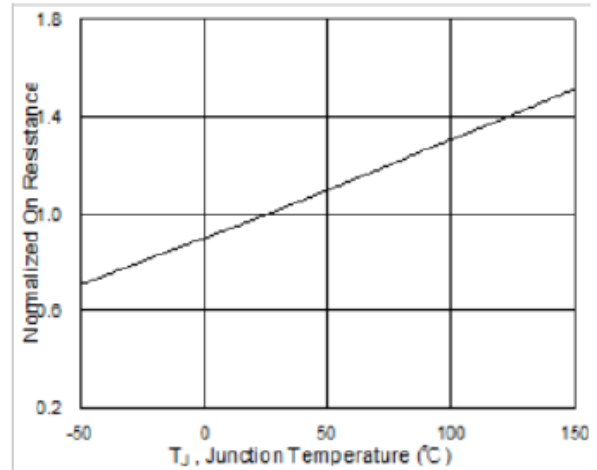
| Parameter | Symbol | Value | Unit |
|---|-----------------|-------|--------------------|
| Thermal Resistance, Junction-to-Case (note1) | $R_{\theta JC}$ | 80 | $^\circ\text{C/W}$ |
| Thermal Resistance, Junction-to-Ambient (note1) | $R_{\theta JA}$ | 95 | |

Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise specified

| Parameter | Symbol | Test Conditions | Value | | | Unit |
|---|---------------|---|-------|------|-----------|-----------|
| | | | Min. | Typ. | Max. | |
| Static | | | | | | |
| Drain-Source Breakdown Voltage | $V_{(BR)DSS}$ | $V_{GS} = 0V, I_D = 250\mu A$ | 60 | -- | -- | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS} = 60V, V_{GS} = 0V, T_J = 25^\circ\text{C}$ | -- | -- | 1 | μA |
| | | $V_{DS} = 60V, V_{GS} = 0V, T_J = 55^\circ\text{C}$ | -- | -- | 5 | μA |
| Gate-Source Leakage | I_{GSS} | $V_{GS} = \pm 20V$ | -- | -- | ± 100 | nA |
| Gate-Source Threshold Voltage | $V_{GS(th)}$ | $V_{DS} = V_{GS}, I_D = 250\mu A$ | 1.2 | 1.6 | 2.5 | V |
| Drain-Source On-Resistance (note2) | $R_{DS(on)}$ | $V_{GS} = 10V, I_D = 3A$ | -- | 65 | 85 | $m\Omega$ |
| | | $V_{GS} = 4.5V, I_D = 2A$ | -- | 75 | 100 | $m\Omega$ |
| Dynamic | | | | | | |
| Input Capacitance | C_{iss} | $V_{GS} = 0V,$ $V_{DS} = 12V,$ $f = 1.0MHz$ | -- | 695 | -- | μF |
| Output Capacitance | C_{oss} | | -- | 148 | -- | |
| Reverse Transfer Capacitance | C_{rss} | | -- | 7 | -- | |
| Total Gate Charge (4.5V) | Q_g | $V_{DS} = 15V, I_D = 1A,$ $V_{GS} = 10V$ | -- | 5.5 | -- | nC |
| Gate-Source Charge | Q_{gs} | | -- | 1.8 | -- | |
| Gate-Drain Charge | Q_{gd} | | -- | 2.4 | -- | |
| Turn-on Delay Time | $t_{d(on)}$ | $V_{DS} = 12V, I_D = 5A$ $, R_G = 3.3\Omega, V_{GS} = 10V$ | -- | 6 | -- | ns |
| Turn-on Rise Time | t_r | | -- | 10 | -- | |
| Turn-off Delay Time | $t_{d(off)}$ | | -- | 15 | -- | |
| Turn-off Fall Time | t_f | | -- | 7 | -- | |
| Body Diode Characteristics | | | | | | |
| Source-Drain Current(Body Diode) | I_S | | -- | -- | 5 | A |
| Pulsed Source-Drain Current(Body Diode) | I_{SDM} | | -- | -- | 12 | |
| Body Diode Voltage | V_{SD} | $T_J = 25^\circ\text{C}, I_{SD} = 1A, V_{GS} = 0V$ | -- | -- | 1.2 | V |

Notes

1. The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
2. The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$
3. The EAS data shows Max. rating . The test condition is $V_{DD} = 25V, V_{GS} = 10V, L = 0.1mH$
4. The power dissipation is limited by 175 $^\circ\text{C}$ junction temperature
5. The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics $T_J = 25^\circ\text{C}$, unless otherwise noted

Fig.1 Typical Output Characteristics

Fig.2 On-Resistance vs. G-S Voltage

Fig.3 Source Drain Forward Characteristics

Fig.4 Gate-Charge Characteristics

Fig.5 Normalized $V_{GS(th)}$ vs. T_J

Fig.6 Normalized $R_{DS(on)}$ vs. T_J

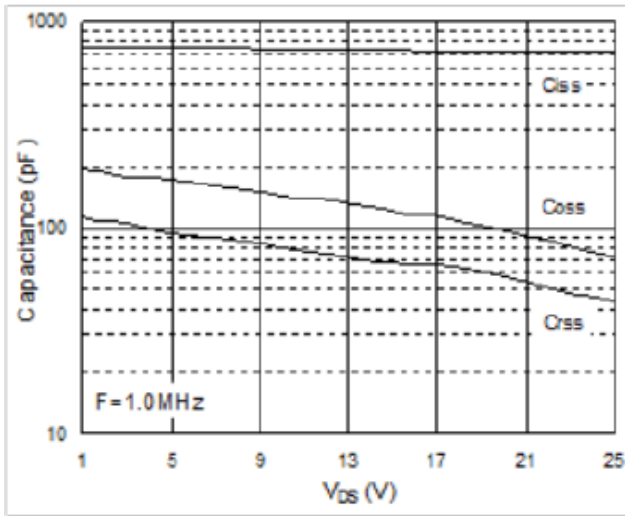
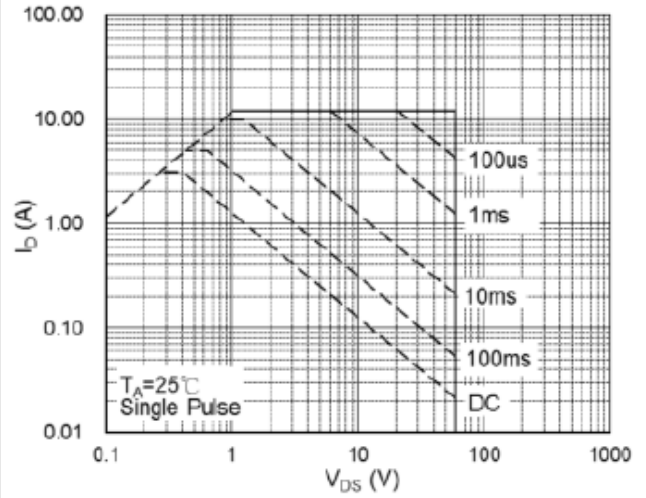
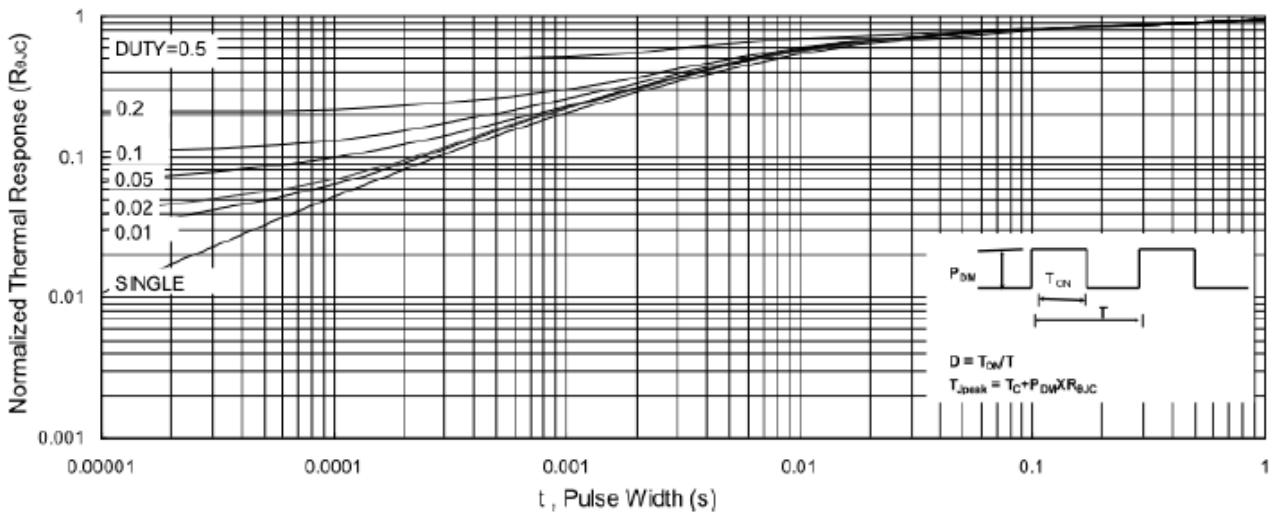
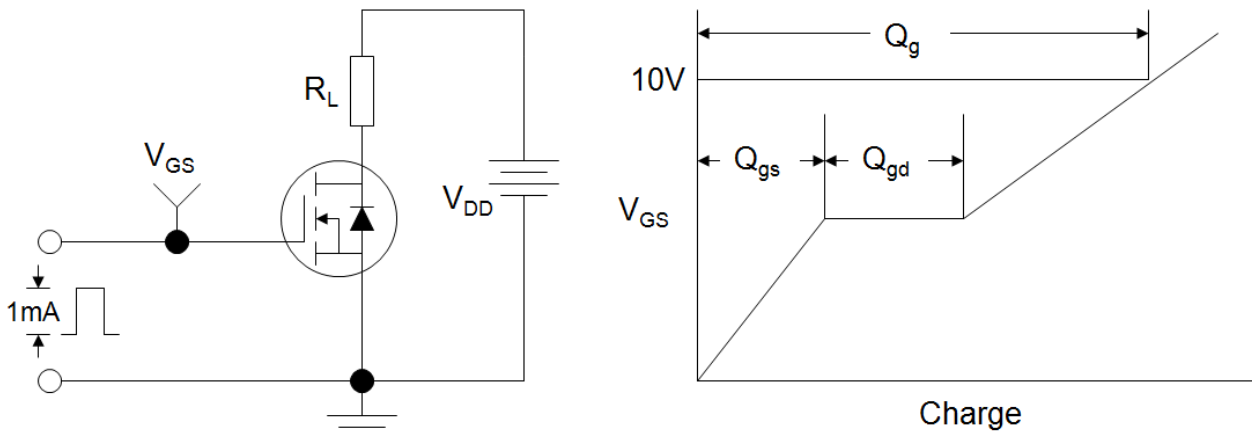
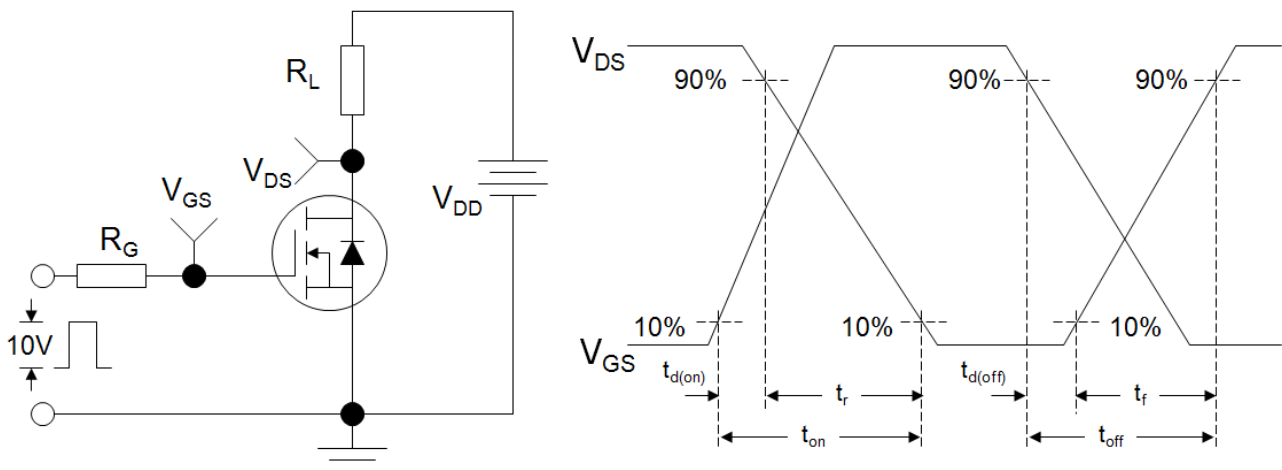
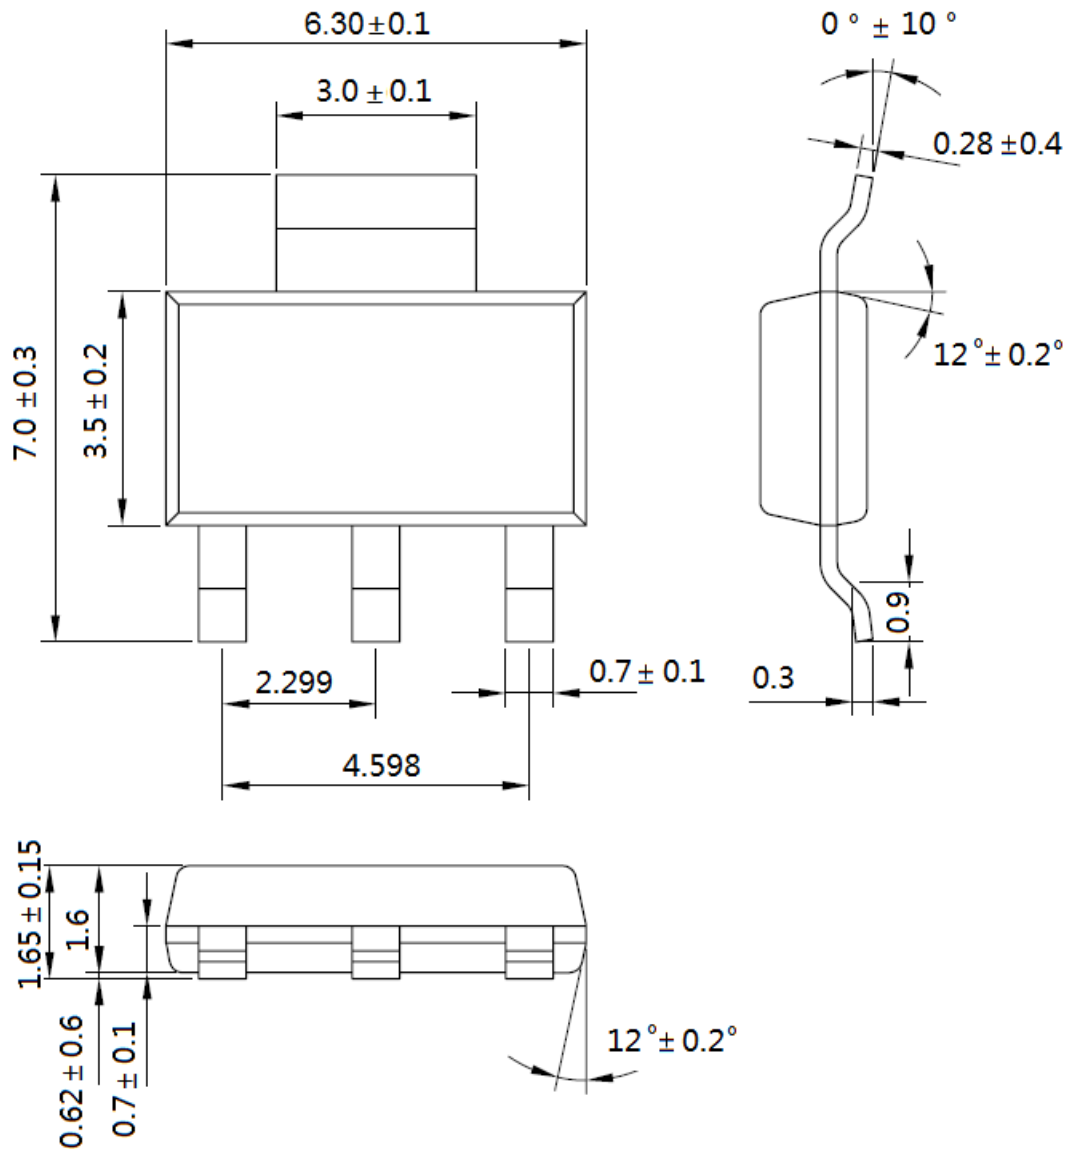
Typical Characteristics $T_J = 25^{\circ}\text{C}$, unless otherwise noted

Fig.7 Capacitance

Fig.8 Safe Operating Area

Fig.9 Normalized Maximum Transient Thermal Impedance

Figure A: Gate Charge Test Circuit and Waveform

Figure B: Resistive Switching Test Circuit and Waveform

Figure C: Unclamped Inductive Switching Test Circuit and Waveform


SOT223



Disclaimer

All product specifications and data are subject to change without notice.

For documents and material available from this datasheet, Suzhou Convert does not warrant or assume any legal liability or responsibility for the accuracy, completeness of any product or technology disclosed hereunder.

No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document or by any conduct of Suzhou Convert.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless. Customers using or selling Suzhou Convert products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Suzhou Convert for any damages arising or resulting from such use or sale.

Suzhou Convert disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Suzhou Convert's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

Suzhou Convert Semiconductor CO., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

In the event that any or all Suzhou Convert products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. Suzhou Convert believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.