

# 2 A Low-Voltage PMOS-NMOS Bridge Driver

## FAN3268-F085

### Description

The FAN3268 dual 2 A gate driver is optimized to drive a high-side P-channel MOSFET and a low-side N-channel MOSFET in motor control applications operating from a voltage rail up to 18 V. The driver has TTL input thresholds and provides buffer and level translation functions from logic inputs. Internal circuitry provides an under-voltage lockout function that prevents the output switching devices from operating if the  $V_{DD}$  supply voltage is below the operating level. Internal 100 k $\Omega$  resistors bias the non-inverting output low and the inverting output to  $V_{DD}$  to keep the external MOSFETs off during startup intervals when logic control signals may not be present.

The FAN3268 driver incorporates MillerDrive™ architecture for the final output stage. This bipolar-MOSFET combination provides high current during the Miller plateau stage of the MOSFET turn-on / turn-off process to minimize switching loss, while providing rail-to-rail voltage swing and reverse current capability.

The FAN3268 has two independent enable pins that default to on if not connected. If the enable pin for non-inverting channel A is pulled low, OUTA is forced low; if the enable pin for inverting channel B is pulled low, OUTB is forced high. If an input is left unconnected, internal resistors bias the inputs such that the external MOSFETs are off.

### Features

- 4.5 V to 18 V Operating Range
- Drives High-Side PMOS and Low-Side NMOS in Motor Control or Buck Step-Down Applications
- Inverting Channel B Biases High-Side PMOS Device Off (with internal 100 k $\Omega$  Resistor) when  $V_{DD}$  is below UVLO Threshold
- TTL Input Thresholds
- 2.4 A Sink / 1.6 A Source at  $V_{OUT} = 6$  V
- Internal Resistors Turn Driver Off If No Inputs
- MillerDrive Technology
- 8-Lead SOIC Package
- Rated from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  Ambient
- AEC-Q100 Qualified and PPAP Capable
- This is a Pb-Free Device


### Applications

- Motor Control with PMOS / NMOS Half-Bridge Configuration
- Buck Converters with High-Side PMOS Device; 100% Duty Cycle Operation Possible
- Logic-Controlled Load Circuits with High-Side PMOS Switch
- AEC-Q100 Qualified and PPAP Capable




ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)



SOIC8  
CASE 751EB

### MARKING DIAGRAM



FAN3268T = Specific Device Code  
Z = Assembly Plant Code  
XY = 2-Digit Data Code  
KK = -Digits Lo Run Traceability Code

### ORDERING INFORMATION

See detailed ordering and shipping information on page 13 of this data sheet.

### Related Resources

[AN-6069](#) - Application Review and Comparative Evaluation of Low-Side Gate Drivers

## FAN3268-F085

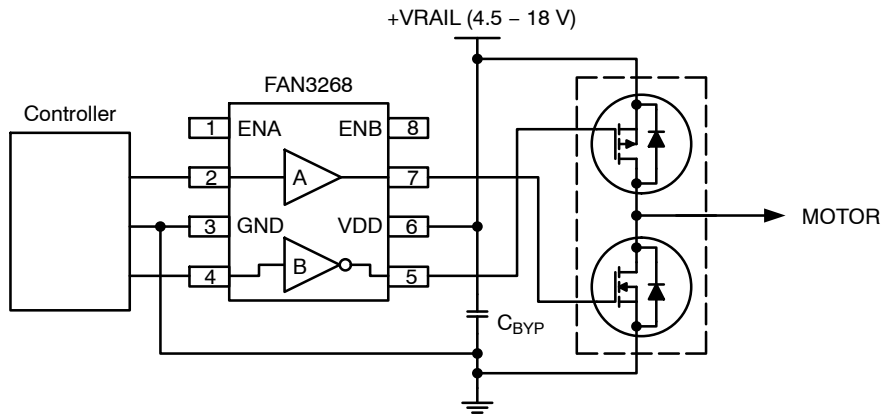


Figure 1. Typical Motor Drive Application

## PACKAGE OUTLINE

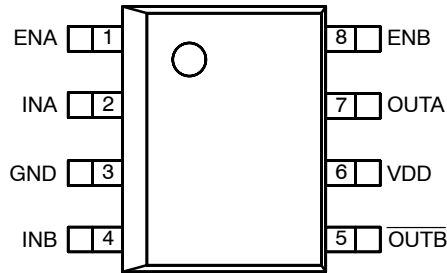


Figure 2. Pin Configuration (Top View)

## THERMAL CHARACTERISTICS (Note 1)

| Package                                       | $\theta_{JL}$ (Note 2) | $\theta_{JT}$ (Note 3) | $\theta_{JA}$ (Note 4) | $\Psi_{JB}$ (Note 5) | $\Psi_{JT}$ (Note 6) | Units                       |
|---|------------------------|------------------------|------------------------|----------------------|----------------------|-----------------------------|
| 8-Pin Small Outline Integrated Circuit (SOIC) | 40                     | 31                     | 89                     | 43                   | 3                    | $^{\circ}\text{C}/\text{W}$ |

1. Estimates derived from thermal simulation; actual values depend on the application.
2.  $\theta_{JL}$  ( $\theta_{JL}$ ): Thermal resistance between the semiconductor junction and the bottom surface of all the leads (including any thermal pad) that are typically soldered to a PCB.
3.  $\theta_{JT}$  ( $\theta_{JT}$ ): Thermal resistance between the semiconductor junction and the top surface of the package, assuming it is held at a uniform temperature by a top-side heatsink.
4.  $\theta_{JA}$  ( $\theta_{JA}$ ): Thermal resistance between junction and ambient, dependent on the PCB design, heat sinking, and airflow. The value given is for natural convection with no heatsink using a 2S2P board, as specified in JEDEC standards JESD51-2, JESD51-5, and JESD51-7, as appropriate.
5.  $\Psi_{JB}$  ( $\Psi_{JB}$ ): Thermal characterization parameter providing correlation between semiconductor junction temperature and an application circuit board reference point for the thermal environment defined in Note 4. For the SOIC-8 package, the board reference is defined as the PCB copper adjacent to pin 6.
6.  $\Psi_{JT}$  ( $\Psi_{JT}$ ): Thermal characterization parameter providing correlation between the semiconductor junction temperature and the center of the top of the package for the thermal environment defined in Note 4.

# FAN3268–F085

## PIN DEFINITIONS

| Pin No. | Name              | Description   |
|---------|-------------------|---|
| 1       | ENA               | Enable Input for Channel A. Pull pin low to inhibit driver A. ENA has TTL thresholds.   |
| 8       | ENB               | Enable Input for Channel B. Pull pin low to inhibit driver B. ENB has TTL thresholds.   |
| 3       | GND               | Ground. Common ground reference for input and output circuits.  |
| 2       | INA               | Input to Channel A.   |
| 4       | INB               | Input to Channel B.   |
| 7       | OUTA              | Gate Drive Output A: Held low unless required input(s) are present and $V_{DD}$ is above the UVLO threshold.                    |
| 5       | $\overline{OUTB}$ | Gate Drive Output B (inverted from the input): Held high unless required input is present and $V_{DD}$ is above UVLO threshold. |
| 6       | VDD               | Supply Voltage. Provides power to the IC.   |

## OUTPUT LOGIC

| FAN3268 (Channel A) |            |      |
|---------------------|------------|------|
| ENA                 | INA        | OUTA |
| 0                   | 0 (Note 7) | 0    |
| 0                   | 1          | 0    |
| 1 (Note 7)          | 0 (Note 7) | 0    |
| 1 (Note 7)          | 1          | 1    |

| FAN3268 (Channel B) |            |                   |
|---------------------|------------|-------------------|
| ENB                 | INB        | $\overline{OUTB}$ |
| 0                   | 0 (Note 7) | 1                 |
| 0                   | 1          | 1                 |
| 1 (Note 7)          | 0 (Note 7) | 1                 |
| 1 (Note 7)          | 1          | 0                 |

7. Default input signal if no external connection is made.

# FAN3268-F085

## BLOCK DIAGRAM

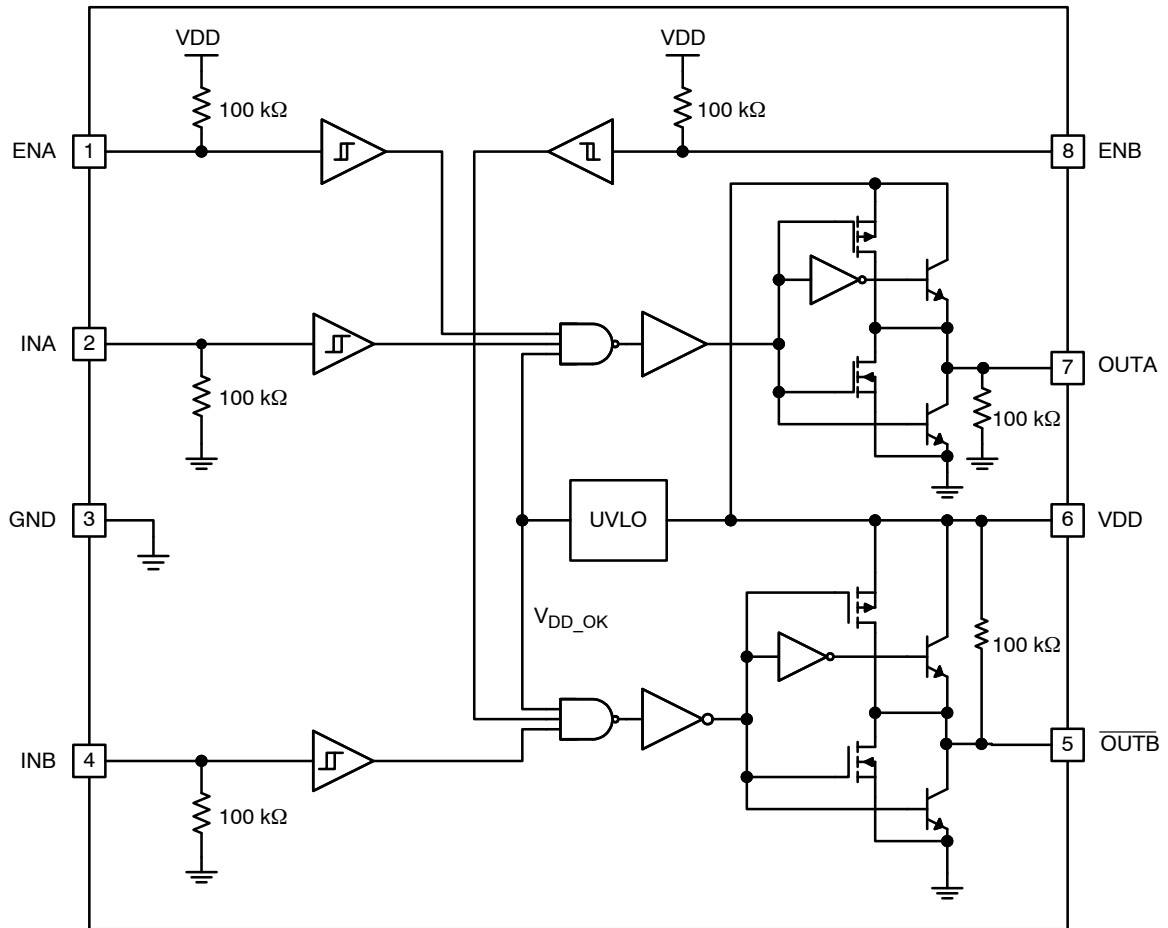


Figure 3. Block Diagram

### ABSOLUTE MAXIMUM RATINGS

| Symbol    | Parameter                               | Min       | Max            | Unit |
|-----------|---|-----------|----------------|------|
| $V_{DD}$  | VDD to GND                              | -0.3      | 20.0           | V    |
| $V_{EN}$  | ENA, ENB to GND                         | GND - 0.3 | $V_{DD} + 0.3$ | V    |
| $V_{IN}$  | INA, INB to GND                         | GND - 0.3 | $V_{DD} + 0.3$ | V    |
| $V_{OUT}$ | OUTA, OUTB to GND                       | GND - 0.3 | $V_{DD} + 0.3$ | V    |
| $T_L$     | Lead Soldering Temperature (10 Seconds) | -         | +260           | °C   |
| $T_J$     | Junction Temperature                    | -55       | +150           | °C   |
| $T_{STG}$ | Storage Temperature                     | -65       | +150           | °C   |

| Symbol   | Parameter                     | Min | Max      | Unit |
|----------|-------------------------------|-----|----------|------|
| $V_{DD}$ | Supply Voltage Range          | 4.5 | 18.0     | V    |
| $V_{EN}$ | Enable Voltage (ENA, ENB)     | 0   | $V_{DD}$ | V    |
| $V_{IN}$ | Input Voltage (INA, INB)      | 0   | $V_{DD}$ | V    |
| $T_A$    | Operating Ambient Temperature | -40 | +125     | °C   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

# FAN3268–F085

## ELECTRICAL CHARACTERISTICS (T<sub>J</sub> = 25°C unless otherwise noted)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------|-----------|------------|-----|-----|-----|------|
|--------|-----------|------------|-----|-----|-----|------|

### SUPPLY

|                  |  |   |     |      |      |    |
|------------------|--|---|-----|------|------|----|
| V <sub>DD</sub>  | Operating Range                          |   | 4.5 | –    | 18.0 | V  |
| I <sub>DD</sub>  | Supply Current Inputs / EN Not Connected |   | –   | 0.75 | 1.20 | mA |
| V <sub>ON</sub>  | Device Turn-On Voltage                   | INA = ENA = V <sub>DD</sub> , INB = ENB = 0 V | 3.3 | 3.9  | 4.5  | V  |
| V <sub>OFF</sub> | Device Turn-Off Voltage                  | INA = ENA = V <sub>DD</sub> , INB = ENB = 0 V | 3.1 | 3.7  | 4.3  | V  |

### INPUT (Note 8)

|                  |                          |  |     |     |     |   |
|------------------|--------------------------|--|-----|-----|-----|---|
| V <sub>IL</sub>  | INx Logic Low Threshold  |  | 0.8 | 1.2 | –   | V |
| V <sub>IH</sub>  | INx Logic High Threshold |  | –   | 1.6 | 2.0 | V |
| V <sub>HYS</sub> | Logic Hysteresis Voltage |  | 0.1 | 0.4 | 0.8 | V |

### ENABLE

|                  |                                    |                    |     |     |     |    |
|------------------|------------------------------------|--------------------|-----|-----|-----|----|
| V <sub>ENL</sub> | Enable Logic Low Threshold         | EN from 5 V to 0 V | 0.8 | 1.2 | –   | V  |
| V <sub>ENH</sub> | Enable Logic High Threshold        | EN from 0 V to 5 V | –   | 1.6 | 2.0 | V  |
| V <sub>HYS</sub> | Logic Hysteresis Voltage (Note 9)  |                    | –   | 0.4 | –   | V  |
| R <sub>PU</sub>  | Enable Pull-up Resistance (Note 9) |                    | –   | 100 | –   | kΩ |

### OUTPUT

|                        |   |  |   |      |    |    |
|------------------------|---|--|---|------|----|----|
| I <sub>SINK</sub>      | Out Current, Mid-Voltage, Sinking (Note 9)  | Out at V <sub>DD</sub> /2, C <sub>LOAD</sub> = 0.1 μF, f = 1 kHz               | – | 2.4  | –  | A  |
| I <sub>SOURCE</sub>    | Out Current, Mid-Voltage, Sourcing (Note 9) | Out at V <sub>DD</sub> /2, C <sub>LOAD</sub> = 0.1 μF, f = 1 kHz               | – | –1.6 | –  | A  |
| I <sub>PK_SINK</sub>   | Out Current, Peak, Sinking (Note 9)         | C <sub>LOAD</sub> = 0.1 μF, f = 1 kHz  | – | 3    | –  | A  |
| I <sub>PK_SOURCE</sub> | Out Current, Peak, Sourcing (Note 9)        | C <sub>LOAD</sub> = 0.1 μF, f = 1 kHz  | – | –3   | –  | A  |
| t <sub>RISE</sub>      | Output Rise Time (Note 10)                  | C <sub>LOAD</sub> = 1000 pF  | – | 12   | 22 | ns |
| t <sub>FALL</sub>      | Output Fall Time (Note 10)                  | C <sub>LOAD</sub> = 1000 pF  | – | 9    | 17 | ns |
| t <sub>D1</sub>        | Propagation Delay                           | 0 – 5 V <sub>IN</sub> , 1 V/ns Slew Rate                                       | 7 | 14   | 32 | ns |
| t <sub>D2</sub>        | Propagation Delay                           | 0 – 5 V <sub>IN</sub> , 1 V/ns Slew Rate                                       | 8 | 19   | 34 | ns |
| V <sub>OH</sub>        | High Level Output Voltage                   | V <sub>OH</sub> = V <sub>DD</sub> – V <sub>OUT</sub> , I <sub>OUT</sub> = 1 mA | – | 15   | 40 | mV |
| V <sub>OL</sub>        | Low Level Output Voltage                    | I <sub>OUT</sub> = 1 mA  | – | 10   | 25 | mV |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

8. EN inputs have TTL thresholds; refer to the ENABLE section.

9. Not tested in production.

10. See the Timing Diagrams of Figure 4 and Figure 5.

## TIMING DIAGRAMS

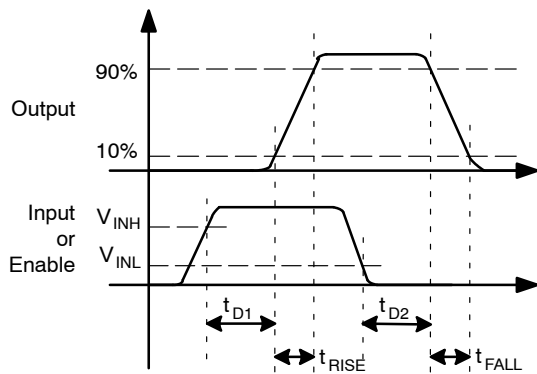


Figure 4. Non-Inverting

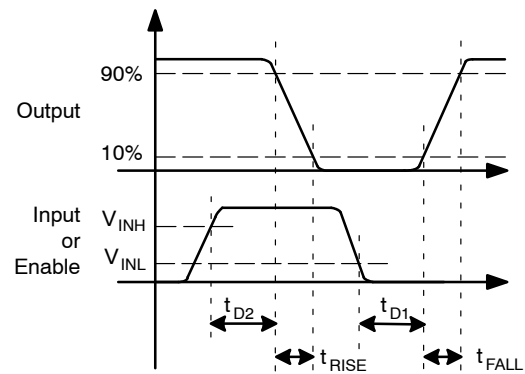


Figure 5. Inverting

**TYPICAL PERFORMANCE CHARACTERISTICS**

(Typical characteristics are provided at  $T_A = 25^\circ\text{C}$  and  $V_{DD} = 12\text{ V}$  unless otherwise noted.)

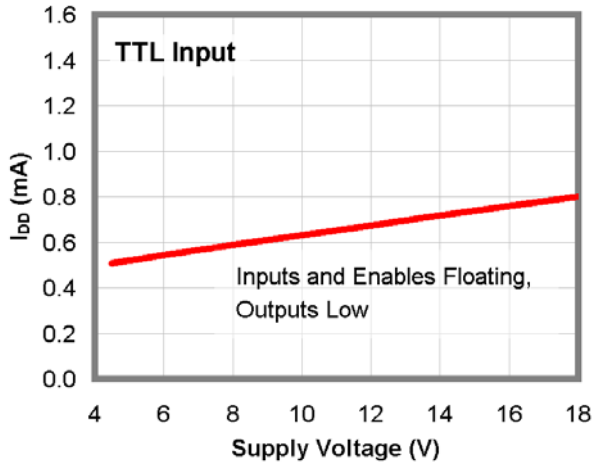


Figure 6.  $I_{DD}$  (Static) vs. Supply Voltage (Note 11)

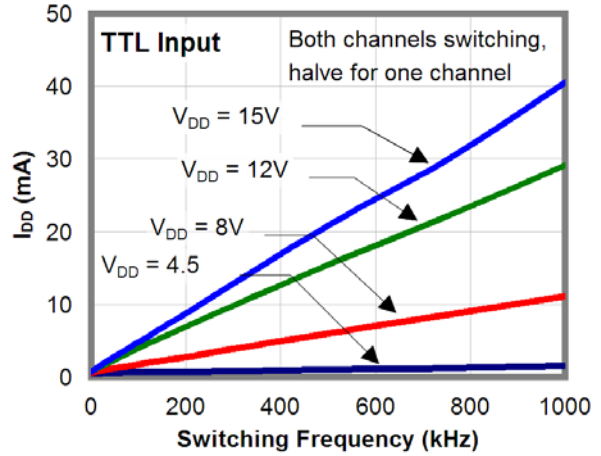


Figure 7.  $I_{DD}$  (No-Load) vs. Frequency

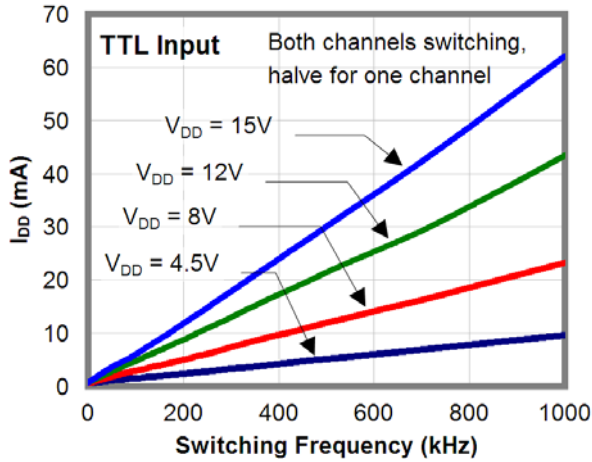


Figure 8.  $I_{DD}$  (1 nF Load) vs. Frequency

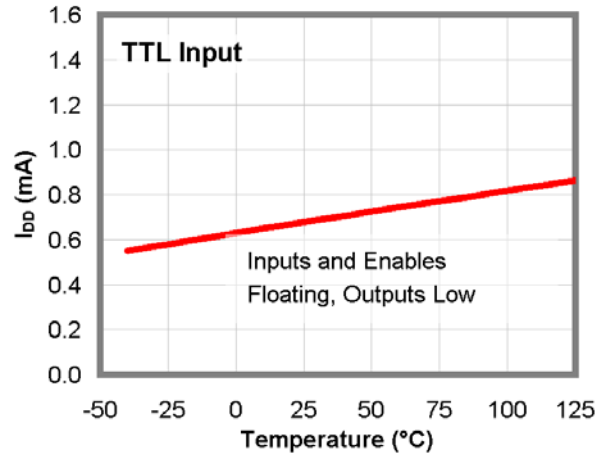


Figure 9.  $I_{DD}$  (Static) vs. Temperature (Note 11)

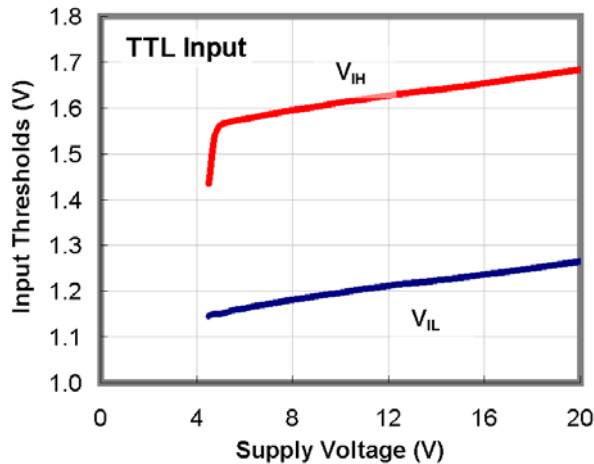


Figure 10. Input Thresholds vs. Supply Voltage

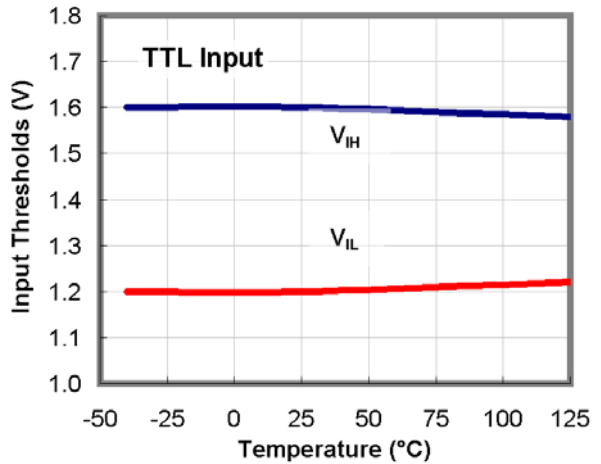


Figure 11. Input Thresholds vs. Temperature

NOTE:

11. For any inverting inputs pulled low, non-inverting inputs pulled high, or outputs driven high, static  $I_{DD}$  increases by the current flowing through the corresponding pull-up/down resistor shown in the block diagram in Figure 3.

TYPICAL PERFORMANCE CHARACTERISTICS

(Typical characteristics are provided at  $T_A = 25^\circ\text{C}$  and  $V_{DD} = 12\text{ V}$  unless otherwise noted.) (continued)

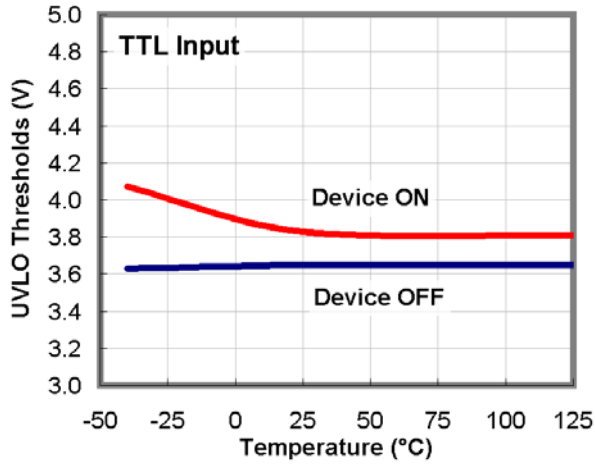


Figure 12. UVLO Threshold vs. Temperature

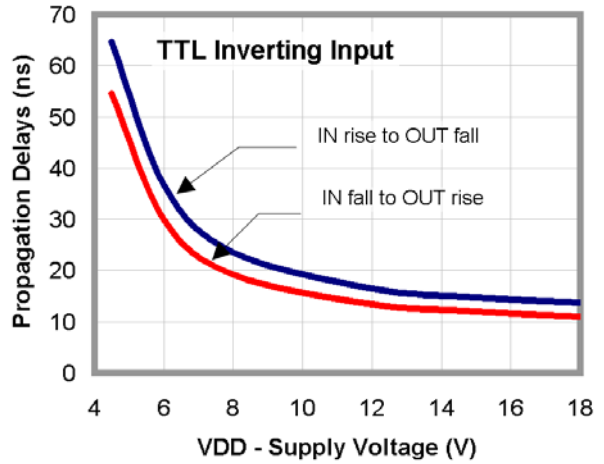


Figure 13. Propagation Delays vs. Supply Voltage

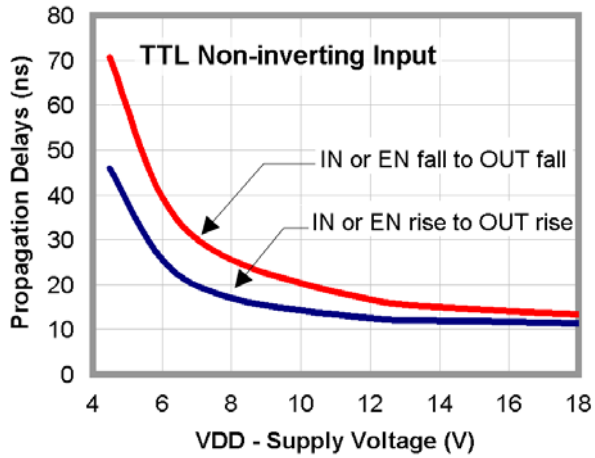


Figure 14. Propagation Delays vs. Supply Voltage

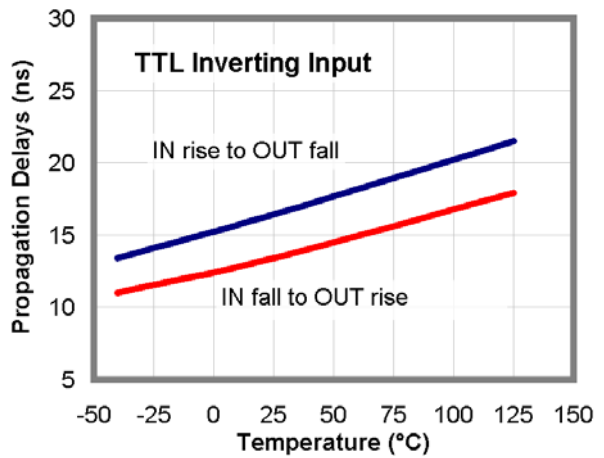


Figure 15. Propagation Delays vs. Temperature

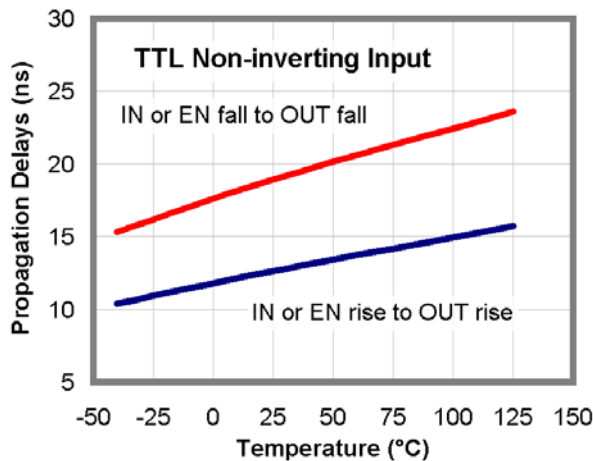


Figure 16. Propagation Delays vs. Temperature

TYPICAL PERFORMANCE CHARACTERISTICS

(Typical characteristics are provided at  $T_A = 25^\circ\text{C}$  and  $V_{DD} = 12\text{ V}$  unless otherwise noted.) (continued)

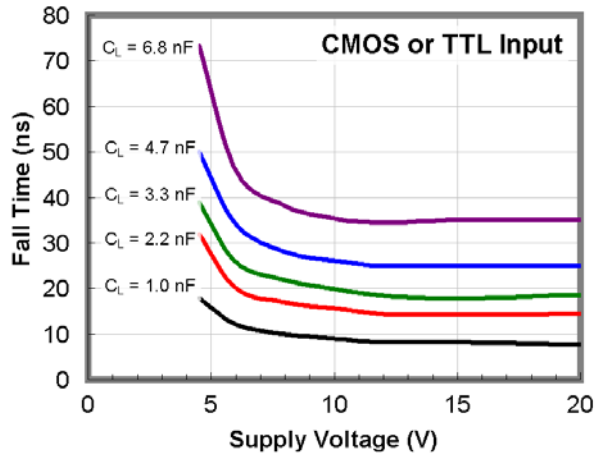


Figure 17. Fall Time vs. Supply Voltage

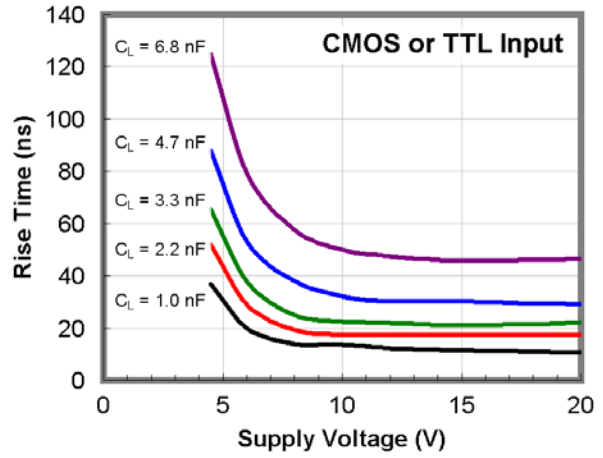


Figure 18. Rise Time vs. Supply Voltage

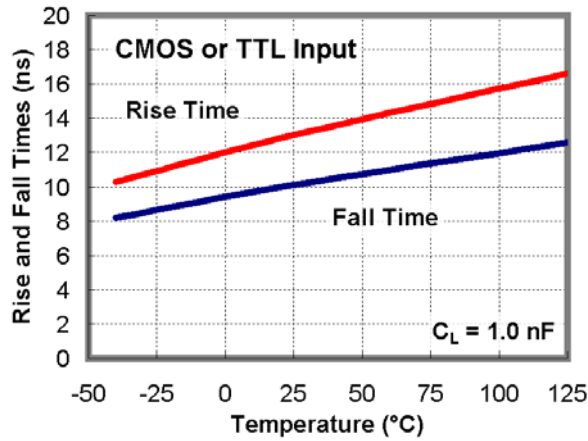


Figure 19. Rise and Fall Times vs. Temperature

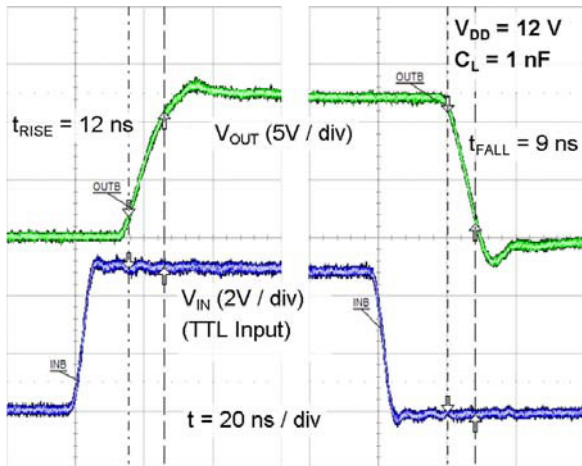


Figure 20. Rise/Fall Waveforms with 1 nF Load

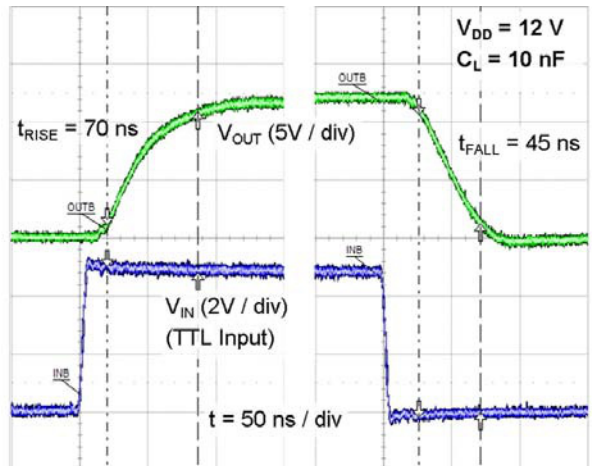


Figure 21. Rise/Fall Waveforms with 10 nF Load



TYPICAL PERFORMANCE CHARACTERISTICS

(Typical characteristics are provided at  $T_A = 25^\circ\text{C}$  and  $V_{DD} = 12\text{ V}$  unless otherwise noted.) (continued)

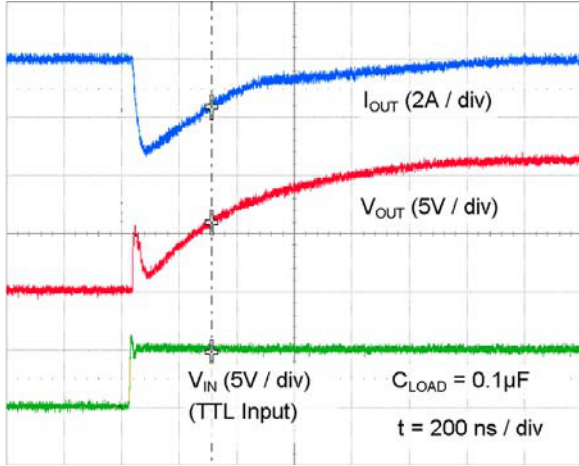


Figure 22. Quasi-Static Source Current with  $V_{DD} = 12\text{ V}$

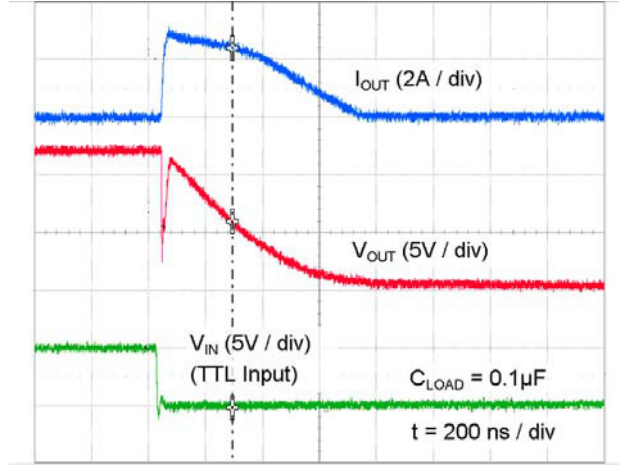


Figure 23. Quasi-Static Sink Current with  $V_{DD} = 12\text{ V}$

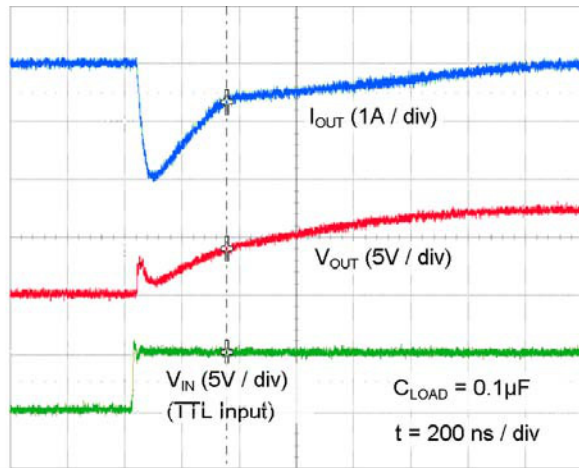


Figure 24. Quasi-Static Source Current with  $V_{DD} = 8\text{ V}$

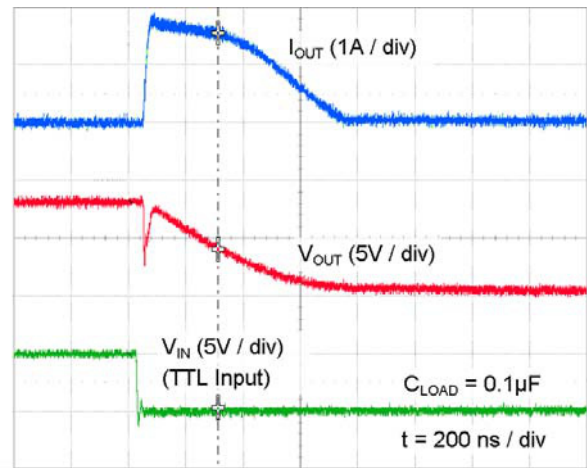


Figure 25. Quasi-Static Sink Current with  $V_{DD} = 8\text{ V}$

TEST CIRCUIT

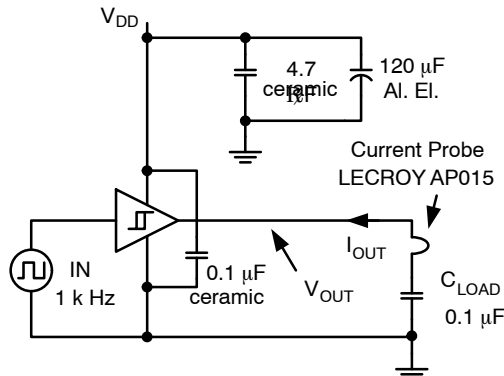


Figure 26. Quasi-Static  $I_{OUT} / V_{OUT}$  Test Circuit

## APPLICATIONS INFORMATION

**Input Thresholds**

The FAN3268 driver has TTL input thresholds and provides buffer and level translation functions from logic inputs. The input thresholds meet industry-standard TTL-logic thresholds, independent of the  $V_{DD}$  voltage, and there is a hysteresis voltage of approximately 0.4 V. These levels permit the inputs to be driven from a range of input logic signal levels for which a voltage over 2 V is considered logic high. The driving signal for the TTL inputs should have fast rising and falling edges with a slew rate of 6 V/ $\mu$ s or faster, so a rise time from 0 to 3.3 V should be 550 ns or less. With reduced slew rate, circuit noise could cause the driver input voltage to exceed the hysteresis voltage and retrigger the driver input, causing erratic operation.

**Static Supply Current**

In the  $I_{DD}$  (static) typical performance characteristics (see Figure 6), the curve is produced with all inputs / enables floating (OUT is low) and indicates the lowest static  $I_{DD}$  current for the tested configuration. For other states, additional current flows through the 100 k $\Omega$  resistors on the inputs and outputs shown in the block diagram (see Figure 3). In these cases, the actual static  $I_{DD}$  current is the value obtained from the curves plus this additional current.

**MillerDrive Gate Drive Technology**

FAN3268 gate drivers incorporate the MillerDrive architecture shown in Figure 1. For the output stage, a combination of bipolar and MOS devices provide large currents over a wide range of supply voltage and temperature variations. The bipolar devices carry the bulk of the current as OUT swings between one and two thirds  $V_{DD}$  and the MOS devices pull the output to the high or low rail.

The purpose of the MillerDrive architecture is to speed up switching by providing high current during the Miller plateau region when the gate-drain capacitance of the MOSFET is being charged or discharged as part of the turn-on / turn-off process.

For applications with zero voltage switching during the MOSFET turn-on or turn-off interval, the driver supplies high peak current for fast switching even though the Miller plateau is not present. This situation often occurs in synchronous rectifier applications because the body diode is generally conducting before the MOSFET is switched on.

The output pin slew rate is determined by  $V_{DD}$  voltage and the load on the output. It is not user adjustable, but a series resistor can be added if a slower rise or fall time at the MOSFET gate is needed.

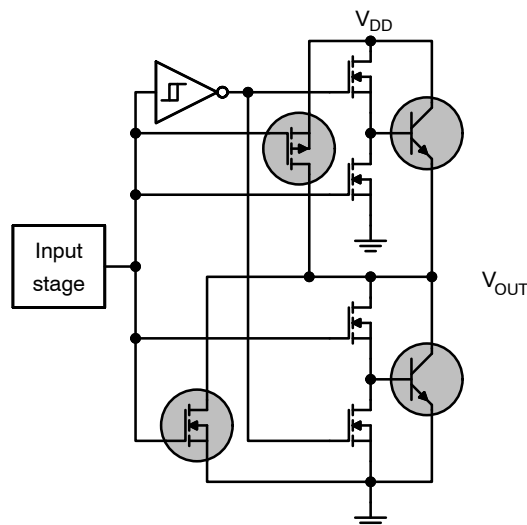


Figure 27. MillerDrive Output Architecture

**Under-Voltage Lockout**

Internal circuitry provides an under-voltage lockout function that prevents the output switching devices from operating if the  $V_{DD}$  supply voltage is below the operating level. When  $V_{DD}$  is rising, but below the 3.9 V operational level, internal 100 k $\Omega$  resistors bias the non-inverting output low and the inverting output to  $V_{DD}$  to keep the external MOSFETs off during startup intervals when logic control signals may not be present. After the part is active, the supply voltage must drop 0.2 V before the part shuts down. This hysteresis helps prevent chatter when low  $V_{DD}$  supply voltages have noise from the power switching.

 **$V_{DD}$  Bypass Capacitor Guidelines**

To enable this IC to turn a device on quickly, a local high-frequency bypass capacitor  $C_{BYP}$  with low ESR and ESL should be connected between the  $V_{DD}$  and GND pins with minimal trace length. This capacitor is in addition to bulk electrolytic capacitance of 10  $\mu$ F to 47  $\mu$ F commonly found on driver and controller bias circuits.

A typical criterion for choosing the value of  $C_{BYP}$  is to keep the ripple voltage on the  $V_{DD}$  supply to  $\leq 5\%$ . This is often achieved with a value  $\geq 20$  times the equivalent load capacitance  $C_{EQV}$ , defined here as  $Q_{GATE}/V_{DD}$ . Ceramic capacitors of 0.1  $\mu$ F to 1  $\mu$ F or larger are common choices, as are dielectrics, such as X5R and X7R, with good temperature characteristics and high pulse current capability.

If circuit noise affects normal operation, the value of  $C_{BYP}$  may be increased to 50 – 100 times the  $C_{EQV}$  or  $C_{BYP}$  may be split into two capacitors. One should be a larger value, based on equivalent load capacitance, and the other a smaller value, such as 1 – 10 nF mounted closest to the VDD and GND pins to carry the higher frequency components of the current pulses. The bypass capacitor must provide the pulsed current from both of the driver channels and, if the drivers are switching simultaneously, the combined peak current sourced from the  $C_{BYP}$  would be twice as large as when a single channel is switching.


**Layout and Connection Guidelines**

The FAN3268 gate driver incorporates fast-reacting input circuits, short propagation delays, and powerful output stages capable of delivering current peaks over 2 A to facilitate voltage transition times from under 10ns to over 150 ns. The following layout and connection guidelines are strongly recommended:

- Keep high-current output and power ground paths separate from logic and enable input signals and signal ground paths. This is especially critical when dealing with TTL-level logic thresholds at driver inputs and enable pins.
- Keep the driver as close to the load as possible to minimize the length of high-current traces. This reduces the series inductance to improve high-speed switching, while reducing the loop area that can radiate EMI to the driver inputs and surrounding circuitry.
- If the inputs to a channel are not externally connected, the internal 100 kΩ resistors indicated on block diagrams command a low output (channel A) or a high output (channel B). In noisy environments, it may be necessary to tie inputs or enables of an unused channel to VDD or GND using short traces to prevent noise from causing spurious output switching.
- Many high-speed power circuits can be susceptible to noise injected from their own output or other external sources, possibly causing output re-triggering. These effects can be obvious if the circuit is tested in breadboard or non-optimal circuit layouts with long input, enable, or output leads. For best results, make connections to all pins as short and direct as possible.
- The turn-on and turn-off current paths should be minimized.


**Operational Waveforms**

Figure 28 shows startup waveforms for non-inverting channel A. At power-up, the driver output for channel A remains low until the  $V_{DD}$  voltage reaches the UVLO turn-on threshold, then OUTA operates in-phase with INA.

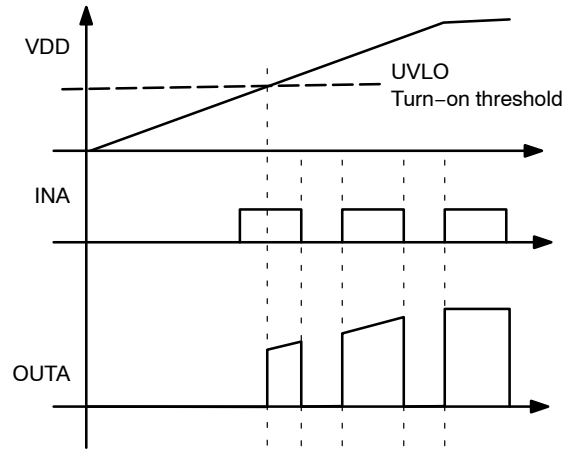

**Figure 28. Non-Inverting Startup Waveforms**

Figure 29 illustrates startup waveforms for inverting channel B. At power-up, the driver output for channel B is tied to  $V_{DD}$  through an internal 100 kΩ resistor until the  $V_{DD}$  voltage reaches the UVLO turn-on threshold, then OUTB operates out of phase with INB.

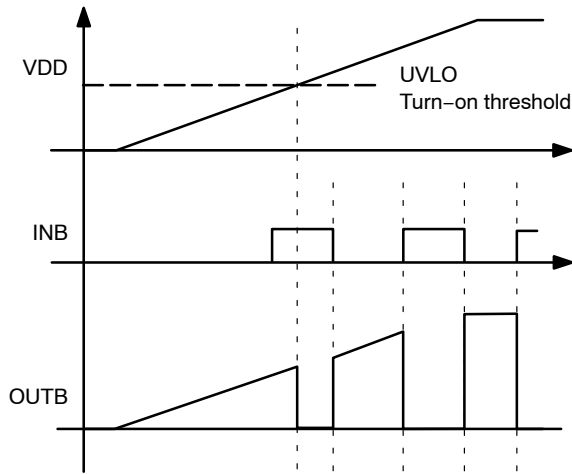

**Figure 29. Inverting Startup Waveforms**

**Thermal Guidelines**

Gate drivers used to switch MOSFETs and IGBTs at high frequencies can dissipate significant amounts of power. It is important to determine the driver power dissipation and the resulting junction temperature in the application to ensure that the part is operating within acceptable temperature limits.

The total power dissipation in a gate driver is the sum of two components,  $P_{GATE}$  and  $P_{DYNAMIC}$ :

$$P_{TOTAL} = P_{GATE} + P_{DYNAMIC} \tag{eq. 1}$$

Gate Driving Loss: The most significant power loss results from supplying gate current (charge per unit time) to switch the load MOSFET on and off at the switching frequency. The power dissipation that results from driving a MOSFET at a specified gate–source voltage,  $V_{GS}$ , with gate charge,  $Q_G$ , at switching frequency,  $f_{SW}$ , is determined by:

$$P_{GATE} = Q_G \times V_{GS} \times f_{SW} \times n \quad (\text{eq. 2})$$

where  $n$  is the number of driver channels in use (1 or 2).

Dynamic Pre–drive / Shoot–through Current: A power loss resulting from internal current consumption under dynamic operating conditions, including pin pull–up / pull–down resistors, can be obtained using the “ $I_{DD}$  (No–Load) vs. Frequency” graphs in Typical Performance Characteristics to determine the current  $I_{DYNAMIC}$  drawn from  $V_{DD}$  under actual operating conditions:

$$P_{DYNAMIC} = I_{DYNAMIC} \times V_{DD} \times n \quad (\text{eq. 3})$$

Once the power dissipated in the driver is determined, the driver junction rise with respect to circuit board can be evaluated using the following thermal equation, assuming  $\Psi_{JB}$  was determined for a similar thermal design (heat sinking and air flow):

$$T_J = P_{TOTAL} \times \Psi_{JB} + T_B \quad (\text{eq. 4})$$

where:

$T_J$  = driver junction temperature

$\Psi_{JB}$  = (psi) thermal characterization parameter relating temperature rise to total power dissipation

$T_B$  = board temperature in location defined in Note 1 under Thermal Resistance table.

As an example of a power dissipation calculation, consider an application driving two MOSFETs with a gate charge of 60 nC with  $V_{GS} = V_{DD} = 7$  V. At a switching frequency of 500 kHz, the total power dissipation is:

$$P_{GATE} = 60 \text{ nC} \times 7 \text{ V} \times 500 \text{ kHz} \times 2 = 0.42 \text{ W} \quad (\text{eq. 5})$$

$$P_{DYNAMIC} = 3 \text{ mA} \times 7 \text{ V} \times 2 = 0.042 \text{ W} \quad (\text{eq. 6})$$

$$P_{TOTAL} = 0.46 \text{ W} \quad (\text{eq. 7})$$

The SOIC–8 has a junction–to–board thermal characterization parameter of  $\Psi_{JB} = 43^\circ\text{C}/\text{W}$ . In a system application, the localized temperature around the device is a function of the layout and construction of the PCB along with airflow across the surfaces. To ensure reliable operation, the maximum junction temperature of the device must be prevented from exceeding the maximum rating of  $150^\circ\text{C}$ ; with 80% derating,  $T_J$  would be limited to  $120^\circ\text{C}$ . Rearranging Equation 4 determines the board temperature required to maintain the junction temperature below  $120^\circ\text{C}$ :

$$T_B = T_J - P_{TOTAL} \times \Psi_{JB} \quad (\text{eq. 8})$$

$$T_B = 120^\circ\text{C} - 0.46 \text{ W} \times 43^\circ\text{C}/\text{W} = 100^\circ\text{C} \quad (\text{eq. 9})$$

## FAN3268–F085

**Table 1. RELATED PRODUCTS**

| Part Number     | Type            | Gate Drive (Note 12)<br>(Sink/Src) | Input Threshold | Logic   | Package      |
|-----------------|-----------------|------------------------------------|-----------------|---|--------------|
| FAN3226C        | Dual 2 A        | +2.4 A / -1.6 A                    | CMOS            | Dual Inverting Channels + Dual Enable   | SOIC8        |
| FAN3226T        | Dual 2 A        | +2.4 A / -1.6 A                    | TTL             | Dual Inverting Channels + Dual Enable   | SOIC8        |
| FAN3227C        | Dual 2 A        | +2.4 A / -1.6 A                    | CMOS            | Dual Non-Inverting Channels + Dual Enable                                       | SOIC8        |
| FAN3227T        | Dual 2 A        | +2.4 A / -1.6 A                    | TTL             | Dual Non-Inverting Channels + Dual Enable                                       | SOIC8        |
| FAN3228C        | Dual 2 A        | +2.4 A / -1.6 A                    | CMOS            | Dual Channels of Two-Input/One-Output, Pin Config.1                             | SOIC8        |
| FAN3228T        | Dual 2 A        | +2.4 A / -1.6 A                    | TTL             | Dual Channels of Two-Input/One-Output, Pin Config.1                             | SOIC8        |
| FAN3229C        | Dual 2 A        | +2.4 A / -1.6 A                    | CMOS            | Dual Channels of Two-Input/One-Output, Pin Config.2                             | SOIC8        |
| FAN3229T        | Dual 2 A        | +2.4 A / -1.6 A                    | TTL             | Dual Channels of Two-Input/One-Output, Pin Config.2                             | SOIC8        |
| <i>FAN3268T</i> | <i>Dual 2 A</i> | <i>+2.4 A / -1.6 A</i>             | <i>TTL</i>      | <i>Non-Inverting Channel (NMOS) and Inverting Channel (PMOS) + Dual Enables</i> | <i>SOIC8</i> |
| FAN3223C        | Dual 4 A        | +4.3 A / -2.8 A                    | CMOS            | Dual Inverting Channels + Dual Enable   | SOIC8        |
| FAN3223T        | Dual 4 A        | +4.3 A / -2.8 A                    | TTL             | Dual Inverting Channels + Dual Enable   | SOIC8        |
| FAN3224C        | Dual 4 A        | +4.3 A / -2.8 A                    | CMOS            | Dual Non-Inverting Channels + Dual Enable                                       | SOIC8        |
| FAN3224T        | Dual 4 A        | +4.3 A / -2.8 A                    | TTL             | Dual Non-Inverting Channels + Dual Enable                                       | SOIC8        |
| FAN3225C        | Dual 4 A        | +4.3 A / -2.8 A                    | CMOS            | Dual Channels of Two-Input/One-Output   | SOIC8        |
| FAN3225T        | Dual 4 A        | +4.3 A / -2.8 A                    | TTL             | Dual Channels of Two-Input/One-Output   | SOIC8        |
| FAN3121C        | Single 9 A      | +9.7 A / -7.1 A                    | CMOS            | Single Inverting Channel + Enable   | SOIC8        |
| FAN3121T        | Single 9 A      | +9.7 A / -7.1 A                    | TTL             | Single Inverting Channel + Enable   | SOIC8        |
| FAN3122T        | Single 9 A      | +9.7 A / -7.1 A                    | CMOS            | Single Non-Inverting Channel + Enable   | SOIC8        |
| FAN3122C        | Single 9 A      | +9.7 A / -7.1 A                    | TTL             | Single Non-Inverting Channel + Enable   | SOIC8        |

12. Typical currents with OUT at 6 V and  $V_{DD} = 12$  V.

13. Thresholds proportional to an externally supplied reference voltage.

### ORDERING INFORMATION

| Device          | Logic  | Package            | Input Threshold | Shipping <sup>†</sup> |
|-----------------|--|--------------------|-----------------|-----------------------|
| FAN3268TMX–F085 | Non-Inverting Channel and Inverting Channel + Dual Enables | SOIC8<br>(Pb-Free) | TTL             | 2500 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.




**MECHANICAL CASE OUTLINE**  
**PACKAGE DIMENSIONS**

ON Semiconductor®



**SOIC8**  
**CASE 751EB**  
**ISSUE A**

DATE 24 AUG 2017

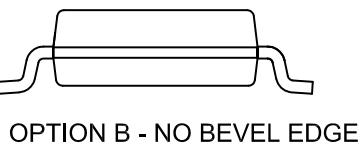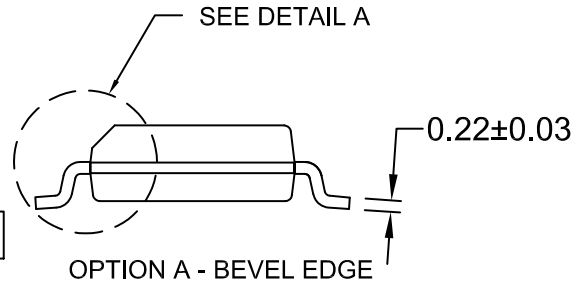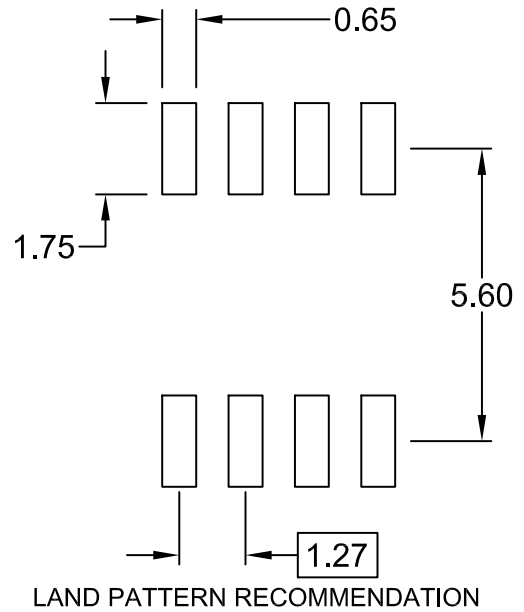

- NOTES:
- A) THIS PACKAGE CONFORMS TO JEDEC MS-012, VARIATION AA.
  - B) ALL DIMENSIONS ARE IN MILLIMETERS.
  - C) DIMENSIONS DO NOT INCLUDE MOLD FLASH OR BURRS.
  - D) LANDPATTERN STANDARD: SOIC127P600X175-8M

|                         |             |  |
|-------------------------|-------------|--|
| <b>DOCUMENT NUMBER:</b> | 98AON13735G | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | SOIC8       | <b>PAGE 1 OF 1</b>   |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

### TECHNICAL SUPPORT

North American Technical Support:  
Voice Mail: 1 800-282-9855 Toll Free USA/Canada  
Phone: 011 421 33 790 2910

### Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative