



Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at
www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

FAN6248

Advanced Synchronous Rectifier Controller for LLC Resonant Converter

The FAN6248 is an advanced synchronous rectifier (SR) controller that is optimized for LLC resonant converter topology with minimum external components. It has two driver stages for driving the SR MOSFETs which are rectifying the outputs of the secondary transformer windings. The two gate driver stages have their own sensing inputs and operate independently of each other. The adaptive parasitic inductance compensation function minimizes the body diode conduction maximizing the efficiency. The advanced control algorithm allows stable SR operation over entire load range. FAN6248 has two different versions - FAN6248HAMX having higher turn-off threshold voltage and FAN6248HBMX having lower turn-off threshold voltage.

Features

- Highly integrated self-contained control of synchronous rectifier with a minimum external component count
- Optimized for LLC resonant converter
- Anti shoot-through control for reliable SR operation
- Separate 100V rated sense inputs for sensing the drain and source voltage of each SR MOSFET
- Adaptive parasitic inductance compensation to minimize the body diode conduction
- SR current inversion detection under light load condition
- Light load detection
- Adaptive minimum on time for noise immunity
- Operating voltage range up to 30 V
- Low start-up and stand-by current consumption
- Operating frequency range from 25kHz up to 700 kHz
- SOIC-8 Package
- High driver output voltage of 10.5 V to drive all MOSFET brands to the lowest R_{DS_ON}
- Low operating current in green mode (typ. 350uA)

Applications


- High power density laptop adapter
- High Power Density Adapter
- Large Screen LCD-TV, PDP-TV, RP-TV Power
- High-Efficiency Desktop and Server Power Supplies
- Networking and Telecom Power Supplies
- High Power LED Lighting



ON Semiconductor®


www.onsemi.com

PACKAGE PICTURE




SOIC-8 NB
CASE 751

MARKING DIAGRAM



U = Frequency, H:High
V = Vth_off level, A or B
Z = Assembly Plant Code
X = Year Code
Y = Two Week Code
TT = Die Run Code

PIN CONNECTIONS

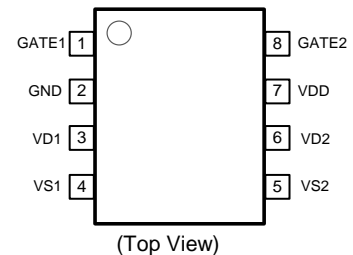

ORDERING INFORMATION

See detailed ordering and shipping information on page 3 of this data sheet.

FAN6248

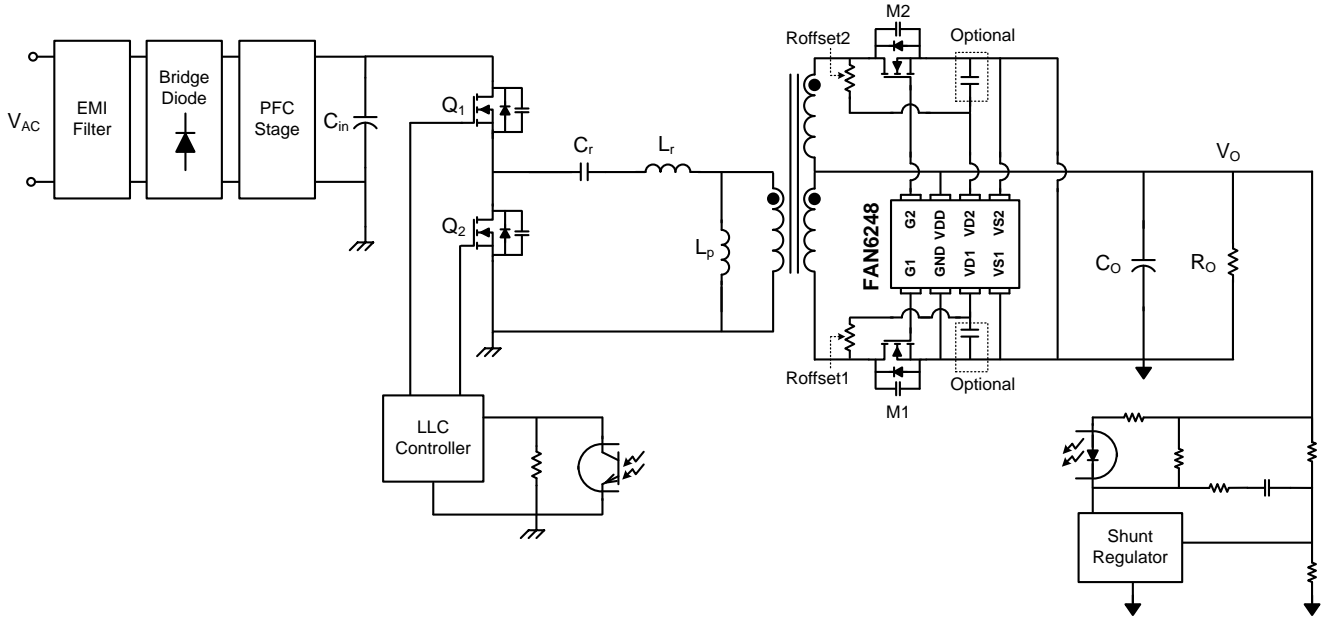


Figure 1. Typical Application Schematic of FAN6248

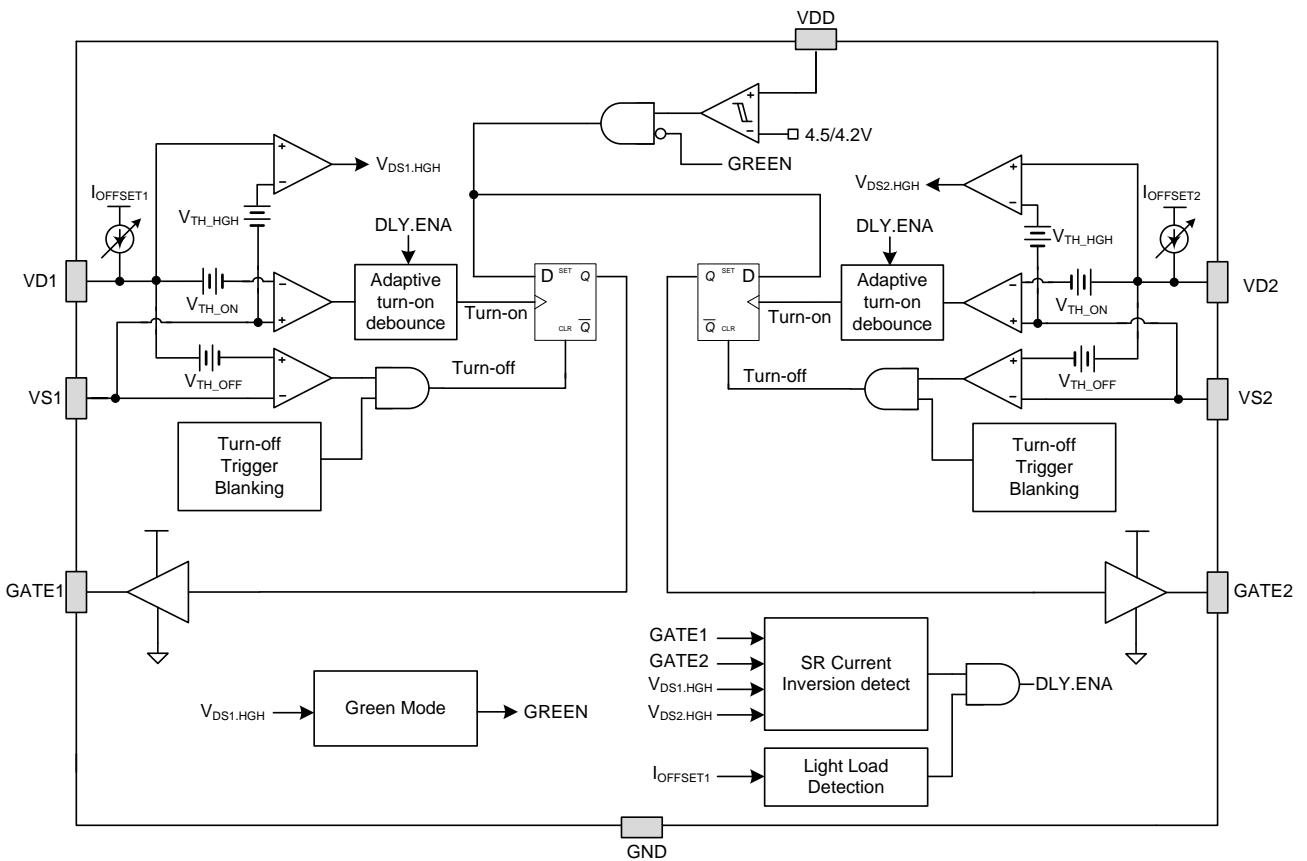


Figure 2. Internal Block Diagram of FAN6248

FAN6248

Pin Description

| Pin Number | Name | Description |
|------------|-------|---|
| 1 | GATE1 | Gate drive output for SR1 |
| 2 | GND | Ground |
| 3 | VD1 | Synchronous rectifier drain sense input. A I_{OFFSET1} current source flows out of the DRAIN pin such that an external series resistor can be used to adjust the synchronous rectifier turn-off threshold. The I_{OFFSET1} current source is turned off when V_{DD} is under-voltage or when switching is disabled in green mode |
| 4 | VS1 | Synchronous rectifier source sense input for SR1 |
| 5 | VS2 | Synchronous rectifier source sense input for SR2 |
| 6 | VD2 | Synchronous rectifier drain sense input. A I_{OFFSET2} current source flows out of the DRAIN pin such that an external series resistor can be used to adjust the synchronous rectifier turn-off threshold. The I_{OFFSET2} current source is turned off when V_{DD} is under-voltage or when switching is disabled in green mode |
| 7 | VDD | Supply Voltage |
| 8 | GATE2 | Gate drive output for SR2 |

Ordering and Shipping Information

| Ordering Code | Device Marking | $V_{\text{TH_OFF1}} / V_{\text{TH_OFF2}}$ | Package | Shipping |
|---------------|----------------|---|---------|--------------------|
| FAN6248HAMX | FAN6248HA | 130mV / 228mV | SOIC-8 | 2500 / Tape & Reel |
| FAN6248HBMX | FAN6248HB | 100mV / 175mV | SOIC-8 | 2500 / Tape & Reel |

FAN6248

MAXIMUM RATINGS

Stresses exceeding the absolute maximum ratings may damage the device. If any of these limits are exceeded, device functionality should not be assumed. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability.

| Symbol | Parameter | Min. | Max. | Unit |
|--|--|---|-------|------|
| V _{DD} | Power Supply Input Pin Voltage | -0.3 | 30 | V |
| V _{D1} , V _{D2} | Drain Sense Input Pin Voltage | -1 | 100 | V |
| V _{GATE1} , V _{GATE2} | Gate Drive Output Pin Voltage | -0.3 | 30 | V |
| V _{S1} , V _{S2} | Source Sense Input Pin Voltage | -0.4 | 0.4 | V |
| P _D | Power Dissipation (T _A =25°C) | | 0.625 | W |
| θ _{JA} | Thermal Resistance (Junction-to-Ambient Thermal) | | 165 | °C/W |
| T _J | Operating Junction Temperature | -40 | 150 | °C |
| T _{STG} | Storage Temperature Range | -60 | 150 | °C |
| T _L | Lead Temperature (Soldering) 10 Seconds | | 260 | °C |
| ESD | Electrostatic Discharge Capability | Human Body Model, ANSI / ESDA / JEDEC JS-001-2012 | | kV |
| | | Charged Device Model, JESD22-C101 | | |
| | | | 4 | |
| | | | 1.75 | |

Notes:

1. All voltage values are with respect to the GND pin.

THERMAL CHARACTERISTICS

| Rating | Symbol | Value | Unit |
|-------------------------|------------------|-------|------|
| Thermal Characteristics | R _{ψJT} | 22 | °C/W |
| Thermal Characteristics | R _{θJA} | 165 | °C/W |

Recommended Operating Conditions

The Recommended Operating Conditions table defines the continuous conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the data sheet specifications. ON Semiconductor does not recommend exceeding them or designing to Absolute Maximum Ratings

| Symbol | Parameter | Min. | Max. | Unit |
|-----------------------------------|--------------------------------|------|------|------|
| V _{DD} ² | VDD Pin Supply Voltage to GND | 0 | 27 | V |
| V _{D1} , V _{D2} | Drain Sense Input Pin Voltage | -0.7 | 100 | V |
| V _{S1} V _{S2} | Source Sense Input Pin Voltage | -0.4 | 0.4 | V |
| T _A ³ | Operating Ambient Temperature | -40 | +125 | °C |

Notes:

2. Allowable operating supply voltage V_{DD} can be limited by the power dissipation of FAN6248 related to switching frequency, load capacitance and ambient temperature.
3. Allowable operating ambient temperature can be limited by the power dissipation of FAN6248 related to switching frequency, load capacitance on GATE pin and V_{DD}.

FAN6248

Electrical Characteristics

$V_{DD} = 12V$ and $T_J = -40^{\circ}C$ to $125^{\circ}C$ unless otherwise specified

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--|---|--|-------|------|-------|---------|
| Input Voltage | | | | | | |
| V_{DD_ON} | Turn-On Threshold | V_{DD} rising | 4.3 | 4.5 | 4.7 | V |
| V_{DD_OFF} | Turn-Off Threshold | V_{DD} falling | 4.0 | 4.2 | 4.4 | V |
| I_{DD_OP} | Operating Current | $f_{SW} = 100kHz$, $C_{GATE} = 3.3nF$ | 7 | 8.5 | 10 | mA |
| $I_{DD_SRSTARTUP}$ | | $V_{DD} = V_{DD_ON} - 0.1V$ | | | 200 | μA |
| I_{DD_GREEN} | Operating Current in Green Mode | $V_{DD} = 12V$ (no switching) | | 350 | 500 | μA |
| Drain Voltage Sensing Section | | | | | | |
| $V_{OSI}^{(1)}$ | Comparator Input Offset Voltage | | -1 | 0 | 1 | mV |
| I_{OFFSET} | $I_{OFFSET1}$ and $I_{OFFSET2}$ | Maximum of adaptive offset current (15 steps, 9uA resolution) $I_{OFFSET} = I_{OFFSET_STEP15}$ | 112.5 | 135 | 157.5 | μA |
| V_{TH_ON} | Turn-On Threshold | $R_{DRAIN} = 0\Omega$ (includes comparator input offset voltage) | -290 | -240 | -190 | mV |
| $t_{ON_DLY}^{(1)}$ | Turn on delay for de-bounce time when turn-on delay mode is disabled by detecting normal SR current | From V_{DS} falling below V_{TH_ON} to V_{GATE} rising above V_{G_HG} (With 50mV overdrive), $C_{GATE} = 0nF$ | | 80 | | ns |
| $t_{ON_DLY2_H}^{(1)}$ | Turn on delay for de-bounce time when turn-on delay mode is enabled by detecting SR current inversion for HA and HB version | From V_{DS} falling below V_{TH_ON} to V_{GATE} rising above V_{G_HG} (With 50mV overdrive), $C_{GATE} = 0nF$ | | 380 | | ns |
| $V_{TH_OFF1_A}^{(1)}$ | First level Turn-Off Threshold for LA and HA version | $R_{DRAIN} = 0\Omega$ (includes comparator input offset voltage) | | 130 | | mV |
| $V_{TH_OFF2_HA}^{(1)}$ | Second level Turn-Off Threshold for HA version | $R_{DRAIN} = 0\Omega$ (includes comparator input offset voltage) | | 228 | | mV |
| $V_{TH_OFF1_B}^{(1)}$ | First level Turn-Off Threshold for LB and HB version | $R_{DRAIN} = 0\Omega$ (includes comparator input offset voltage) | | 100 | | mV |
| $V_{TH_OFF2_HB}^{(1)}$ | Second level Turn-Off Threshold for HB version | $R_{DRAIN} = 0\Omega$ (includes comparator input offset voltage) | | 175 | | mV |
| $t_{OFF_DLY}^{(1)}$ | Comparator delay for V_{TH_OFF1} | From V_{DS} rising above V_{TH_OFF} to V_{GATE} falling below V_{G_LW} (With 10mV overdrive), $C_{GATE} = 0nF$ | | 80 | | ns |
| V_{TH_HGH} | Drain voltage high detect threshold | V_{DS} Rising | 0.65 | 0.8 | 0.95 | V |
| $t_{DB_HGH_H}^{(1)}$ | V_{TH_HGH} detection blanking time for HA and HB version | From V_{DS} falling below V_{TH_ON} | | 400 | | ns |
| Minimum On-Time and Maximum On-Time | | | | | | |
| $K_{TON}^{(1)}$ | Adaptive minimum on time ratio | Ratio between t_{ON_MIN} and SR conduction time of previous switching cycle | | 50 | | % |
| $t_{ON_MIN_LH}^{(1)}$ | Minimum On-Time Lower Limit for HA and HB version | | | 200 | | ns |
| $t_{ON_MIN_UH}$ | Minimum On-Time Upper Limit for HA and HB version | | 0.96 | 1.2 | 1.44 | μs |
| $t_{SR_CNDT_H}$ | Minimum SR conduction time to enable SR for HA and HB version | The duration from turn-on trigger to V_{DS} rising above V_{TH_HGH} | 380 | 600 | 820 | ns |

FAN6248

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--|--|--|-----|------|-----|-------|
| t _{SR_MAX_H} ⁽¹⁾ | Maximum SR turn-on time for HA and HB version | | | 15 | | μs |
| Regulated Dead Time | | | | | | |
| t _{DEAD_H} ⁽¹⁾ | Dead time regulation target for HA and HB version | From V _{GATE} falling below V _{G_LW} to V _{DS} rising above V _{TH_HGH} | | 200 | | ns |
| t _{DEAD_H_LIGHT} ⁽¹⁾ | Dead time regulation target under light load condition for HA and HB version | From V _{GATE} falling below V _{G_LW} to V _{DS} rising above V _{TH_HGH} | | 250 | | ns |
| t _{TSDT} ⁽¹⁾ | Too small dead time threshold to speed up I _{OFFSET} change (Speed up 2 times) | From V _{GATE} falling below V _{G_LW} to V _{DS} rising above V _{TH_HGH} | | 35 | | ns |
| K _{INV} ⁽¹⁾ | Adaptive SR current inversion detection time Ratio between T _{INV} and SR conduction time of previous switching cycle | V _{GATE} > V _{G_HG} and V _{DS} > V _{TH_OFF} | | 12.5 | | % |
| Green Mode Control | | | | | | |
| t _{GRN_ENT_H} | Non-Switching Period to Enter Green Mode for HA and HB version | Non switching cycles between burst switching bundles | 60 | 80 | 100 | μs |
| t _{GRN_ENT_DBNC_H} | De-bounce time to Enter Green Mode for HA and HB version | De-bounce time after t _{GRN_ENT_H} | 130 | 180 | 230 | μs |
| t _{GRN_EXT_H} | Non-Switching Period to Exit Green for HA and HB version | Non switching cycles between burst switching bundles | 30 | 40 | 50 | μs |
| η _{CSW_EXT} | Continuous switching cycles to exit Green Mode | | 7 | 11 | 15 | cycle |
| t _{S_NORMAL_H} | Switching period to be recognized as normal switching for HA and HB version | | 13 | 20 | 27 | μs |
| Output Driver Section | | | | | | |
| V _{GATE_MAX} | Gate clamping voltage | 12V < V _{DD} < 25 V | 9 | 10.5 | 12 | V |
| V _{GATE_MAX_5V} | Gate clamping voltage | V _{DD} =5V | 4.9 | | | |
| V _{OL} | Output Voltage Low | V _{DD} =12V, V _{D1} =V _{D2} =2V, I _{GATE} =50mA | | | 1.5 | V |
| V _{OH} | Output Voltage High | V _{DD} =12V, I _{GATE} =-50mA | 7 | | | V |
| I _{SOURCE} ⁽¹⁾ | Peak source current for turning on | V _{DD} =12V, V _{GATE} =2V | | 0.7 | | A |
| I _{SINK} ⁽¹⁾ | Peak sink current for turning off | V _{DD} =12V, V _{GATE} =7V | | 1.4 | | A |
| t _R ⁽¹⁾ | Rise Time | V _{DD} =12V, C _L =3.3nF, V _{GATE} =2V→7V | | 50 | | ns |
| t _F ⁽¹⁾ | Fall Time | V _{DD} =12V, C _L =3.3nF, V _{GATE} =7V→2V | | 30 | | ns |
| V _{G_LW} ⁽¹⁾ | Gate voltage considered as turned off for adaptive dead time control | Gate falling | | 2 | | V |
| V _{G_HG} ⁽¹⁾ | Gate voltage considered as turned on for adaptive dead time control | Gate rising | | 2.8 | | V |
| Switching frequency | | | | | | |
| f _{MAX} ⁽¹⁾ | Maximum switching frequency | | 700 | | | kHz |
| f _{MIN} ⁽¹⁾ | Minimum switching frequency | | | | 25 | kHz |

Notes:

(1): Not tested but guaranteed by design

FAN6248

KEY DIFFERENT PARAMETERS FOR OPTIONS

| Item | FAN6248HA | FAN6248HB |
|-------------------------|-------------|-------------|
| V _{TH_OFF1} | 130 mV | 100 mV |
| V _{TH_OFF2} | 228 mV | 175 mV |
| t _{ON_DLY2} | 380 ns | 380 ns |
| t _{DB_HGH} | 400 ns | 400 ns |
| t _{ON_MIN_L} | 200 ns | 200 ns |
| t _{ON_MIN_U} | 1.2 μ s | 1.2 μ s |
| t _{SR_CNDT} | 0.6 μ s | 0.6 μ s |
| t _{SR_MAX} | 15 μ s | 15 μ s |
| t _{DEAD} | 200 ns | 200 ns |
| t _{DEAD_LIGHT} | 250 ns | 250 ns |
| t _{GRN_ENT} | 80 μ s | 80 μ s |
| t _{S_NORMAL} | 20 μ s | 20 μ s |

TYPICAL CHARACTERISTICS

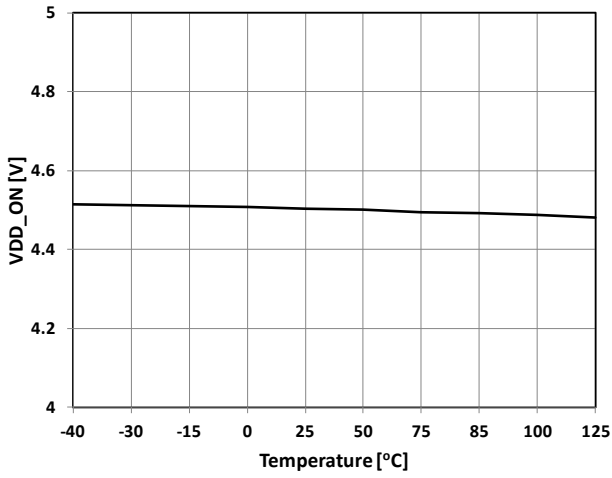


Figure 3. V_{DD_ON}

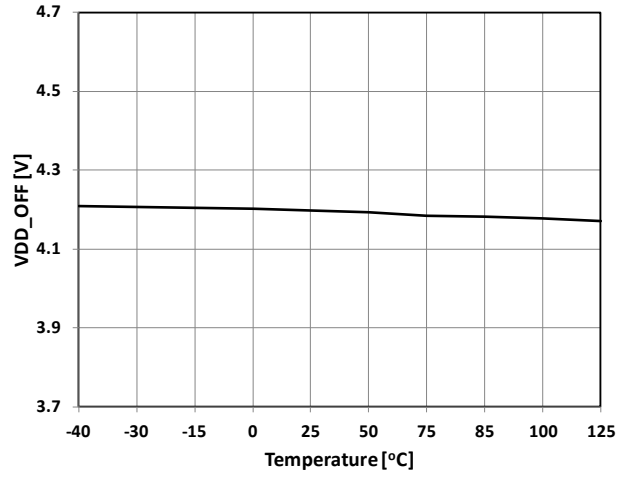


Figure 4. V_{DD_OFF}

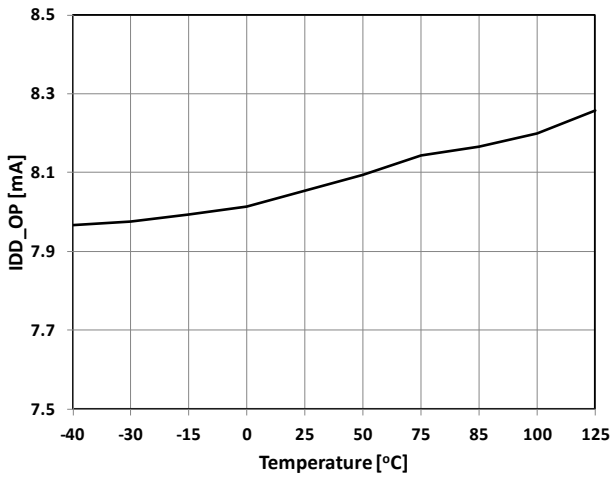


Figure 5. I_{DD_OP}

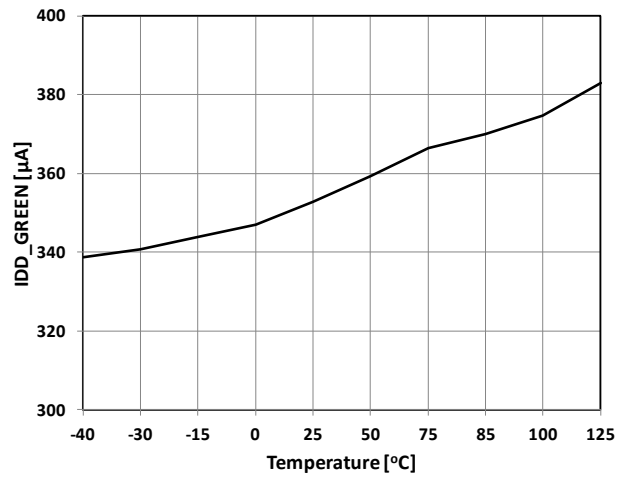


Figure 6. I_{DD_GREEN}

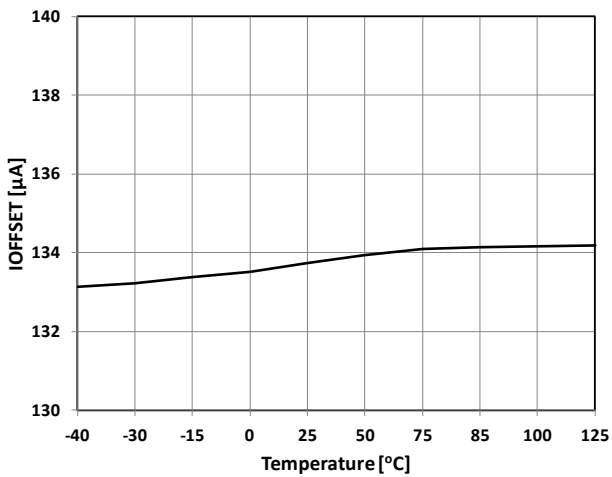


Figure 7. I_{OFFSET}

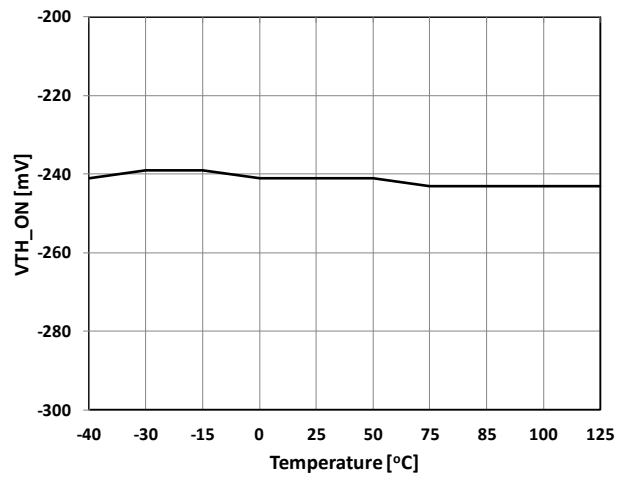


Figure 8. V_{TH_ON}

TYPICAL CHARACTERISTICS

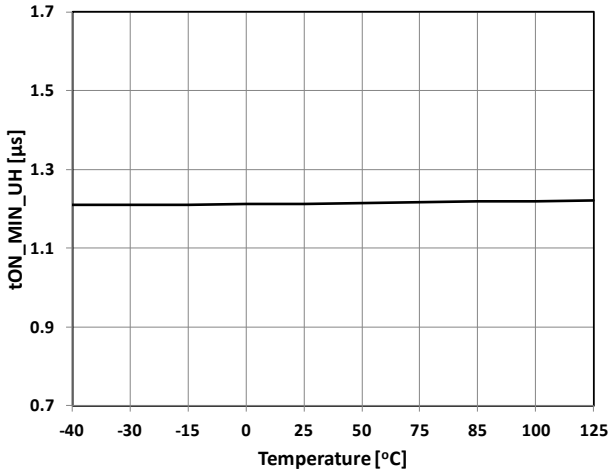


Figure 9. tON_MIN_UH

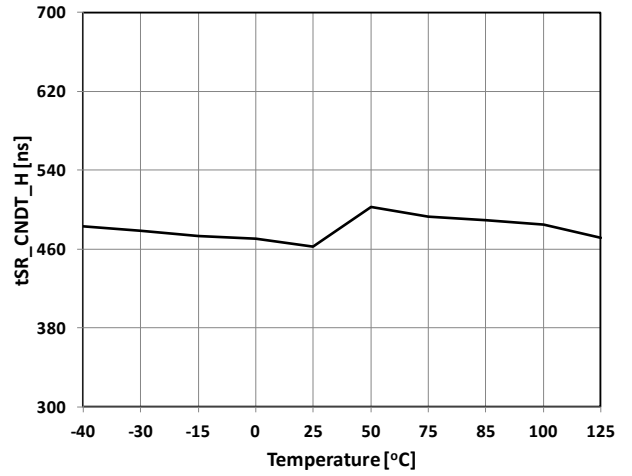


Figure 10. tSR_CNDT_H

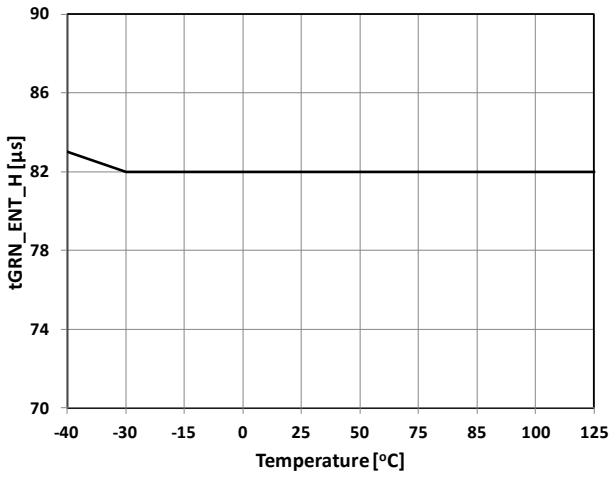


Figure 11. tGRN_EXT_H

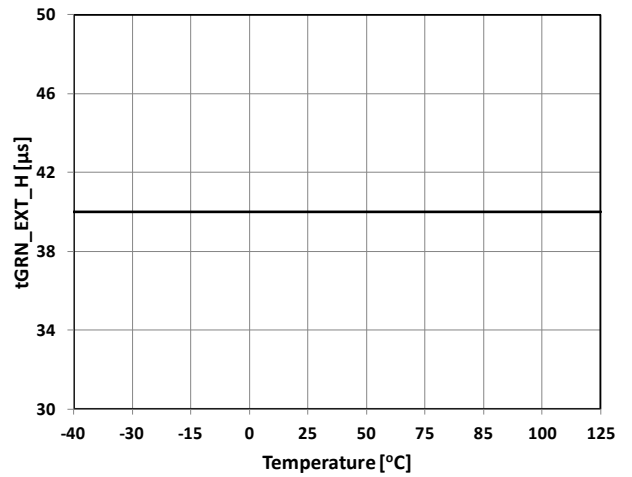


Figure 12. tGRN_EXT_H

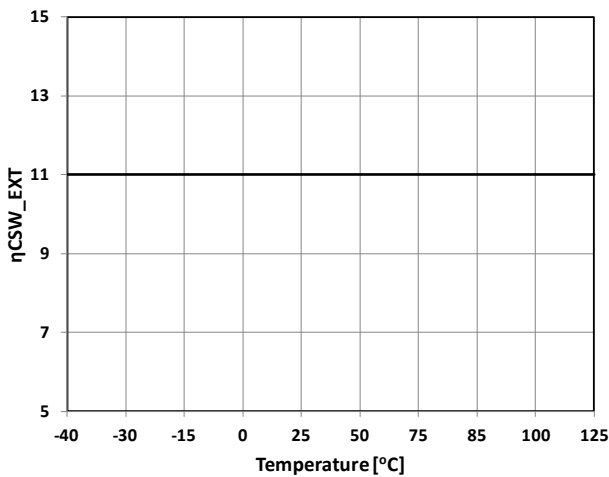


Figure 13. ηCSW_EXT

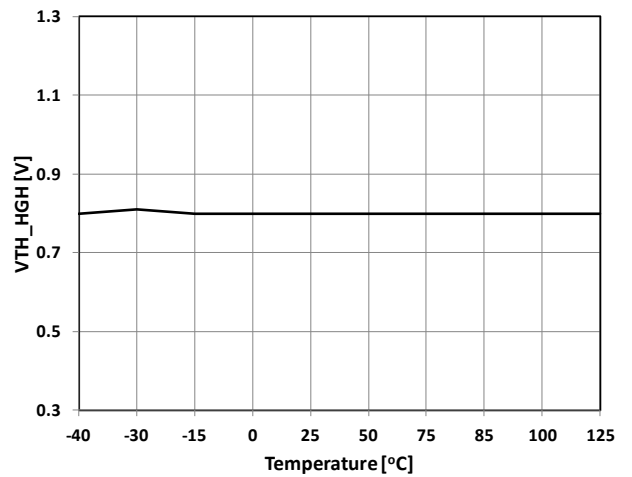


Figure 14. VTH_HGH

TYPICAL CHARACTERISTICS

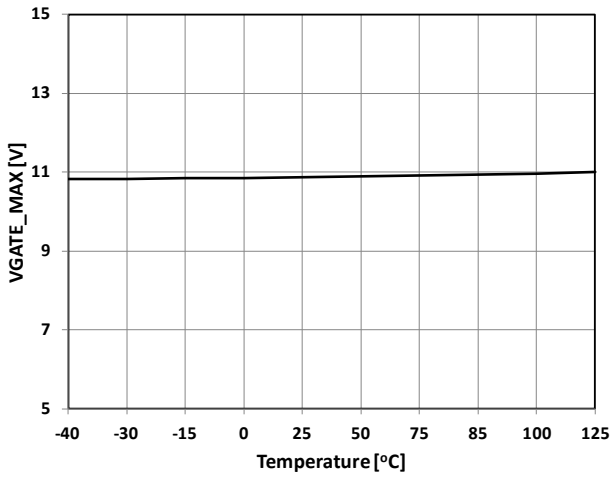


Figure 15. VGATE_MAX

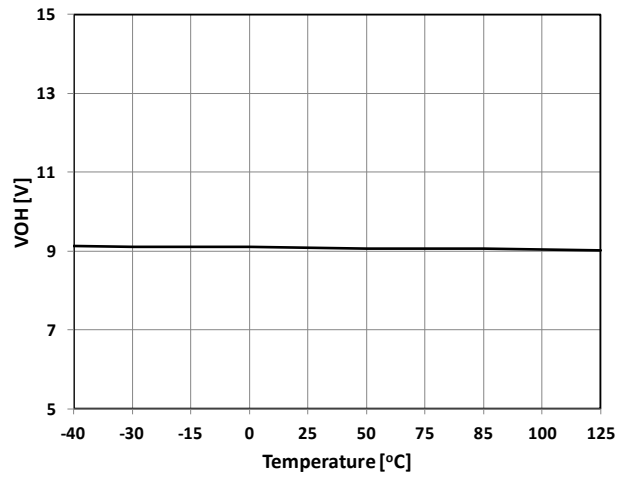


Figure 16. VOH

Application Information

Basic Operation Principle

FAN6248 controls the SR MOSFET based on the instantaneous drain-to-source voltage sensed across DRAIN and SOURCE pins. Before SR gate is turned on, SR body diode operates as the conventional diode rectifier. Once the body diode starts conducting, the drain-to-source voltage drops below the turn-on threshold voltage V_{TH_ON} which triggers the turn-on of the SR gate. Then the drain-to-source voltage is determined by the product of turn-on resistance R_{ds_on} of SR MOSFET and instantaneous SR current. When the drain-to-source voltage reaches the turn-off threshold voltage V_{TH_OFF} as SR MOSFET current decreases to near zero, FAN6248 turns off the gate. If a SR dead time is larger or smaller than the dead time regulation target t_{DEAD} , FAN6248 adaptively changes internal offset voltage to compensate the dead time. In addition, to prevent cross conduction SR operation, FAN6248 has 200ns of turn-on blaking time just after alternating SR gate is turned off.

SR Turn-off Algorithm

Since a SR turn-off method determines SR conduction time and stable SR operation, the SR turn-off method is one of important feature of SR controllers. The SR turn-off method can be classified into two methods. The first method uses present information by an instantaneous drain voltage. This method is widely used and easy to realize, and can prevent late turn-off. However, it may show premature turn-off by paracitic stray inductances caused by PCB pattern and lead frame of SR MOSFET. The second method predicts SR conduction time by using previous cycle drain voltage information. Since it can prevent the premature turn-off, it is good for the system with constant operating frequency and turn-on time. However, in case of the frequency varying system, it may lead late turn-off so that negative current can flow in the secondary side.

To achieve both advantages, FAN6248 adopts mixed type control method as shown in Figure 17. Basically the instantaneous drain voltage V_{Drain} is compared with V_{TH_OFF} to turn off SR gate. Then, the offset voltage V_{offset} , which is determined by the product R_{offset} and I_{offset} , is added to V_{Drain} in order to compensate the stray inductance effect and maintain 200ns of t_{DEAD} regardless of parasitic inductances. R_{offset} is a external resistor in

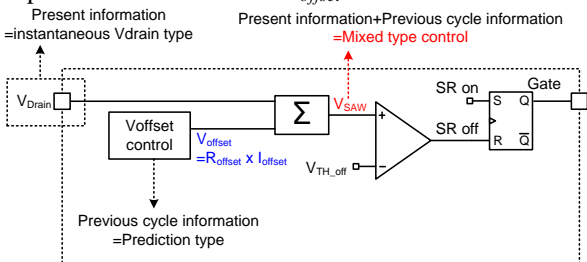


Figure 17. SR turn-off algorithm

Figure 1 and I_{offset} is an internal modulation current in Figure 2. Therefore, FAN6248 can show robust operation with minimum dead time.

Adaptive Dead Time Control

The stray inductances of the lead frame of SR MOSFET and PCB pattern induce positive voltage offset across drain-to-source voltage when SR current decreases. This makes drain-to-source voltage of SR MOSFET larger than the product of R_{ds_on} and instantaneous SR current, which results in premature turn-off of SR gate. Since the the induced offset voltage changes as load condition changes, the dead time also changes with load variation. To compensate the induced offset voltage, FAN6248 has a adaptive virtual turn-off threshold voltage as shown in Figure 18 with a combination of variable internal turn-off threshold voltages V_{TH_OFF1} and V_{TH_OFF2} (2 steps) and modulated offset voltage V_{offset} (16 steps). The virtual turn-off threshold voltage can be expressed as:

$$\text{Virtual } V_{TH_OFF} = V_{TH_OFF} - V_{offset} \quad (1)$$

In FAN6248HA(B) version, if a dead time T_{DEAD} is larger than 200ns of t_{DEAD_H} , as shown in Figure 19, V_{offset} decreases by one step in next switching cycle. As a result, the dead time is decreased by increase of virtual V_{TH_OFF} , and becomes close to t_{DEAD_H} , as shown in Figure 20. If the dead time is smaller than t_{DEAD_H} , the dead time is increased by the virtual V_{TH_OFF} decrease. Thus, the dead time is maintained at around t_{DEAD_H} regardless of parasitic inductances.

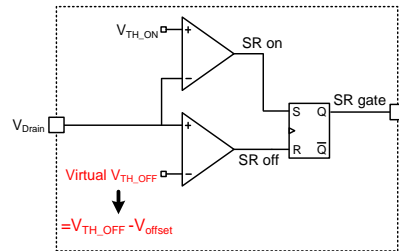


Figure 18. Virtual V_{TH_OFF}

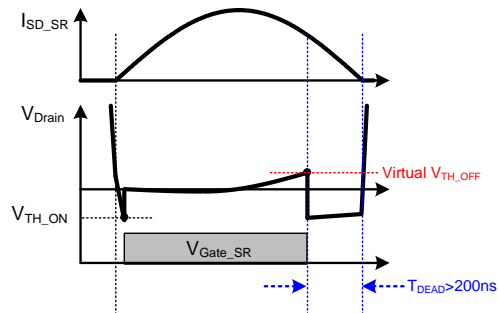


Figure 19. Premature SR gate turn-off ($T_{DEAD} > t_{DEAD_H}$)

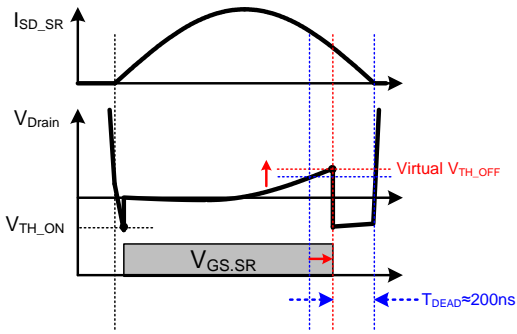


Figure 20. Dead time control to maintain $T_{DEAD} \approx 200ns$

Minimum Turn-on Time

When SR gate is turned on, there may exist severe oscillation in drain-to-source voltage of SR MOSFET, which results in several mis-triggering turn-off as shown in Figure 21. To provide stable SR control without mis-trigger, it is desirable to have large turn-off blanking time (=minimum turn-on time) until the drain voltage oscillation attenuates. However, too large blanking time results in problems at light load condition where the SR conduction time is shorter than the minimum turn-on time. To solve this issue, FAN6248 has adaptive minimum turn-on time where the turn-off blanking time changes in accordance with the SR conduction time T_{SRCOND} measured in previous switching cycle. The SR conduction time is measured by the time from SR gate rising edge to the instant when drain sensing voltage V_{DS_SR} is higher than V_{TH_HGH} . From the previous cycle T_{SRCOND} measurement result, the minimum turn-on time is defined by 50% of T_{SRCOND} .

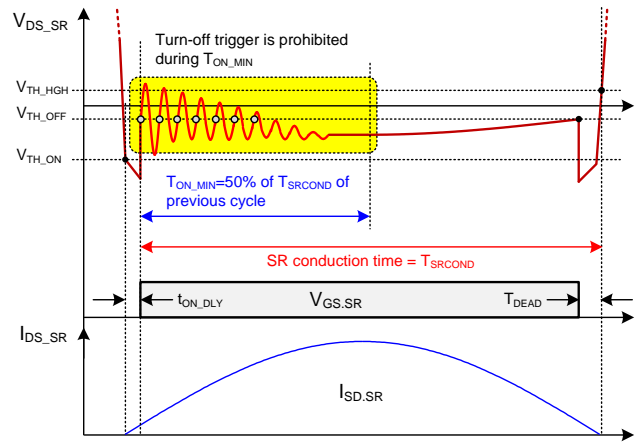


Figure 21. Minimum turn-on time

Capacitive Current Spike Detection

At heavy load condition, the body diode of SR MOSFET in LLC resonant converter starts conducting right after the primary side switching transition takes place. However, when the resonance capacitor voltage amplitude is not large enough at light load condition, the voltage across the magnetizing inductance of the transformer is smaller than the reflected output voltage. Thus, the secondary side SR body diode conduction is delayed until the magnetizing inductor voltage builds up to the reflected output voltage. However, the primary side switching transition can cause capacitive current spike and turn on the body diode of SR MOSFET for a short time as shown in Figure 22, which induces SR mis-trigger signal. Finally, the SR mis-trigger makes inversion current in the secondary side. If a proper algorithm is not to prevent the mis-trigger by the capacitive current spike, severe SR current inversion can happen.

To prevent the SR mis-trigger, FAN6248 has a capacitive current spike detection method. When SR current inversion occurs by the mis-trigger signal, the drain sensing voltage of SR MOSFET becomes positive. In this condition, if V_{DS_SR} is higher than V_{TH_OFF} for $(T_{SRCOND} * K_{INV})$, SR current inversion is detected. Then, FAN6248 increases turn-on delay from

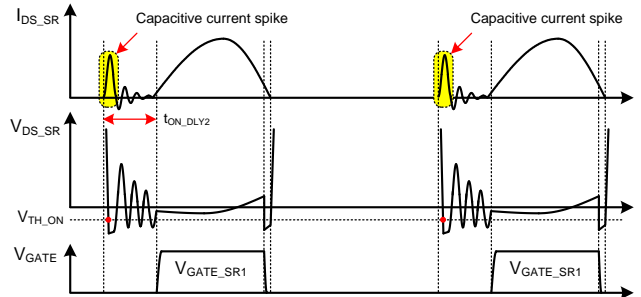


Figure 22. Capacitive current spike at light load condition

t_{ON_DLY} to t_{ON_DLY2} in next cycle. As a result, SR mis-trigger is prevented. To exit the SR current inversion detection mode, seven consecutive switching cycles without capacitive current spike are required.

Light Load Detection (LLD)

To guarantee stable operation under light load condition, FAN6248 adopts a light load detection function. The modulation current I_{OFFSET} is mainly used for the adaptive dead time control. When the output load is heavy, I_{OFFSET_STEP} declines due to large di/dt in the secondary side current to maintain 200ns of t_{DEAD} . On the contrary, I_{OFFSET_STEP} increases at light load condition by small di/dt of SR current. FAN6248 can detect light load condition by using this I_{OFFSET_STEP} as shown in Figure 23. When SR turn-off threshold voltage is V_{TH_OFF1} and the modulation current becomes I_{OFFSET_STEP8} , the light load detection is triggered. In this mode, the turn-on delay is changed to t_{ON_DLY2} to prevent the SR inversion current, and dead time target becomes to 250ns of t_{DEAD_LIGHT} in FAN6248HA and HB version.

Green Mode

When the power supply system operates at very light load condition, FAN6248 disables SR operation and enters into green mode operation. Once FAN6248 is in the green mode, all the major blocks are disabled to minimize the operating current. When V_{DS_SR} has no switching operation long than t_{GRN_ENT} during the burst mode of the primary side LLC controller, the green mode is enabled after $t_{GRN_ENT_DBNC}$ of debounce time. After then, FAN6248 exits the green mode when the non-switching time in the burst mode is less than $t_{GRN_EXT_H}$ or 11 consecutive switching cycles are detected as shown in Figure 24.

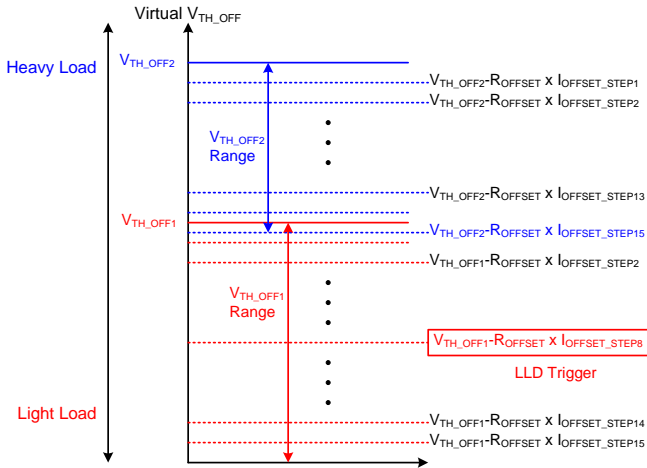


Figure 23. Light load detection




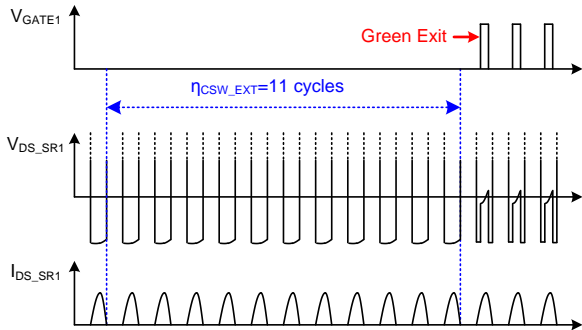


Figure 24. Green mode exit

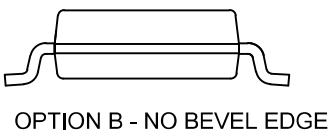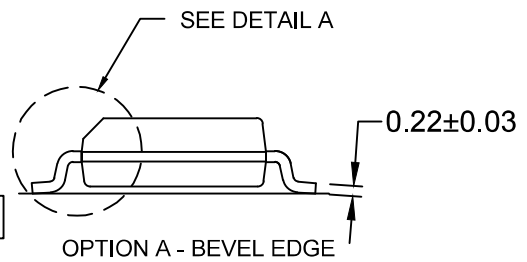

NOTES:

- A) THIS PACKAGE CONFORMS TO JEDEC MS-012, VARIATION AA.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS DO NOT INCLUDE MOLD FLASH OR BURRS.
- D) LANDPATTERN STANDARD: SOIC127P600X175-8M
- E) DRAWING FILENAME: M08Arev16

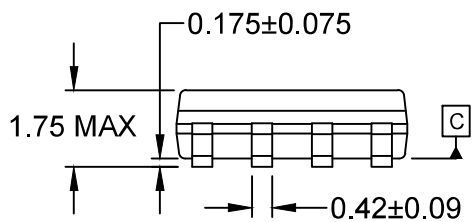

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>
For additional information, please contact your local
Sales Representative