

LMV1032-06/LMV1032-15/LMV1032-25 Amplifiers for 3-Wire Analog Electret Microphones

Check for Samples: [LMV1032](#)


FEATURES

- (Typical LMV1032-15, 1.7V Supply; Unless Otherwise Noted)
- Output Voltage Noise (A-weighted) –89 dBV
- Low Supply Current 60 μ A
- Supply Voltage 1.7V to 5V
- PSRR 70 dB
- Signal to Noise Ratio 61 dB
- Input Capacitance 2 pF
- Input Impedance >100 M Ω
- Output Impedance <200 Ω
- Max Input Signal 170 mV_{PP}
- Temperature Range –40°C to 85°C
- Large Dome 4-Bump DSBGA Package with Improved Adhesion Technology.

APPLICATIONS

- Mobile Communications - Bluetooth
- Automotive Accessories
- Cellular Phones
- PDAs
- Accessory Microphone Products

Block Diagram

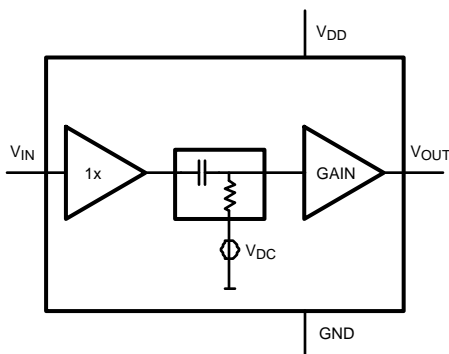


DESCRIPTION

The LMV1032s are an audio amplifier series for small form factor electret microphones. They are designed to replace the JFET preamp currently being used. The LMV1032 series is ideal for extended battery life applications, such as a Bluetooth communication link. The addition of a third pin to an electret microphone that incorporates an LMV1032 allows for a dramatic reduction in supply current as compared to the JFET equipped electret microphone. Microphone supply current is thus reduced to 60 μ A, assuring longer battery life. The LMV1032 series is specified for supply voltages from 1.7V to 5V, and has fixed voltage gains of 6 dB, 15 dB and 25 dB.

The LMV1032 series offers low output impedance over the voice bandwidth, excellent power supply rejection (PSRR), and stability over temperature.

The devices are offered in space saving 4-bump ultra thin DSBGA lead free packages and are thus ideally suited for the form factor of miniature electret microphone packages. These extremely miniature packages have the Large Dome Bump (LDB) technology. This DSBGA technology is designed for microphone PCBs requiring 1 kg adhesion criteria.

Electret Microphone

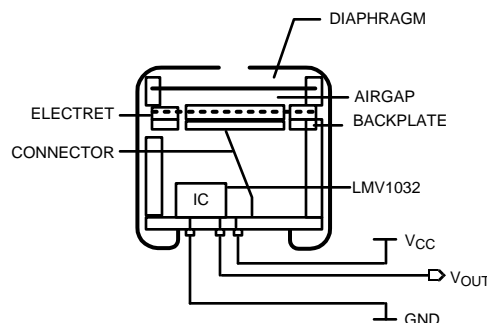

These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

Absolute Maximum Ratings⁽¹⁾⁽²⁾

| | | |
|-------------------------------------|----------------------------------|----------------|
| ESD Tolerance ⁽³⁾ | Human Body Model | 2500V |
| | Machine Model | 250V |
| Supply Voltage | V _{DD} - GND | 5.5V |
| Storage Temperature Range | | -65°C to 150°C |
| Junction Temperature ⁽⁴⁾ | | 150°C max |
| Mounting Temperature | Infrared or Convection (20 sec.) | 235°C |

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics.
- (2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/ Distributors for availability and specifications.
- (3) The Human Body Model (HBM) is 1.5 kΩ in series with 100 pF. The Machine Model is 0Ω in series with 200 pF.
- (4) The maximum power dissipation is a function of T_{J(MAX)}, θ_{JA} and T_A. The maximum allowable power dissipation at any ambient temperature is P_D = (T_{J(MAX)} - T_A)/θ_{JA}. All numbers apply for packages soldered directly onto a PC board.

Operating Ratings⁽¹⁾

| | |
|-------------------|----------------|
| Supply Voltage | 1.7V to 5V |
| Temperature Range | -40°C to +85°C |

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics.

1.7V and 5V Electrical Characteristics⁽¹⁾

Unless otherwise specified, all limits ensured for T_J = 25°C and V_{DD} = 1.7V and 5V. **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Min ⁽²⁾ | Typ ⁽³⁾ | Max ⁽²⁾ | Units |
|-------------------|--------------------------------|--|--------------------|------------------------|-------------------------|------------------|
| I _{DD} | Supply Current | V _{IN} = GND | | 60 | 85 100 | μA |
| SNR | Signal to Noise Ratio | V _{DD} = 1.7V V _{IN} = 18 mV _{PP} f = 1 kHz | LMV1032-06 | 58 | | dB |
| | | | LMV1032-15 | 61 | | |
| | | | LMV1032-25 | 61 | | |
| | | V _{DD} = 5V V _{IN} = 18 mV _{PP} f = 1 kHz | LMV1032-06 | 59 | | |
| | | | LMV1036-15 | 61 | | |
| | | | LMV1032-25 | 62 | | |
| PSRR | Power Supply Rejection Ratio | 1.7V < V _{DD} < 5V | LMV1032-06 | 65 60 | 75 | dB |
| | | | LMV1032-15 | 60 55 | 70 | |
| | | | LMV1032-25 | 55 50 | 65 | |
| V _{IN} | Max Input Signal | f = 1 kHz and THD+N < 1% | LMV1032-06 | 300 | | mV _{PP} |
| | | | LMV1032-15 | 170 | | |
| | | | LMV1032-25 | 60 | | |
| f _{LOW} | Lower -3 dB Roll Off Frequency | R _{SOURCE} = 50Ω V _{IN} = 18 mV _{PP} | | 70 | | Hz |
| f _{HIGH} | Upper -3 dB Roll Off Frequency | R _{SOURCE} = 50Ω V _{IN} = 18 mV _{PP} | LMV1032-06 | 120 | | kHz |
| | | | LMV1032-15 | 75 | | |
| | | | LMV1032-25 | 21 | | |

- (1) Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that T_J = T_A. No specification of parametric performance is indicated in the electrical tables under conditions of internal self-heating where T_J > T_A.
- (2) All limits are specified by design or statistical analysis.
- (3) Typical values represent the most likely parametric norm.

1.7V and 5V Electrical Characteristics⁽¹⁾ (continued)

Unless otherwise specified, all limits ensured for $T_J = 25^\circ\text{C}$ and $V_{DD} = 1.7\text{V}$ and 5V . **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | | Min ⁽²⁾ | Typ ⁽³⁾ | Max ⁽²⁾ | Units |
|-----------|---------------------------|---|------------|--------------------|--------------------|--------------------|------------|
| e_n | Output Noise | A-Weighted | LMV1032-06 | | -97 | | dBV |
| | | | LMV1032-15 | | -89 | | |
| | | | LMV1032-25 | | -80 | | |
| V_{OUT} | Output Voltage | $V_{IN} = \text{GND}$ | LMV1032-06 | 100 | 300 | 500 | mV |
| | | | LMV1032-15 | 250 | 500 | 750 | |
| | | | LMV1032-25 | 300 | 600 | 1000 | |
| R_O | Output Impedance | $f = 1 \text{ kHz}$ | | | <200 | | Ω |
| I_O | Output Current | $V_{DD} = 1.7\text{V}, V_{OUT} = 1.7\text{V}, \text{Sinking}$ | | 0.9 0.5 | 2.3 | | mA |
| | | $V_{DD} = 1.7\text{V}, V_{OUT} = 0\text{V}, \text{Sourcing}$ | | 0.3 0.2 | 0.64 | | |
| | | $V_{DD} = 5\text{V}, V_{OUT} = 1.7\text{V}, \text{Sinking}$ | | 0.9 0.5 | 2.4 | | |
| | | $V_{DD} = 5\text{V}, V_{OUT} = 0\text{V}, \text{Sourcing}$ | | 0.4 0.1 | 1.46 | | |
| THD | Total Harmonic Distortion | $f = 1 \text{ kHz}$ $V_{IN} = 18 \text{ mV}_{PP}$ | LMV1032-06 | | 0.11 | | % |
| | | | LMV1032-15 | | 0.13 | | |
| | | | LMV1032-25 | | 0.35 | | |
| C_{IN} | Input Capacitance | | | | 2 | | pF |
| Z_{IN} | Input Impedance | | | | >100 | | M Ω |
| A_V | Gain | $f = 1 \text{ kHz}$ $V_{IN} = 18 \text{ mV}_{PP}$ | LMV1032-06 | 5.5 4.5 | 6.2 | 6.7 7.7 | dB |
| | | | LMV1032-15 | 14.8 14 | 15.4 | 16 17 | |
| | | | LMV1032-25 | 24.8 24 | 25.5 | 26.2 27 | |

Connection Diagram

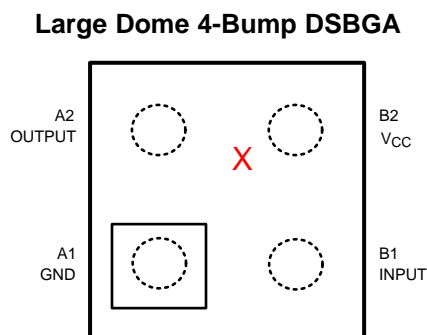


Figure 1. Top View

Note:

- Pin numbers are referenced to package marking text orientation.
- The actual physical placement of the package marking will vary slightly from part to part. The package will designate the date code and will vary considerably. Package marking does not correlate to device type in any way.

Typical Performance Characteristics

Unless otherwise specified, $V_S = 1.7V$, single supply, $T_A = 25^\circ C$

Supply Current vs. Supply Voltage (LMV1032-06)

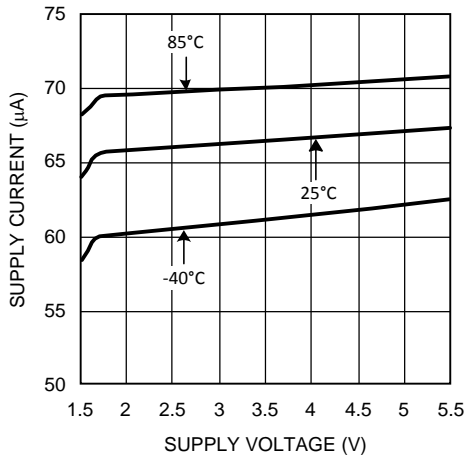


Figure 2.

Supply Current vs. Supply Voltage (LMV1032-15)

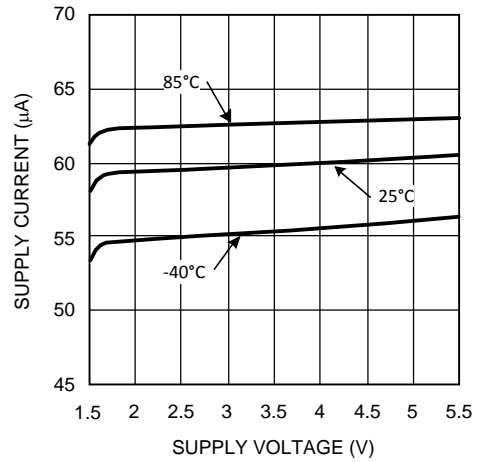


Figure 3.

Supply Current vs. Supply Voltage (LMV1032-25)

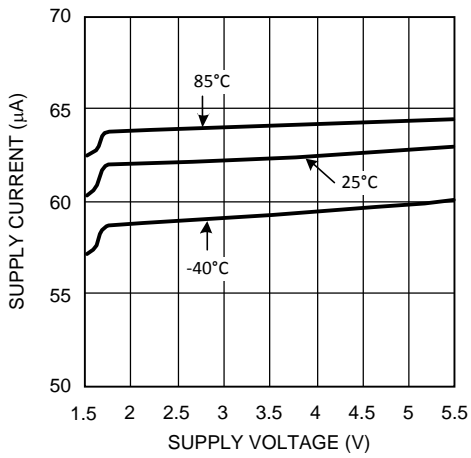


Figure 4.

Closed Loop Gain and Phase vs. Frequency (LMV1032-06)

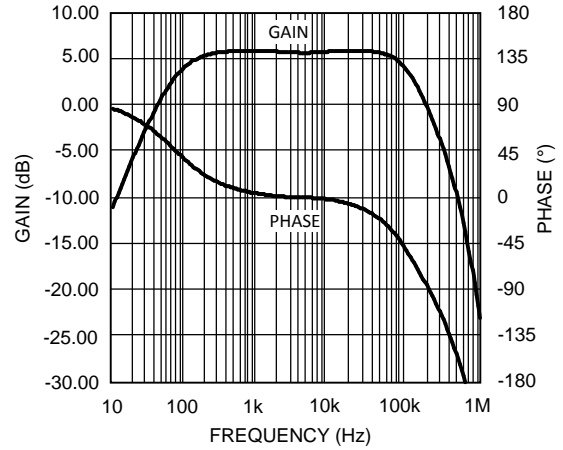


Figure 5.

Closed Loop Gain and Phase vs. Frequency (LMV1032-15)

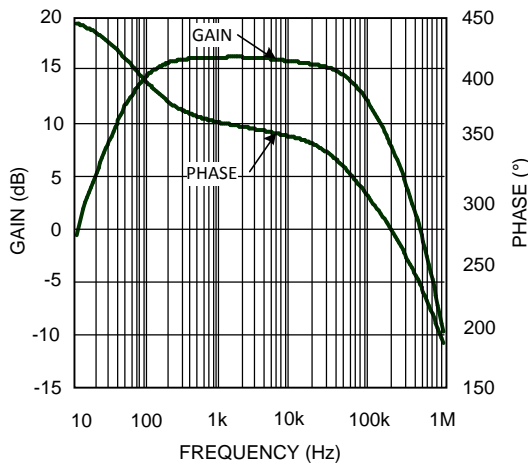


Figure 6.

Closed Loop Gain and Phase vs. Frequency (LMV1032-25)

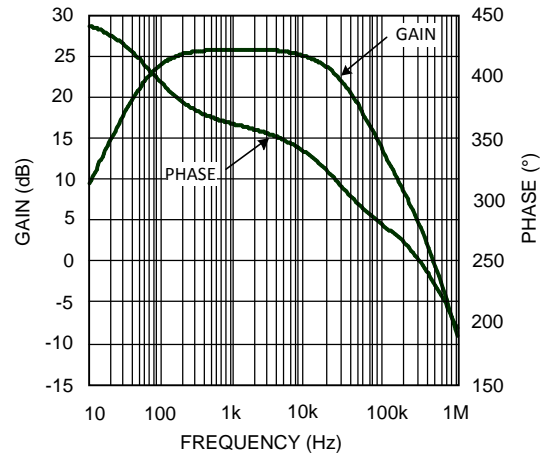


Figure 7.

Typical Performance Characteristics (continued)

Unless otherwise specified, $V_S = 1.7V$, single supply, $T_A = 25^\circ C$

Power Supply Rejection Ratio vs. Frequency (LMV1032-06)

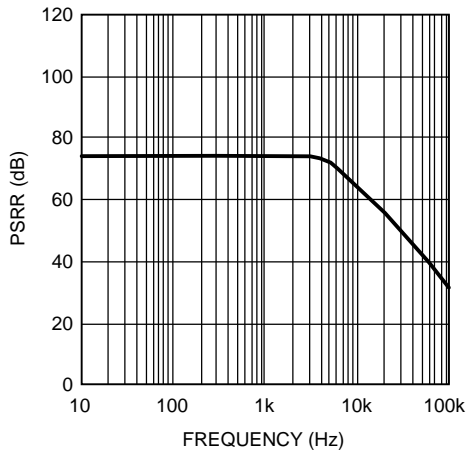


Figure 8.

Power Supply Rejection Ratio vs. Frequency (LMV1032-15)

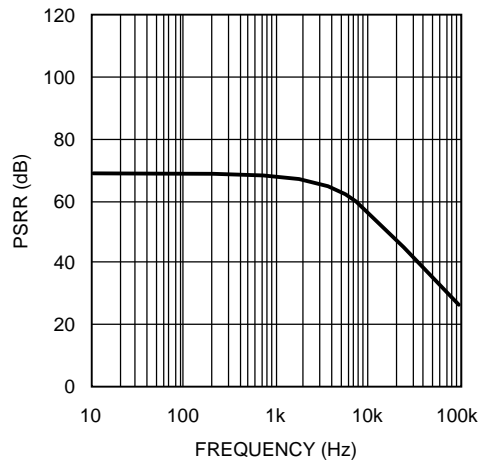


Figure 9.

Power Supply Rejection Ratio vs. Frequency (LMV1032-25)

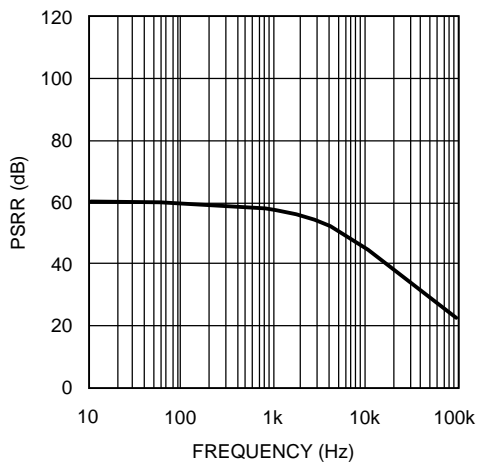


Figure 10.

Total Harmonic Distortion vs. Frequency (LMV1032-06)

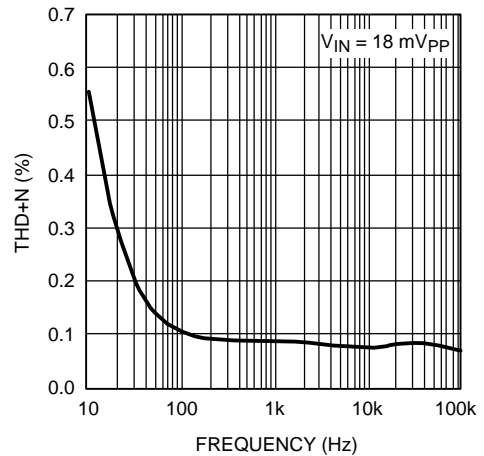


Figure 11.

Total Harmonic Distortion vs. Frequency (LMV1032-15)

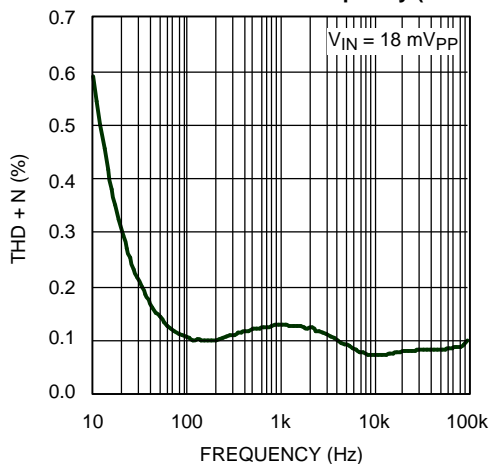


Figure 12.

Total Harmonic Distortion vs. Frequency (LMV1032-25)

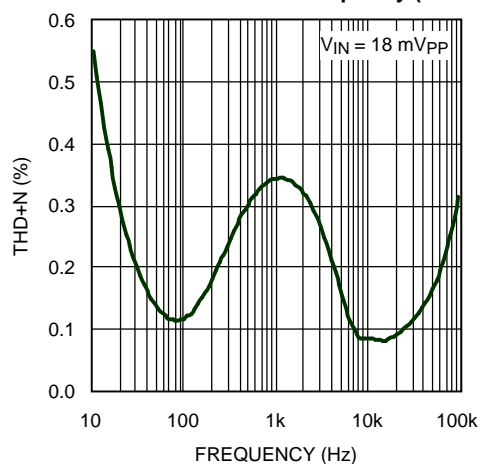


Figure 13.

Typical Performance Characteristics (continued)

Unless otherwise specified, $V_S = 1.7V$, single supply, $T_A = 25^\circ C$

Total Harmonic Distortion vs. Input Voltage (LMV1032-06)

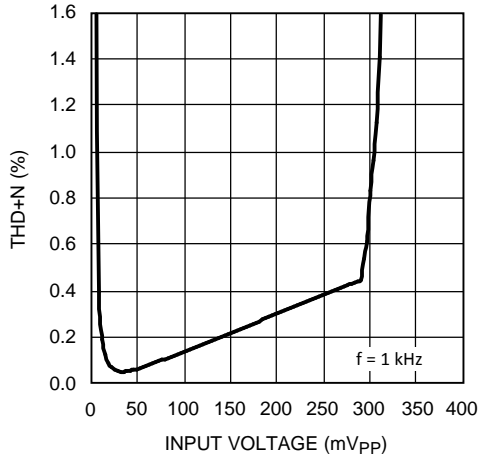


Figure 14.

Total Harmonic Distortion vs. Input Voltage (LMV1032-15)

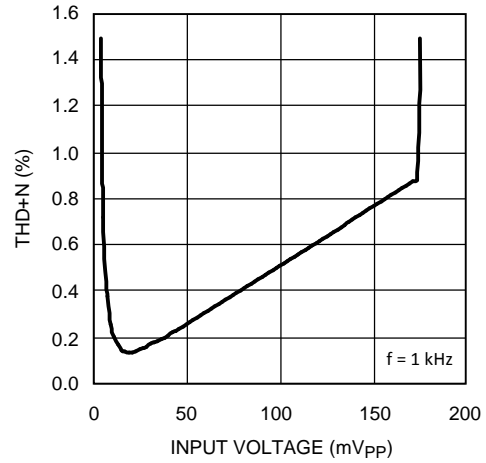


Figure 15.

Total Harmonic Distortion vs. Input Voltage (LMV1032-25)

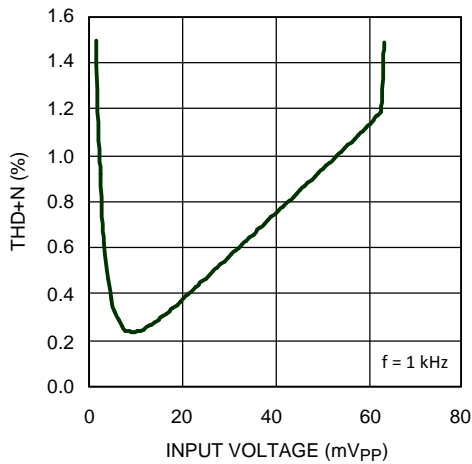


Figure 16.

Output Voltage Noise vs. Frequency (LMV1032-06)

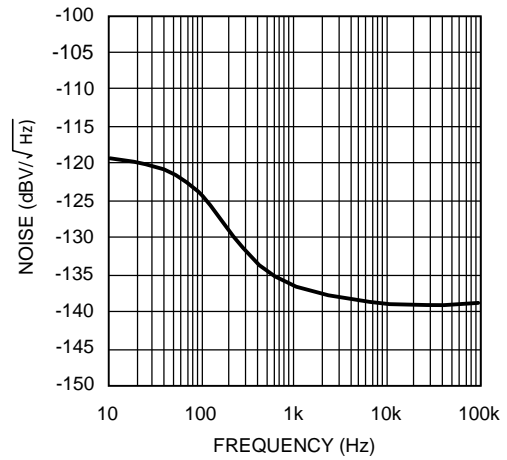


Figure 17.

Output Voltage Noise vs. Frequency (LMV1032-15)

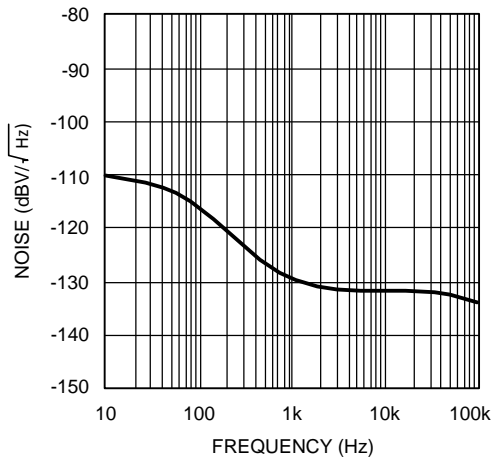


Figure 18.

Output Voltage Noise vs. Frequency (LMV1032-25)

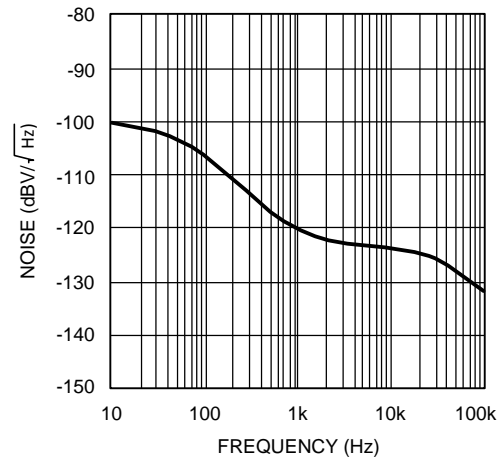


Figure 19.

APPLICATION SECTION

LOW CURRENT

The LMV1032 has a low supply current which allows for a longer battery life. The low supply current of $60\mu\text{A}$ makes this amplifier optimal for microphone applications which need to be always on.

BUILT-IN GAIN

The LMV1032 is offered in the space saving small DSBGA package which fits perfectly into the metal can of a microphone. This allows the LMV1032 to be placed on the PCB inside the microphone.

The bottom side of the PCB has the pins that connect the supply voltage to the amplifier and make the output available. The input of the amplifier is connected to the microphone via the PCB.

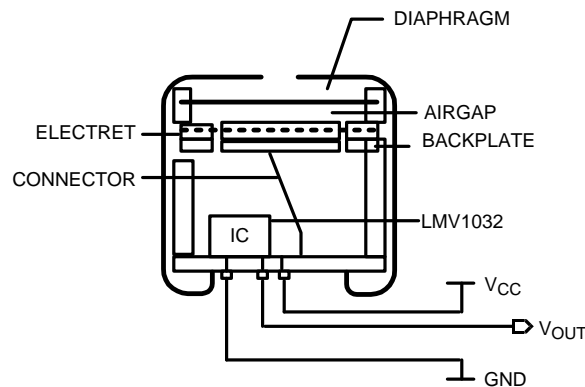


Figure 20. Built-in Gain

A-WEIGHTED FILTER

The human ear has a frequency range from 20 Hz to about 20 kHz. Within this range the sensitivity of the human ear is not equal for each frequency. To approach the hearing response weighting filters are introduced. One of those filters is the A-weighted filter.

The A-weighted filter is usually used in signal-to-noise ratio measurements, where sound is compared to device noise. It improves the correlation of the measured data to the signal-to-noise ratio perceived by the human ear.

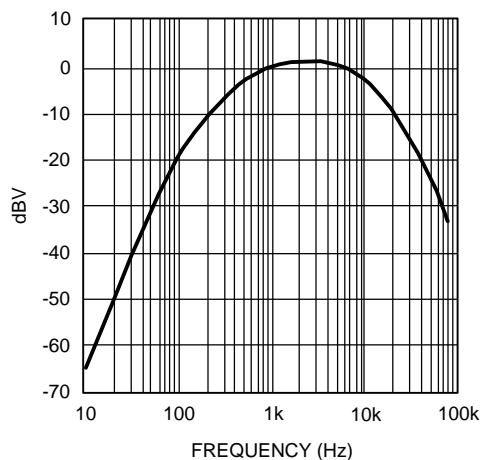


Figure 21. A-Weighted Filter

MEASURING NOISE AND SNR

The overall noise of the LMV1032 is measured within the frequency band from 10 Hz to 22 kHz using an A-weighted filter. The input of the LMV1032 is connected to ground with a 5 pF capacitor.

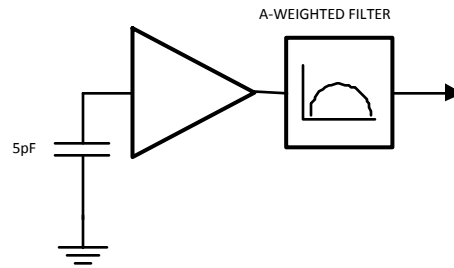


Figure 22. Noise Measurement Setup

The signal-to-noise ratio (SNR) is measured with a 1 kHz input signal of 18 mV_{PP} using an A-weighted filter. This represents a sound pressure level of 94 dB SPL. No input capacitor is connected.

SOUND PRESSURE LEVEL

The volume of sound applied to a microphone is usually stated as the pressure level with respect to the threshold of hearing of the human ear. The sound pressure level (SPL) in decibels is defined by:

$$\text{Sound pressure level (dB)} = 20 \log P_m/P_o$$

Where,

P_m is the measured sound pressure

P_o is the threshold of hearing (20 μPa)

In order to be able to calculate the resulting output voltage of the microphone for a given SPL, the sound pressure in dB SPL needs to be converted to the absolute sound pressure in dBPa. This is the sound pressure level in decibels which is referred to as 1 Pascal (Pa).

The conversion is given by:

$$\text{dBPa} = \text{dB SPL} + 20 \cdot \log 20 \mu\text{Pa}$$

$$\text{dBPa} = \text{dB SPL} - 94 \text{ dB}$$

Translation from absolute sound pressure level to a voltage is specified by the sensitivity of the microphone. A conventional microphone has a sensitivity of -44 dBV/Pa.

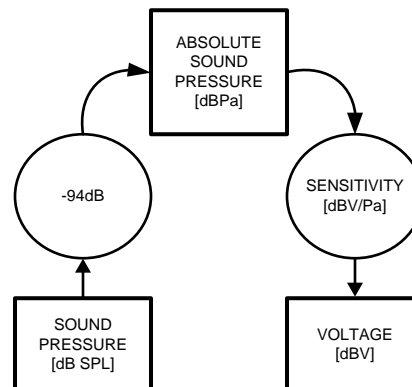


Figure 23. dB SPL to dBV Conversion

Example: Busy traffic is 70 dB SPL

$$V_{OUT} = 70 - 94 - 44 = -68 \text{ dBV}$$

This is equivalent to 1.13 mV_{PP}

Since the LMV1032-15 has a gain of 5.6 (15 dB) over the JFET, the output voltage of the microphone is 6.35 mV_{PP}. By replacing the JFET with the LMV1032-15, the sensitivity of the microphone is -29 dBV/Pa (-44 + 15).

LOW FREQUENCY CUT OFF FILTER

To reduce noise on the output of the microphone a low cut filter has been implemented in the LMV1032. This filter reduces the effect of wind and handling noise.

It's also helpful to reduce the proximity effect in directional microphones. This effect occurs when the sound source is very close to the microphone. The lower frequencies are amplified which gives a bass sound. This amplification can cause an overload, which results in a distortion of the signal.

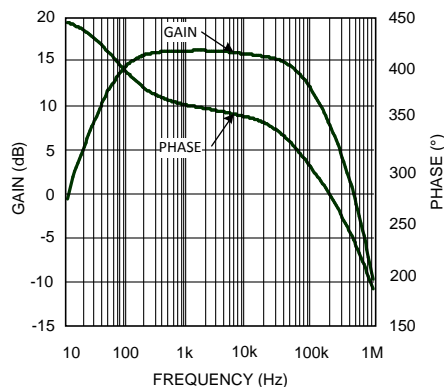


Figure 24. Gain vs. Frequency

The LMV1032 is optimized to be used in audio band applications. The LMV1032 provides a flat gain response within the audio band and offers linearity and excellent temperature stability.

ADVANTAGE OF THREE PINS

The LMV1032 ECM solution has three pins instead of the two pins provided in the case of a JFET solution. The third pin provides the advantage of a low supply current, high PSRR and eliminates the need for additional components.

Noise pick-up by a microphone in a cell phone is a well-known problem. A conventional JFET circuit is sensitive for noise pick-up because of its high output impedance. The output impedance is usually around 2.2 kΩ. By providing separate output and supply pins a much lower output impedance is achieved and therefore is less sensitive to noise pick-up.

RF noise is among other caused by non-linear behavior. The non-linear behavior of the amplifier at high frequencies, well above the usable bandwidth of the device, causes AM demodulation of high frequency signals. The AM modulation contained in such signals folds back into the audio band, thereby disturbing the intended microphone signal. The GSM signal of a cell phone is such an AM-modulated signal. The modulation frequency of 216 Hz and its harmonics can be observed in the audio band. This type of noise is called bumblebee noise.

EXTERNAL PRE-AMPLIFIER APPLICATION

The LMV1032 can also be used outside of an ECM as a space saving external pre-amplifier. In this application, the LMV1032 follows a phantom biased JFET microphone in the circuit. This is shown in Figure 25. The input of the LMV1032 is connected to the microphone via the 2.2 μF capacitor. The advantage of this circuit over one with only a JFET microphone are the additional gain and the high pass filter supplied by the LMV1032. The high pass filter makes the output signal more robust and less sensitive to low frequency disturbances. In this configuration the LMV1032 should be placed as close as possible to the microphone.

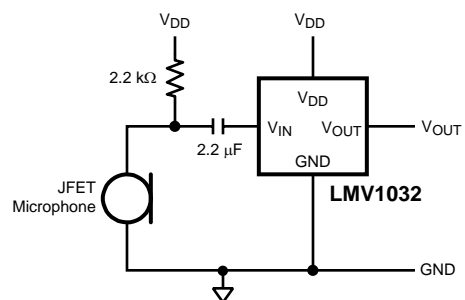


Figure 25. LMV1032 as External Pre-Amplifier

REVISION HISTORY

| Changes from Revision F (May 2013) to Revision G | Page |
|--|--------------------------|
| <hr/> <ul style="list-style-type: none">• Changed layout of National Data Sheet to TI format | <hr/> 10 |

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead finish/ Ball material (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|--------------------|---------------|--------------|-----------------|------|-------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| LMV1032UP-06/NOPB | ACTIVE | DSBGA | YPC | 4 | 250 | RoHS & Green | SNAGCU | Level-1-260C-UNLIM | | | Samples |
| LMV1032UP-15/NOPB | ACTIVE | DSBGA | YPC | 4 | 250 | RoHS & Green | SNAGCU | Level-1-260C-UNLIM | | | Samples |
| LMV1032UP-25/NOPB | ACTIVE | DSBGA | YPC | 4 | 250 | RoHS & Green | SNAGCU | Level-1-260C-UNLIM | | | Samples |
| LMV1032UPX-06/NOPB | ACTIVE | DSBGA | YPC | 4 | 3000 | RoHS & Green | SNAGCU | Level-1-260C-UNLIM | -40 to 85 | | Samples |
| LMV1032UR-15/NOPB | ACTIVE | DSBGA | YPD | 4 | 250 | RoHS & Green | SNAGCU | Level-1-260C-UNLIM | | | Samples |
| LMV1032UR-25/NOPB | ACTIVE | DSBGA | YPD | 4 | 250 | RoHS & Green | SNAGCU | Level-1-260C-UNLIM | | | Samples |
| LMV1032URX-15/NOPB | ACTIVE | DSBGA | YPD | 4 | 3000 | RoHS & Green | SNAGCU | Level-1-260C-UNLIM | -40 to 85 | | Samples |
| LMV1032URX-25/NOPB | ACTIVE | DSBGA | YPD | 4 | 3000 | RoHS & Green | SNAGCU | Level-1-260C-UNLIM | -40 to 85 | | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

⁽⁶⁾ Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal


| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LMV1032UP-06/NOPB | DSBGA | YPC | 4 | 250 | 178.0 | 8.4 | 1.22 | 1.22 | 0.56 | 4.0 | 8.0 | Q1 |
| LMV1032UP-15/NOPB | DSBGA | YPC | 4 | 250 | 178.0 | 8.4 | 1.22 | 1.22 | 0.56 | 4.0 | 8.0 | Q1 |
| LMV1032UP-25/NOPB | DSBGA | YPC | 4 | 250 | 178.0 | 8.4 | 1.22 | 1.22 | 0.56 | 4.0 | 8.0 | Q1 |
| LMV1032UPX-06/NOPB | DSBGA | YPC | 4 | 3000 | 178.0 | 8.4 | 1.22 | 1.22 | 0.56 | 4.0 | 8.0 | Q1 |
| LMV1032UR-15/NOPB | DSBGA | YPD | 4 | 250 | 178.0 | 8.4 | 1.22 | 1.22 | 0.56 | 4.0 | 8.0 | Q1 |
| LMV1032UR-25/NOPB | DSBGA | YPD | 4 | 250 | 178.0 | 8.4 | 1.22 | 1.22 | 0.56 | 4.0 | 8.0 | Q1 |
| LMV1032URX-15/NOPB | DSBGA | YPD | 4 | 3000 | 178.0 | 8.4 | 1.22 | 1.22 | 0.56 | 4.0 | 8.0 | Q1 |
| LMV1032URX-25/NOPB | DSBGA | YPD | 4 | 3000 | 178.0 | 8.4 | 1.22 | 1.22 | 0.56 | 4.0 | 8.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LMV1032UP-06/NOPB | DSBGA | YPC | 4 | 250 | 208.0 | 191.0 | 35.0 |
| LMV1032UP-15/NOPB | DSBGA | YPC | 4 | 250 | 208.0 | 191.0 | 35.0 |
| LMV1032UP-25/NOPB | DSBGA | YPC | 4 | 250 | 208.0 | 191.0 | 35.0 |
| LMV1032UPX-06/NOPB | DSBGA | YPC | 4 | 3000 | 208.0 | 191.0 | 35.0 |
| LMV1032UR-15/NOPB | DSBGA | YPD | 4 | 250 | 208.0 | 191.0 | 35.0 |
| LMV1032UR-25/NOPB | DSBGA | YPD | 4 | 250 | 208.0 | 191.0 | 35.0 |
| LMV1032URX-15/NOPB | DSBGA | YPD | 4 | 3000 | 208.0 | 191.0 | 35.0 |
| LMV1032URX-25/NOPB | DSBGA | YPD | 4 | 3000 | 208.0 | 191.0 | 35.0 |


YPD0004



PACKAGE OUTLINE

DSBGA - 0.395 mm max height

DIE SIZE BALL GRID ARRAY

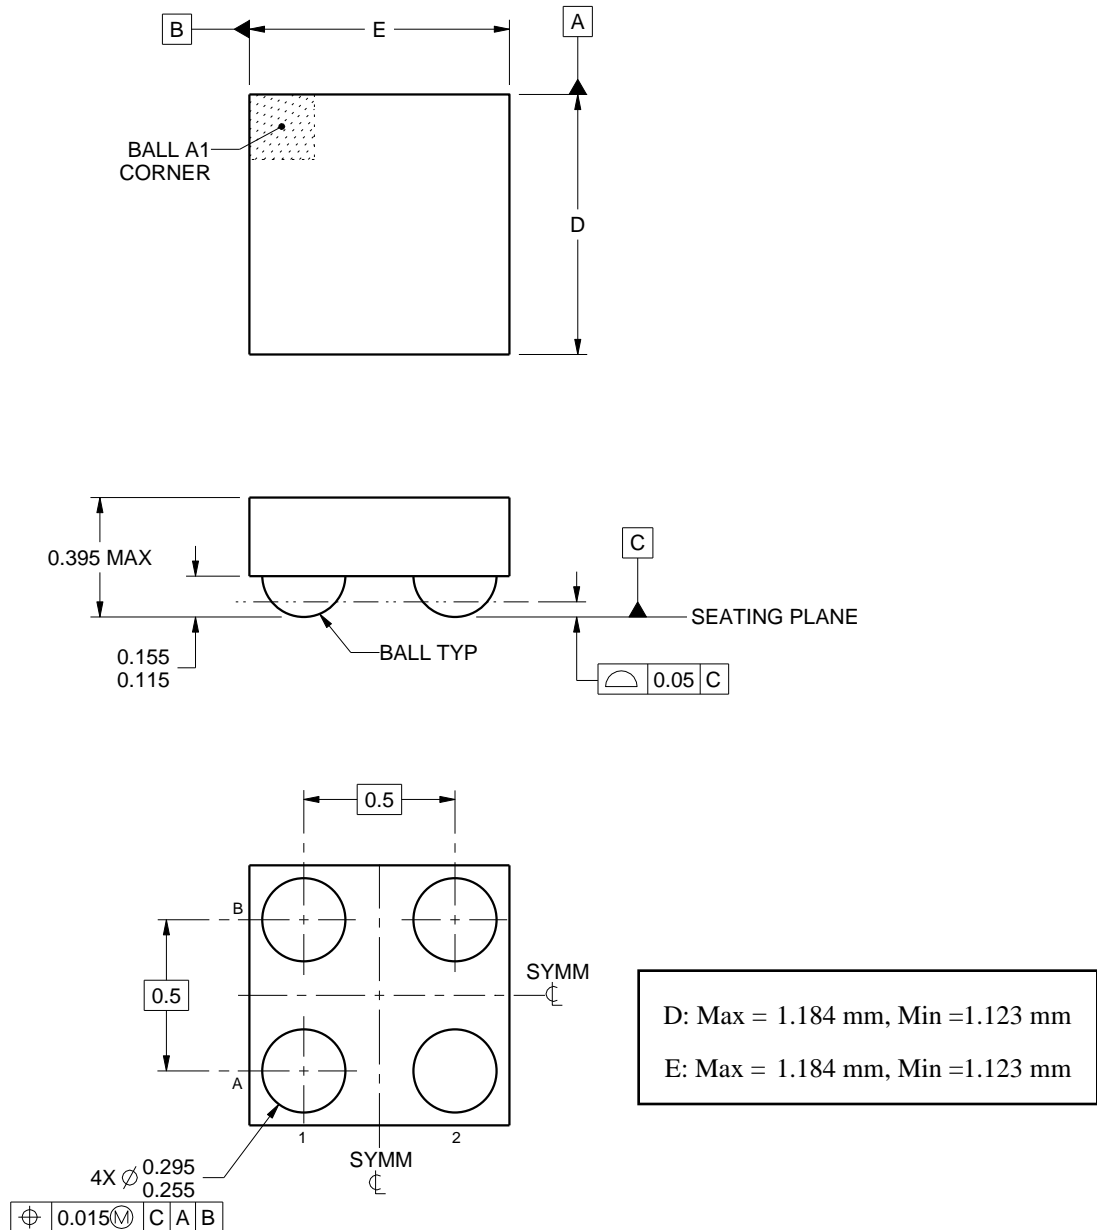

4215141/B 08/2016

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

EXAMPLE BOARD LAYOUT


YPD0004

DSBGA - 0.395 mm max height

DIE SIZE BALL GRID ARRAY

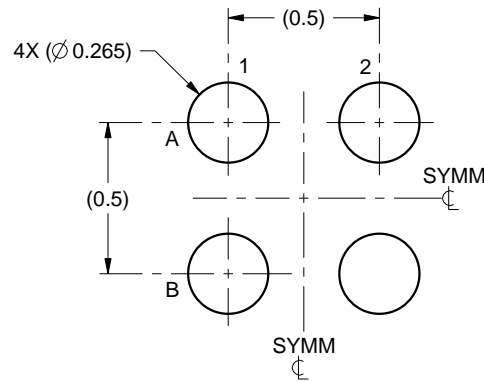

LAND PATTERN EXAMPLE
SCALE:40X

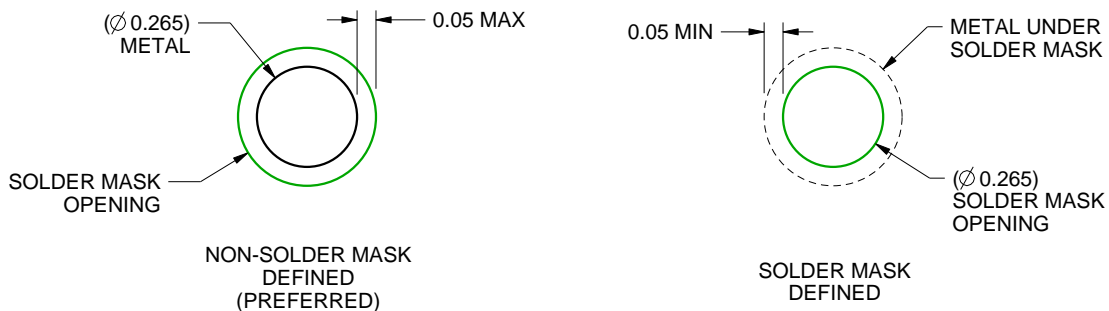

SOLDER MASK DETAILS
NOT TO SCALE

4215141/B 08/2016

NOTES: (continued)


3. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. See Texas Instruments Literature No. SNVA009 (www.ti.com/lit/snva009).

EXAMPLE STENCIL DESIGN

YPD0004

DSBGA - 0.395 mm max height

DIE SIZE BALL GRID ARRAY

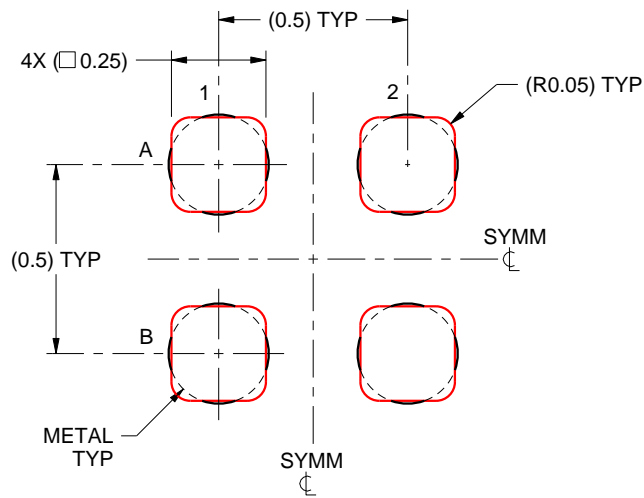


SOLDER PASTE EXAMPLE
BASED ON 0.1 mm THICK STENCIL
SCALE:50X

4215141/B 08/2016

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

YPC0004

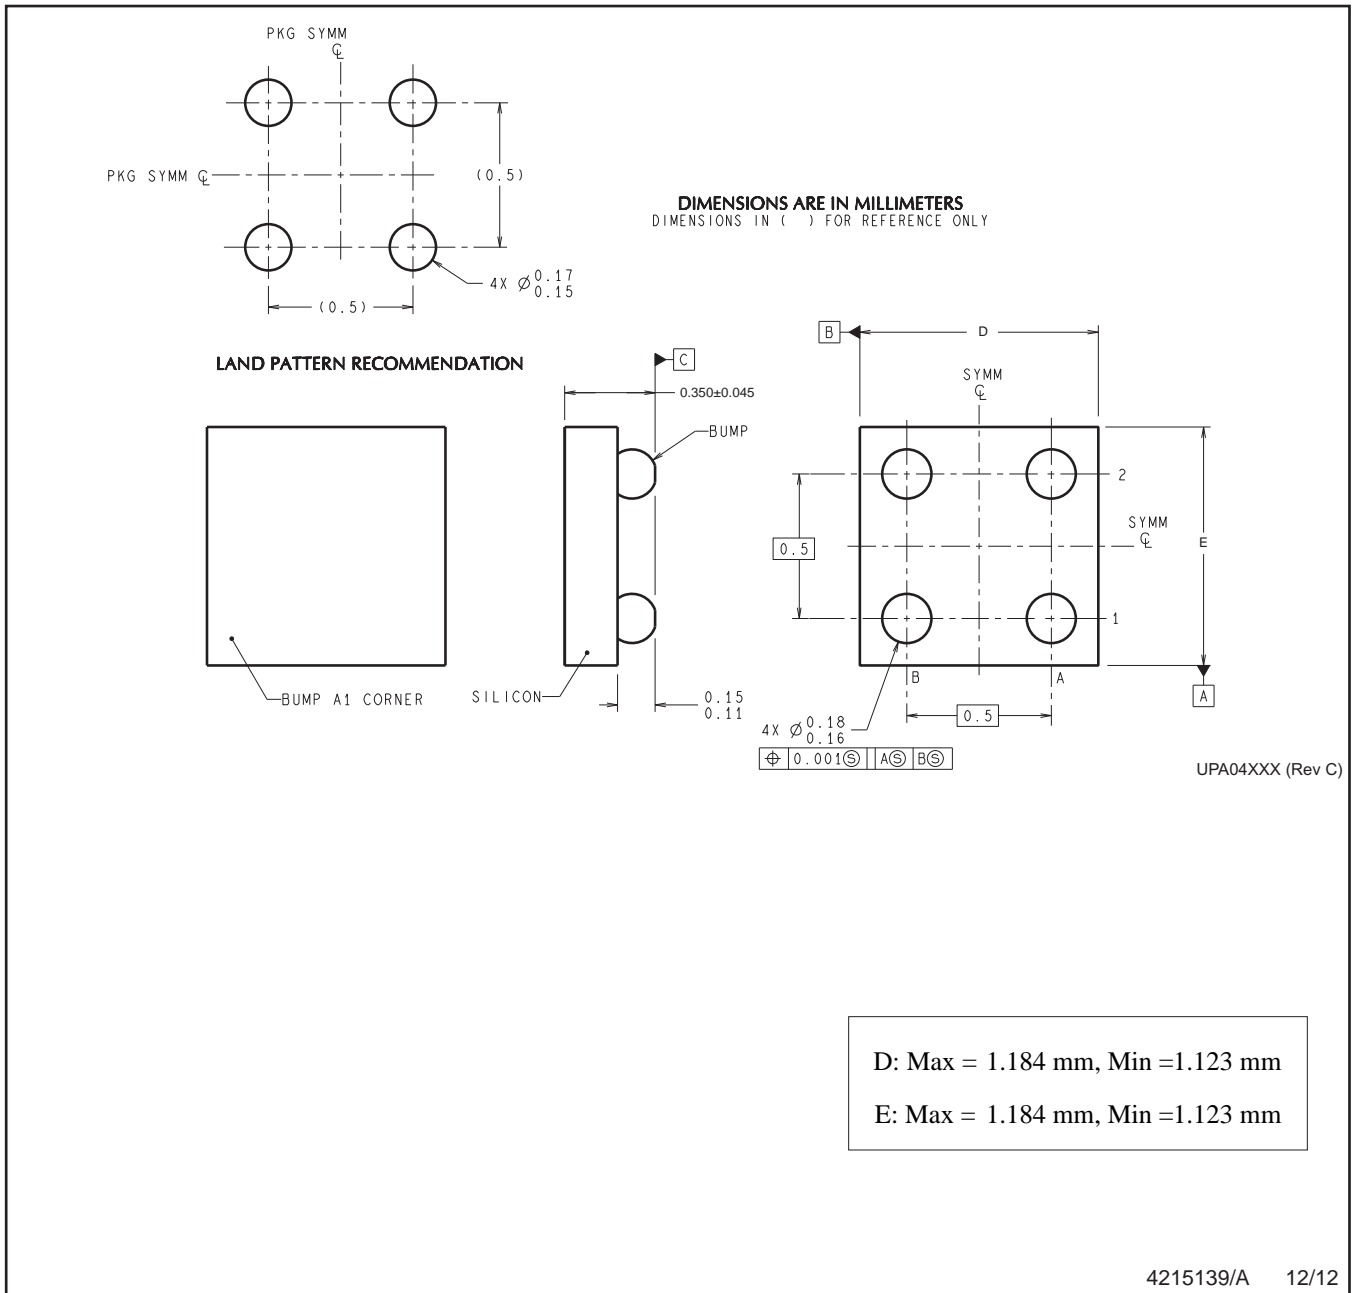

4215139/A 12/12

NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
B. This drawing is subject to change without notice.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2022, Texas Instruments Incorporated