

# LM3632A 集成单芯片背光、偏置电源和 1.5A 闪光灯 LED 驱动器

## 1 特性

- 可驱动多达两个灯串（通常为 8 个串联的 LED）
  - 集成背光升压转换器，最高输出电压达 29V
  - 两个低侧恒流 LED 驱动器，最高输出电流达 25mA
- 背光效率高达 90%
- 11 位指数或线性调光
- 具有外部脉宽调制 (PWM) 输入，可实现内容自适应背光控制 (CABC) 背光操作
- LCD 偏置电源效率 > 85%
- 可编程的正 LCD 偏置电源 (4V 至 6V)，最大输出电流达 50mA
- 可编程的负 LCD 偏置电源 (-6V 至 -4V)，最大输出电流达 50mA
- 1.5A 闪光灯 LED 升压转换器
- 闪光灯效率 > 85%
- 输入电压范围：2.7V 至 5V

## 2 应用

- 智能手机 LCD 背光照明和偏置电源
- 小型平板电脑 LCD 背光照明和偏置电源

## 3 说明

LM3632A 器件集成了用于 LCD 面板背光照明和摄像机闪光灯的白光发光二极管 (WLED) 驱动器以及用于 LCD 面板的偏置电源。该器件具备 LED 驱动器所需的全套安全功能，并且效率高达 90%，正/负偏置电源轨精度高达 1.5%。该器件最多能够驱动 16 个背光 LED，是中小型显示屏的理想选择。该器件可使用由同步升压转换器供电的 1.5A 恒流 LED 驱动器来驱动闪光灯。高侧闪光灯电流源支持 LED 阴极接地操作。


LM3632A 兼具高集成度和可编程性，无需修改硬件即可适应各类应用。

### 器件信息(1)


器件型号	封装	封装尺寸 (最大值)
LM3632A	DSBGA (30)	2.47mm x 2.07mm

(1) 要了解所有可用封装，请见数据表末尾的可订购产品附录。

简化电路原理图

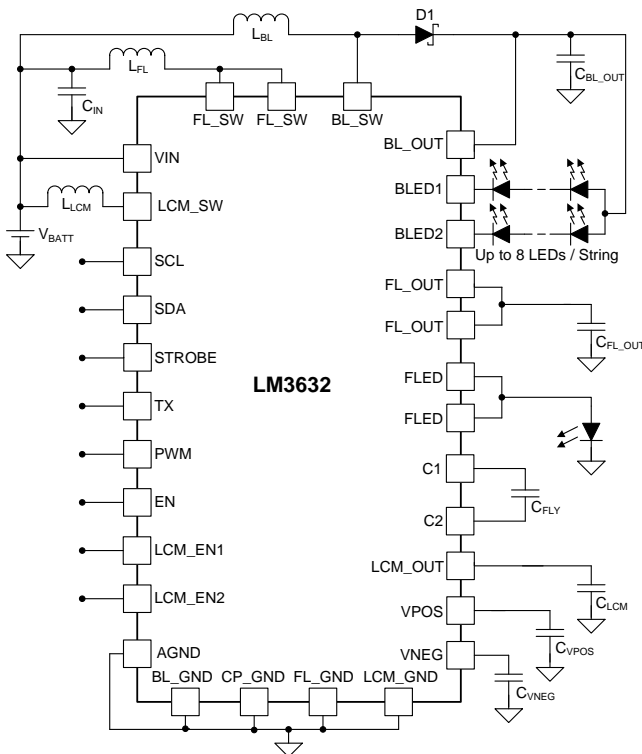

背光效率, 2P7S

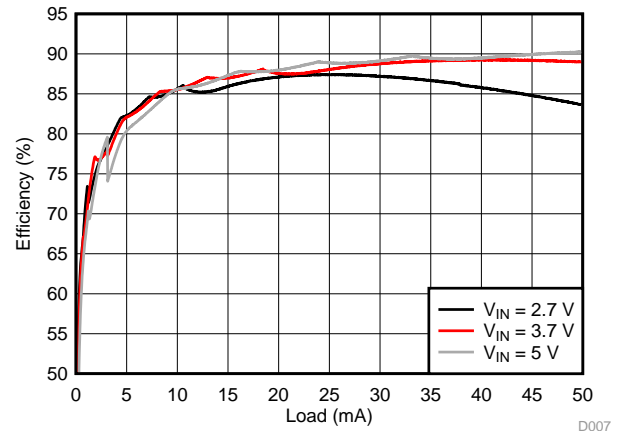

D007



## 目录


1	特性 .....	1	7.4	Device Functional Modes .....	26
2	应用 .....	1	7.5	Programming .....	26
3	说明 .....	1	7.6	Register Maps .....	31
4	修订历史记录 .....	2	<b>8</b>	<b>Application and Implementation</b> .....	<b>39</b>
5	<b>Pin Configuration and Functions</b> .....	<b>3</b>	8.1	Application Information .....	39
6	<b>Specifications</b> .....	<b>4</b>	8.2	Typical Application .....	39
6.1	Absolute Maximum Ratings .....	4	<b>9</b>	<b>Power Supply Recommendations</b> .....	<b>53</b>
6.2	ESD Ratings .....	4	<b>10</b>	<b>Layout</b> .....	<b>53</b>
6.3	Recommended Operating Conditions .....	4	10.1	Layout Guidelines .....	53
6.4	Thermal Information .....	4	10.2	Layout Example .....	54
6.5	Electrical Characteristics .....	5	<b>11</b>	<b>器件和文档支持</b> .....	<b>55</b>
6.6	I <sup>2</sup> C Timing Requirements (SDA, SCL) .....	8	11.1	器件支持 .....	55
6.7	Typical Characteristics .....	9	11.2	文档支持 .....	55
<b>7</b>	<b>Detailed Description</b> .....	<b>12</b>	11.3	商标 .....	55
7.1	Overview .....	12	11.4	静电放电警告 .....	55
7.2	Functional Block Diagram .....	13	11.5	术语表 .....	55
7.3	Features Description .....	14	<b>12</b>	<b>机械、封装和可订购信息</b> .....	<b>55</b>

## 4 修订历史记录

日期	修订版本	注释
2015 年 4 月	*	最初发布。

## 5 Pin Configuration and Functions

**YFF Package  
30-Pin DSBGA  
Top View**

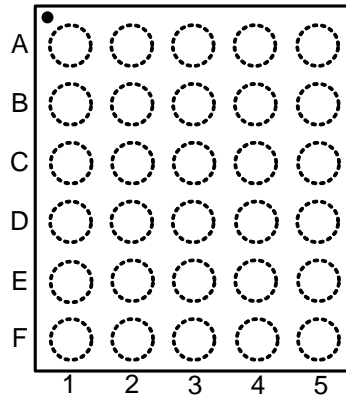

**Pin Functions**

PIN		TYPE	DESCRIPTION
NUMBER	NAME		
A1	VPOS	O	Positive LDO output for LCM bias power
A2	LCM_OUT	O	LCM bias boost output voltage
A3	LCM_SW	O	LCM bias boost switch connection
A4	BL_GND	-	Backlight boost ground connection
A5	BL_SW	O	Backlight boost switch connection
B1	LCM_EN2	I	Enable for inverting charge pump output
B2	LCM_EN1	I	Enable for positive LDO output
B3	EN	I	Active high chip enable
B4	LCM_GND	-	LCM bias boost ground connection
B5	BL_OUT	O	Backlight boost output voltage
C1	C1	O	Inverting charge pump flying capacitor positive connection
C2	SDA	I/O	Serial data connection for I <sup>2</sup> C- compatible interface
C3	TX	I	Flash interrupt input
C4	AGND	-	Analog ground connection
C5	BLED1	O	Input pin to internal LED current sink 1
D1	CP_GND	-	Inverting charge pump ground connection
D2	SCL	I	Serial clock connection for I <sup>2</sup> C- compatible interface
D3	STROBE	I	Flash enable input
D4	PWM	I	PWM input for CABBC current control
D5	BLED2	O	Input pin to internal LED current sink 2
E1	C2	O	Inverting charge pump flying capacitor negative connection
E2	FLED	O	High-side current source output for flash LED
E3	FL_OUT	O	Flash boost output voltage
E4	FL_SW	O	Flash boost switch connection
E5	VIN	I	Input voltage connection
F1	VNEG	O	Inverting charge pump output voltage
F2	FLED	O	High-side current source output for flash LED
F3	FL_OUT	O	Flash boost output voltage
F4	FL_SW	O	Flash boost switch connection
F5	FL_GND	-	Flash boost ground connection

## 6 Specifications

### 6.1 Absolute Maximum Ratings<sup>(1)</sup>

Over operating free-air temperature range (unless otherwise noted)

	MIN	MAX	UNIT
Voltage on VIN, FL_SW, FL_OUT, FLED, EN, LCM_EN1, LCM_EN2, PWM, STROBE, TX, SCL, SDA	-0.3	6	V
Voltage on LCM_SW, LCM_OUT, VPOS, C1	-0.3	7	V
Voltage on VNEG, C2	-7	0.3	V
Voltage on BL_SW, BL_VOUT, BLED1, BLED2	-0.3	30	V
Continuous power dissipation	Internally limited		
Maximum junction temperature, T <sub>J(MAX)</sub>	150		°C
Storage temperature, T <sub>stg</sub>	-45	150	

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 6.2 ESD Ratings

		VALUE	UNIT
V <sub>(ESD)</sub>	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup>	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.  
 (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted).

	MIN	MAX	UNIT
Input voltage, V <sub>IN</sub>	2.7	5	V
Operating ambient temperature, T <sub>A</sub> <sup>(1)</sup>	-40	85	°C

- (1) In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature may have to be derated. Maximum ambient temperature (T<sub>A-MAX</sub>) is dependent on the maximum operating junction temperature (T<sub>J-MAX-OP</sub> = 125°C), the maximum power dissipation of the device in the application (P<sub>D-MAX</sub>), and the junction-to-ambient thermal resistance of the part/package in the application (R<sub>θJA</sub>), as given by the following equation: T<sub>A-MAX</sub> = T<sub>J-MAX-OP</sub> - (R<sub>θJA</sub> × P<sub>D-MAX</sub>).

### 6.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		LM3632A YFF (DSBGA) 30 PINS	UNIT
R <sub>θJA</sub>	Junction-to-ambient thermal resistance	58.6	°C/W
R <sub>θJC</sub>	Junction-to-case (top) thermal resistance	0.2	
R <sub>θJB</sub>	Junction-to-board thermal resistance	8.3	
Ψ <sub>JT</sub>	Junction-to-top characterization parameter	1.4	
Ψ <sub>JB</sub>	Junction-to-board characterization parameter	8.3	

- (1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](http://www.ti.com/lit/an/spra953).

## 6.5 Electrical Characteristics

Unless otherwise specified, limits apply over the full operating ambient temperature range ( $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ ),  $V_{\text{IN}} = 3.7\text{ V}$ ,  $V_{\text{VPOS}} = 5.5\text{ V}$ ,  $V_{\text{VNEG}} = -5.4\text{ V}$ ,  $V_{\text{LCM\_OUT}} = 6\text{ V}$ .

PARAMETER		TEST CONDITION	MIN	TYP	MAX	UNIT
<b>CURRENT CONSUMPTION</b>						
$I_{\text{SD}}$	Shutdown current	EN = 0		1	4	$\mu\text{A}$
$I_{\text{Q}}$	Quiescent current, device not switching	EN = $V_{\text{IN}}$ , LCD bias boost disabled		2	10	$\mu\text{A}$
$I_{\text{LCD\_EN}}$		LCD bias boost enabled, no-load		0.5		mA
<b>DEVICE PROTECTION</b>						
TSD	Thermal shutdown			140		$^{\circ}\text{C}$
<b>BACKLIGHT LED CURRENT SINKS</b>						
$I_{\text{LED\_MAX}}$	Maximum output current in BLED1/2	$2.7\text{ V} \leq V_{\text{IN}} \leq 5\text{ V}$ , linear or exponential mode		25		mA
$I_{\text{LED\_MIN}}$	Minimum output current in BLED1/2	$2.7\text{ V} \leq V_{\text{IN}} \leq 5\text{ V}$ , linear or exponential mode		50		$\mu\text{A}$
$I_{\text{ACCU}}$	LED current accuracy <sup>(1)</sup>	$2.7\text{ V} \leq V_{\text{IN}} \leq 5\text{ V}$ , $50\text{ }\mu\text{A} \leq I_{\text{LED}} \leq 25\text{ mA}$ , linear or exponential mode	-3%	0.1%	3%	
$I_{\text{MATCH}}$	LED1 to LED2 current matching <sup>(1)</sup>	$2.7\text{ V} \leq V_{\text{IN}} \leq 5\text{ V}$ , $300\text{ }\mu\text{A} \leq I_{\text{LED}} \leq 25\text{ mA}$ , linear or exponential mode	-2%	0.1%	2%	
<b>BACKLIGHT BOOST CONVERTER</b>						
$V_{\text{OVP\_BL}}$	Backlight boost output overvoltage protection	$2.7\text{ V} \leq V_{\text{IN}} \leq 5\text{ V}$ , 29 V option	28	28.75	29.5	V
Efficiency	Typical efficiency <sup>(2)</sup>	$I_{\text{LED}} = 5\text{ mA/string}$ , $V_{\text{IN}} = 3.7\text{ V}$ (2 x 7 LEDs), ( $P_{\text{OUT}}/P_{\text{IN}}$ )		87%		
$V_{\text{HR}}$	Regulated current sink headroom voltage	$I_{\text{LED}} = 25\text{ mA}$		250		mV
		$I_{\text{LED}} = 5\text{ mA}$		100		mV
$V_{\text{HR\_MIN}}$	Current sink minimum headroom voltage	$I_{\text{LED}} = 95\%$ of nominal, $I_{\text{LED}} = 5\text{ mA}$		30		mV
$R_{\text{DSON}}$	NMOS switch on resistance	$I_{\text{SW}} = 100\text{ mA}$		0.25		$\Omega$
$I_{\text{CL}}$	NMOS switch current limit	$2.7\text{ V} \leq V_{\text{IN}} \leq 5\text{ V}$	900	1000	1100	mA
$f_{\text{SW\_BLBOOST}}$	Switching frequency	$2.7\text{ V} \leq V_{\text{IN}} \leq 5\text{ V}$				
		500-kHz mode	450	500	550	kHz
		1-MHz mode	900	1000	1100	
$D_{\text{MAX}}$	Maximum duty cycle			94%		
<b>LCM BIAS BOOST CONVERTER</b>						
$V_{\text{OVP\_LCM}}$	LCM bias boost output overvoltage protection	$2.7\text{ V} \leq V_{\text{IN}} \leq 5\text{ V}$		7		V
$f_{\text{SW\_LCMBST}}$	Switching frequency <sup>(3)</sup>	$2.7\text{ V} \leq V_{\text{IN}} \leq 5\text{ V}$		2500		kHz
$V_{\text{LCM\_OUT}}$	Bias boost output voltage range		4.5		6.4	V
	Output voltage step size			50		mV
	Peak-to-peak ripple voltage <sup>(3)</sup>	$I_{\text{LOAD}} = 5\text{ mA} \ \& \ 50\text{ mA}$ , $C_{\text{BST}} = 10\text{ }\mu\text{F}$		50		mVpp
	LCM_OUT line transient response <sup>(3)</sup>	$V_{\text{IN}} + 500\text{ mVp-p AC square wave}$ , $T_r = 100\text{ mV}/\mu\text{s}$ , 200 Hz, 12.5 % duty, $I_{\text{LOAD}} = 5\text{ mA}$ , $C_{\text{IN}} = 10\text{ }\mu\text{F}$	-50	$\pm 25$	50	mV
	LCM_OUT load transient response <sup>(3)</sup>	Load current step 0 mA to 100 mA, $T_{\text{RISE/FALL}} = 100\text{ mA}/\mu\text{s}$ , $C_{\text{IN}} = 10\text{ }\mu\text{F}$	-150		150	mV
$I_{\text{CL\_LCMBST}}$	Valley current limit			1000		mA

(1) Output Current Accuracy is the difference between the actual value of the output current and programmed value of this current. Matching is the maximum difference from the average. For the constant current sinks on the device (BLED1 and BLED2), the following is determined: the maximum output current (MAX), the minimum output current (MIN), and the average output current of both outputs (AVG). Matching number is calculated:  $(I_{\text{LED1}} - I_{\text{LED2}})/(I_{\text{LED1}} + I_{\text{LED2}})$ . The typical specification provided is the most likely norm of the matching figure of all parts. Note that some manufacturers have different definitions in use.

(2) Typical value only for information.

(3) Limits set by characterization and/or simulation only.

**Electrical Characteristics (continued)**

Unless otherwise specified, limits apply over the full operating ambient temperature range ( $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ ),  $V_{IN} = 3.7\text{ V}$ ,  $V_{VPOS} = 5.5\text{ V}$ ,  $V_{VNEG} = -5.4\text{ V}$ ,  $V_{LCM\_OUT} = 6\text{ V}$ .

PARAMETER		TEST CONDITION	MIN	TYP	MAX	UNIT
$R_{DSON\_LCMBST}$	High-side MOSFET on resistance	$V_{IN} = V_{GS} = 5\text{ V}$ , $T_A = 25^{\circ}\text{C}$		170		m $\Omega$
	Low-side MOSFET on Resistance	$V_{IN} = V_{GS} = 5\text{ V}$ , $T_A = 25^{\circ}\text{C}$		290		
$EFF_{LCMBST}$	Efficiency <sup>(2)</sup>	$V_{LCM\_OUT} = 6\text{ V}$ , $5\text{ mA} < I_{LCMBST} < 100\text{ mA}$		92%		
$t_{ST\_LCMBST}$	Start-up time (LCM_OUT), $V_{LCM\_OUT} = 10\%$ to 90% <sup>(3)</sup>	$C_{LCM\_BST} = 10\text{ }\mu\text{F}$			1000	$\mu\text{s}$
<b>DISPLAY BIAS POSITIVE OUTPUT (VPOS)</b>						
$V_{VPOS}$	Programmable output voltage range		4		6	V
	Output voltage step size			50		mV
	Output voltage accuracy	Output voltage = 5.4 V	-1.5%		1.5%	
	VPOS line transient response <sup>(3)</sup>	$V_{IN} + 500\text{ mVp-p AC square wave}$ , $T_r = 100\text{ mV}/\mu\text{s}$ , $200\text{ Hz}$ , $I_{LOAD} = 25\text{ mA}$ , $C_{IN} = 10\text{ }\mu\text{F}$	-50		50	mV
	VPOS load transient response <sup>(3)</sup>	0 to 50 mA load transient, $C_{VPOS} = 10\text{ }\mu\text{F}$	-50		50	mV
	DC load regulation <sup>(3)</sup>	$0\text{ mA} \leq I_{VPOS} \leq 50\text{ mA}$			20	mV
$I_{MAX\_VPOS}$	Maximum output current			50		mA
$I_{CL\_VPOS}$	Output current limit			80		mA
$I_{RUSH\_PK\_VPOS}$	Peak start-up inrush current <sup>(3)</sup>	$V_{LCM\_OUT} = 6.3\text{ V}$ , $V_{VPOS} = 5.8\text{ V}$ , $C_{VPOS} = 10\text{ }\mu\text{F}$			250	mA
$V_{DO\_VPOS}$	VPOS dropout voltage <sup>(4)</sup>	$I_{VPOS} = 50\text{ mA}$ , $V_{VPOS} = 5.5\text{ V}$			100	mV
$t_{ST\_VPOS}$	Start-up time VPOS, $V_{VPOS} = 10\%$ to 90% <sup>(3)</sup>	$C_{VPOS} = 10\text{ }\mu\text{F}$	500- $\mu\text{s}$ setting	500		$\mu\text{s}$
			800- $\mu\text{s}$ setting	800		
$R_{PD\_VPOS}$	Output pull-down resistor (VPOS)	VPOS disabled	30	80	110	$\Omega$
<b>DISPLAY BIAS NEGATIVE OUTPUT (VNEG)</b>						
$V_{OVP\_VNEG}$	LCM bias negative charge-pump output overvoltage protection	Below $V_{VNEG}$ output voltage target		-250		mV
$V_{SHORT\_VNEG}$	LCM bias negative charge-pump output short circuit protection	VNEG to CP_GND		-750		mV
$V_{VNEG}$	Programmable output voltage range		-6		-4	V
	Output voltage step size			50		mV
	Output accuracy	Output voltage = -5.4 V	-1.5%		1.5%	
	Peak-to-peak ripple voltage <sup>(3)</sup>	$I_{LOAD} = 5\text{ mA} \text{ \& } 50\text{ mA}$ , $C_{VNEG} = 10\text{ }\mu\text{F}$		60		mVpp
	VNEG line transient response <sup>(3)</sup>	$V_{IN} + 500\text{ mVp-p AC square wave}$ , $100\text{ mV}/\mu\text{s}$ , $200\text{ Hz}$ , $12.5\%$ duty at $5\text{ mA}$	-50	$\pm 25$	50	mV
	VNEG load transient response <sup>(3)</sup>	0 to 50 mA load transient, $T_{RISE/FALL} = 1\text{ }\mu\text{s}$ , $C_{VNEG} = 10\text{ }\mu\text{F}$			100	mV
	Efficiency <sup>(2)</sup>	$V_{IN} = 3.7\text{ V}$ , $V_{LCM\_OUT} = 5.8\text{ V}$ , $V_{VNEG} = -5.4\text{ V}$ , $I_{VNEG} > 5\text{ mA}$		92%		
$I_{MAX\_VNEG}$	Maximum output current <sup>(3)</sup>	$V_{IN} = 3.7\text{ V}$ , $V_{LCM\_OUT} = 5.8\text{ V}$ , $V_{VNEG} = -5.4\text{ V}$		50		mA
$I_{CL\_VNEG}$	Output current limit <sup>(3)</sup>			75		mA

(4)  $V_{IN\_VPOS} - V_{VPOS}$  when  $V_{VPOS}$  has dropped 100 mV below target.

## Electrical Characteristics (continued)

Unless otherwise specified, limits apply over the full operating ambient temperature range ( $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ ),  $V_{\text{IN}} = 3.7\text{ V}$ ,  $V_{\text{VPOS}} = 5.5\text{ V}$ ,  $V_{\text{VNEG}} = -5.4\text{ V}$ ,  $V_{\text{LCM\_OUT}} = 6\text{ V}$ .


PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNIT	
R <sub>DSON_VNEG</sub>	Charge FET pump on resistance	Q1	350		mΩ	
		Q2	400			
		Q3	400			
t <sub>ST_VNEG</sub>	Start-up time (V <sub>VNEG</sub> ), V <sub>VNEG</sub> = 10% to 90% <sup>(3)</sup>	V <sub>VNEG</sub> = -6 V, C <sub>VNEG</sub> = 10 μF	1		ms	
R <sub>PU_VNEG</sub>	Output pullup resistor, VNEG <sup>(3)</sup>	VNEG Disabled, V <sub>LCM_OUT</sub> > 4.8 V	20	40	Ω	
<b>FLASH DRIVER BOOST</b>						
I <sub>LED</sub>	Current source accuracy	1.5-A flash, V <sub>FL_OUT</sub> = 4 V	1.4	1.5	1.6	A
V <sub>OVP</sub>	Output overvoltage protection trip point	ON threshold	4.85	5	5.1	V
		OFF threshold	4.75	4.9	5	
V <sub>HR</sub>	Current source regulation voltage	1.5-A flash, V <sub>FL_OUT</sub> = 4 V	275		mV	
I <sub>CL</sub>	Switch current limit		2.45	2.8	3.15	A
			1.65	1.9	2.15	
R <sub>NMOS</sub>	NMOS switch on resistance	I <sub>NMOS</sub> = 1 A	80		mΩ	
R <sub>PMOS</sub>	PMOS switch on resistance	I <sub>PMOS</sub> = 1 A	100			
V <sub>VINM</sub>	Input voltage monitor trip threshold		2.76	2.9	3.04	V
<b>LOGIC INPUTS (PWM, EN, LCM_EN1, LCM_EN2, SCL, SDA, TX, STROBE)</b>						
V <sub>IL</sub>	Input logic low		0	0.4	V	
V <sub>IH</sub>	Input logic high		1.2	V <sub>IN</sub>	V	
<b>LOGIC OUTPUTS (SDA)</b>						
V <sub>OL</sub>	Output logic low	2.7 V ≤ V <sub>IN</sub> ≤ 5 V, I <sub>OL</sub> = 3 mA	0	0.4	V	
<b>PWM INPUT</b>						
f <sub>PWM_INPUT</sub>	PWM input frequency <sup>(2)</sup>		100	20000	Hz	
	Minimum PWM ON/OFF time <sup>(3)</sup>	PWM sampling frequency = 1 MHz	6		μs	
		PWM sampling frequency = 4 MHz	1.5			
	PWM timeout <sup>(3)</sup>	PWM sampling frequency = 1 MHz	25		ms	
		PWM sampling frequency = 4 MHz	3			

## 6.6 I<sup>2</sup>C Timing Requirements (SDA, SCL) <sup>(1)</sup>

Over operating free-air temperature range (unless otherwise noted)(see [Figure 1](#)).

		MIN	NOM	MAX	UNIT
$f_{SCL}$	Clock frequency			400	kHz
1	Hold time (repeated) START condition	0.6			$\mu$ s
2	Clock low time	1.3			$\mu$ s
3	Clock high time	600			ns
4	Set-up time for a repeated START condition	600			ns
5	Data hold time	50			ns
6	Data set-up time	100			ns
7	Rise time of SDA and SCL	$20 + 0.1C_b$		300	ns
8	Fall time of SDA and SCL	$15 + 0.1C_b$		300	ns
9	Set-Up time between a STOP and a START condition	1.3			$\mu$ s
$C_b$	Capacitive load for each bus line	10		200	pF

(1) Limits set by characterization and/or simulation only.






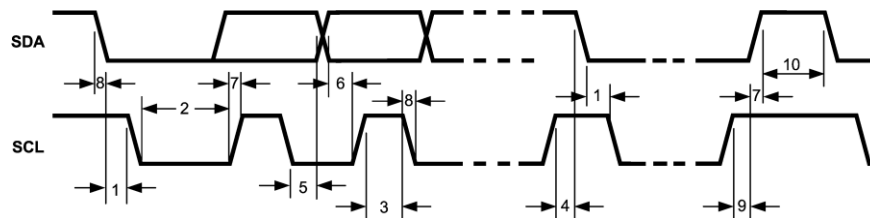


**Figure 1. I<sup>2</sup>C Timing Parameters**



## 6.7 Typical Characteristics

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted.

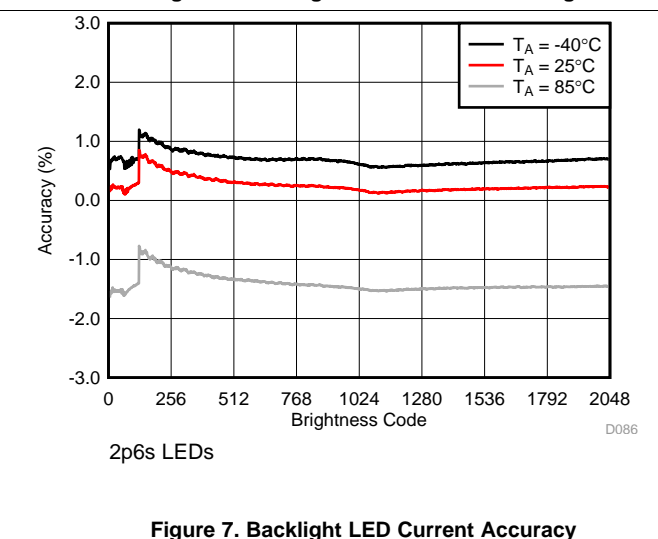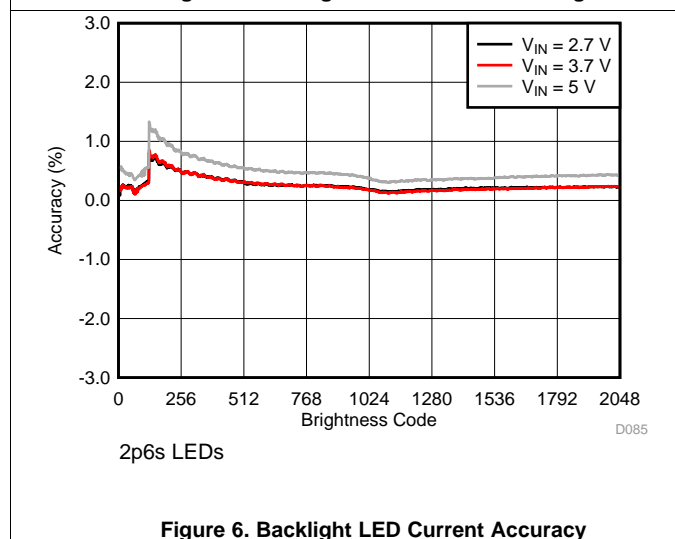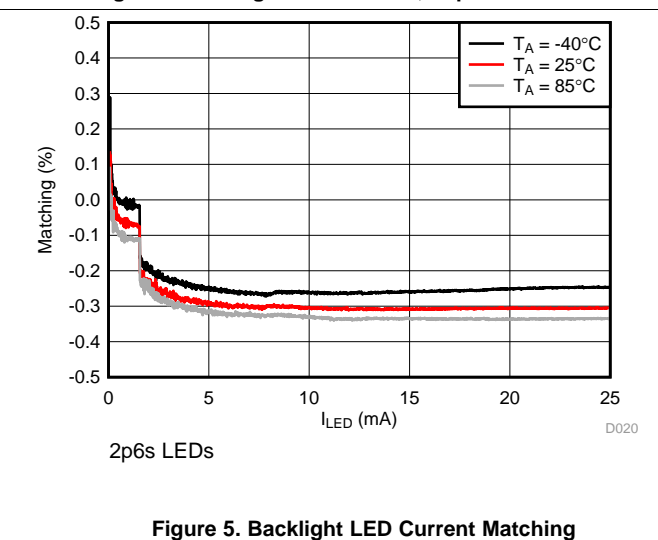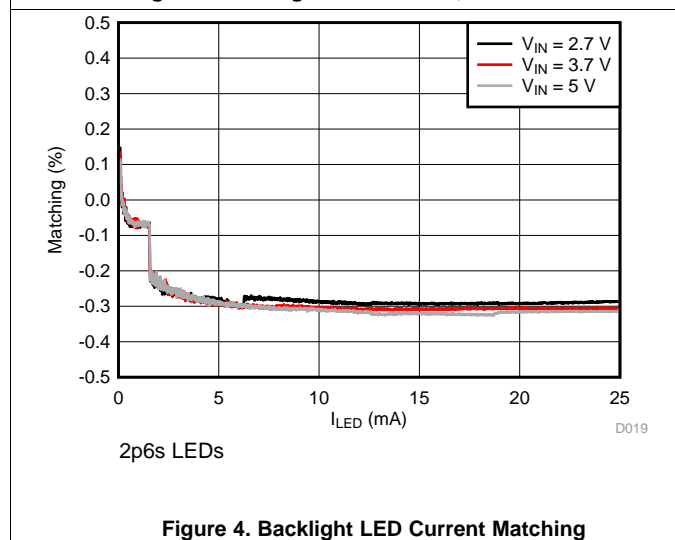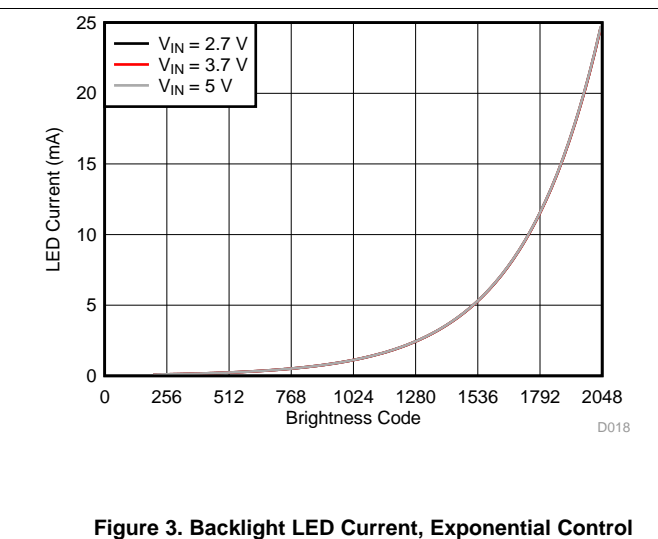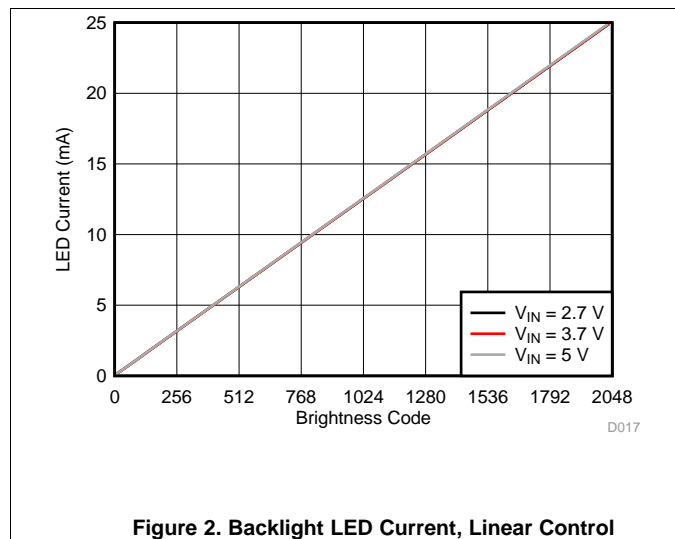

Typical Characteristics (continued)

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted.

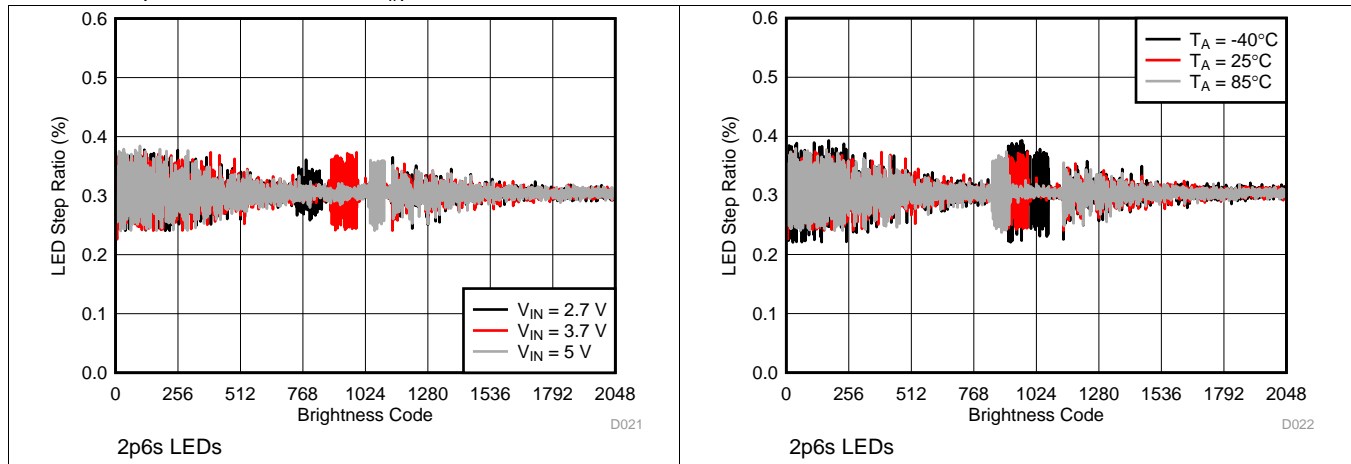


Figure 8. Backlight LED Current-Step Ratio

Figure 9. Backlight LED Current-Step Ratio

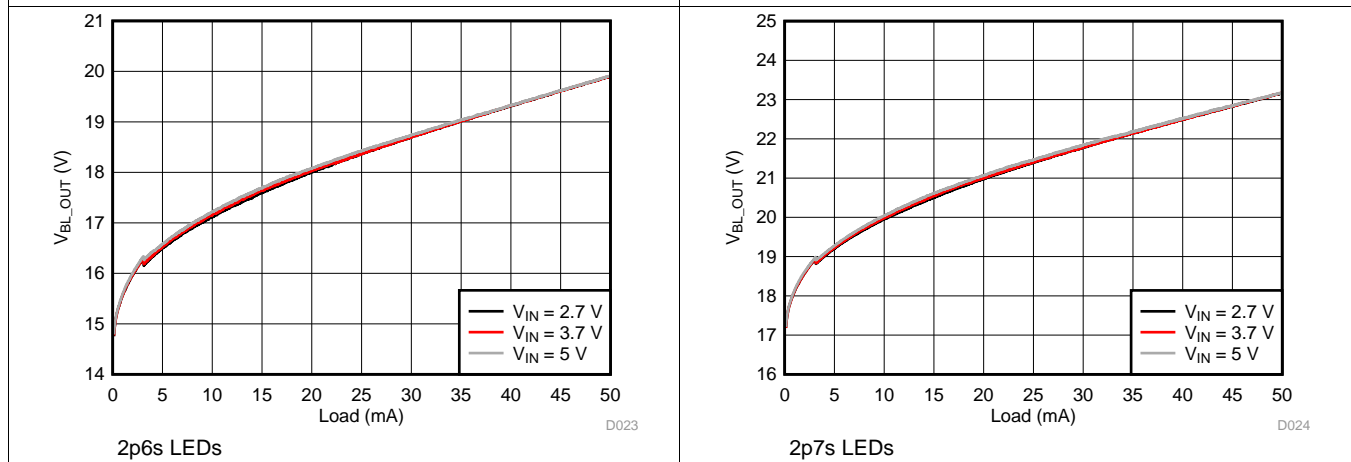


Figure 10. Backlight Boost Voltage

Figure 11. Backlight Boost Voltage

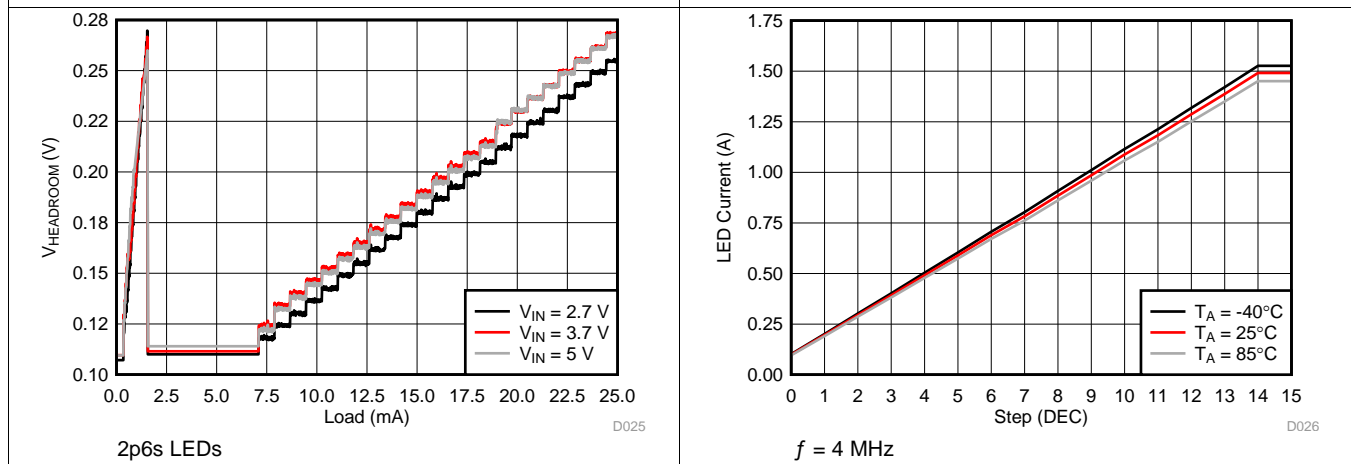


Figure 12. Backlight Headroom Voltage

Figure 13. Flash LED Current

Typical Characteristics (continued)

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted.

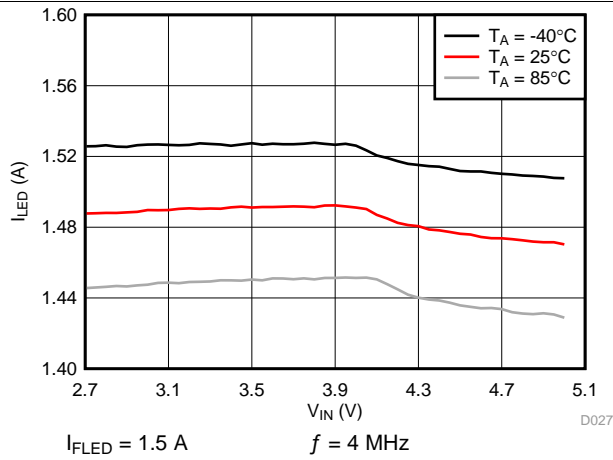


Figure 14. Flash LED Current

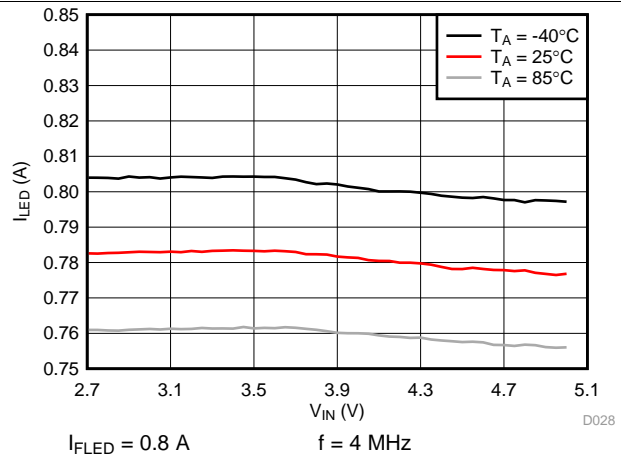


Figure 15. Flash LED Current

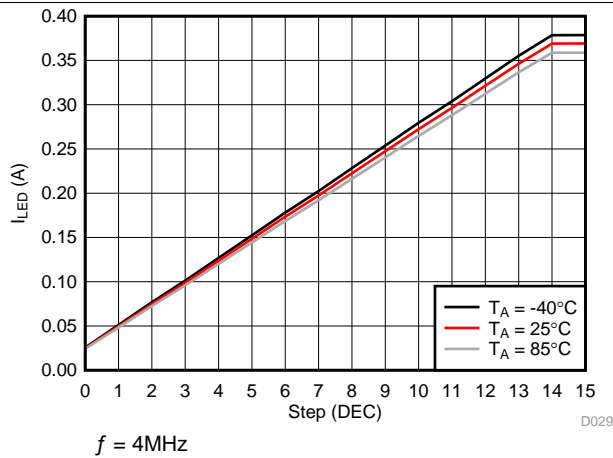


Figure 16. Torch LED Current

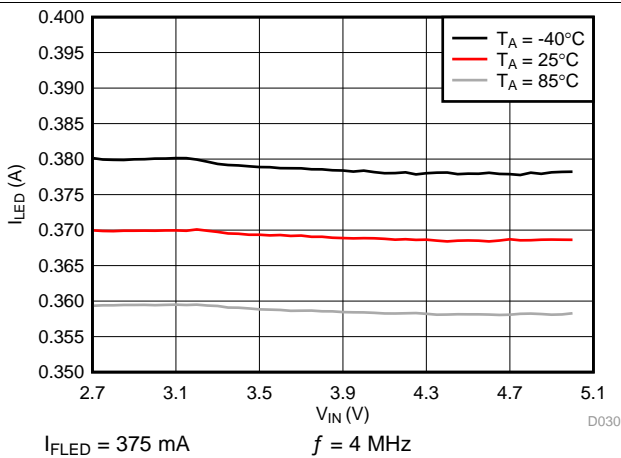


Figure 17. Torch LED Current

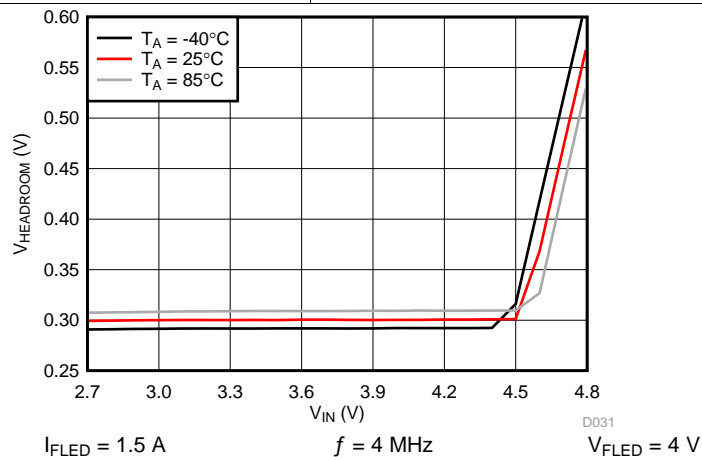


Figure 18. Flash Headroom Voltage

## 7 Detailed Description

### 7.1 Overview

The LM3632A is a single-chip complete backlight, LCM power and flash solution. The device operates over the 2.7-V to 5-V input voltage range.

The LM3632A can drive up to two LED strings with up to 8 LEDs each (up to 28 V typical), with a maximum of 25 mA per string. The power for the LED strings comes from an integrated asynchronous backlight boost converter with two selectable switching frequencies to optimize performance or solution area. LED current is regulated by two low-headroom current sinks. Automatic voltage scaling adjusts the output voltage of the backlight boost converter to minimize the LED driver headroom voltage. The 11-bit LED current is set via an I<sup>2</sup>C interface, via a logic level PWM input, or a combination of both.


The LCM bias power portion of the LM3632A consists of a synchronous LCM bias boost converter, inverting charge pump, and an integrated LDO. The LCM positive bias voltage  $V_{POS}$  (up to 6 V) is post-regulated from the LCM bias boost converter output voltage. The LCM negative bias voltage  $V_{NEG}$  (down to -6 V) is generated from the LCM bias boost converter output using a regulated inverting charge pump.

The flash driver consists of a synchronous boost converter and a 1.5-A constant current LED driver. The high-side current source allows for grounded cathode LED operation providing flash current up to 1.5 A. An adaptive regulation method ensures the current source remains in regulation and maximizes efficiency.

The LM3632A flexible control interface consists of an EN active low reset input, LCM\_EN1 and LCM\_EN2 inputs for  $V_{POS}$  and  $V_{NEG}$  enable control, PWM input for content adaptive backlight control (CABC), a TX flash interrupt input, and an I<sup>2</sup>C-compatible interface.

Additionally, there are two flag registers with flag and status bits. The user can read back these registers and determine if a fault or warning message has been generated.

## 7.2 Functional Block Diagram

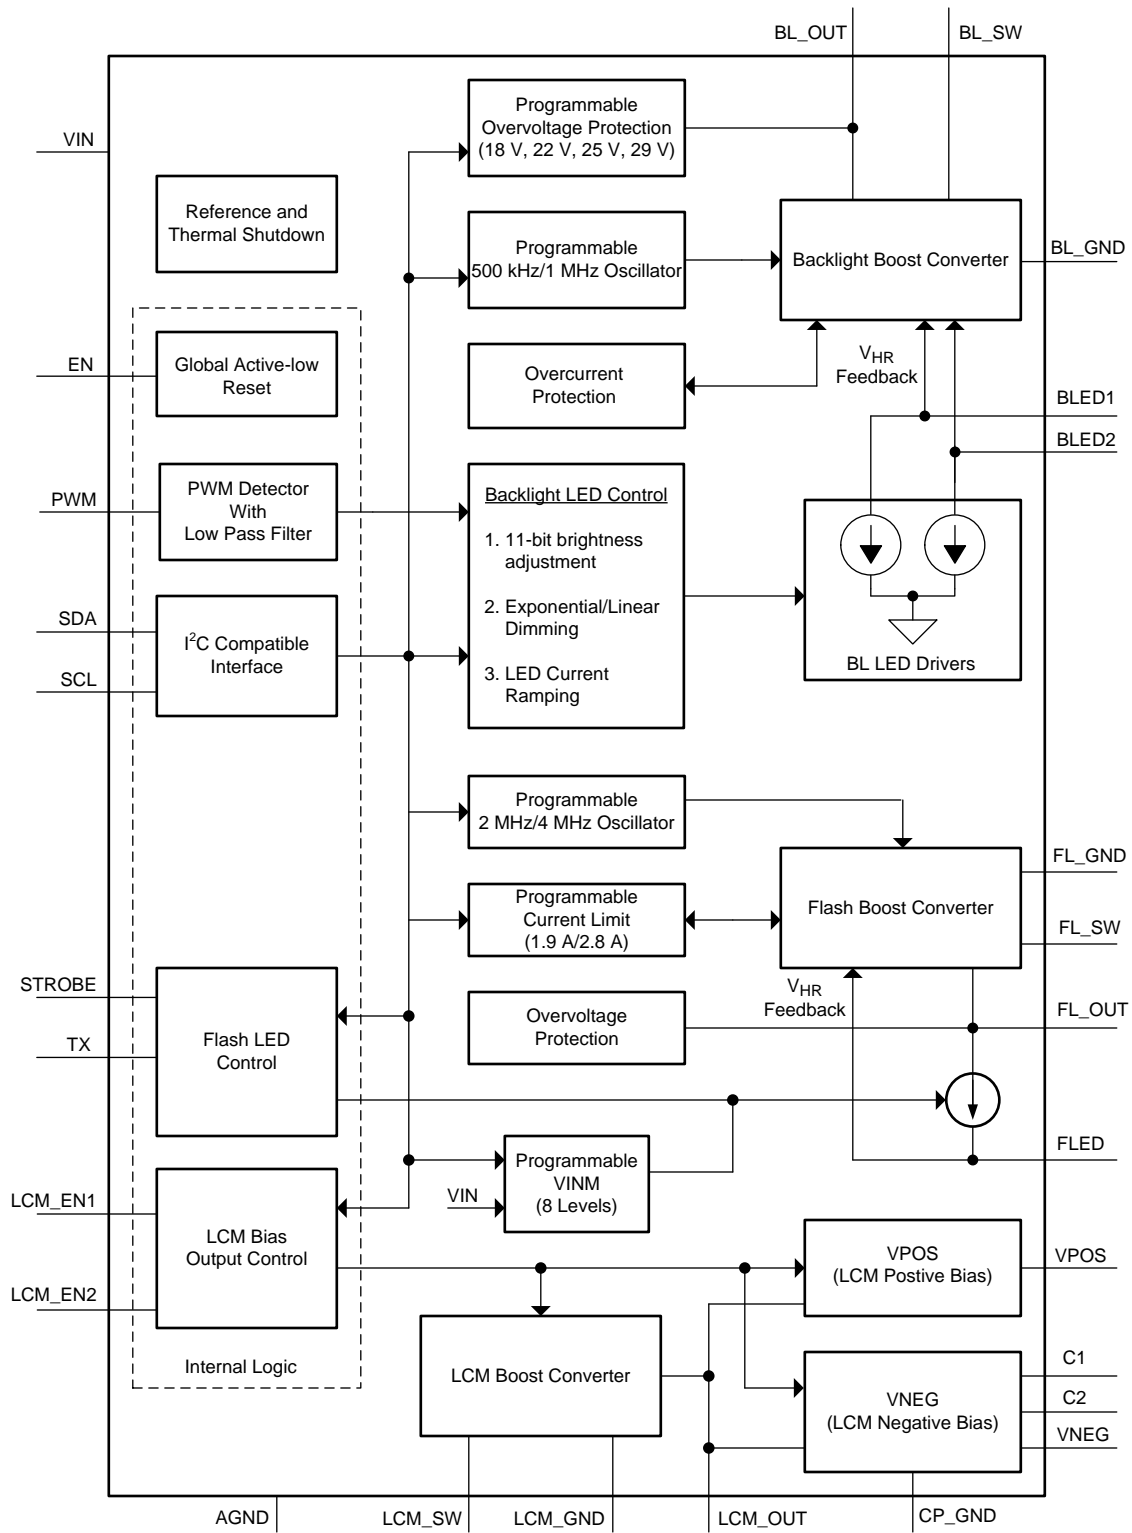

## 7.3 Features Description

### 7.3.1 Backlight

The backlight is enabled if the BL\_EN bit (bit[0] in reg[0x0A]) is set to '1', at least one of the backlight sink outputs is enabled (bit[3] and/or bit[4] in reg[0x0A]), and the brightness value is different than 0. When the brightness value is 0 or the BL\_EN bit is '0', the backlight is disabled.

#### 7.3.1.1 Brightness Control

Brightness can be controlled either by the I<sup>2</sup>C brightness register or a combination of the external PWM control and the I<sup>2</sup>C brightness register. The backlight truth table is shown in [Table 1](#).

When controlling brightness through I<sup>2</sup>C, registers 0x04 and 0x05 are used. Registers 0x04 and 0x05 hold the 11-bit brightness data. Register 0x04 contains the 3 LSBs, and register 0x05 contains the 8 MSBs. The LED current transitions to the new level after a write is done to register 0x05.

When controlling brightness through I<sup>2</sup>C, setting the brightness value to '0' shuts down the backlight. When controlling the brightness with PWM input, if PWM input is low for a certain period of time (25 ms typ.), the backlight shuts down. When using the combination of a PWM input and the I<sup>2</sup>C register, either option shuts down the backlight.

**Table 1. Backlight Truth Table**

EN PIN	BL_EN 0x0A[0]	BLED1_EN 0x0A[4]	BLED2_EN 0x0A[3]	PWM_EN 0x09[6]	ACTION
0	X	X	X	X	Shutdown
1	0	X	X	X	Standby
1	1	0	0	X	Bias enable
1	1	1	0	0	BLED1 ramp to target current
1	1	0	1	0	BLED1 & BLED2 ramp-to-target current
1	1	1	1	0	BLED1 & BLED2 ramp-to-target current
1	1	1	0	1	BLED1 ramp to (target current × PWM duty cycle)
1	1	0	1	1	BLED1 & BLED2 ramp to (target current × PWM duty cycle)
1	1	1	1	1	BLED1 & BLED2 ramp to (target current × PWM duty cycle)

#### 7.3.1.1.1 LED Current with PWM Disabled



When LED brightness is controlled from the I<sup>2</sup>C brightness registers, the 11-bit brightness data directly controls the LED current in BLED1 and BLED2. LED mapping can be selected as either linear or exponential. When this mode is selected, setting the PWM input to 0 does not disable the backlight.

With exponential mapping the 11-bit code-to-current response is approximated by the equation:

$$I_{LED} = 50 \mu A \times 1.003040572^{I^2C \text{ BRGT CODE}} \quad (\text{for codes} > 0) \quad (1)$$

[Equation 1](#) is valid for I<sup>2</sup>C brightness codes between 1 and 2047. Code 0 disables the backlight. The Code-to-LED current response realizes a 0.304% change in LED current per LSB of brightness code.

[Figure 19](#) and [Figure 20](#) detail the exponential response of the LED current vs. brightness code. [Figure 19](#) shows the response on a linear Y axis while [Figure 20](#) shows the response on a log Y axis to show the low current levels at the lower codes.

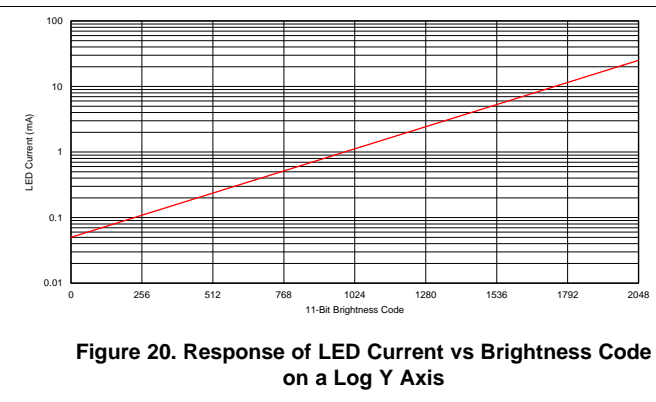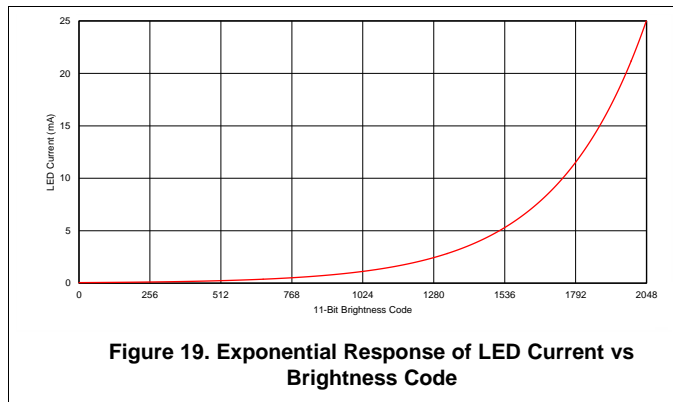

With linear mapping the 11-bit code to current response is approximated by the equation:

$$I_{LED} = 37.8055 \mu A + 12.1945 \mu A \times I2C \text{ BRGT CODE (for codes } > 0) \tag{2}$$

Equation 2 is valid for codes between 1 and 2047. Code 0 disables the backlight.

**7.3.1.1.2 LED Current with PWM Enabled**

When LED brightness is controlled with the combination of I<sup>2</sup>C register and the PWM duty cycle, the multiplication result of I<sup>2</sup>C register value and PWM duty cycle controls the LED current in BLED1 and BLED2. LED mapping can be selected as either linear or exponential.

With exponential mapping the multiplication result-to-current response is approximated by the equation:

$$I_{LED} = 50 \mu A \times 1.003040572^{I2C \text{ BRGT CODE} \times \text{PWM D/C}} \tag{3}$$

Equation 3 is valid for brightness values other than 0. Brightness value 0 (PWM D/C or I2C BRGT CODE) disables the backlight.

With linear mapping the PWM duty cycle-to-current response is approximated by the equation:

$$I_{LED} = 37.8055 \mu A + (12.1945 \mu A \times I2C \text{ BRGT CODE} \times \text{PWM D/C}) \tag{4}$$

Equation 4 is valid for brightness values other than 0. Brightness value 0 (PWM D/C or I2C BRGT CODE) disables the backlight.

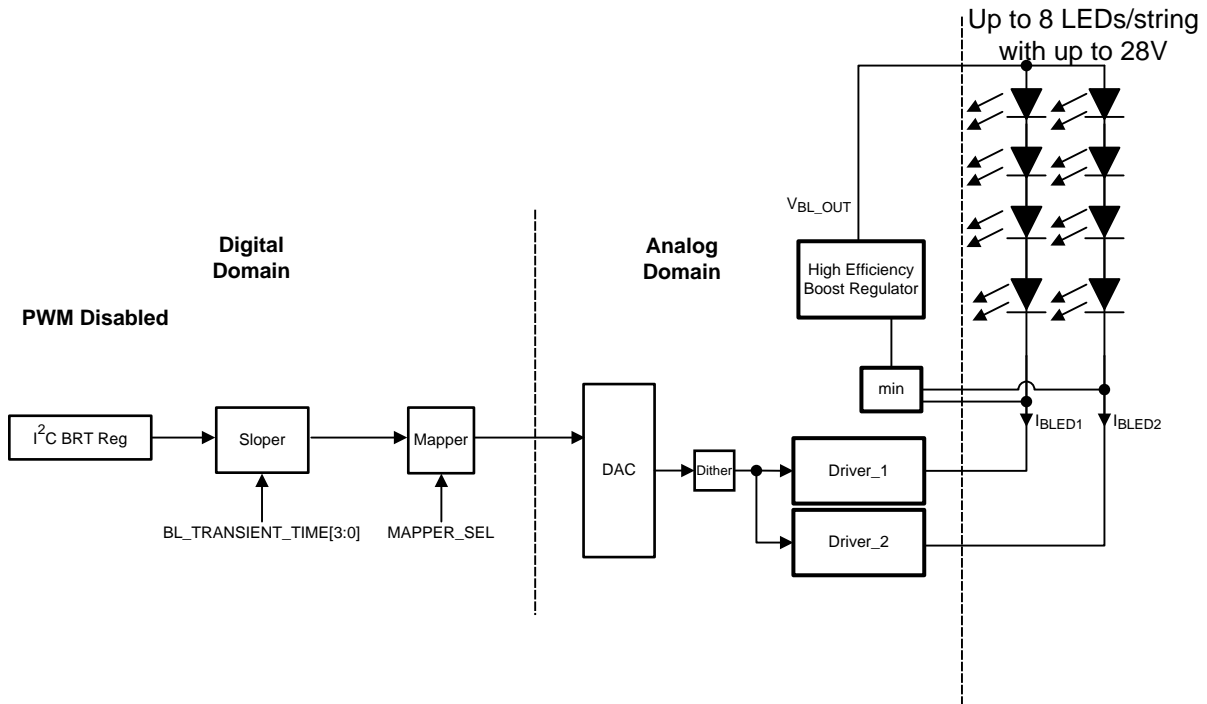


Figure 21. Brightness Control with PWM Bit Disabled

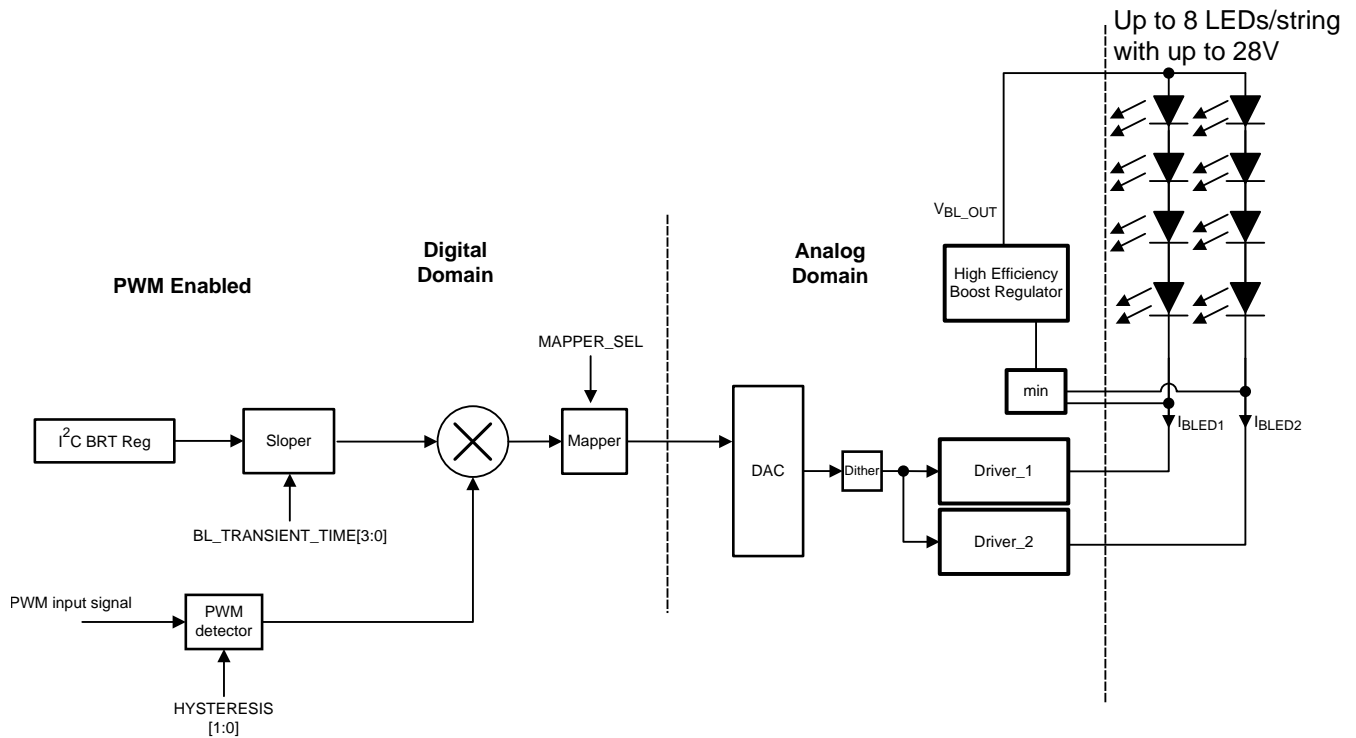


Figure 22. Brightness Control with PWM Bit Enabled



### 7.3.1.2 Sloper

The sloper smooths the transition from one brightness value to another. Slope time can be adjusted from 0 ms to 8000 ms with BL\_TRANS[3:0] bits (see Table 9 for details). Transient time is used for sloping up and down. Transient time always remains the same regardless of the amount of change in brightness.

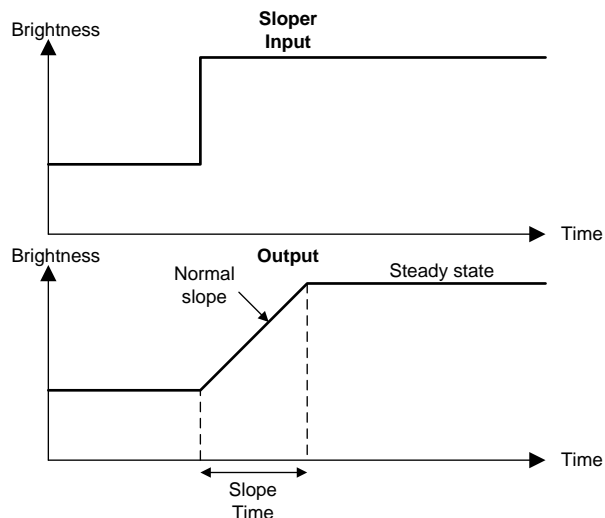


Figure 23. Sloper

### 7.3.1.3 Mapper

The mapper block maps the digital word set for the LED driver into current code. The user can select whether the mapping is exponential or linear with the BLED\_MAP bit, register 0x02 bit[4].

Exponential control is tailored to the response of the human eye such that the perceived change in brightness during ramp up or ramp down is linear.

### 7.3.1.4 PWM Input

The PWM detector block measures the duty cycle in the PWM pin. The PWM period is measured from the rising edge to the next rising edge. PWM polarity can be changed with bit PWM\_CONFIG, register 0x02 bit[3]. The sample rate for the PWM input can be set to 1 MHz or 4 MHz with bit PWM\_FREQ, register 0x03 bit[2]. The choice of sample rate depends on three factors:

1. Required PWM resolution (input duty cycle to brightness code, with 11 bits max)
2. PWM input frequency
3. Efficiency

The PWM input block timeout is 25 ms for 1-MHz sampling frequency and 3 ms for 4-MHz sampling frequency, measured from the last rising edge. This should be taken into account for 0% and 100% brightness settings (for setting 100% brightness, the high level of PWM input signal should be greater than the PWM input timeout) and for selecting the minimum PWM input signal frequency.

### 7.3.1.5 PWM Minimum On/Off Time


The minimum PWM input signal allowed for low and high pulse width is 6  $\mu$ s for 1-MHz sampling frequency and 1.5  $\mu$ s for 4-MHz sampling frequency. This should be taken into account when selecting the PWM input signal frequency and maximum or minimum duty cycle. For example, if the PWM input signal frequency is 2 kHz (500  $\mu$ s) and the 4-MHz sampling frequency is used, the maximum allowed on-time is:  $(500 - 1.5) \mu$ s = 498.5  $\mu$ s. The maximum duty cycle allowed is  $100 \times (498.5/500) = 99.7\%$ . By comparison, following similar calculations, with a PWM input signal frequency of 20 kHz the maximum allowed duty cycle is 97%.

**NOTE**

If the Minimum Off Time requirement is violated, there may be a range of duty cycle values in which flickering of the LEDs may occur or the LEDs may turn off completely. As the duty cycle increases farther and approaches 100%, the LEDs will turn on at full brightness level. This is due to the algorithm used by the device to detect 100% duty cycle in conjunction with the minimum low pulse width requirement discussed in this section. To avoid LED flickering and/or the LEDs turning off at high PWM duty cycles, the PWM Minimum On/Off Time requirement should be met.

**7.3.1.6 PWM Resolution and Input Frequency Range**

The PWM input resolution depends on the input signal frequency. To achieve the full 11-bit maximum resolution of PWM duty cycle to the LED brightness code, the input PWM duty cycle must be  $\geq 11$  bits, and the PWM sample period ( $1/f_{\text{SAMPLE}}$ ) must be smaller than the minimum PWM input pulse width. Figure 24 shows the possible brightness code resolutions based on the input PWM frequency. The minimum recommended PWM frequency is 100 Hz, and maximum recommended PWM frequency is 20 kHz.

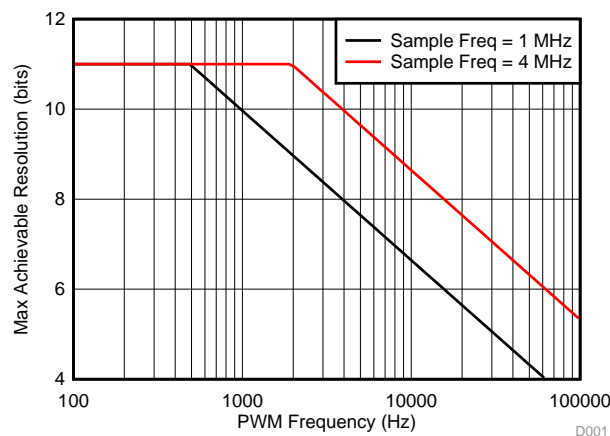
**Figure 24. PWM Resolution and PWM Input Frequency**
**7.3.1.7 PWM Hysteresis**

To prevent jitter in the input PWM signal from feeding through the PWM path and causing oscillations in the LED current, the LM3632A offers 4 programmable PWM hysteresis settings. Hysteresis works by forcing a specific number of 11-bit LSB code transitions to occur in the input duty cycle before the LED current changes. Table 9 describes the hysteresis. Hysteresis only applies during the change in direction of brightness currents. Once the change in direction has taken place, the PWM input must overcome the required LSB(s) of the hysteresis setting before the brightness change takes effect. Once the initial hysteresis has been overcome and the direction in brightness change remains the same, the PWM-to-current response changes with no hysteresis. Hysteresis is selected with the PWM\_HYST bits, register 0x03 bits[1:0]. Changing the hysteresis value is recommended when PWM input frequency increases.


**7.3.1.8 PWM Timeout**

The LM3632A PWM timeout feature turns off the backlight boost output when the PWM input is enabled and there is no PWM pulse detected. The timeout duration depends on the PWM sample rate setting and defines the minimum supported PWM input frequency. Table 2 summarizes the sample rate, timeout, and minimum supported PWM frequency.

**Table 2. PWM Timeout and Minimum Supported PWM Frequency vs PWM Sample Rate**

SAMPLE RATE	TIMEOUT	MINIMUM SUPPORTED PWM FREQUENCY
1 MHz	25 msec	48 Hz
4 MHz	3 msec	400 Hz



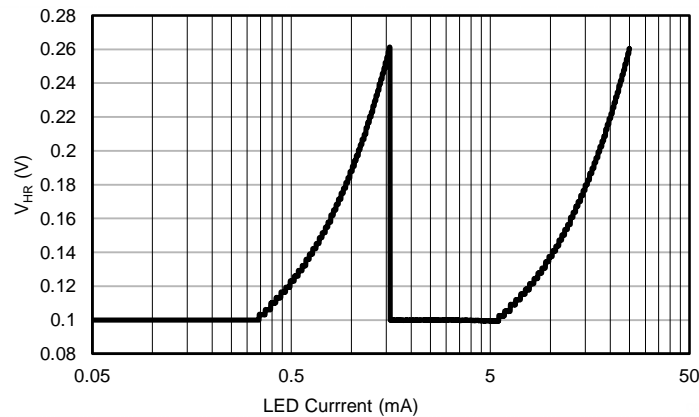

**Figure 26. Regulated Headroom vs LED Current**

### 7.3.1.9.2 Backlight Protection and Faults

#### 7.3.1.9.2.1 Overvoltage Protection (OVP) and Open-Load Fault Protection

The LM3632A provides an OVP that monitors the LED boost output voltage ( $V_{BL\_OUT}$ ) and protects BL\_OUT and BL\_SW from exceeding safe operating voltages. The OVP threshold can be set to 18 V, 22 V, 25 V or 29 V with register 0x02 bits[7:5]. Once an OVP event has been detected, the BL\_OVP flag is set in the Flags1 register, and the subsequent behavior depends on the state of bit BL\_OVP\_SET in the Enable Register: If BL\_OVP\_SET is set to '0', as soon as  $V_{BL\_OUT}$  falls below the backlight OVP threshold, the LM3632A begins switching again. If BL\_OVP\_SET is set to '1' and the device detects three occurrences of  $V_{BL\_OUT} > V_{OVP\_BL}$  while any of the enabled current sink headroom voltages drops below 40 mV, the BL\_OVP flag is set, the Backlight Enable bit is cleared, and the LM3632A enters standby mode. When the device is shut down due to a BL\_OVP fault the Flags1 register must be read back before the device can be reenabled.

#### 7.3.1.9.2.2 Overcurrent Protection (OCP) and Overcurrent Protection Flag

The LM3632A has an OCP threshold of 1 A. The OCP threshold is a cycle-by-cycle current limit detected in the low-side NFET. Once the threshold is reached, the NFET turns off for the remainder of the switching period. If enough overcurrent events occur, the BL\_OCP flag (register 0x10 bit[0]) is set. The flag can be cleared upon a readback of register 0x10. To avoid transient conditions from inadvertently setting the BL\_OCP flag, a pulse density counter monitors BL\_OCP events over a 128- $\mu$ s time window. If 8 consecutive 128- $\mu$ s windows of at least 2 OCP events are detected, the BL\_OCP flag is set.

## 7.3.2 LCM Bias

### 7.3.2.1 Display Bias Boost Converter ( $V_{VPOS}$ , $V_{VNEG}$ )

A single high-efficiency boost converter provides a positive voltage rail,  $V_{LCM\_OUT}$ , which serves as the power rail for the LCM VPOS and VNEG outputs.

- The  $V_{VPOS}$  output LDO has a programmable range from 4 V up to 6 V with 50-mV steps and can supply up to 50 mA.
- The  $V_{VNEG}$  output is generated from a regulated, inverting charge pump and has an adjustable range of -6 V up to -4 V with 50-mV steps and a maximum load of 50 mA.

Boost voltage also has a programmable range from 4.5 V up to 6.4 V with 50-mV steps. Please refer to [Table 19](#), [Table 20](#) and [Table 21](#) for  $V_{LCM\_OUT}$ ,  $V_{VPOS}$  and  $V_{VNEG}$  voltage settings. When selecting a suitable boost-output voltage, the following estimation can be used:  $V_{LCM\_OUT} = \max(V_{VPOS}, |V_{VNEG}|) + V_{HR}$ , where  $V_{HR} = 300$  mV for lower currents and 400 mV for higher currents. When the device input voltage ( $V_{IN}$ ) is greater than the programmed LCM boost output voltage, the boost voltage goes to  $V_{IN} + 100$  mV.  $V_{VPOS}$ , and  $V_{VNEG}$  voltage settings cannot be changed while they are enabled. While the  $V_{LCM\_OUT}$  target changes immediately upon a register write,  $V_{VPOS}$  and  $V_{VNEG}$  register setting targets take effect only after the outputs are disabled and re-enabled.

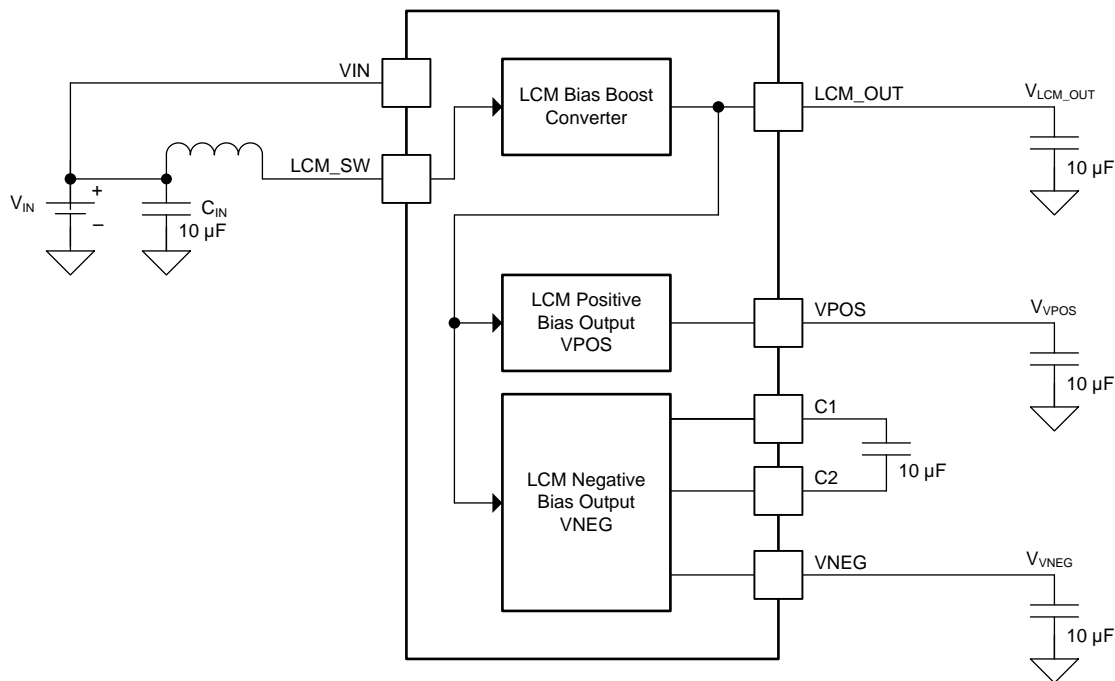


Figure 27. LCM Boost Block Diagram


The LCM Bias outputs can be controlled either by pins LCM\_EN1 and LCM\_EN2 or register bits VPOS\_EN and VNEG\_EN, register 0x0C bits[2:1]. Setting bit EXT\_EN, register 0x0C bit[0], to '0' allows pins LCM\_EN1 and LCM\_EN2 to control VPOS and VNEG, respectively, while setting this bit to '1' yields control to bits VPOS\_EN and VNEG\_EN. Refer to Table 3 for LCM bias control information.

Table 3. LCM Bias Truth Table

EN PIN	LCM_EN2 PIN	LCM_EN1 PIN	EXT_EN 0x0C[0]	VNEG_EN 0x0C[1]	VPOS_EN 0x0C[2]	AUTO_SEQ 0x0C[5]	WAKE-UP 0x0C[7]	ACTION
0	X	X	X	X	X	X	X	Shutdown
1	0	0	1	X	X	X	0	Standby
1	0	1	1	X	X	X	0	External VPOS
1	1	0	1	X	X	X	0	External VNEG
1	1	1	1	X	X	0	0	External VPOS and VNEG Independent
1	1	1	1	X	X	1	0	External VPOS and VNEG Auto Sequence
1	X	X	0	0	0	X	0	Standby
1	X	X	0	0	1	X	0	I <sup>2</sup> C VPOS
1	X	X	0	1	0	X	0	I <sup>2</sup> C VNEG
1	X	X	0	1	1	0	0	I <sup>2</sup> C VPOS and VNEG Independent
1	X	X	0	1	1	1	0	I <sup>2</sup> C VPOS and VNEG Auto Sequence
1	0	X	X	X	X	X	1	Standby
1	1	X	X	0	0	X	1	Standby
1	1	X	X	0	1	X	1	Wake-up VPOS
1	1	X	X	1	0	X	1	Wake-up VNEG
1	1	X	X	1	1	X	1	Wake-up VPOS and VNEG

### 7.3.2.2 Auto Sequence Mode

If this mode is selected the LM3632A controls the turn-on and turn-off of VPOS and VNEG as shown in Figure 28.

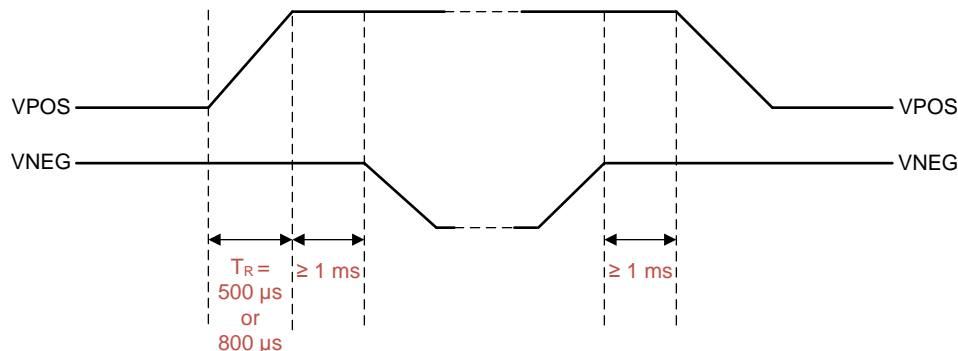

**Figure 28. Auto Sequence Timing**

### 7.3.2.3 Wake-up Mode

If Wake-up mode is selected the LM3632A allows on/off control of both VPOS and VNEG with only one external pin (LCM\_EN2). Any combination of VPOS, VNEG, or both can be turned on based on the state of bits VPOS\_EN and VNEG\_EN in register 0x0C. In this mode the internal shutdown timing of the VPOS and VNEG blocks is modified to allow for lower quiescent current in standby mode, therefore reducing the average current consumption during a sequence of on/off events.

### 7.3.2.4 Active Discharge

An optional active discharge is available for the VPOS and VNEG output rails. An internal switch resistance for this discharge function is implemented on each output rail. The VPOS active discharge function is enabled with register 0x0C bit[4] and the VNEG active discharge with register 0x0C bit[3].

#### NOTE

To avoid an unsafe operating condition when the active discharge function is enabled, a minimum delay of 1 millisecond needs to be maintained between disabling and re-enabling of the VNEG output.

### 7.3.2.5 LCM Bias Protection and Faults

The LCM Bias block of the LM3632A provides four protection mechanisms in order to prevent damage to the device. Note that none of these have any effect on backlight or flash operation.

#### 7.3.2.5.1 LCM Overvoltage Protection

The LM3632A provides OVP that monitors the LCM Bias boost output voltage ( $V_{LCM\_OUT}$ ) and protects LCM\_OUT and LCM\_SW from exceeding safe operating voltages. The OVP threshold is set to 7 V (typical). If an LCM Bias overvoltage condition is detected, the LCM\_OVP flag, register 0x10 bit[5], is set. The flag can be cleared with an I<sup>2</sup>C read back of the register. An LCM OVP condition will not cause the LCM Bias to shut down; it is a report-only flag.

#### 7.3.2.5.2 VNEG Overvoltage Protection

If the charge-pump voltage goes 250 mV (typical) below its target set-point, the LM3632A provides a mechanism for preventing the voltage from increasing even further and damaging the device and sets the VNEG\_OVP flag, register 0x10 bit[4]. The flag can be cleared with an I<sup>2</sup>C readback of the register. A VNEG OVP condition will not cause the charge pump to shut down; it is a report-only flag.

**NOTE**

The VNEG\_OVP flag may get set during VNEG start-up under light load and low VNEG voltage settings due to VNEG voltage undershoot. After the flag is cleared via register read back, the LM3632A detects VNEG OVP conditions properly.

**7.3.2.5.3 VPOS Short Circuit Protection**

If the current at VPOS exceeds 80 mA (typical), the LM3632A sets the VPOS\_SHORT flag, register 0x10 bit[3]. A readback of register 0x10 is required to clear the flag. A VPOS\_SHORT condition will not cause the LCM Bias to shut down; it is a report-only flag.


**7.3.2.5.4 VNEG Short Circuit Protection**

If the voltage at VNEG goes within 750 mV (typical) from ground, the LM3632A sets the VNEG\_SHORT flag, register 0x10 bit[2]. A readback of register 0x10 is required to clear the flag. A VNEG\_SHORT condition will not cause the LCM Bias to shut down; it is a report-only flag.

**7.3.3 Flash**

**7.3.3.1 Flash Boost Converter**

The LM3632A incorporates a high-efficiency synchronous current-mode PWM boost converter that switches and boosts the output to maintain at least  $V_{HR}$  across the flash current source (FLED) over the 2.7-V to 5.5-V input voltage range. The flash boost has two switching frequency modes, 2-MHz and 4-MHz. These are set via the FL\_FREQ Select bits, register 0x07 bits[7:6].

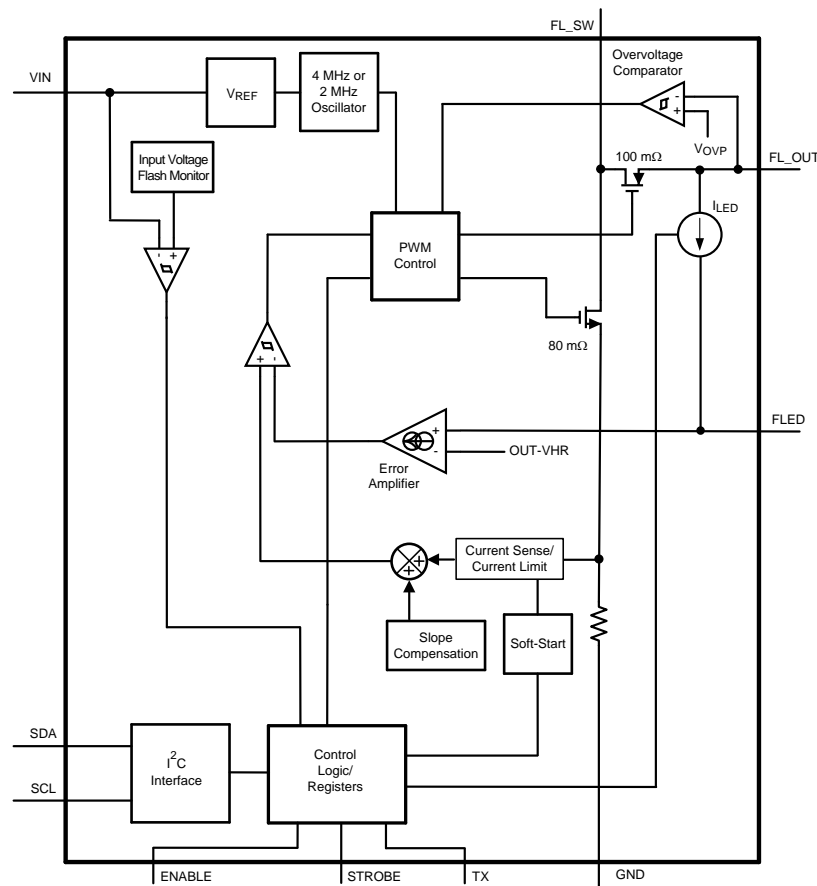

**Figure 29. Flash Boost Block Diagram**

### 7.3.3.2 Start-Up (Enabling The Device)

The flash LED output (FLED) can be enabled in flash or torch mode with the Enable Register and the STROBE pin. The state of bit STROBE\_EN, register 0x09 bit[4], determines if the FLED output is enabled by bit[1] of register 0x0A or the STROBE pin. Table 4 contains the details for flash operation control. While a positive edge is required at the STROBE pin in order to initiate a Torch or Flash event, the STROBE pin is level sensitive. That means that the event is terminated as soon as the STROBE pin transitions low.

**Table 4. Flash Truth Table**

EN PIN	STROBE_EN 0x09[4]	STROBE PIN	FLASH_EN 0x0A[1]	FLASH_MODE 0x0A[2]	ACTION
0	X	X	X	X	Shutdown
1	0	X	0	X	Standby
1	0	X	1	0	Int Torch
1	0	X	1	1	Int Flash
1	1	0	0	X	Standby
1	1	0	1	X	Standby
1	1	pos edge	0	X	Standby
1	1	pos edge	1	0	Ext Torch
1	1	pos edge	1	1	Ext Flash

On start-up, when  $V_{OUT}$  is less than  $V_{IN}$  the internal synchronous PFET turns on as a current source and delivers 200 mA (typical) to the output capacitor. During this time the current source (LED) is off. When the voltage across the output capacitor reaches 2.2 V (typical) the current source turns on. At turn-on the current source steps through each flash or torch level until the target LED current is reached. This gives the device a controlled turn-on and limits inrush current from the  $V_{IN}$  supply.

### 7.3.3.3 Pass Mode

The LM3632A flash boost starts up in pass mode and stays there until boost mode is needed to maintain regulation. If the voltage difference between  $V_{FL\_OUT}$  and  $V_{FLED}$  falls below  $V_{HR}$ , the device switches to boost mode. In pass mode the boost converter does not switch, and the synchronous PFET turns fully on bringing  $V_{FL\_OUT}$  up to  $V_{IN} - I_{FLED} \times R_{PMOS}$ . In pass mode the inductor current is not limited by the peak current limit.

### 7.3.3.4 Flash Mode

In flash mode, the LED current source (FLED) provides 15 target current levels from 100 mA to 1500 mA in 100 mA increments. The flash currents are adjusted via register 0x06 (see Table 12 for details). Once the flash sequence is activated the current source (FLED) ramps up to the programmed flash current by stepping through all current steps until the programmed current is reached. The headroom in the current source is regulated to provide 100 mA to 1.5 A to the output. Whether the device is enabled in flash mode through the Enable Register or through the STROBE pin, the Flash Enable bit in the Enable Register is cleared at the completion of the flash event and needs to be re-written in order to perform the next internal or external flash event.

### 7.3.3.5 Torch Mode

In torch mode, the LED current source (FLED) provides 15 target current levels from 25 mA to 375 mA in 25-mA increments. The torch currents are adjusted via register 0x06 (see Table 12 for details). Once the torch sequence is activated the current source (FLED) ramps up to the programmed Torch current by stepping through all current steps until the programmed current is reached. Torch mode is not affected by Flash Timeout or by a TX Interrupt event.

### 7.3.3.6 Power Amplifier Synchronization (TX)

The TX pin is a Power Amplifier Synchronization input. This is designed to reduce the flash FLED current and thus limit the battery current during high battery-current conditions such as PA transmit events. When the LM3632A is engaged in a flash event, and the TX pin is pulled high, the FLED current is forced into torch mode at the programmed torch current setting. If the TX pin is then pulled low before the flash pulse terminates, the FLED current returns to the previous flash current level. At the end of the flash time-out, whether the TX pin is high or low, the FLED current is turned off.



### 7.3.3.7 VIN Monitor

The LM3632A has the ability to adjust the flash current based upon the voltage level present at the VIN pin. The adjustable VINM threshold ranges from 2.6 V to 3.3 V in 100-mV steps. The Flags1 Register (0x0B) has the fault flag set when the input voltage crosses the VINM value. Additionally, the VINM threshold sets the input voltage boundary that forces the device to either transition into torch mode at the programmed torch current setting or turn off the FLED current for the remaining flash duration. This decision is made based on the status of bit VINM\_MODE, register 0x09 bit[1]. In order to re-enable the LM3632A in torch or flash mode the VINM flag has to be cleared. If the VINM flag is tripped during flash current ramp-up, and VINM mode is set to torch, the FLED current is reduced not to the torch current setting but to the same percentage of the last flash current that was reached during flash current ramp-up. For example, if the flash current setting is 1 A, the torch current setting is 100 mA and the maximum flash current that was reached before the VINM threshold was crossed is 700 mA, the device will transition the flash current to 70 mA (70% of 100 mA).

### 7.3.3.8 Flash Fault Protections

#### 7.3.3.8.1 Fault Operation

If the LM3632A enters a fault condition during flash, the device sets the appropriate flag in the Flags1 and Flags2 Registers (0x0B and 0x10) and places the flash block into standby by clearing the FLASH\_EN bit in the Enable Register. The flash block remains in shutdown until an I<sup>2</sup>C read of the Flag Registers is completed. Upon clearing the flags/faults, flash can be restarted. If the fault is still present, the LM3632A re-enters the fault state and enters standby again. Flash faults have no effect on Backlight or LCM control.

#### 7.3.3.8.2 Flash Time-Out

The Flash Time-Out period sets the amount of time that the Flash Current is being sourced from the current source (FLED). The LM3632A has 32 timeout levels ranging from 32 ms to 1024 ms (see [Table 13](#) for more detail). Once a flash event is completed, the FTO flag in Flags1 register (register 0x0B bit[1]) is set. If a flash event is activated via the STROBE pin and STROBE transitions low after the end of the programmed flash timeout, the flash event is terminated at the programmed flash timeout, and the FTO flag is set. If the STROBE pin transitions low before the end of the programmed flash timeout, the flash event is terminated, and the FTO flag is not set.

#### 7.3.3.8.3 Overvoltage Protection (OVP)

The flash output voltage is limited to typically 4.9 V (see  $V_{OVP}$  Spec in [Electrical Characteristics](#)). In situations such as an open FLED, the LM3632A tries to raise the output voltage in order to keep the FLED current at its target value. When  $V_{FL\_OUT}$  reaches 4.9 V (typical), the overvoltage comparator trips and turns off the internal NFET. When  $V_{FL\_OUT}$  falls below the  $V_{OVP}$  Off threshold, the LM3632A begins switching again. The Flash Enable bit is cleared, and the FLASH\_OVP flag is set, when an OVP condition is present for three rising OVP edges. This prevents momentary OVP events from forcing the device to shut down.

#### 7.3.3.8.4 Current Limit

The LM3632A features two selectable flash inductor current limits that are programmable through the I<sup>2</sup>C-compatible interface. When the inductor current limit is reached, the device terminates the charging phase of the switching cycle. Switching resumes at the start of the next switching period. If the overcurrent condition persists, the device operates continuously in current limit. Since the current limit is sensed in the NMOS switch, there is no mechanism to limit the current when the device operates in pass mode (current does not flow through the NMOS in pass mode). In boost mode or pass mode if  $V_{FL\_OUT}$  falls below 2.3 V, the device stops switching, and the PFET operates as a current source limiting the current to 200 mA. This prevents damage to the LM3632A and excessive current draw from the battery during output short-circuit conditions. The Flash Enable bit is not cleared upon a current limit event, but the FLASH\_OCP flag (register 0x10 bit[1]) is set.

### 7.3.3.8.5 FLED and/or FL\_OUT Short Fault

The FLED short flag (FLED\_SHORT) reads back a '1' if the device is active in flash or torch mode and the FLED output experiences a short condition. The flash output short flag (FOUT\_SHORT) reads back a '1' if the device is active in flash or torch mode and the flash boost output experiences a short condition. A FLED short condition is determined if the voltage at FLED goes below 500 mV (typical) while the device is in torch or flash mode. There is a deglitch time of 256  $\mu$ s before the LED Short flag is valid and a deglitch time of 2.048 ms before the FL\_OUT Short flag is valid. The FLED Short Fault can only be reset to '0' by removing power to the LM3632A, setting EN to '0', setting the SW RESET bit to a '1', or by reading back the Flags1 Register (0x0B on device). The Flash Enable bit is cleared upon a FLED and/or FL\_OUT short fault.

### 7.3.4 Software RESET

Bit[7] (SWR\_RESET) of the Enable Register (0x0A) is a software reset bit. Writing an '1' to this bit resets all I<sup>2</sup>C register values to their default values. Once the LM3632A has finished resetting all registers, it auto-clears the SWR\_RESET bit.

### 7.3.5 EN Input

The EN pin is a global hardware enable for the LM3632A. This pin must be pulled to logic HIGH to enable the device and the I<sup>2</sup>C-compatible interface. There is a 300-k $\Omega$  internal resistor between EN and GND. When this pin is at logic LOW, the LM3632A is placed in shutdown, the I<sup>2</sup>C-compatible interface is disabled, and the internal registers are reset to their default state. It is recommended that V<sub>IN</sub> has risen above 2.7 V before setting EN HIGH.

### 7.3.6 Thermal Shutdown (TSD)

The LM3632A has TSD protection which shuts down the backlight boost, both backlight current sinks, LCM Bias Boost and outputs, inverting charge pump, flash boost, and flash current source when the die temperature reaches or exceeds 140°C (typical). The I<sup>2</sup>C interface remains active during a TSD event. If a TSD fault occurs the TSD fault is set, register 0x0B bit[0]. The fault is cleared by an I<sup>2</sup>C read of register 0x0B or by toggling the EN pin.

## 7.4 Device Functional Modes

### 7.4.1 Modes of Operation

**Shutdown:** The LM3632A is in shutdown when the EN pin is low.

**Standby:** After the EN pin is set high the LM3632A goes into standby mode. In standby mode, I<sup>2</sup>C writes are allowed but references, bias currents, the oscillator, LCM powers, backlight and flash are all disabled, to keep the quiescent supply current low (2  $\mu$ A typ.).

**Normal mode:** All three main blocks of the LM3632A are independently controlled. For enabling each of the blocks in all available modes, see [Table 1](#), [Table 3](#), and [Table 4](#).

## 7.5 Programming

### 7.5.1 I<sup>2</sup>C-Compatible Serial Bus Interface

#### 7.5.1.1 Interface Bus Overview

The I<sup>2</sup>C-compatible synchronous serial interface provides access to the programmable functions and registers on the device. This protocol uses a two-wire interface for bidirectional communications between the IC's connected to the bus. The two interface lines are the Serial Data Line (SDA) and the Serial Clock Line (SCL). These lines should be connected to a positive supply via a pull-up resistor and remain HIGH even when the bus is idle.

Every device on the bus is assigned a unique address and acts as either a Master or a Slave, depending whether it generates or receives the serial clock (SCL).

## Programming (continued)

### 7.5.1.2 Data Transactions

One data bit is transferred during each clock pulse. Data is sampled during the high state of the serial clock (SCL). Consequently, throughout the clock's high period, the data should remain stable. Any changes on the SDA line during the high state of the SCL and in the middle of a transaction, aborts the current transaction. New data should be sent during the low SCL state. This protocol permits a single data line to transfer both command/control information and data using the synchronous serial clock.

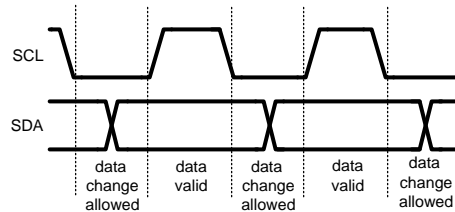


Figure 30. Data Validity

Each data transaction is composed of a Start Condition, a number of byte transfers (set by the software), and a Stop Condition to terminate the transaction. Every byte written to the SDA bus must be 8 bits long and is transferred with the most significant bit first. After each byte, an Acknowledge signal must follow. The following sections provide further details of this process.


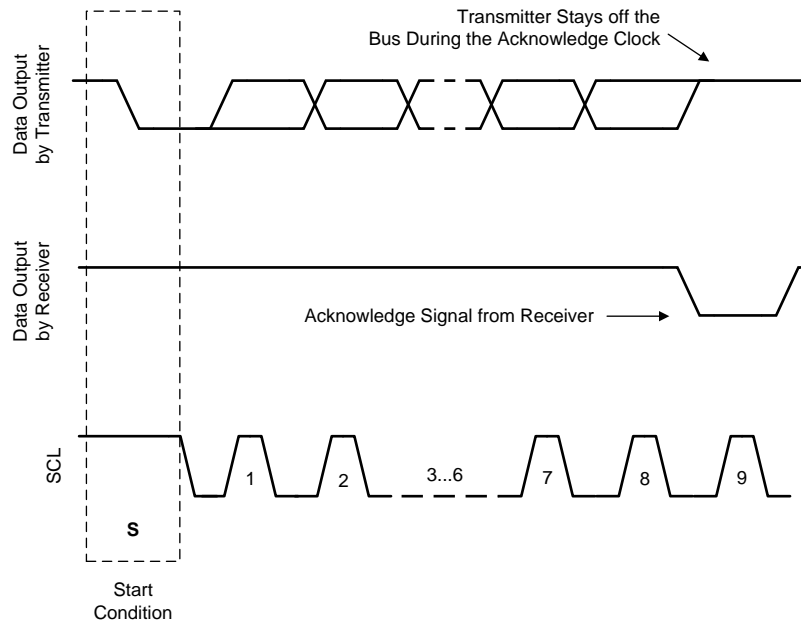


Figure 31. Acknowledge Signal

The Master device on the bus always generates the Start and Stop Conditions (control codes). After a Start Condition is generated, the bus is considered busy, and it retains this status until a certain time after a Stop Condition is generated. A high-to-low transition of the data line (SDA) while the clock (SCL) is high indicates a Start Condition. A low-to-high transition of the SDA line while the SCL is high indicates a Stop Condition.

## Programming (continued)

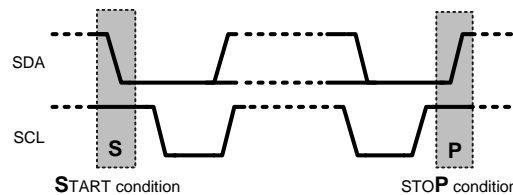

**Figure 32. Start and Stop Conditions**

In addition to the first Start Condition, a repeated Start Condition can be generated in the middle of a transaction. This allows another device to be accessed, or a register read cycle.

### 7.5.1.3 Acknowledge Cycle

The Acknowledge Cycle consists of two signals: the acknowledge clock pulse the master sends with each byte transferred, and the acknowledge signal sent by the receiving device.

The master generates the acknowledge clock pulse on the ninth clock pulse of the byte transfer. The transmitter releases the SDA line (permits it to go high) to allow the receiver to send the acknowledge signal. The receiver must pull down the SDA line during the acknowledge clock pulse and ensure that SDA remains low during the high period of the clock pulse, thus signaling the correct reception of the last data byte and its readiness to receive the next byte.

### 7.5.1.4 Acknowledge After Every Byte Rule

The master generates an acknowledge clock pulse after each byte transfer. The receiver sends an acknowledge signal after every byte received.


There is one exception to the “acknowledge after every byte” rule. When the master is the receiver, it must indicate to the transmitter an end of data by not-acknowledging (“negative acknowledge”) the last byte clocked out of the slave. This “negative acknowledge” still includes the acknowledge clock pulse (generated by the master), but the SDA line is not pulled down.

### 7.5.1.5 Addressing Transfer Formats

Each device on the bus has a unique slave address. The LM3632A operates as a slave device with the 7-bit address. If an 8-bit address is used for programming, the 8th bit is '1' for read and '0' for write. The 7-bit address for the device is 0x11.

Before any data is transmitted, the master transmits the address of the slave being addressed. The slave device should send an acknowledge signal on the SDA line, once it recognizes its address. The slave address is the first seven bits after a Start Condition. The direction of the data transfer (R/W) depends on the bit sent after the slave address — the eighth bit.

When the slave address is sent, each device in the system compares this slave address with its own. If there is a match, the device considers itself addressed and sends an acknowledge signal. Depending upon the state of the R/W bit (1:read, 0:write), the device acts as a transmitter or a receiver.

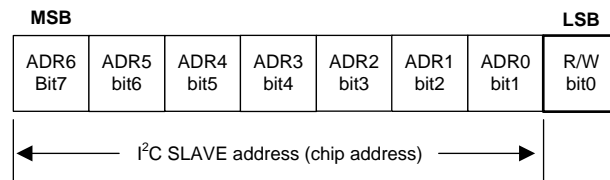

**Figure 33. I<sup>2</sup>C Device Address**

### Control Register Write Cycle

- Master device generates start condition.
- Master device sends slave address (7 bits) and the data direction bit (r/w = 0).

### Programming (continued)

- Slave device sends acknowledge signal if the slave address is correct.
- Master sends control register address (8 bits).
- Slave sends acknowledge signal.
- Master sends data byte to be written to the addressed register.
- Slave sends acknowledge signal.
- If master sends further data bytes the control register address is incremented by one after acknowledge signal.
- Write cycle ends when the master creates stop condition.

#### Control Register Read Cycle

- Master device generates a start condition.
- Master device sends slave address (7 bits) and the data direction bit (r/w = 0).
- Slave device sends acknowledge signal if the slave address is correct.
- Master sends control register address (8 bits).
- Slave sends acknowledge signal
- Master device generates repeated start condition.
- Master sends the slave address (7 bits) and the data direction bit (r/w = 1).
- Slave sends acknowledge signal if the slave address is correct.
- Slave sends data byte from addressed register.
- If the master device sends acknowledge signal, the control register address is incremented by one. Slave device sends data byte from addressed register.
- Read cycle ends when the master does not generate acknowledge signal after data byte and generates stop condition.

Table 5. I<sup>2</sup>C Data Read/Write<sup>(1)</sup>

	ADDRESS MODE
Data Read	<Start Condition> <Slave Address><r/w =0>[Ack] <Register Addr>[Ack] <Repeated Start Condition> <Slave Address><r/w = 1>[Ack] [Register Data]<Ack or NAck> ...additional reads from subsequent register address possible <Stop Condition>
Data Write	<Start Condition> <Slave Address><r/w = 0>[Ack] <Register Addr>[Ack] <Register Data>[Ack] ...additional writes to subsequent register address possible <Stop Condition>

(1) < > = Data from master, [ ] = Data from slave


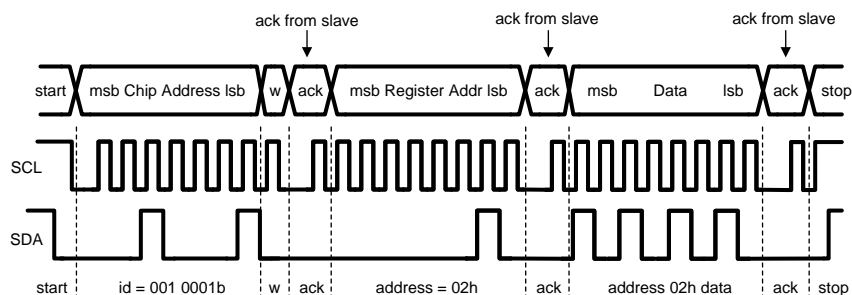


Figure 34. Register Write Format

When a READ function is to be accomplished, a WRITE function must precede the READ function, as show in the Read Cycle waveform.

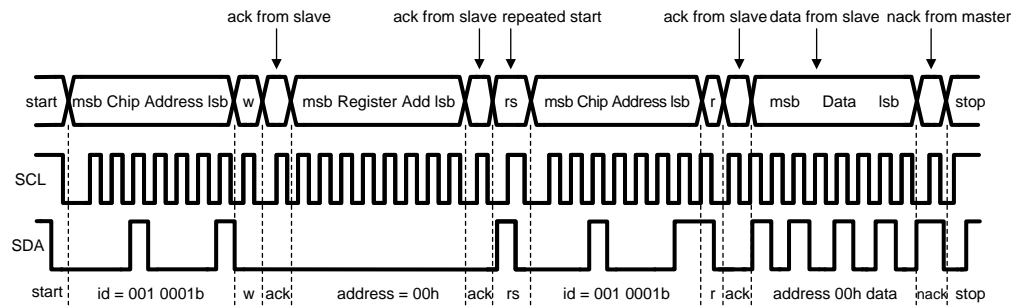

**Figure 35. Register Read Format**

**NOTE**

w = write (SDA = 0), r = read (SDA = 1), ack = acknowledge (SDA pulled down by either master or slave), rs = repeated start id = 7-bit chip address

## 7.6 Register Maps

**Table 6. Register Default Values**

I <sup>2</sup> C Address	Register Name	Read/Write	Power On/Reset Value
0x01	Revision Register	R	0x09
0x02	Backlight Configuration1 Register	R/W	0x30
0x03	Backlight Configuration2 Register	R/W	0x0D
0x04	LED Brightness LSB Register	R/W	0x07
0x05	LED Brightness MSB Register	R/W	0xFF
0x06	Flash/Torch Current Register	R/W	0x3E
0x07	Flash Configuration Register	R/W	0x2F
0x08	VIN Monitor Register	R/W	0x03
0x09	I/O Control Register	R/W	0x00
0x0A	Enable Register	R/W	0x00
0x0B	Flags1 Register	R	0x00
0x0C	Display Bias Configuration Register	R/W	0x18
0x0D	LCM Boost Bias Register	R/W	0x1E
0x0E	VPOS Bias Register	R/W	0x1E
0x0F	VNEG Bias Register	R/W	0x1C
0x10	Flags2 Register	R	0x00

### 7.6.1 Revision (Address = 0x01) [reset = 0x05]

**Figure 36. Revision Register**

7	6	5	4	3	2	1	0
DEV_REV[5]	DEV_REV[4]	DEV_REV[3]	DEV_REV[2]	DEV_REV[1]	DEV_REV[0]	VENDOR[1]	VENDOR[0]
R-0	R-0	R-0	R-0	R-1	R-0	R-0	R-1

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 7. Revision Register Field Descriptions**

Bit	Field	Type	Reset	Description
7-2	DEV_REV[6:0]	R	000010	
1-0	VENDOR[1:0]	R	01	

### 7.6.2 Backlight Configuration1 (Address = 0x02) [reset = 0x30]

**Figure 37. Backlight Configuration1 Register**

7	6	5	4	3	2	1	0
BLED_OVP[2]	BLED_OVP[1]	BLED_OVP[0]	BLED_MAP	PWM_CONFIG	Reserved		
R/W-0	R/W-0	R/W-1	R/W-1	R/W-0			

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 8. Backlight Configuration1 Register Field Descriptions**

Bit	Field	Type	Reset	Description
7-5	BLED_OVP	R/W	001	Backlight OVP level select 000: 18 V 001: 22 V (Default) 010: 25 V 011: 29 V Note: Codes 100 to 111 also map to 29 V
4	BLED_MAP	R/W	1	Sets the backlight LED mapping mode 0: Exponential 1: Linear (Default)

**Table 8. Backlight Configuration1 Register Field Descriptions (continued)**

Bit	Field	Type	Reset	Description
3	PWM_CONFIG	R/W	0	Sets the polarity of the PWM input signal 0: Active High PWM Input (default) 1: Active Low PWM Input
2-0	Reserved			

**7.6.3 Backlight Configuration2 (Address = 0x03) [reset = 0x0D]**

**Figure 38. Backlight Configuration2 Register**

7	6	5	4	3	2	1	0
BL_FREQ	BL_TRANS[3]	BL_TRANS[2]	BL_TRANS[1]	BL_TRANS[0]	PWM_FREQ	PWM_HYST[1]	PWM_HYST[0]
R/W-0	R/W-0	R/W-0	R/W-0	R/W-1	R/W-1	R/W-0	R/W-1

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 9. Backlight Configuration2 Register Field Descriptions**

Bit	Field	Type	Reset	Description
7	BL_FREQ	R/W	0	Sets the backlight boost switch frequency 0: 500 kHz (Default) 1: 1 MHz
6-3	BL_TRANS[3:0]	R/W	001	Controls backlight LED ramping time. The transient time is a constant time that the backlight takes to transition from an existing programmed code to a new programmed code. 0000: 0 0001: 500 μs (Default) 0010: 750 μs 0011: 1 ms 0100: 2 ms 0101: 5 ms 0110: 10 ms 0111: 20 ms 1000: 50 ms 1001: 100 ms 1010: 250 ms 1011: 800 ms 1100: 1 s 1101: 2 s 1110: 4 s 1111: 8 s
2	PWM_FREQ	R/W	1	Sets PWM sampling frequency 0: 1 MHz 1: 4 MHz (Default)
1-0	PWM_HYST[1:0]	R/W	01	Sets the minimum change in PWM input duty cycle that results in a change of backlight LED brightness level 00: 1 bit 01: 2 bits (Default) 10: 4 bits 11: 6 bits

**7.6.4 Backlight Brightness LSB (Address = 0x04) [reset = 0x07]**

**Figure 39. Backlight Brightness LSB Register**

7	6	5	4	3	2	1	0
Reserved					BL_BRT_LSB[2]	BL_BRT_LSB[1]	BL_BRT_LSB[0]
					R/W-1	R/W-1	R/W-1

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset



**Table 10. Backlight Brightness LSB Register Field Descriptions**

Bit	Field	Type	Reset	Description
7-3	Reserved			
2-0	BL_BRT_LSB[2:0]	R/W	111	Lower 3 bits (LSB's) of brightness code. Concatenated with brightness bits in Register 0x05 (MSB).

**7.6.5 Backlight Brightness MSB (Address = 0x05) [reset = 0xFF]**
**Figure 40. Backlight Brightness MSB Register**

7	6	5	4	3	2	1	0
BL_BRT_MSB[7]	BL_BRT_MSB[6]	BL_BRT_MSB[5]	BL_BRT_MSB[4]	BL_BRT_MSB[3]	BL_BRT_MSB[2]	BL_BRT_MSB[1]	BL_BRT_MSB[0]
R/W-1	R/W-1	R/W-1	R/W-1	R/W-1	R/W-1	R/W-1	R/W-1

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 11. Backlight Brightness MSB Register Field Descriptions**

Bit	Field	Type	Reset	Description
7-0	BL_BRT_MSB[7:0]	R/W	11111111	Upper 8 bits (MSB's) of backlight brightness code. Concatenated with brightness bits in Register 0x04 (LSB). With linear mapping the 11-bit code to current response is approximated by the equation: $I_{LED}=37.8055\mu A+12.1945\mu A \times I2C\_BRT\_CODE$ (for codes > 0). With exponential mapping the 11-bit code-to-current response is approximated by the equation: $I_{LED}=50\mu A \times 1.003040572^{I2C\_BRT\_CODE}$ (for codes > 0). These equations are valid for I2C brightness codes between 1 and 2047. Code 0 disables the backlight.

**7.6.6 Flash/Torch Current (Address = 0x06) [reset = 0x3E]**
**Figure 41. Flash/Torch Current Register**

7	6	5	4	3	2	1	0
TORCH_BRT[3]	TORCH_BRT[2]	TORCH_BRT[1]	TORCH_BRT[0]	FLASH_BRT[3]	FLASH_BRT[2]	FLASH_BRT[1]	FLASH_BRT[0]
R/W-0	R/W-0	R/W-1	R/W-1	R/W-1	R/W-1	R/W-1	R/W-0

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 12. Flash/Torch Current Register Field Descriptions**

Bit	Field	Type	Reset	Description
7-4	TORCH_BRT[3:0]	R/W	0011	Sets torch mode current level (25 mA per step) 0000: 25 mA 0001: 50 mA 0010: 75 mA 0011: 100 mA (Default) ..... 1101: 350 mA 1110: 375 mA Note: Code 1111 also maps to 375 mA
3-0	FLASH_BRT[3:0]	R/W	1110	Sets flash mode current level (100 mA per step) 0000: 100 mA 0001: 200 mA 0010: 300 mA 0011: 400 mA ..... 1101: 1.4 A 1110: 1.5 A (Default) Note: Code 1111 also maps to 1.5 A

**7.6.7 Flash Configuration (Address = 0x07) [reset = 0x2F]**

**Figure 42. Flash Configuration Register**

7	6	5	4	3	2	1	0
FL_FREQ[1]	FL_FREQ[0]	FL_ILIMIT	FTO[4]	FTO[3]	FTO[2]	FTO[1]	FTO[0]
R/W-0	R/W-0	R/W-1	R/W-0	R/W-1	R/W-1	R/W-1	R/W-1

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 13. Flash Configuration Register Field Descriptions**

Bit	Field	Type	Reset	Description
7-6	FL_FREQ[1:0]	R/W	00	Sets the flash boost switch frequency 00: 4 MHz (Default) 01: 2 MHz Note: Codes 10 and 11 also map to 2 MHz
5	FL_ILIMIT	R/W	1	Selects the switch current limit level for flash boost 0: 1.9 A 1: 2.8 A (Default)
4-0	FTO[4:0]	R/W	01111	Selects the flash timeout duration (32 ms per step) 00000: 32 ms 00001: 64 ms 00010: 96 ms 00011: 128 ms ..... 01110: 480 ms 01111: 512 ms (Default) 10000: 544 ms ..... 11110: 992 ms 11111: 1024 ms

**7.6.8 VIN Monitor (Address = 0x08) [reset = 0x03]**

**Figure 43. VIN Monitor Register**

7	6	5	4	3	2	1	0
Reserved					VINM[2]	VINM[1]	VINM[0]
					R/W-0	R/W-1	R/W-1

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 14. VIN Monitor Register Field Descriptions**

Bit	Field	Type	Reset	Description
7-3	Reserved			
2-0	VINM[2:0]	R/W	011	This field sets the VIN Monitor threshold level 000: 2.6 V 001: 2.7 V 010: 2.8 V 011: 2.9 V (Default) 100: 3 V 101: 3.1 V 110: 3.2 V 111: 3.3 V

**7.6.9 I/O Control (Address = 0x09) [reset = 0x00]**

**Figure 44. I/O Control Register**

7	6	5	4	3	2	1	0
Reserved	PWM_EN	Reserved	STROBE_EN	Reserved	TX_EN	VINM_MODE	VINM_EN
	R/W-0		R/W-0		R/W-0	R/W-0	R/W-0

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 15. I/O Control Register Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved			
6	PWM_EN	R/W	0	This bit enables and disables the PWM input pin. If enabled, the backlight LED current ramps up to Target_Current*PWM_Duty_Cycle. If disabled, the PWM input is ignored. 0: PWM disabled (Default) 1: PWM enabled
5	Reserved			
4	STROBE_EN	R/W	0	Hardware flash enable 0: STROBE disabled (Default) 1: STROBE enabled
3	Reserved			
2	TX_EN	R/W	0	Flash Interrupt mode enable 0: TX disabled (Default) 1: TX enabled
1	VINM_MODE	R/W	0	Selects the VIN Monitor current reduction level 0: Flash driver returns to standby mode (Default) 1: Flash current reduced to programmed Torch current level
0	VINM_EN	R/W	0	Set this bit to enable VIN Monitor function 0: Disabled (Default) 1: Enabled

**7.6.10 Enable (Address = 0x0A) [reset = 0x00]**
**Figure 45. Enable Register**

7	6	5	4	3	2	1	0
SWR_RESET	Reserved	BL_OVP_SET	BLED1_EN	BLED1/2_EN	FLASH_MODE	FLASH_EN	BL_EN
R/W-0		R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 16. Enable Register Field Descriptions**

Bit	Field	Type	Reset	Description
7	SWR_RESET	R/W	0	Setting this bit resets all registers to their default values. Bit auto-clears (returns to "0" upon device reset).
6	Reserved	R/W	0	
5	BL_OVP_SET	R/W	0	0: Reports flag if OVP condition detected, but no action taken (Default) 1: OVP causes shutdown
4	BLED1_EN	R/W	0	Backlight sink 1 enable only 0: Disabled (Default) 1: Enabled
3	BLED1/2_EN	R/W	0	Backlight sink 1 and sink 2 enable. Has priority over bit[4] (BLED1_EN). 0: Backlight sink 2 disabled, backlight sink 1 status depends on BLED1_EN bit status (Default) 1: Backlight sink 1 and sink 2 enabled regardless of BLED1_EN bit status
2	FLASH_MODE	R/W	0	Selects Torch or Flash mode for flash LED output 0: Torch (Default) 1: Flash
1	FLASH_EN	R/W	0	Flash LED output enable 0: Disabled (Default) 1: Enabled
0	BL_EN	R/W	0	Backlight output enable 0: Disabled (Default) 1: Enabled

**7.6.11 Flags1 (Address = 0x0B) [reset = 0x00]**

**Figure 46. Flags1 Register**

7	6	5	4	3	2	1	0
BL_OVP	FLASH_OVP	FOUT_SHORT	VINM	TX	FLED_SHORT	FTO	TSD
R-0	R-0	R-0	R-0	R-0	R-0	R-0	R-0

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 17. Flags1 Register Field Descriptions**

Bit	Field	Type	Reset	Description
7	BL_OVP	R	0	Backlight overvoltage protection fault or flag
6	FLASH_OVP	R	0	Flash overvoltage protection fault or flag
5	FOUT_SHORT	R	0	Flash output short fault
4	VINM	R	0	VINM fault or flag
3	TX	R	0	TX Interrupt flag
2	FLED_SHORT	R	0	Flash LED short fault
1	FTO	R	0	Flash timeout flag
0	TSD	R	0	Thermal shutdown fault

**7.6.12 Display Bias Configuration (Address = 0x0C) [reset = 0x18]**

**Figure 47. Display Bias Configuration Register**

7	6	5	4	3	2	1	0
WAKE-UP	VPOS_TRANS	AUTOSEQ	VPOS_DISCH	VNEG_DISCH	VPOS_EN	VNEG_EN	EXT_EN
			R/W-1	R/W-1	R/W-0	R/W-0	R/W-0

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 18. Display Bias Configuration Register Field Descriptions**

Bit	Field	Type	Reset	Description
7	WAKE-UP	R/W	0	Enables wake-up mode 0: Wake-up mode disabled (Default) 1: Wake-up mode enabled
6	VPOS_TRANS	R/W	0	Controls positive display bias voltage (LDO) ramping time 0: 800 $\mu$ s (Default) 1: 500 $\mu$ s
5	AUTOSEQ	R/W	0	Enables Auto-sequence 0: Auto-sequence disabled (Default) 1: Auto-sequence enabled
4	VPOS_DISCH	R/W	1	Positive display bias voltage (LDO) active discharge selection 0: Not discharged 1: Active discharge (Default)
3	VNEG_DISCH	R/W	1	Negative display bias voltage (inverting charge pump) active discharge selection 0: Not discharged 1: Active discharge (Default)
2	VPOS_EN	R/W	0	Positive display bias (LDO) enable 0: Disabled (Default) 1: Enabled
1	VNEG_EN	R/W	0	Negative display bias (inverting charge pump) enable 0: Disabled (Default) 1: Enabled
0	EXT_EN	R/W	0	Setting this bit activates pins LCM_EN1 and LCM_EN2 to enable VPOS and VNEG, respectively 0: VPOS and VNEG can only be enabled via bit VPOS_EN and VNEG_EN, respectively (Default) 1: VPOS and VNEG can only be enabled via pin LCM_EN1 and LCM_EN2, respectively

**7.6.13 LCM Boost Bias (Address = 0x0D) [reset = 0x1E]**
**Figure 48. LCM Boost Bias Register**

7	6	5	4	3	2	1	0
Reserved		LCM_VBST[5]	LCM_VBST[4]	LCM_VBST[3]	LCM_VBST[2]	LCM_VBST[1]	LCM_VBST[0]
		R/W-0	R/W-1	R/W-1	R/W-1	R/W-1	R/W-0

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 19. LCM Boost Bias Register Field Descriptions**

Bit	Field	Type	Reset	Description
7-6	Reserved			
5-0	LCM_VBST[5:0]	R/W	011110	Sets the LCM Boost Voltage (50 mV per step) 000000: 4.5 V 000001: 4.55 V 000010: 4.6 V ..... 011101: 5.95 V 011110: 6 V (Default) 011111: 6.05 V ..... 100101: 6.35 V 100110: 6.4 V Note: Codes 100111 to 111111 map to 6.4V

**7.6.14 VPOS Bias (Address = 0x0E) [reset = 0x1E]**
**Figure 49. VPOS Bias Register**

7	6	5	4	3	2	1	0
Reserved		VPOS[5]	VPOS[4]	VPOS[3]	VPOS[2]	VPOS[1]	VPOS[0]
		R/W-0	R/W-1	R/W-1	R/W-1	R/W-1	R/W-0

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 20. VPOS Bias Register Field Descriptions**

Bit	Field	Type	Reset	Description
7-6	Reserved			
5-0	VPOS[5:0]	R/W	011110	Sets the Positive Display Bias (LDO) Voltage (50 mV per step) 000000: 4 V 000001: 4.05 V 000010: 4.1 V ..... 011101: 5.45 V 011110: 5.5 V (Default) 011111: 5.55 V ..... 100111: 5.95 V 101000: 6 V Note: Codes 101001 to 111111 map to 6 V

**7.6.15 VNEG Bias (Address = 0x0F) [reset = 0x1C]**
**Figure 50. VNEG Bias Register**

7	6	5	4	3	2	1	0
Reserved		VNEG[5]	VNEG[4]	VNEG[3]	VNEG[2]	VNEG[1]	VNEG[0]
		R/W-0	R/W-1	R/W-1	R/W-1	R/W-0	R/W-0

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 21. VNEG Bias Register Field Descriptions**

Bit	Field	Type	Reset	Description
7-6	Reserved			
5-0	VNEG[5:0]	R/W	011100	Sets the Negative Display Bias (inverting charge pump) Voltage (–50 mV per step) 000000: –4 V 000001: –4.05 V 000010: –4.1 V ..... 011011: –5.35 V 011100: –5.4 V (Default) 011101: –5.45 V ..... 100111: –5.95 V 101000: –6 V Note: Codes 101001 to 111111 map to –6 V

**7.6.16 Flags2 (Address = 0x10) [reset = 0x00]**
**Figure 51. Flags2 Register**

7	6	5	4	3	2	1	0
Reserved		LCM_OVP	VNEG_OVP	VPOS_SHORT	VNEG_SHORT	FLASH_OCP	BL_OCP
		R-0	R-0	R-0	R-0	R-0	R-0

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 22. Flags2 Register Field Descriptions**

Bit	Field	Type	Reset	Description
7-6	Reserved			
5	LCM_OVP	R	0	LCM boost overvoltage protection flag
4	VNEG_OVP	R	0	VNEG overvoltage protection flag
3	VPOS_SHORT	R	0	VPOS short circuit protection flag
2	VNEG_SHORT	R	0	VNEG short circuit protection flag
1	FLASH_OCP	R	0	Flash boost output overcurrent protection flag
0	BL_OCP	R	0	Backlight boost overcurrent protection flag

## 8 Application and Implementation

### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 8.1 Application Information

The LM3632A integrates an LCD backlight driver, LCM positive and negative bias voltage supplies, and a flash driver into a single device. The backlight boost converter generates the high voltage required for the LEDs. The device can drive one or two LED strings with 4 to 8 white LEDs per string. Positive and negative bias voltages are post-regulated from the LCM bias boost output voltage. The flash driver can supply constant current of up to a 1.5 A to the LED output. All three functions are independent of each other and can be enabled using their own dedicated controls.

### 8.2 Typical Application

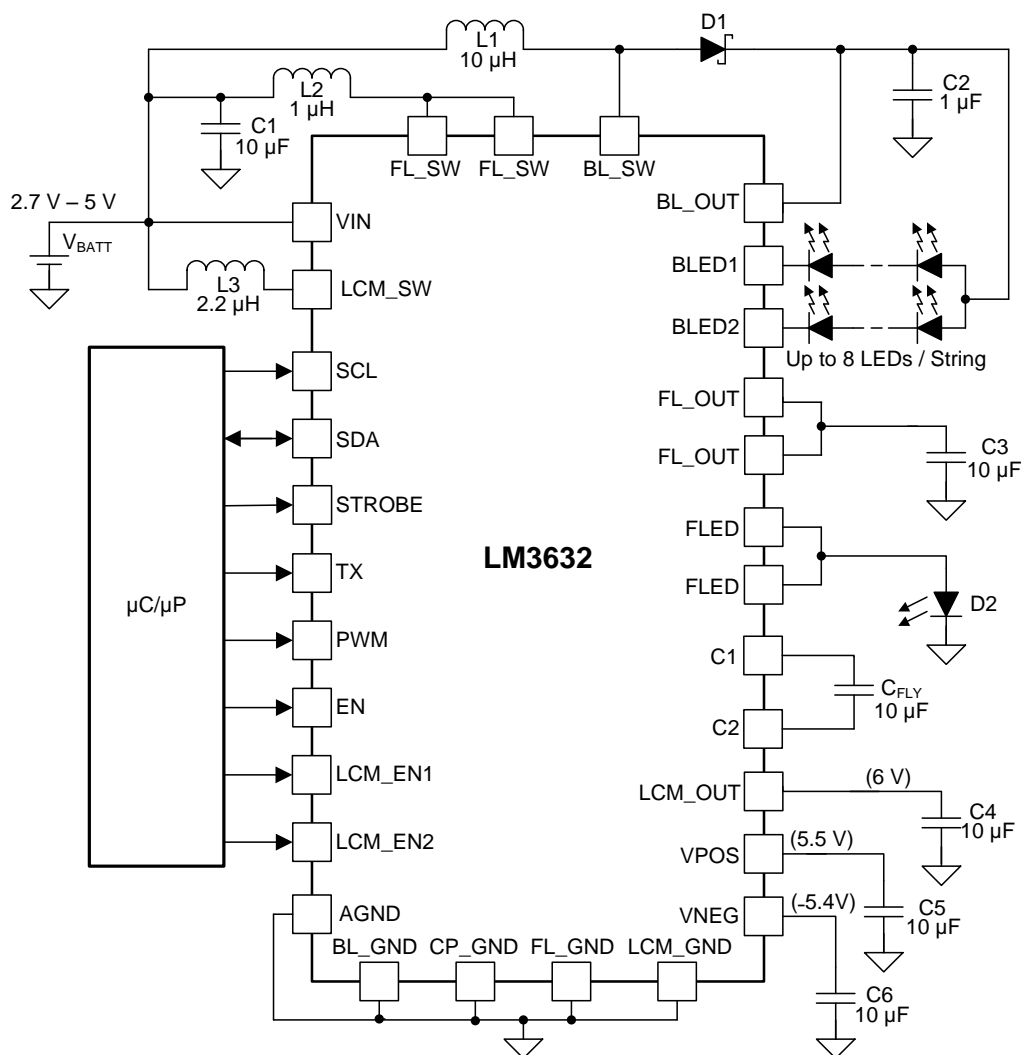


Figure 52. Typical Application Schematic

## Typical Application (continued)

### 8.2.1 Design Requirements

Example requirements are shown below:

DESIGN PARAMETER	EXAMPLE VALUE
Input voltage range	2.7 V to 4.5 V (single Li-Ion cell battery)
Brightness control	I <sup>2</sup> C Register
Backlight LED configuration	2 parallel, 6 series
Backlight LED current	max 25 mA / string
Backlight boost maximum voltage	29 V
Backlight boost SW frequency	1 MHz
Backlight boost inductor	10 μH, 1-A saturation current
LCM boost output voltage	6 V
V <sub>NEG</sub> output voltage	-5.4 V
V <sub>POS</sub> output voltage	5.5 V
Flash LED current	1.5 A
Torch LED current	100 mA

### 8.2.2 Detailed Design Procedure

#### 8.2.2.1 External Components

Table 23 shows examples of external components for the LM3632A. Boost converter output capacitors can be replaced with dual output capacitors of lower capacitance as long as the minimum effective capacitance requirement is met. DC bias effect of the ceramic capacitors must be taken into consideration when choosing the output capacitors. This is especially true for the high output-voltage backlight-boost converter.

**Table 23. Recommended External Components**

DESIGNATOR (Figure 52)	DESCRIPTION	VALUE	EXAMPLE
C1, C3, C4, C5, C6	Ceramic capacitor	10 μF, 10 V	C1608X5R0J106M
C2	Ceramic capacitor	1 μF, 35 V	C2012X7R1H105K125AB
L1	Inductor	10 μH, 1 A	VLF403212MT- 100M
L2	Inductor	1 μH, 2.8 A	DFE201610P-1R0M
L3	Inductor	2.2 μH, 1 A	VLS201612ET-2R2M
D1	Schottky diode	30 V, 500 mA	NSR0530P2T5G

#### 8.2.2.2 Inductor Selection

Both of the LM3632A boost converters are internally compensated. The compensation parameters are designed for the inductance values listed on Table 23. Effective inductance of the inductors should be ±20%.

There are two main considerations when choosing an inductor: the inductor should not saturate, and the inductor current ripple should be small enough to achieve the desired output voltage ripple. Different saturation current rating specifications are followed by different manufacturers so attention must be given to details. Saturation current ratings are typically specified at 25°C. However, ratings at the maximum ambient temperature of the application should be requested from the manufacturer. The saturation current should be greater than the sum of the maximum load current and the worst-case average-to-peak inductor current. When the boost device is boosting ( $V_{OUT} > V_{IN}$ ) the inductor is one of the largest area of efficiency loss in the circuit. Therefore, choosing an inductor with the lowest possible series resistance is important, especially for the flash and LCM Bias converters. For proper inductor operation and circuit performance, ensure that the inductor saturation and the peak current limit setting of the LM3632A are greater than  $I_{PEAK}$  in Equation 5:

$$I_{PEAK} = \frac{I_{LOAD}}{\eta} \times \frac{V_{OUT}}{V_{IN}} + \Delta I_L \quad \text{where} \quad \Delta I_L = \frac{V_{IN} \times (V_{OUT} - V_{IN})}{2 \times f_{SW} \times L \times V_{OUT}} \quad (5)$$



See detailed information in “Understanding Boost Power Stages in Switch Mode Power Supplies” <http://focus.ti.com/lit/an/slva061/slva061.pdf>. “Power Stage Designer™ Tools” can be used for the boost calculation: <http://www.ti.com/tool/powerstage-designer>.

### 8.2.2.3 Boost Output Capacitor Selection

At least an 1- $\mu\text{F}$  capacitor is recommended for the backlight boost converter output capacitor. A high-quality ceramic type X5R or X7R is recommended. Voltage rating must be greater than the maximum output voltage that is used. The effective output capacitance should always remain higher than 0.4  $\mu\text{F}$  for stable operation.

For the LCM bias boost output a high-quality 10- $\mu\text{F}$  ceramic type X5R or X7R capacitor is recommended. Voltage rating must be greater than the maximum output voltage that is used.

The flash driver is designed to operate with a 10- $\mu\text{F}$  ceramic output capacitor. When the boost converter is running, the output capacitor supplies the load current during the boost converter's on-time. When the NMOS switch turns off, the inductor energy is discharged through the internal PMOS switch, supplying power to the load and restoring charge to the output capacitor. This causes a sag in the output voltage during the on-time and a rise in the output voltage during the off-time. The output capacitor is therefore chosen to limit the output ripple to an acceptable level depending on load current and input/output voltage differentials and also to ensure the converter remains stable.

The DC-bias effect of the capacitors must be taken into consideration when selecting the output capacitors. The effective capacitance of a ceramic capacitor can drop down to less than 10% with maximum rated DC bias voltage. Note that with a same voltage applied, the capacitors with higher voltage rating suffer less from the DC-bias effect than capacitors with lower voltage rating.







### 8.2.2.4 Input Capacitor Selection

Choosing the correct size and type of input capacitor helps minimize the voltage ripple caused by the switching of the LM3632A boost converters and reduce noise on the boost converter's input pin that can feed through and disrupt internal analog signals. In [Figure 52](#) a 10- $\mu\text{F}$  ceramic input capacitor works well. It is important to place the input capacitor as close as possible to the LM3632A input (VIN) pin. This reduces the series resistance and inductance that can inject noise into the device due to the input switching currents.

## 8.2.3 Application Curves

### 8.2.3.1 Backlight Curves

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted. Backlight System Efficiency is defined as PLED / PIN, where PLED is actual power consumed in backlight LEDs.

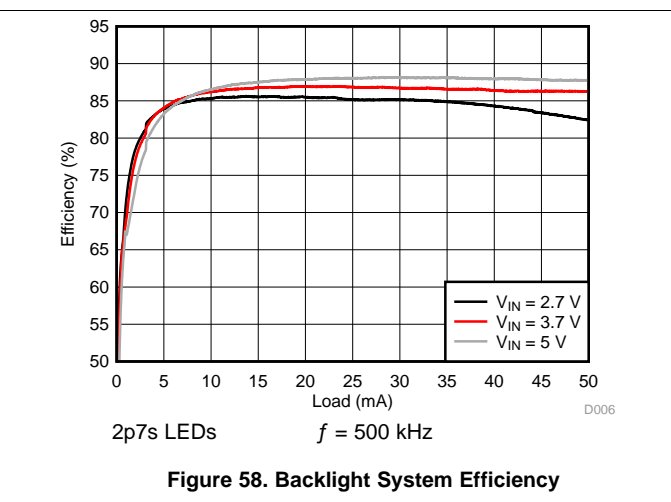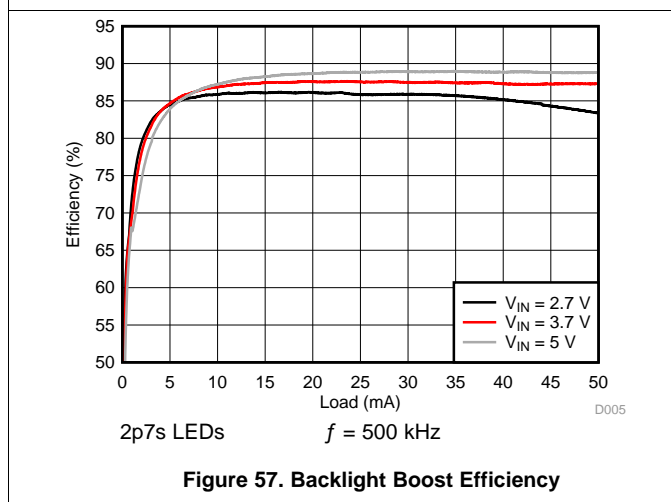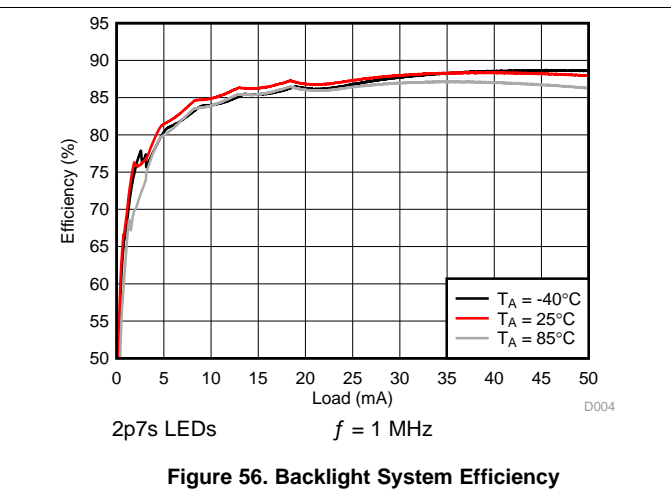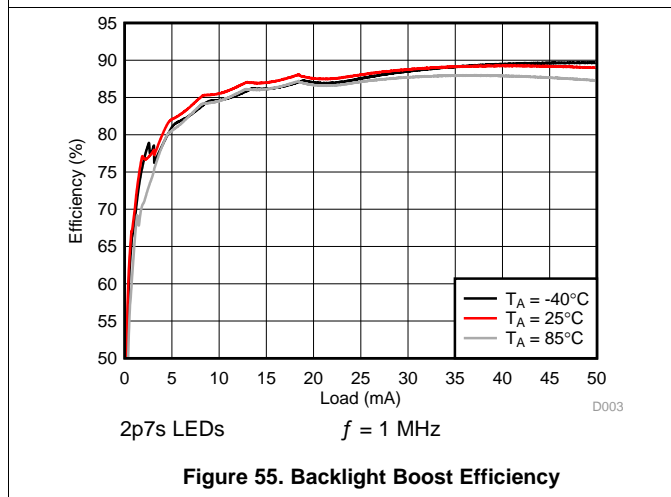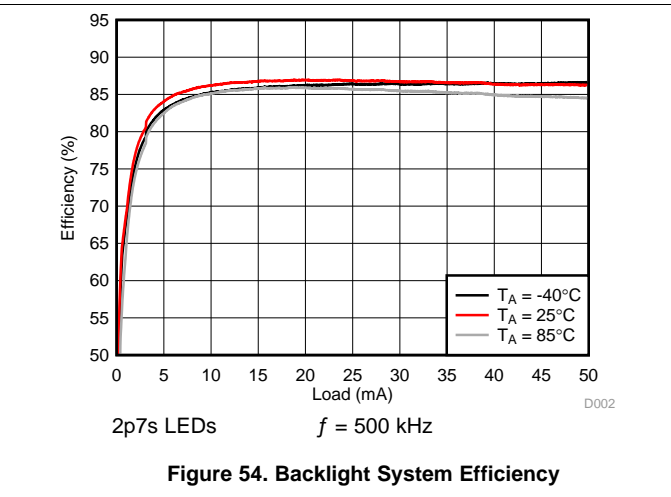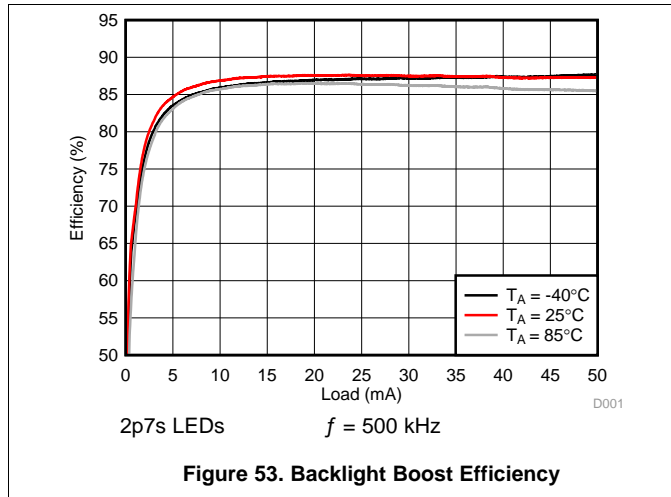

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted. Backlight System Efficiency is defined as PLED / PIN, where PLED is actual power consumed in backlight LEDs.

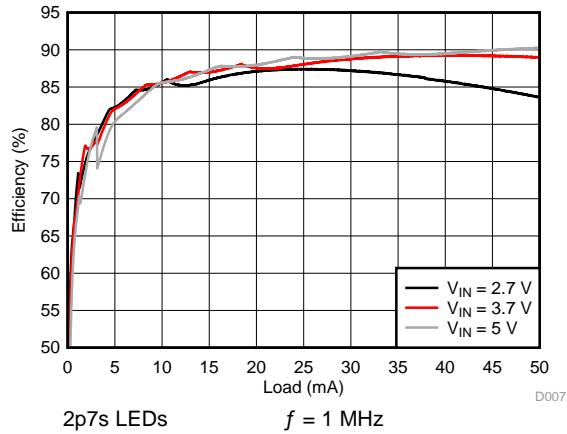


Figure 59. Backlight Boost Efficiency

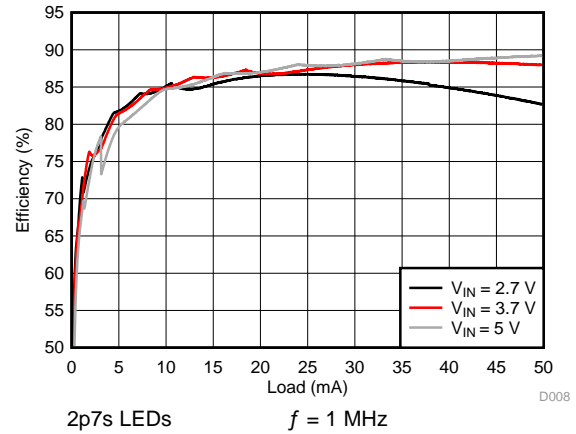


Figure 60. Backlight System Efficiency

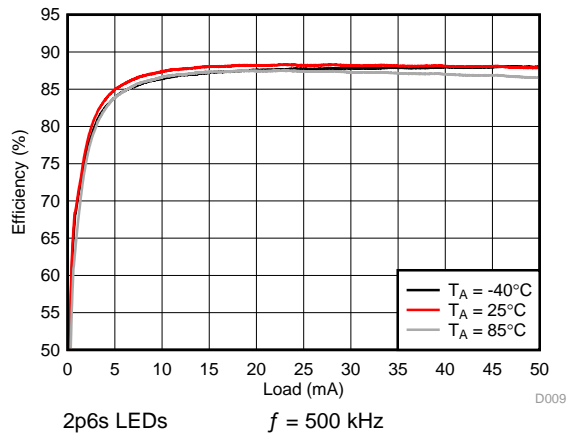


Figure 61. Backlight Boost Efficiency

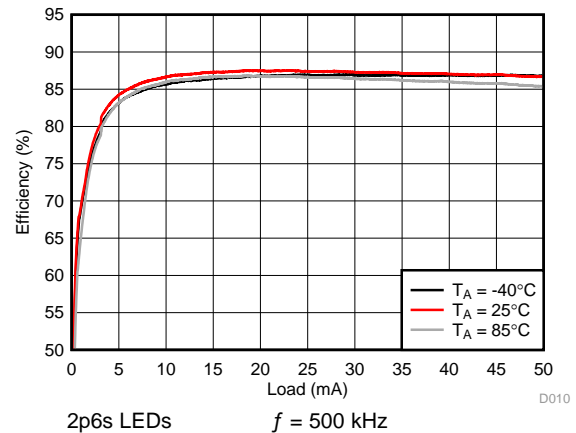


Figure 62. Backlight System Efficiency

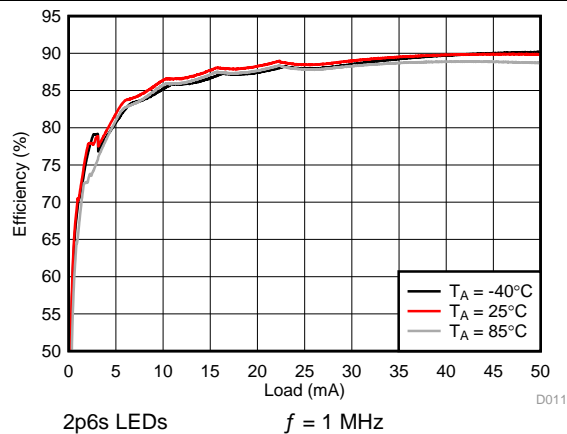


Figure 63. Backlight Boost Efficiency

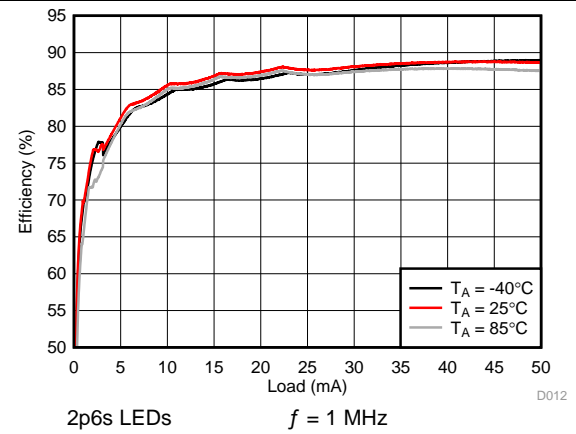


Figure 64. Backlight System Efficiency

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted. Backlight System Efficiency is defined as PLED / PIN, where PLED is actual power consumed in backlight LEDs.

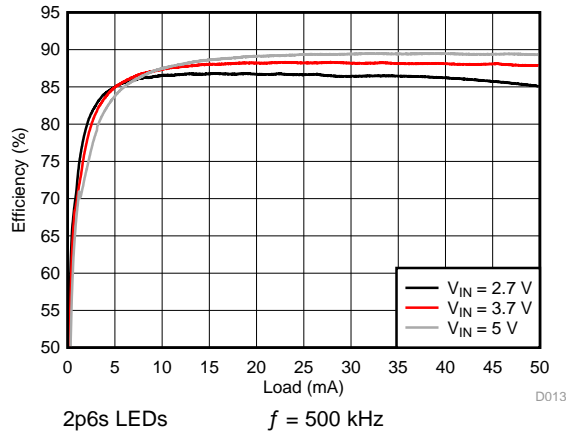


Figure 65. Backlight Boost Efficiency

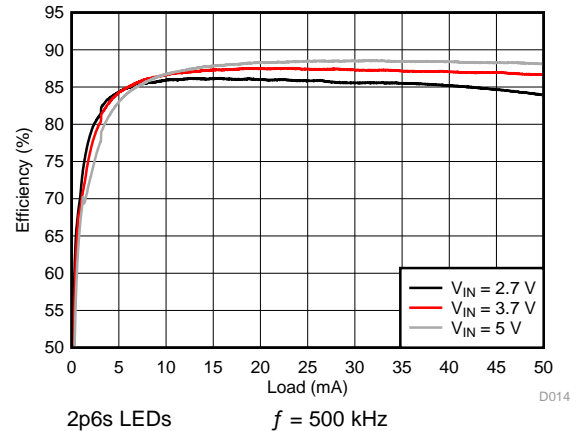


Figure 66. Backlight System Efficiency

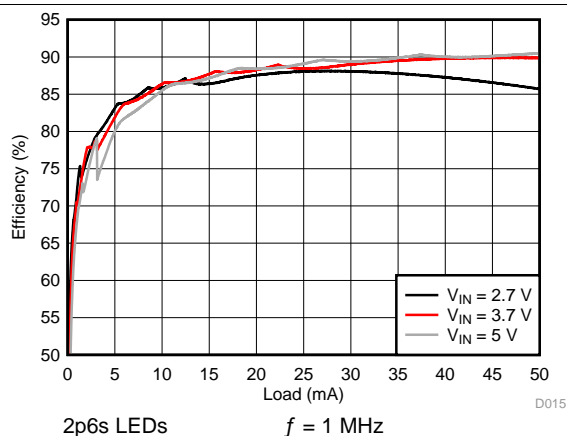


Figure 67. Backlight Boost Efficiency

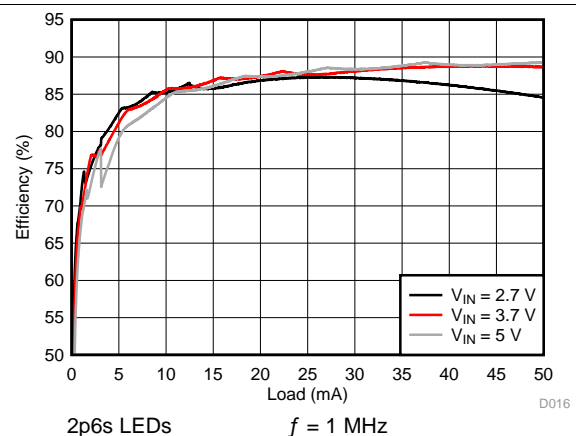


Figure 68. Backlight System Efficiency

8.2.3.2 LCM Bias Curves

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted. VPOS, VNEG and VPOS/VNEG Efficiency is defined as POUT / PIN, where POUT is actual power consumed in VPOS, VNEG and (VPOS + VNEG) outputs, respectively.

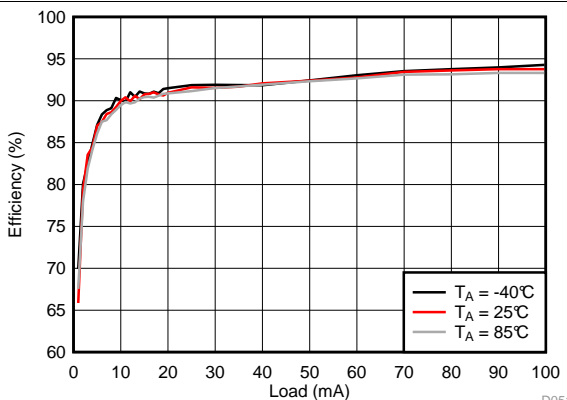


Figure 69. LCM Boost Efficiency


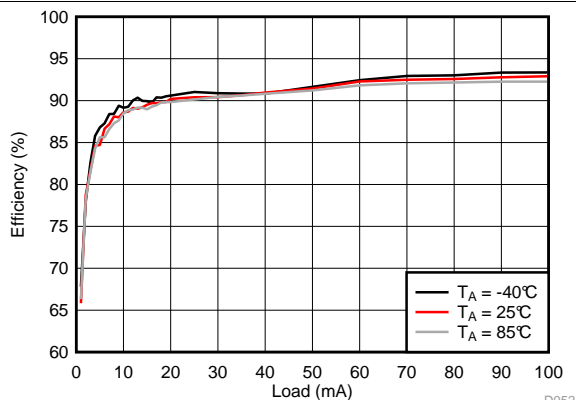



Figure 70. LCM Boost Efficiency

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted. VPOS, VNEG and VPOS/VNEG Efficiency is defined as  $POUT / PIN$ , where POUT is actual power consumed in VPOS, VNEG and (VPOS + VNEG) outputs, respectively.

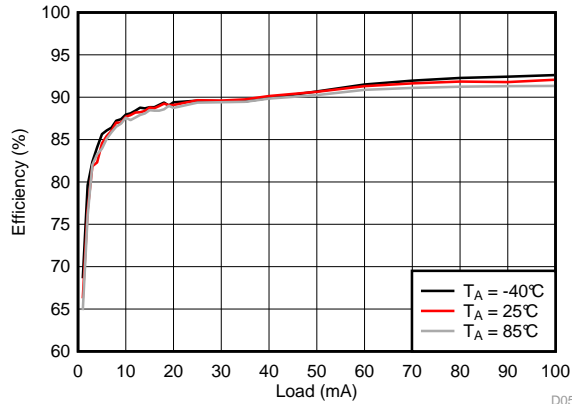


$V_{LCM\_OUT} = 5.5 V$

Figure 71. LCM Boost Efficiency

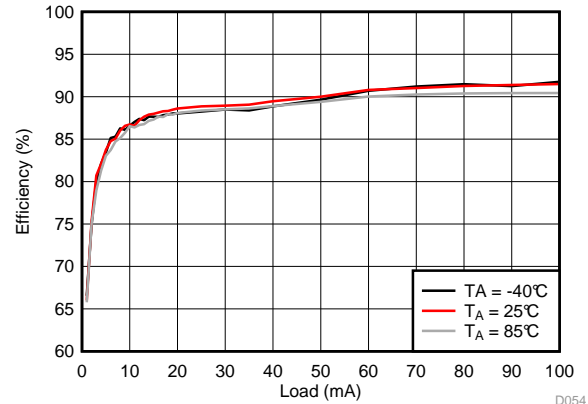


$V_{LCM\_OUT} = 6 V$

Figure 72. LCM Boost Efficiency

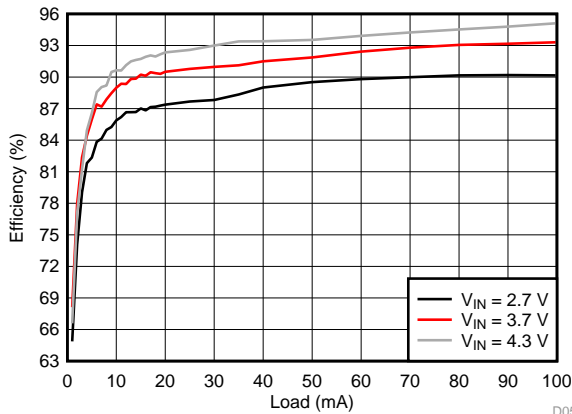


$V_{LCM\_OUT} = 4.8 V$

Figure 73. LCM Boost Efficiency

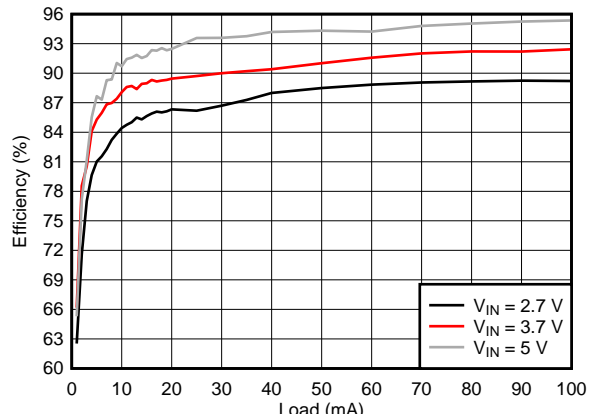


$V_{LCM\_OUT} = 5.3 V$

Figure 74. LCM Boost Efficiency

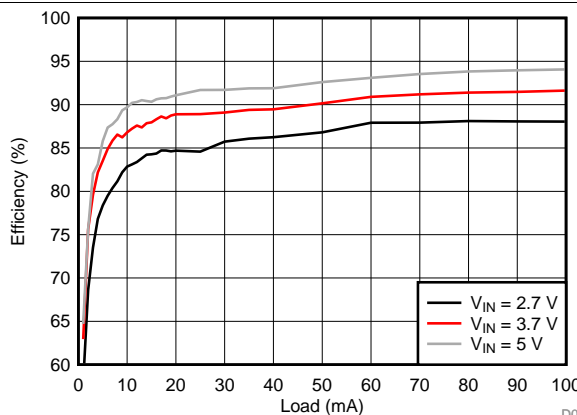

$V_{LCM\_OUT} = 5.9 V$

Figure 75. LCM Boost Efficiency

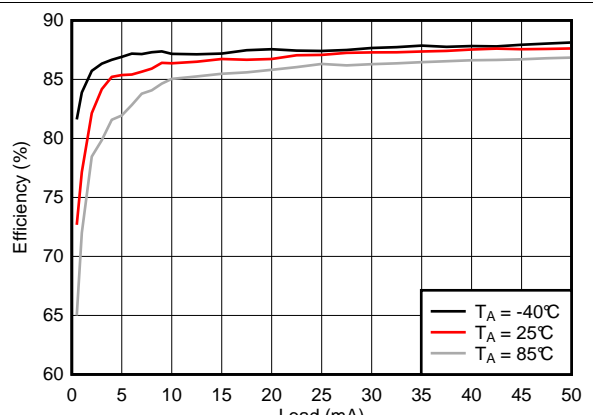

$V_{VPOS} = 4.5 V$      $V_{LCM\_OUT} = 4.9 V$

Figure 76. VPOS Efficiency

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted. VPOS, VNEG and VPOS/VNEG Efficiency is defined as  $POUT / PIN$ , where POUT is actual power consumed in VPOS, VNEG and (VPOS + VNEG) outputs, respectively.

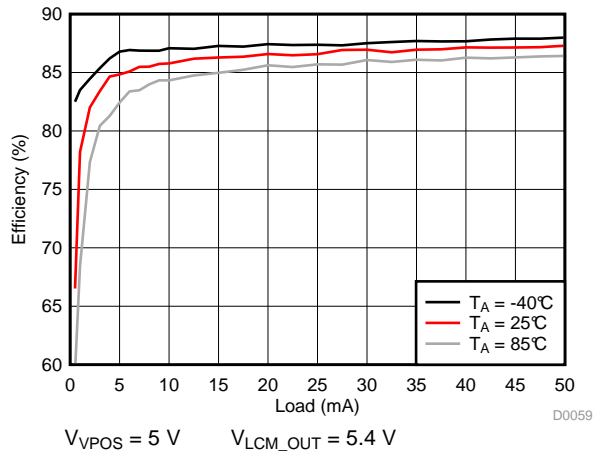


Figure 77. VPOS Efficiency

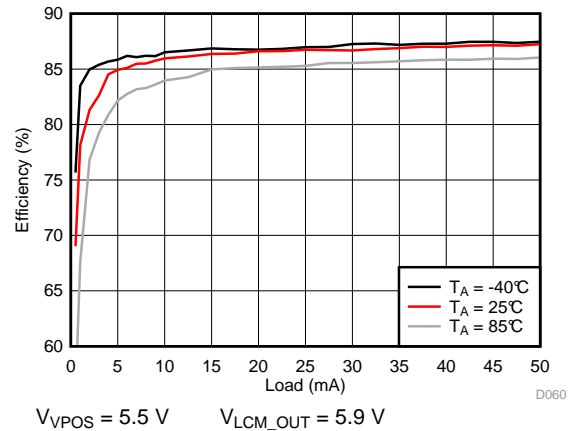


Figure 78. VPOS Efficiency

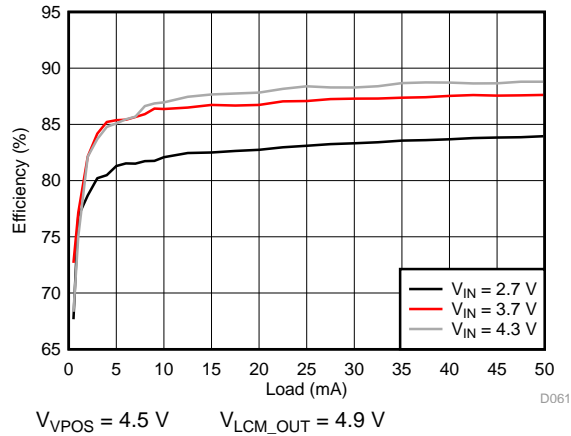


Figure 79. VPOS Efficiency

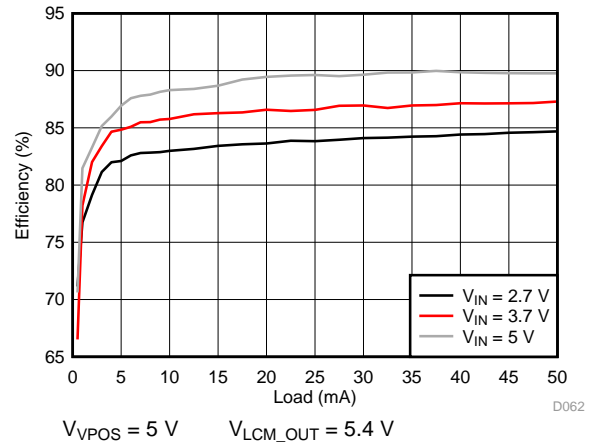


Figure 80. VPOS Efficiency

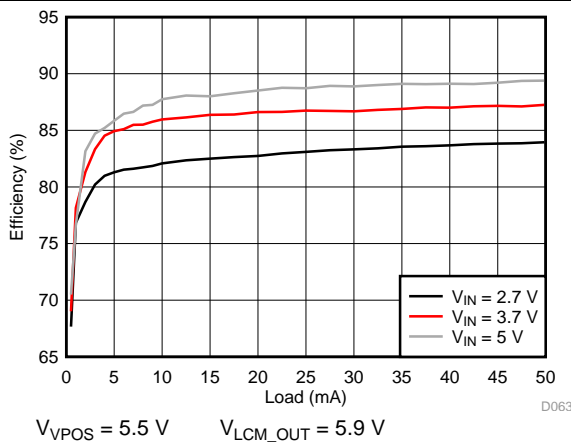


Figure 81. VPOS Efficiency

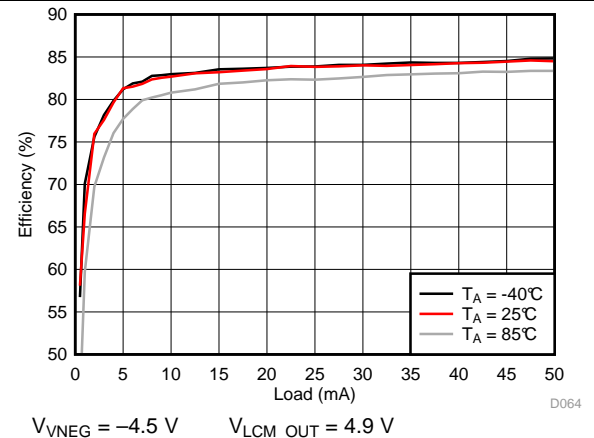


Figure 82. VNEG Efficiency

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted. VPOS, VNEG and VPOS/VNEG Efficiency is defined as  $POUT / PIN$ , where POUT is actual power consumed in VPOS, VNEG and (VPOS + VNEG) outputs, respectively.

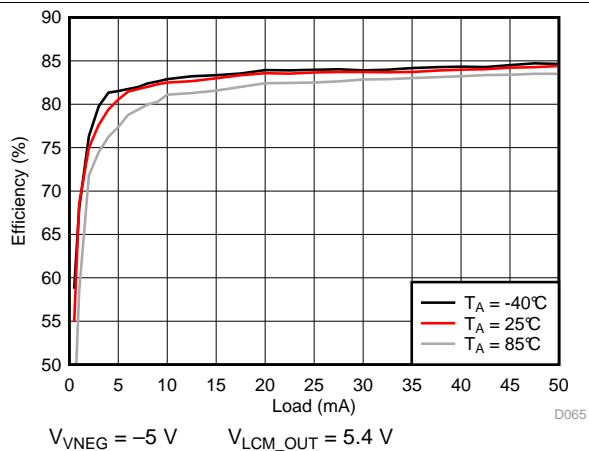


Figure 83. VNEG Efficiency

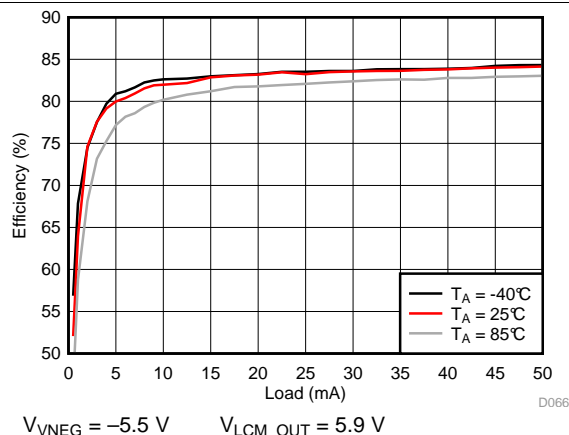


Figure 84. VNEG Efficiency

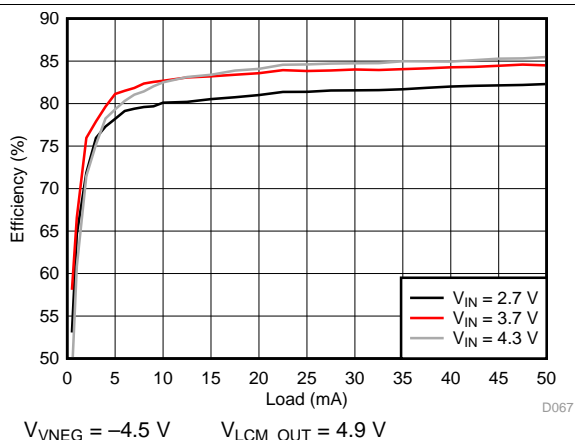


Figure 85. VNEG Efficiency

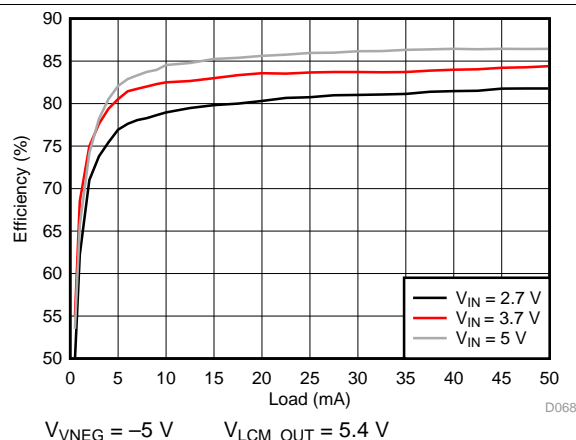


Figure 86. VNEG Efficiency

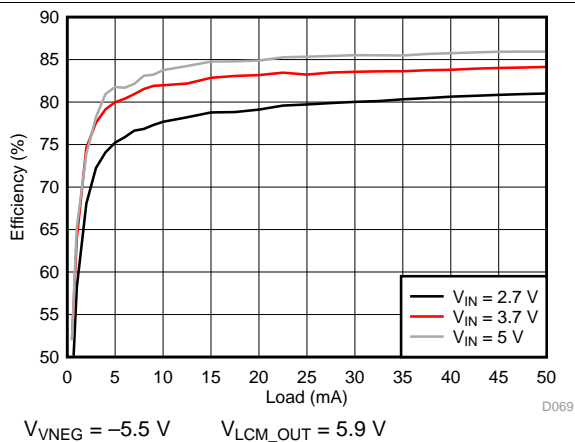


Figure 87. VNEG Efficiency

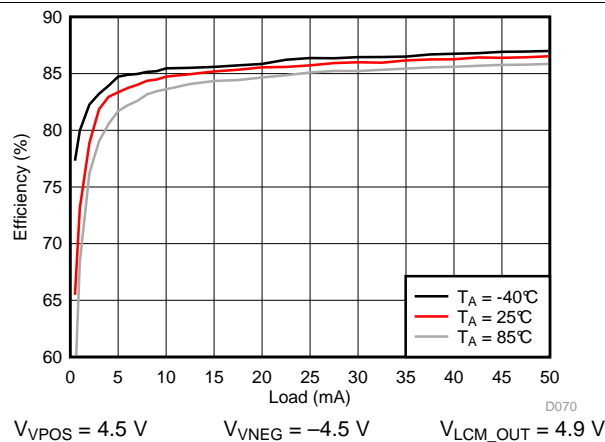


Figure 88. VPOS/VNEG Efficiency

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted. VPOS, VNEG and VPOS/VNEG Efficiency is defined as  $POUT / PIN$ , where POUT is actual power consumed in VPOS, VNEG and (VPOS + VNEG) outputs, respectively.

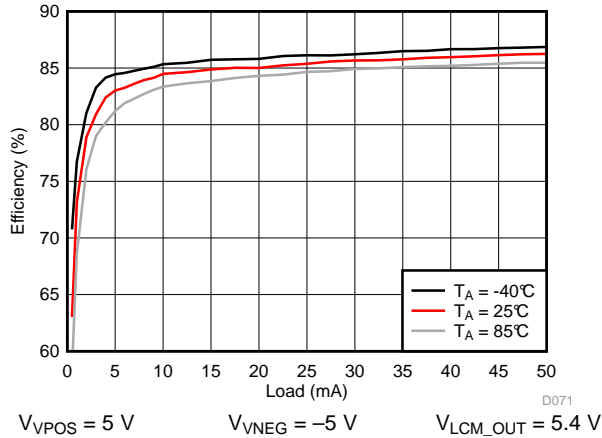


Figure 89. VPOS/VNEG Efficiency

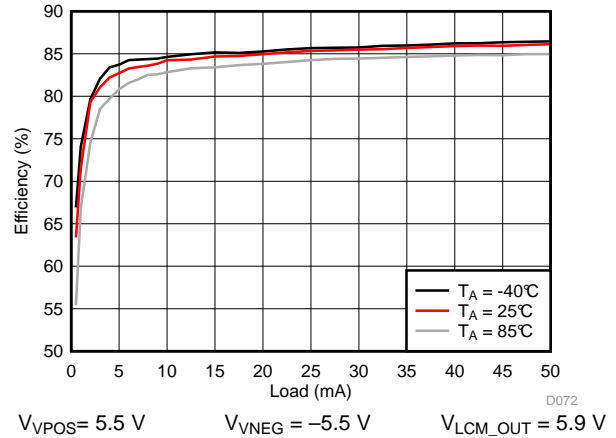


Figure 90. VPOS/VNEG Efficiency

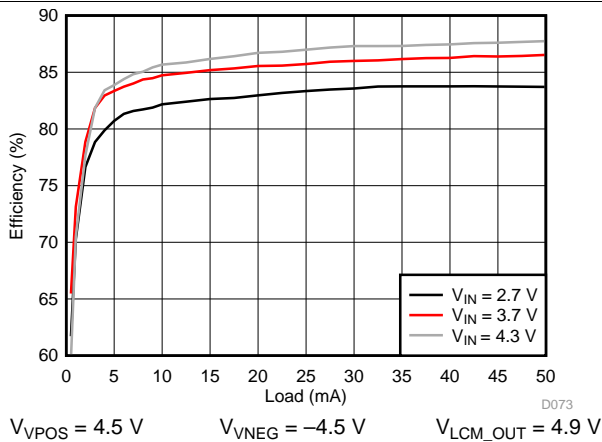


Figure 91. VPOS/VNEG Efficiency

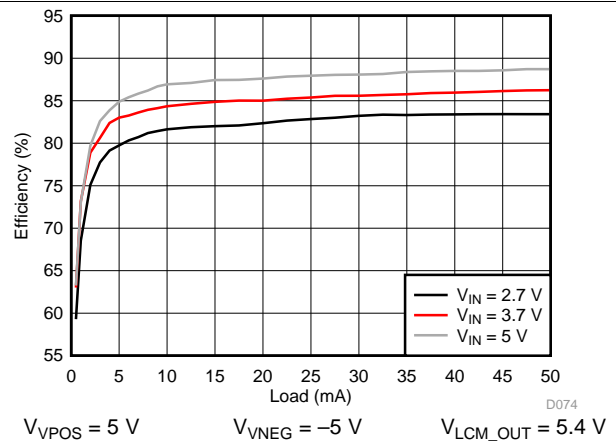


Figure 92. VPOS/VNEG Efficiency

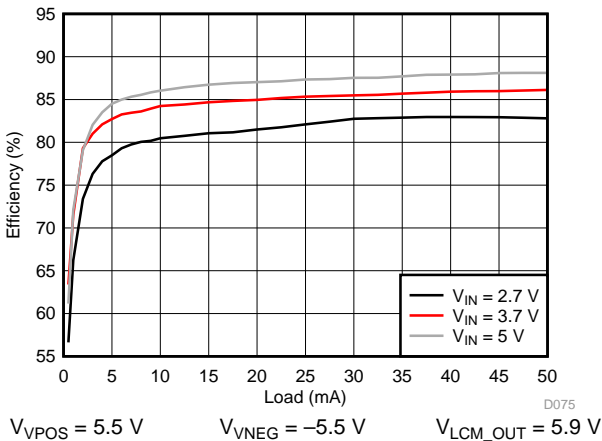


Figure 93. VPOS/VNEG Efficiency


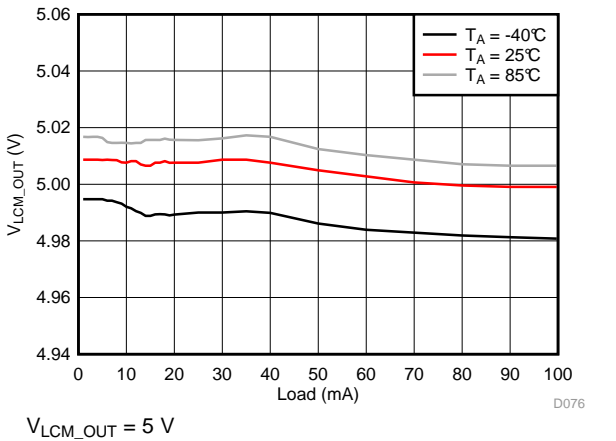


Figure 94.  $V_{LCM\_OUT}$  Load Regulation




Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted.  $V_{POS}$ ,  $V_{NEG}$  and  $V_{POS}/V_{NEG}$  Efficiency is defined as  $POUT / PIN$ , where  $POUT$  is actual power consumed in  $V_{POS}$ ,  $V_{NEG}$  and ( $V_{POS} + V_{NEG}$ ) outputs, respectively.

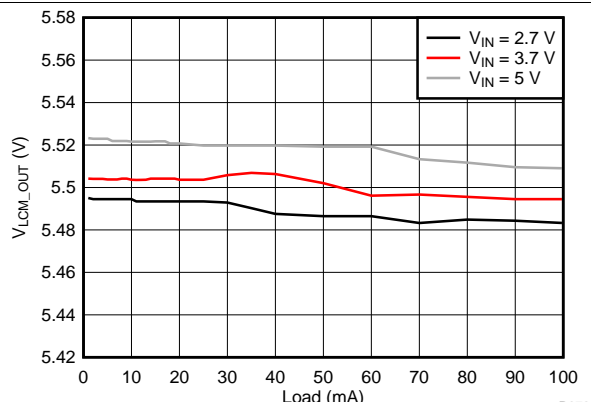


$V_{LCM\_OUT} = 5.5 V$

Figure 95.  $V_{LCM\_OUT}$  Load Regulation

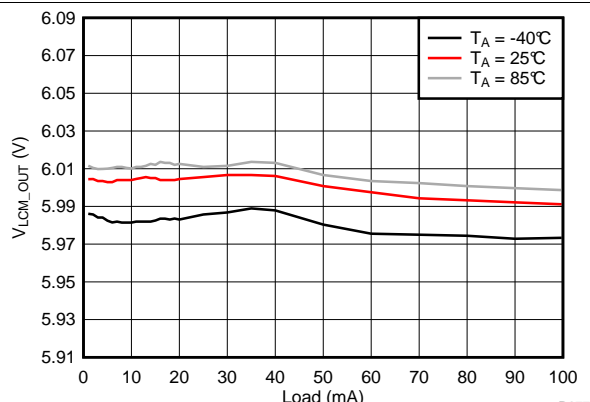


$V_{LCM\_OUT} = 6 V$

Figure 96.  $V_{LCM\_OUT}$  Load Regulation

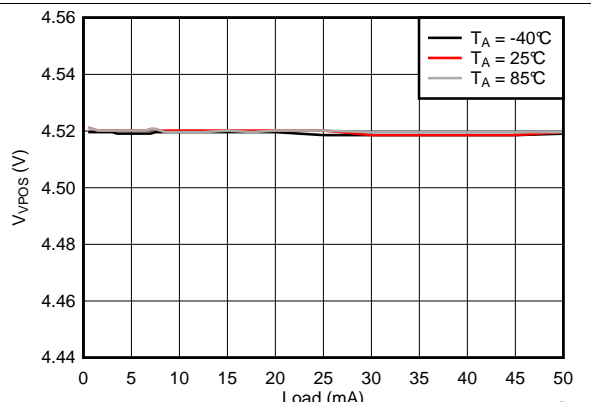


$V_{VPOS} = 4.5 V$      $V_{LCM\_OUT} = 4.9 V$

Figure 97.  $V_{VPOS}$  Load Regulation

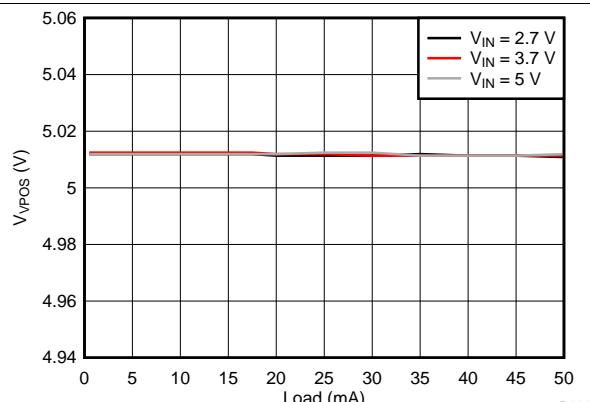


$V_{VPOS} = 5 V$      $V_{LCM\_OUT} = 5.4 V$

Figure 98.  $V_{VPOS}$  Load Regulation

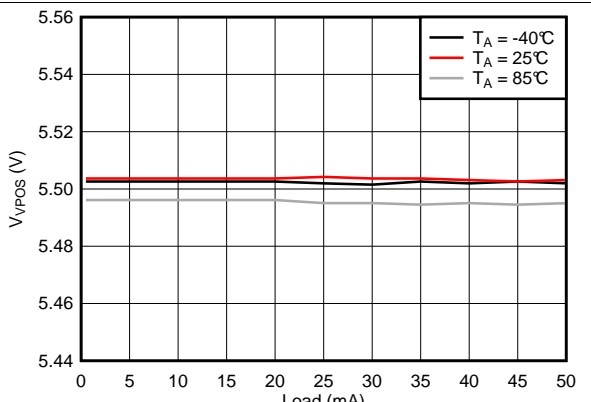

$V_{VPOS} = 5.5 V$      $V_{LCM\_OUT} = 5.9 V$


Figure 99.  $V_{VPOS}$  Load Regulation

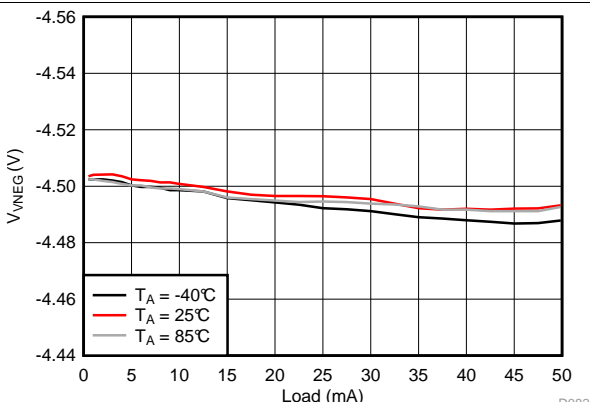

$V_{VNEG} = -4.5 V$      $V_{LCM\_OUT} = 4.9 V$


Figure 100.  $V_{VNEG}$  Load Regulation

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted. VPOS, VNEG and VPOS/VNEG Efficiency is defined as  $POUT / PIN$ , where POUT is actual power consumed in VPOS, VNEG and (VPOS + VNEG) outputs, respectively.

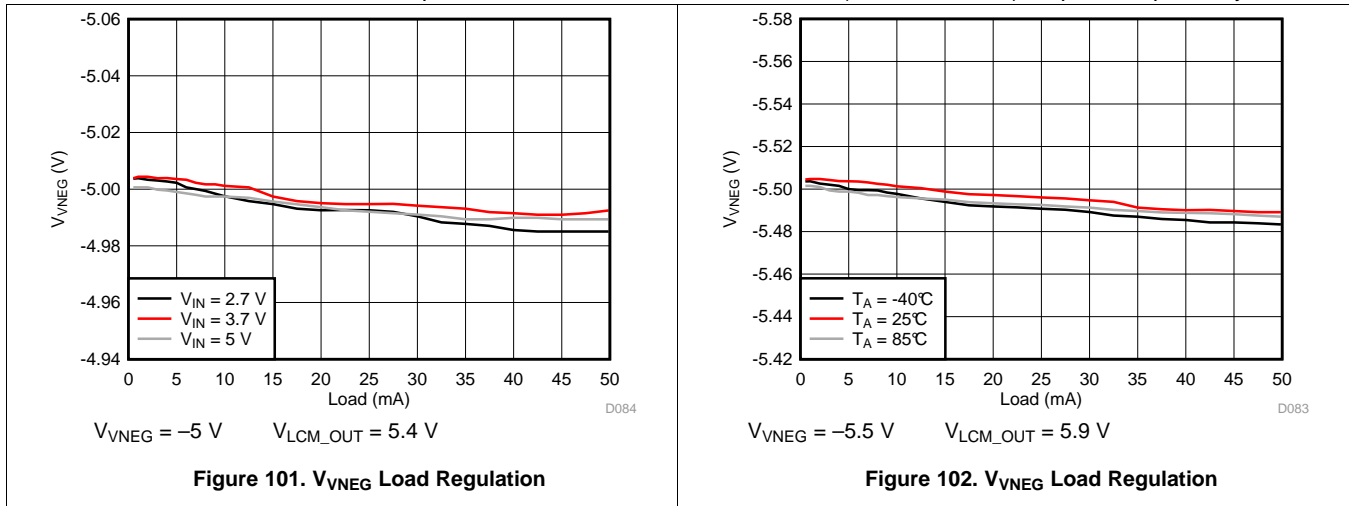

### 8.2.3.3 Flash Curves

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted. Flash System Efficiency defined as  $PLED / PIN$ , where PLED is actual power consumed in flash LED.

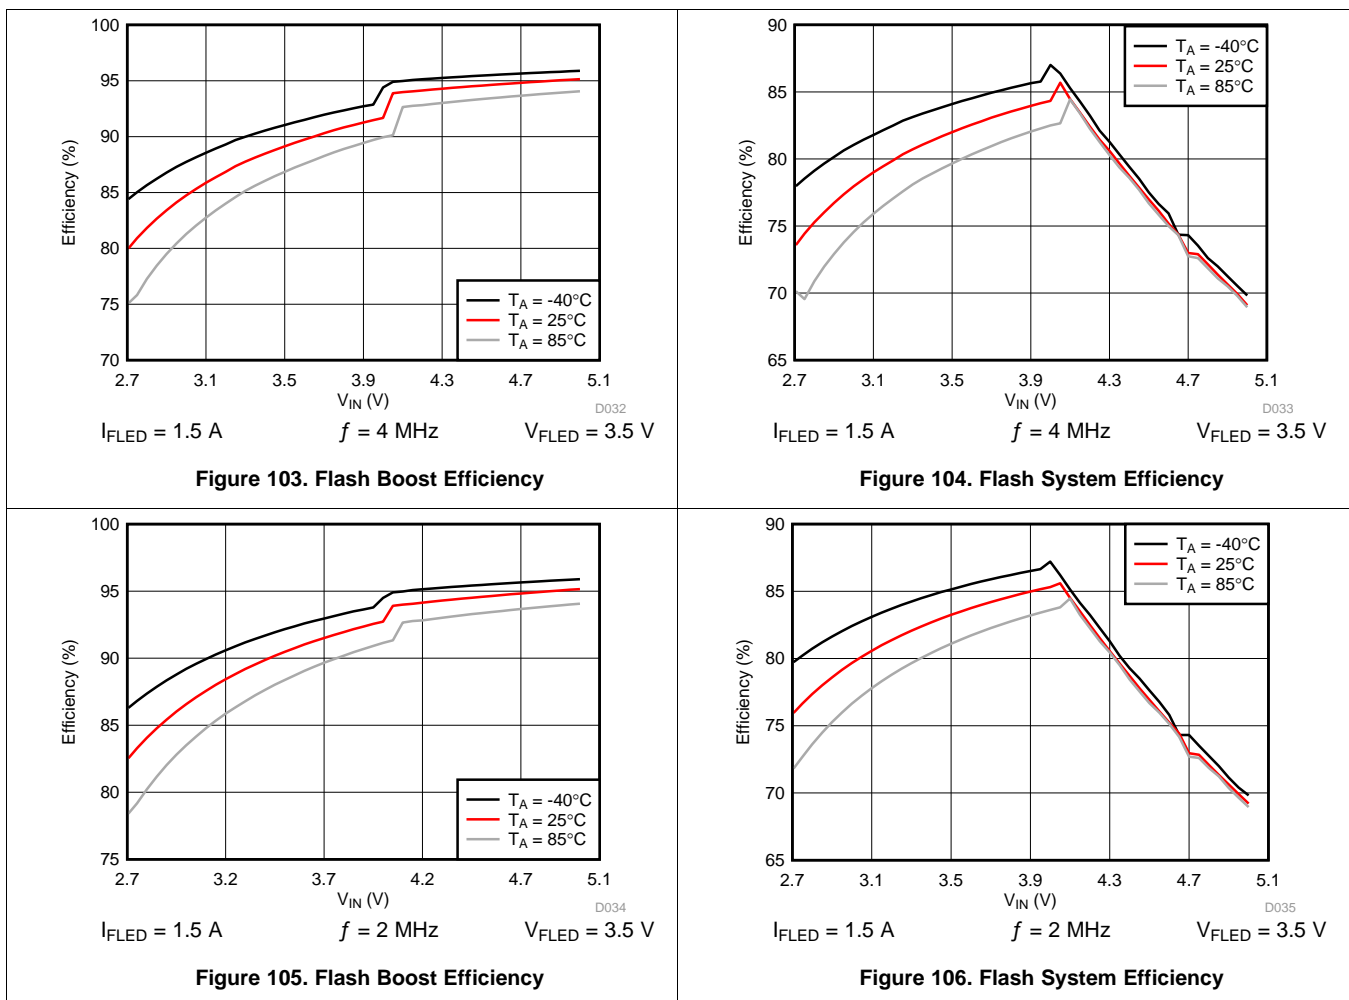

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted. Flash System Efficiency defined as PLED / PIN, where PLED is actual power consumed in flash LED.

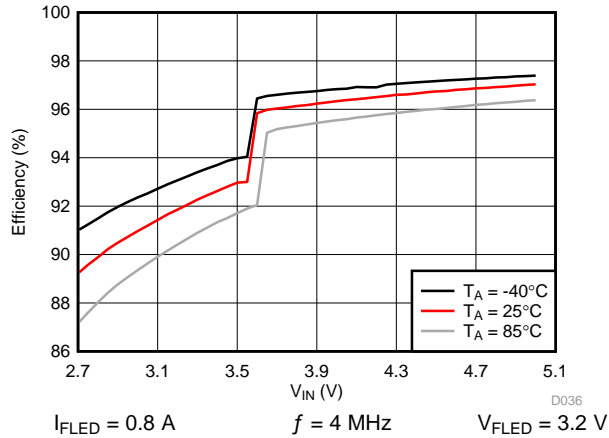


Figure 107. Flash Boost Efficiency

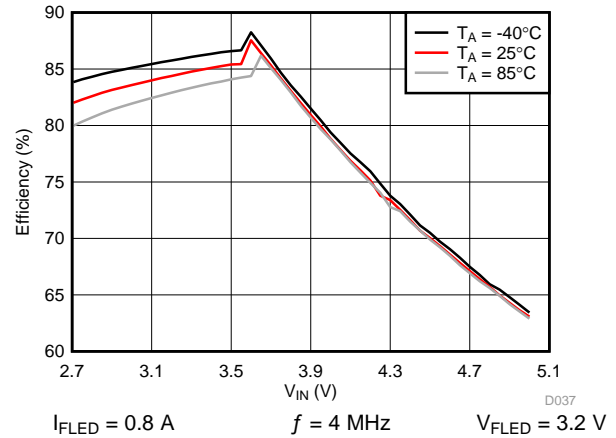


Figure 108. Flash System Efficiency

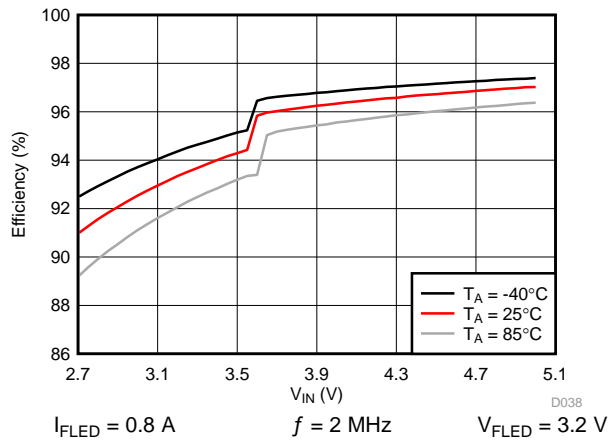


Figure 109. Flash Boost Efficiency

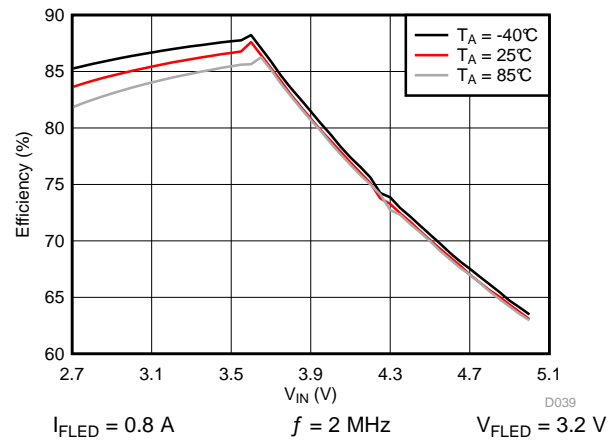


Figure 110. Flash System Efficiency

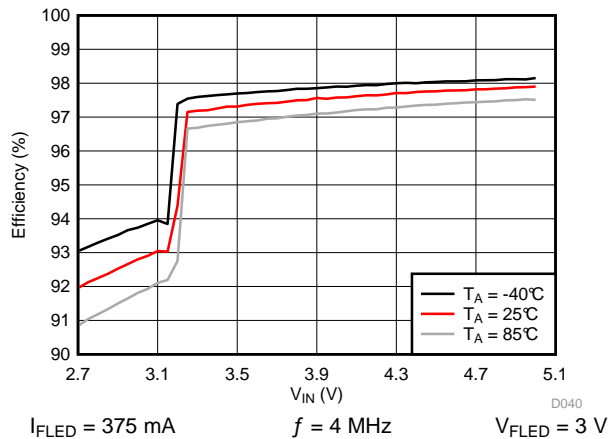


Figure 111. Torch Boost Efficiency

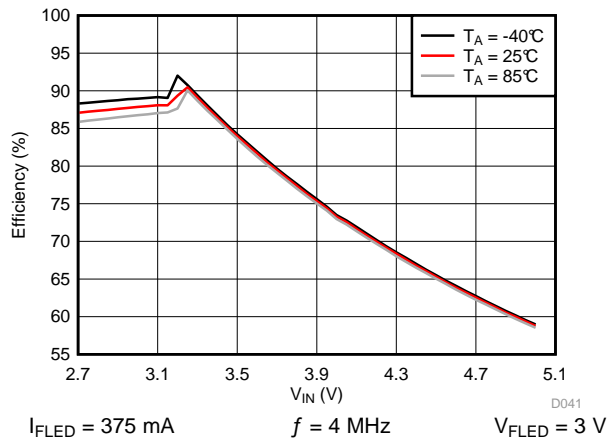


Figure 112. Torch System Efficiency

Ambient temperature is 25°C and  $V_{IN}$  is 3.7 V unless otherwise noted. Flash System Efficiency defined as PLED / PIN, where PLED is actual power consumed in flash LED.

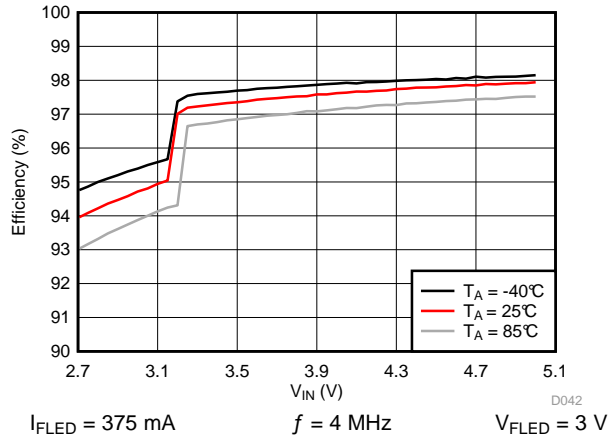


Figure 113. Torch Boost Efficiency

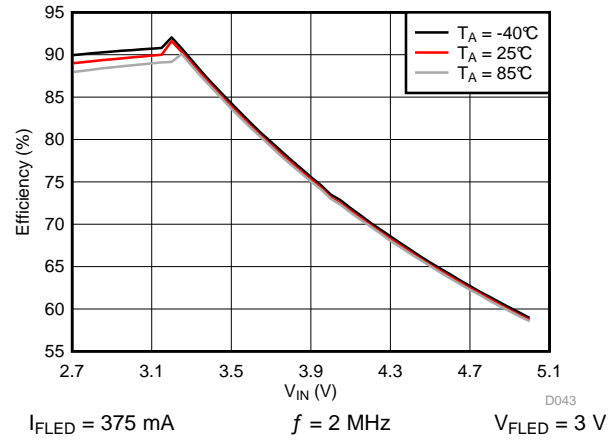


Figure 114. Torch System Efficiency

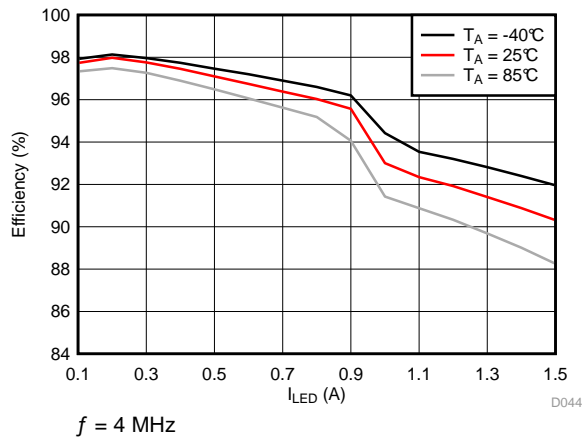


Figure 115. Flash Boost Efficiency

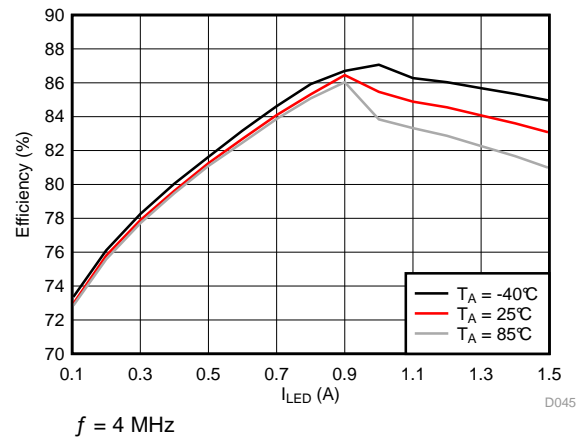


Figure 116. Flash System Efficiency

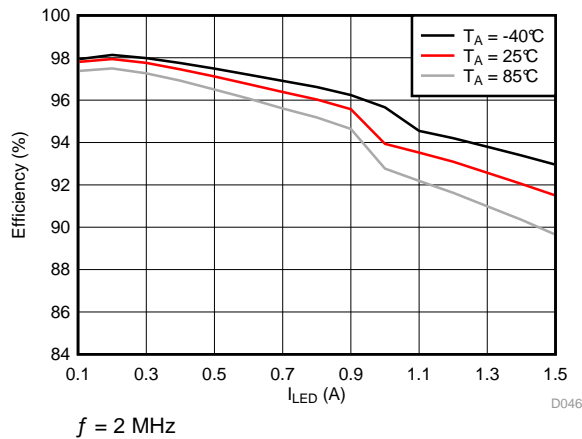


Figure 117. Flash Boost Efficiency

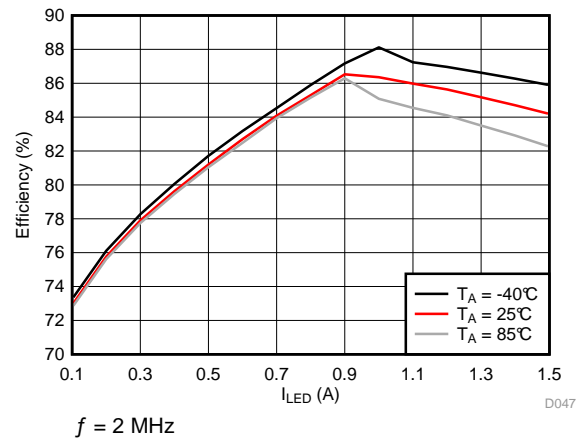


Figure 118. Flash System Efficiency

## 9 Power Supply Recommendations


The LM3632A is designed to operate from an input voltage supply range between 2.7 V and 5 V. This input supply must be well regulated and capable to supply the required input current. If the input supply is located far from the LM3632A additional bulk capacitance may be required in addition to the ceramic bypass capacitors.

## 10 Layout

### 10.1 Layout Guidelines

- Place the boost converters output capacitors as close to the output voltage and GND pins as possible.
- Minimize the boost converter switching loops by placing the input capacitors and inductors close to GND and switch pins.
- If possible, route the switching loops on top layer only. For best efficiency, try to minimize copper on the switch node to minimize switch pin parasitic capacitance while preserving adequate routing width.
- VIN input voltage pin needs to be bypassed to ground with a low-ESR bypass capacitor. Place the capacitor as close to VIN pin as possible.
- Place the output capacitor of the LDO as close to the output pins as possible. Also place the charge pump flying capacitor and output capacitor close to their respective pins.
- Terminate the Flash LED cathode directly to the Flash GND pin of the LM3632A. If possible, route the LED return with a dedicated path so as to keep the high amplitude LED current out of the GND plane.
- Route the internal pins on the second layer. Use offset micro vias to go from top layer to mid-layer1. Avoid routing the signal traces directly under the switching loops of the boost converters.

## 10.2 Layout Example

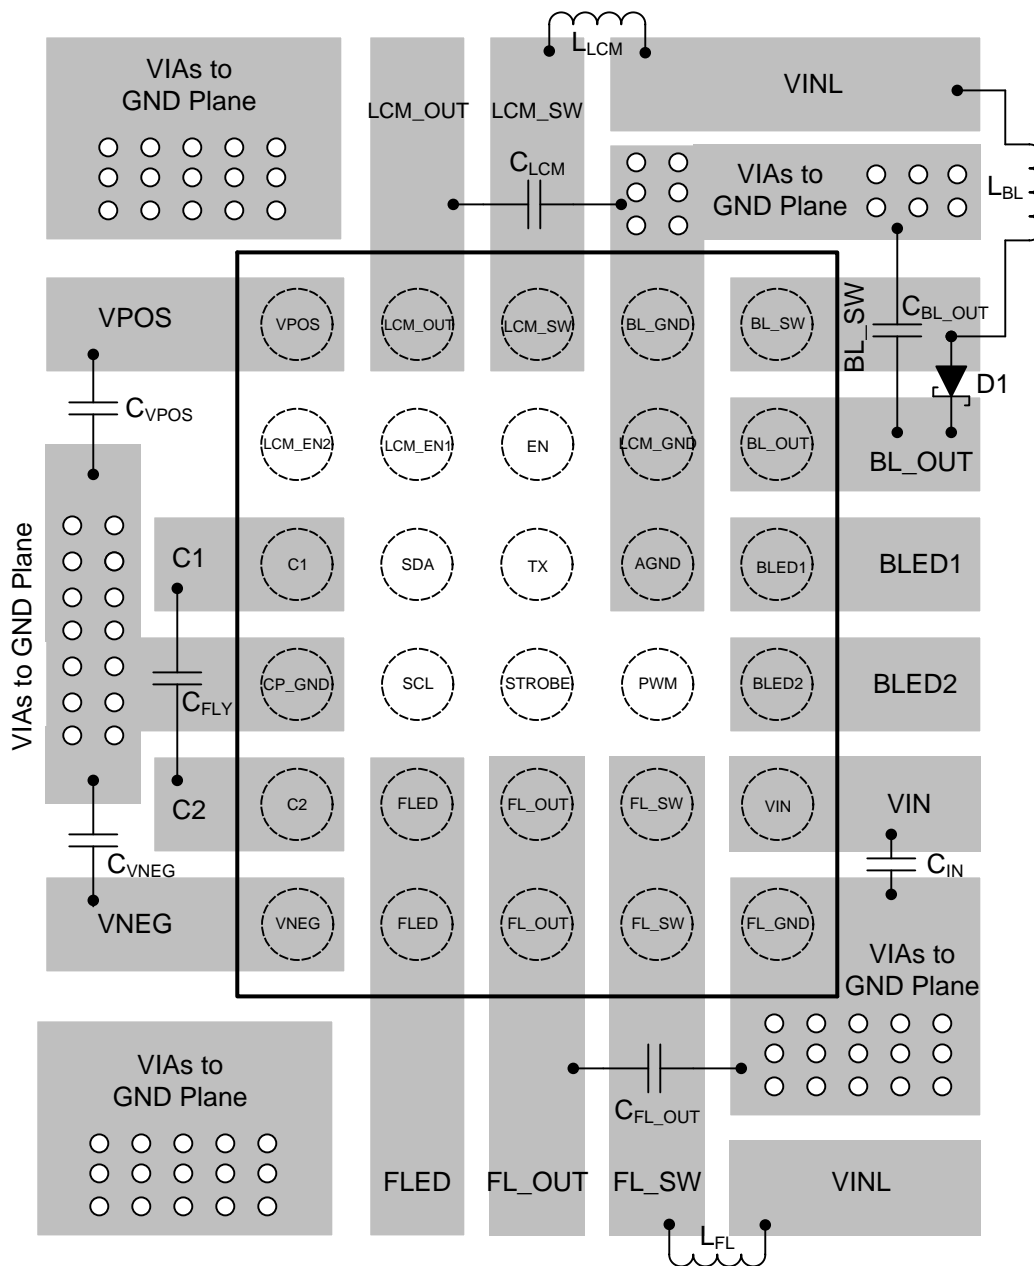

## 11 器件和文档支持

### 11.1 器件支持

#### 11.1.1 第三方产品免责声明

TI 发布的与第三方产品或服务有关的信息，不能构成与此类产品或服务或保修的适用性有关的认可，不能构成此类产品或服务单独或与任何 TI 产品或服务一起的表示或认可。

### 11.2 文档支持

#### 11.2.1 相关文档

相关文档如下：

德州仪器 (TI) 应用手册 AN1112: 《DSBGA 晶圆级芯片规模封装》(文献编号: SNVA009)。

《了解开关模式电源中的升压功率级》，

<http://focus.ti.com/lit/an/slva061/slva061.pdf>。

《Power Stage Designer™ 工具》，<http://www.ti.com.cn/tool/cn/powerstage-designer>。

### 11.3 商标

All trademarks are the property of their respective owners.

### 11.4 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 11.5 术语表

**SLYZ022** — TI 术语表。

这份术语表列出并解释术语、首字母缩略词和定义。

## 12 机械、封装和可订购信息

以下页中包括机械、封装和可订购信息。 这些信息是针对指定器件可提供的最新数据。 这些数据会在无通知且不对本文档进行修订的情况下发生改变。 欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

## 重要声明

德州仪器(TI)及其下属子公司有权根据 JESD46 最新标准,对所提供的产品和服务进行更正、修改、增强、改进或其它更改,并有权根据 JESD48 最新标准中止提供任何产品和服务。客户在下订单前应获取最新的相关信息,并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的组件的性能符合产品销售时 TI 半导体产品销售条件与条款的适用规范。仅在 TI 保证的范围内,且 TI 认为有必要时才会使用测试或其它质量控制技术。除非适用法律做出了硬性规定,否则没有必要对每种组件的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险,客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 组件或服务的组合设备、机器或流程相关的 TI 知识产权中授予的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息,不能构成从 TI 获得使用这些产品或服务的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可,或是 TI 的专利权或其它知识产权方面的许可。

对于 TI 的产品手册或数据表中 TI 信息的重要部分,仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况下才允许进行复制。TI 对此类篡改过的文件不承担任何责任或义务。复制第三方的信息可能需要服从额外的限制条件。

在转售 TI 组件或服务时,如果对该组件或服务参数的陈述与 TI 标明的参数相比存在差异或虚假成分,则会失去相关 TI 组件或服务的所有明示或暗示授权,且这是不正当的、欺诈性商业行为。TI 对任何此类虚假陈述均不承担任何责任或义务。

客户认可并同意,尽管任何应用相关信息或支持仍可能由 TI 提供,但他们将独立负责满足与其产品及其在应用中使用的 TI 产品相关的所有法律、法规和安全相关要求。客户声明并同意,他们具备制定与实施安全措施所需的全部专业技术和知识,可预见故障的危险后果、监测故障及其后果、降低有可能造成人身伤害的故障的发生机率并采取适当的补救措施。客户将全额赔偿因在此类安全关键应用中使用任何 TI 组件而对 TI 及其代理造成的任何损失。

在某些场合中,为了推进安全相关应用有可能对 TI 组件进行特别的促销。TI 的目标是利用此类组件帮助客户设计和创立其特有的可满足适用的功能安全性标准和要求的终端产品解决方案。尽管如此,此类组件仍然服从这些条款。

TI 组件未获得用于 FDA Class III (或类似的生命攸关医疗设备)的授权许可,除非各方授权官员已经达成了专门管控此类使用的特别协议。

只有那些 TI 特别注明属于军用等级或“增强型塑料”的 TI 组件才是设计或专门用于军事/航空应用或环境的。购买者认可并同意,对并非指定面向军事或航空航天用途的 TI 组件进行军事或航空航天方面的应用,其风险由客户单独承担,并且由客户独立负责满足与此类使用相关的所有法律和法规要求。

TI 已明确指定符合 ISO/TS16949 要求的产品,这些产品主要用于汽车。在任何情况下,因使用非指定产品而无法达到 ISO/TS16949 要求, TI 不承担任何责任。

	产品		应用
数字音频	<a href="http://www.ti.com.cn/audio">www.ti.com.cn/audio</a>	通信与电信	<a href="http://www.ti.com.cn/telecom">www.ti.com.cn/telecom</a>
放大器和线性器件	<a href="http://www.ti.com.cn/amplifiers">www.ti.com.cn/amplifiers</a>	计算机及周边	<a href="http://www.ti.com.cn/computer">www.ti.com.cn/computer</a>
数据转换器	<a href="http://www.ti.com.cn/dataconverters">www.ti.com.cn/dataconverters</a>	消费电子	<a href="http://www.ti.com.cn/consumer-apps">www.ti.com.cn/consumer-apps</a>
DLP® 产品	<a href="http://www.dlp.com">www.dlp.com</a>	能源	<a href="http://www.ti.com.cn/energy">www.ti.com.cn/energy</a>
DSP - 数字信号处理器	<a href="http://www.ti.com.cn/dsp">www.ti.com.cn/dsp</a>	工业应用	<a href="http://www.ti.com.cn/industrial">www.ti.com.cn/industrial</a>
时钟和计时器	<a href="http://www.ti.com.cn/clockandtimers">www.ti.com.cn/clockandtimers</a>	医疗电子	<a href="http://www.ti.com.cn/medical">www.ti.com.cn/medical</a>
接口	<a href="http://www.ti.com.cn/interface">www.ti.com.cn/interface</a>	安防应用	<a href="http://www.ti.com.cn/security">www.ti.com.cn/security</a>
逻辑	<a href="http://www.ti.com.cn/logic">www.ti.com.cn/logic</a>	汽车电子	<a href="http://www.ti.com.cn/automotive">www.ti.com.cn/automotive</a>
电源管理	<a href="http://www.ti.com.cn/power">www.ti.com.cn/power</a>	视频和影像	<a href="http://www.ti.com.cn/video">www.ti.com.cn/video</a>
微控制器 (MCU)	<a href="http://www.ti.com.cn/microcontrollers">www.ti.com.cn/microcontrollers</a>		
RFID 系统	<a href="http://www.ti.com.cn/rfidsys">www.ti.com.cn/rfidsys</a>		
OMAP应用处理器	<a href="http://www.ti.com/omap">www.ti.com/omap</a>		
无线连通性	<a href="http://www.ti.com.cn/wirelessconnectivity">www.ti.com.cn/wirelessconnectivity</a>	德州仪器在线技术支持社区	<a href="http://www.deyisupport.com">www.deyisupport.com</a>

邮寄地址: 上海市浦东新区世纪大道1568号, 中建大厦32楼邮政编码: 200122  
Copyright © 2015, 德州仪器半导体技术(上海)有限公司



**PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
LM3632AYFFR	ACTIVE	DSBGA	YFF	30	3000	RoHS & Green	SNAGCU	Level-1-260C-UNLIM	-40 to 85	3632A	Samples

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSELETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.




# EXAMPLE BOARD LAYOUT


YFF0030

DSBGA - 0.625 mm max height

DIE SIZE BALL GRID ARRAY

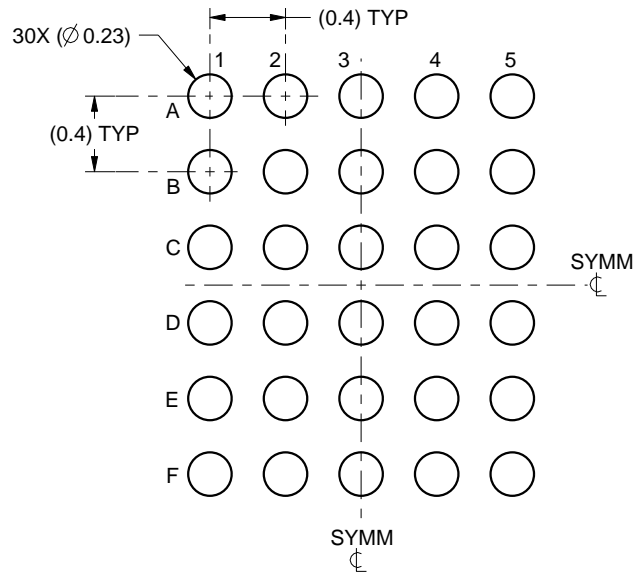

LAND PATTERN EXAMPLE  
SCALE:25X

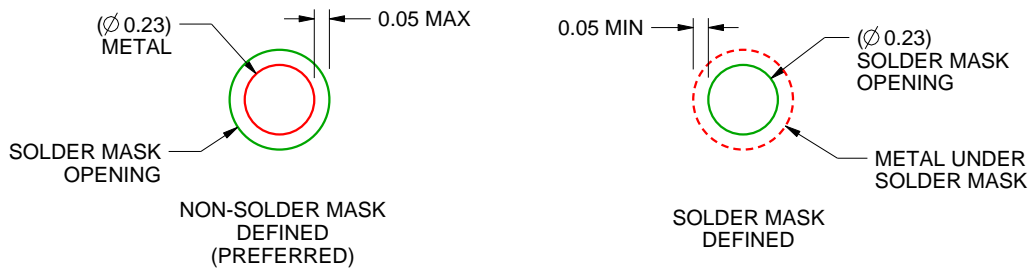

SOLDER MASK DETAILS  
NOT TO SCALE

4219433/A 03/2016

NOTES: (continued)


- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SNVA009 ([www.ti.com/lit/snva009](http://www.ti.com/lit/snva009)).

# EXAMPLE STENCIL DESIGN

YFF0030

DSBGA - 0.625 mm max height

DIE SIZE BALL GRID ARRAY

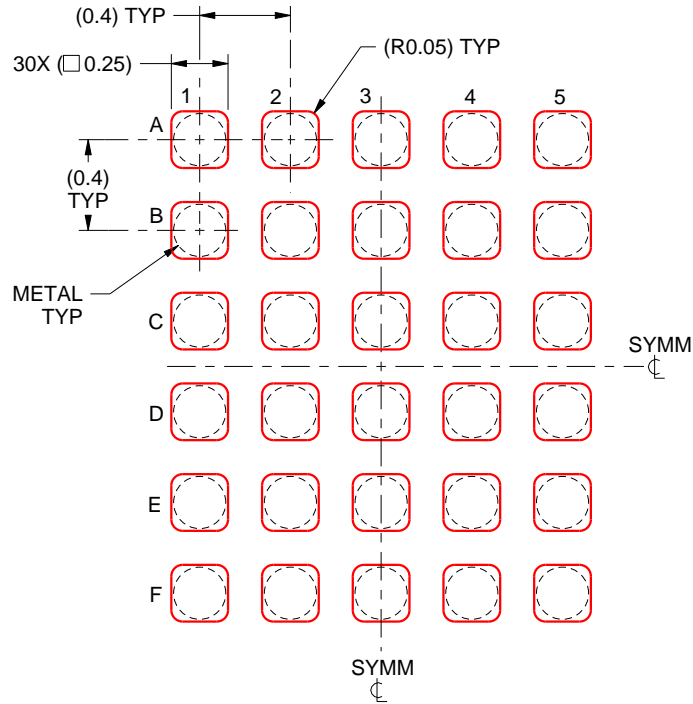

SOLDER PASTE EXAMPLE  
BASED ON 0.1 mm THICK STENCIL  
SCALE:30X

4219433/A 03/2016

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

## 重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122  
Copyright © 2020 德州仪器半导体技术（上海）有限公司