



CERAMIC

# High Pass Filter

## HFCW-133+

Mini-Circuits

50Ω 14200 to 20500 MHz

### THE BIG DEAL

- Good rejection, 38 dB typ.
- Tiny size, 0603 (0.063" X 0.032" X 0.024")
- Good power handling, 2.5W



Generic photo used for illustration purposes only

CASE STYLE: JC0603C

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### APPLICATIONS

- Test and Measurement Equipment
- EW, Radar and ECM Defense Systems
- Back Haul Radio Systems

### PRODUCT OVERVIEW

HFCW-133+ is a high pass filter with passband from 14200 MHz to 20500 MHz supporting a variety of applications. This model provides good insertion loss over a wide band due to strategically constructed layout. Housed in a tiny 0603 ceramic form factor with wraparound terminations, the filter is ideal for dense PCB layouts.

### KEY FEATURES

Feature	Advantages
Wide passband	This filter has a very wide passband from 14.2 GHz to 20.5 GHz.
LTCC Construction	Provides repeatable performance in a rugged, ceramic package well suited for tough environments such as high humidity and temperature extremes.
Small size, 0603 (0.063" X 0.032" X 0.024")	Saves space in dense circuit board layouts and minimizes the effects of parasitics.
Wrap-around terminations	Provides excellent solderability and easy visual inspection.

REV. A  
ECO-015160  
HFCW-133+  
EDU4313  
URJ  
220924





CERAMIC

# High Pass Filter

## HFCW-133+

### ELECTRICAL SPECIFICATIONS<sup>1,2</sup> AT 25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Stopband	Rejection Loss	DC-F1	DC - 8500	28	34	—	dB
		F1-F2	8500 - 10200	24	38	—	dB
	Freq. Cut-Off	F3*	13300	—	3	—	dB
Passband	Insertion Loss	F4-F5	14200 - 16500	—	2.5	—	dB
		F5-F6	16500 - 19500	—	1.1	1.9	dB
		F6-F7	19500 - 20500	—	1.2	—	dB
	Return Loss	F4-F5	14200 - 16500	—	8	—	dB
		F5-F6	16500 - 19500	—	10	—	dB
		F6-F7	19500 - 20500	—	8	—	dB

1 This component should not be employed as a DC-block. DC de-coupling capacitors are required in Applications where DC voltage and/or current is present at either input or output ports. Please contact Mini-Circuits for further support.

2 Measured on Mini-Circuits Characterization Test Board TB-HFCW-133+


\* Typically, a ±5% frequency deviation from the stated value may occur on a unit-to-unit basis.

### MAXIMUM RATINGS


Parameter	Ratings
Operating temperature	-55°C to 125°C
Storage temperature	-55°C to 125°C
RF Power Input*	2.5W @25°C

\*Passband rating, derate linearly to 0.6W at 125°C ambient  
Permanent damage may occur if any of these limits are exceeded.

### TYPICAL FREQUENCY RESPONSE

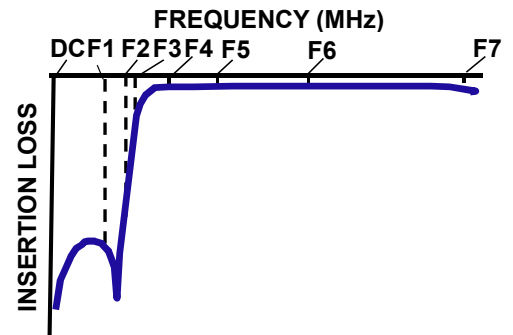

### FUNCTIONAL SCHEMATIC

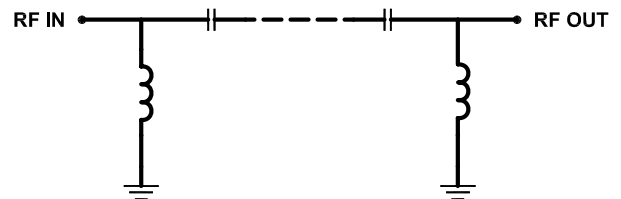



CERAMIC

# High Pass Filter


## HFCW-133+

### PAD CONNECTIONS



INPUT	1
OUTPUT	3
GROUND	2,4,5,6

PRODUCT MARKING: 8

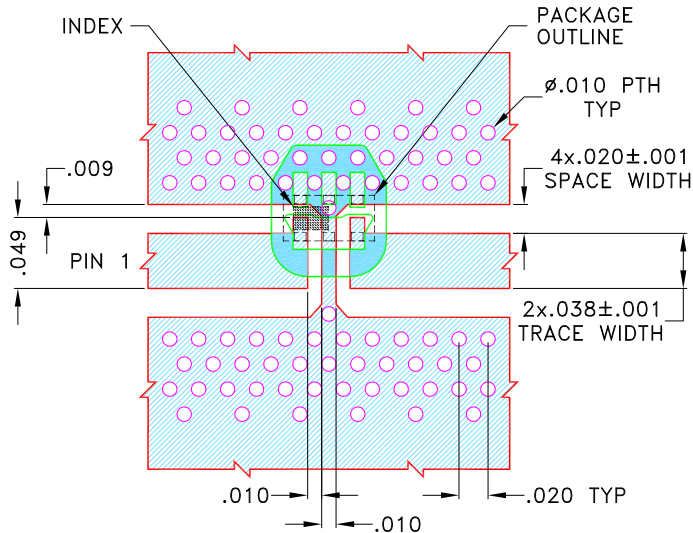
DEMO BOARD MCL P/N: TB-HFCW-133+  
SUGGESTED PCB LAYOUT (PL-704)



#### NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS (R03003) WITH DIELECTRIC THICKNESS  $.020 \pm .001$  COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK

### OUTLINE DRAWING

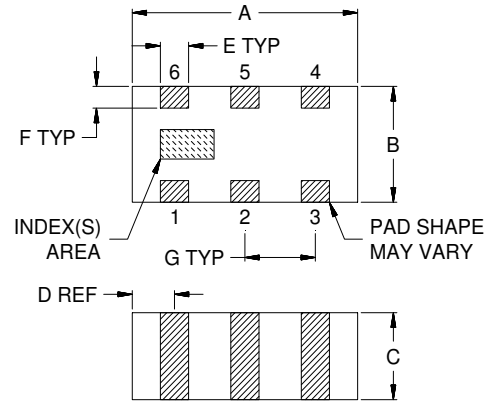

### OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F	G	Wt.
.063	.032	.024	.012	.008	.006	.020	grams
1.60	0.80	0.60	0.30	0.20	0.15	0.50	.005

Note: Please refer to case style drawing for details






CERAMIC

# High Pass Filter

## HFCW-133+

### TYPICAL PERFORMANCE DATA AT 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
10	73.18	0.08
100	62.35	0.10
2000	39.39	0.13
8500	41.95	0.13
10200	39.81	0.28
11000	30.36	0.44
11900	20.18	0.86
13250	3.05	13.20
13300	2.78	15.80
14200	1.75	11.01
15500	1.19	14.15
16500	0.97	16.87
18000	0.78	15.91
19500	0.75	14.87
20500	0.76	13.18

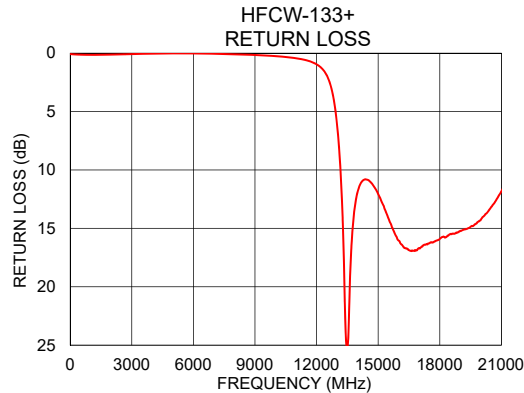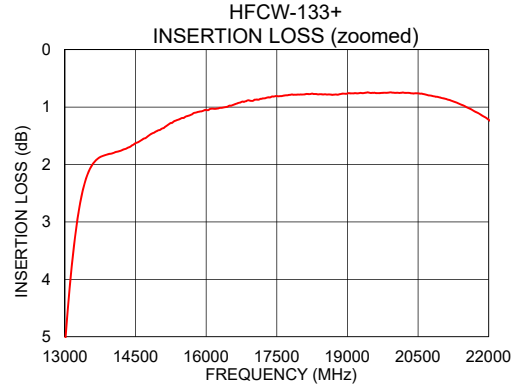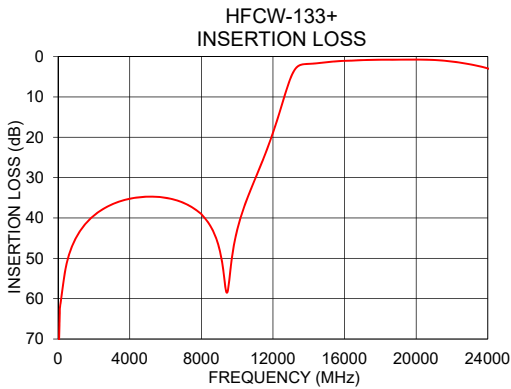

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[HFCW-133+](#)