

30V/0.8A High Brightness Step-Down LED Driver

Description

The NDP3310SD is a high-efficiency step-down LED driver controller with a wide input voltage range of 6V to 30V.

The NDP3310SD employs a continuous conduction mode architecture that accurately regulates LED current with a feedback coming from an external current-sense resistor. This control scheme optimizes circuit stabilization and fast response time without loop compensation. Its low 100mV average feedback voltage reduces power loss and improves the converter's efficiency.

The NDP3310SD implements PWM and analog dimming together through the DIM pin.

The NDP3310SD also includes thermal regulation protection in case of output overload.


Features

- Wide 6V to 30V Input Range
- Able to Drive $\leq 0.8A$ LED Load
- $\pm 3\%$ output current accuracy
- Up to 1MHz switching frequency
- High Efficiency
- Analog and PWM Dimming
- Open LED Protection
- No need compensation
- Thermal Regulation
- RoHS and Halogen free compliance.
- Available in SOT23-5 Package

Applications

- Low Voltage Halogen Replacement
- DC/DC or AC/DC LED Driver Application
- Automotive/Decorative LED Lighting
- Emergency Lighting
- LED Backlighting

Typical Application

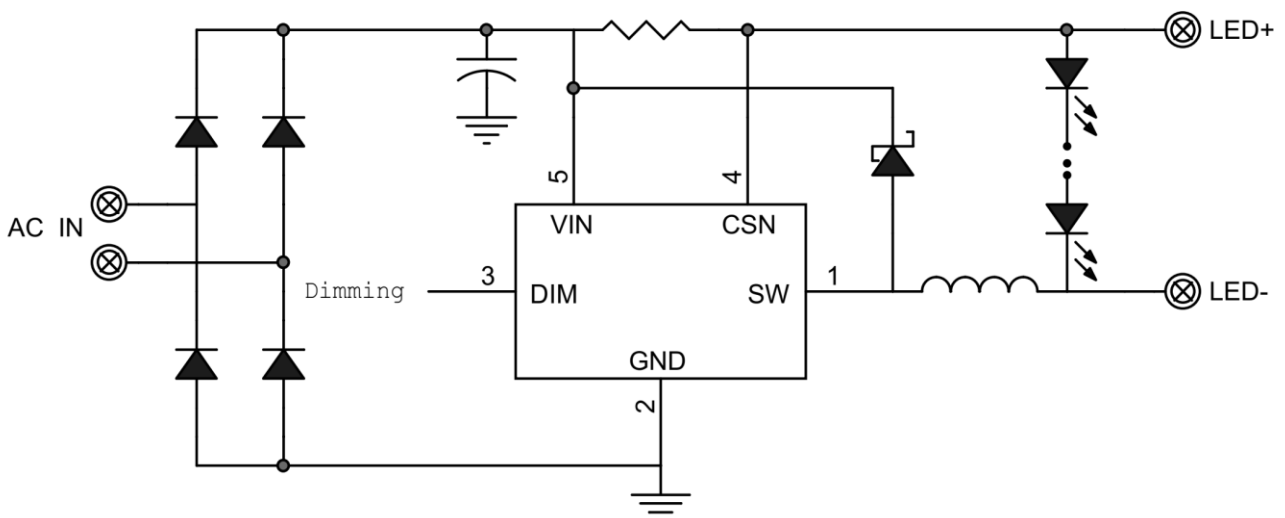


Absolute Maximum Ratings (at TA = 25°C)

Characteristics	Symbol	Rating	Unit
VIN,CSN to GND		-0.3 to 36	V
SW to GND		-0.3 to 36	V
DIM to GND		-0.3 to +6.5	V
Junction to Ambient Thermal Resistance	$R_{\theta JA}$	45	°C/W
Operation Junction temperature range	T_J	-40~150	°C
Storage Temperature	T_{STG}	-55~150	°C

Pin Function And Descriptions

PIN	Name	Description
1	SW	Drain of the internal NMOS
2	GND	Ground
3	DIM	PWM/Analog Diming Input. Internal week pull up. Drive DIM low to turn off the output
4	CSN	Connect sensor input reference to VIN for measure output current.
5	VIN	Power input



Order information


Order Information	Top Marking
<p>NDP3310 S D</p> <p>Pin NO. D:5</p> <p>Package S: SOT</p> <p>Product Number</p>	<div style="border: 1px solid black; padding: 10px; text-align: center;"> <p>NDP3310SD XYWWX</p> <p>●</p> </div> <p>YY : Year (22=2022,23=2023,...) WW: Weekly (01-53) X : Internal ID</p>

Electrical Characteristics





T_J = 25°C. V_{IN} = 12V, unless otherwise noted

Characteristics	Symbol	Conditions	Min	Typ	Max	Units
Input voltage	V _{IN}		6		30	V
VCC UVLO threshold	V _{UVLOTH}	VCC Rising		5.5		V
VCC UVLO hysteresis	V _{UVLOHYS}			0.5		V
Quiescent supply current	I _Q	No Switching		210		uA
Current Sense voltage	V _{CS}			100		mV
Current Sense threshold	V _{CS_HY}			15		%
CSN input Current	I _{CSN}			3		uA
DIM floating voltage	V _{DIM_F}			3.9		V
DIM input leakage current	I _{DIM_PU}	IDIM=5V		27		uA
DIM pull up current	I _{DIM_PU}	IDIM=0V		-25		uA
DIM input High	V _{DIM_H}		2.7			V
DIM input Low	V _{DIM_L}				0.3	V
DIM voltage range	V _{DIM}	V _{DIM} Rising	0.5		2.5	V
Min recommended pwm dimming frequency	F _{PWMmin}			0.1		kHz
Max recommended pwm dimming frequency	F _{PWMmax}			20		kHz
Maximum switch frequency	F _{MAX}			1		MHz
MOSFET ON resistance	R _{DSON}			390		mΩ
Thermal Regulate	T _{REG}	Temp Rising		105		°C
Thermal Shutdown	T _{SH}		-	160	-	°C


Block Diagram

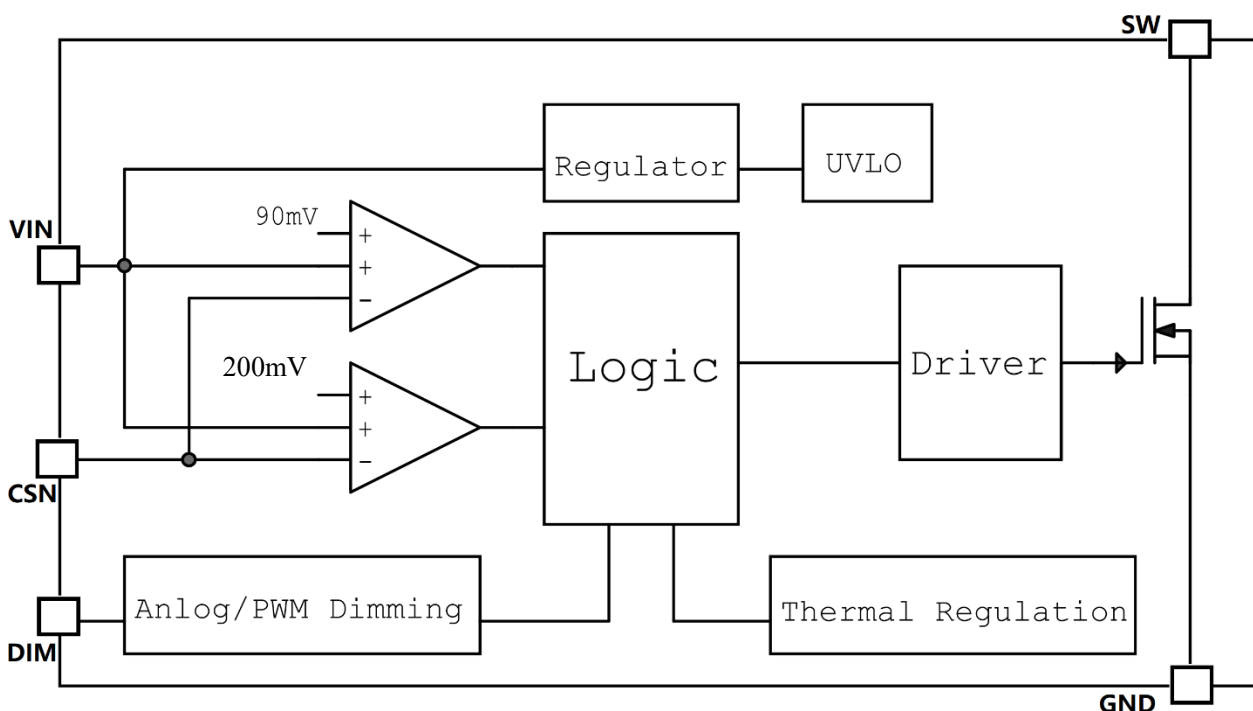


Typical Performance Characteristics (T_J= 25°C,unless otherwise noted)

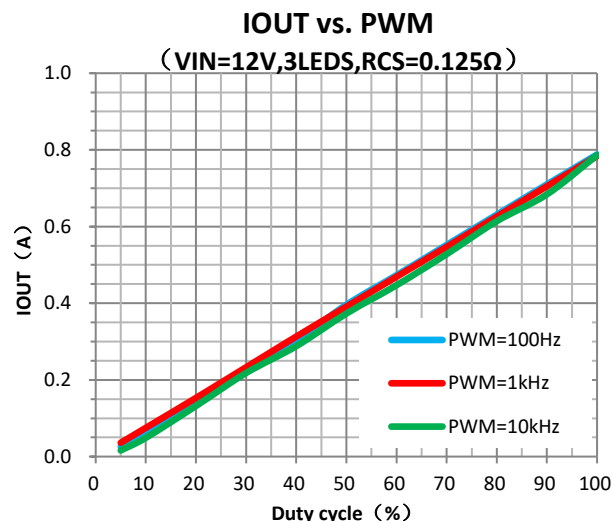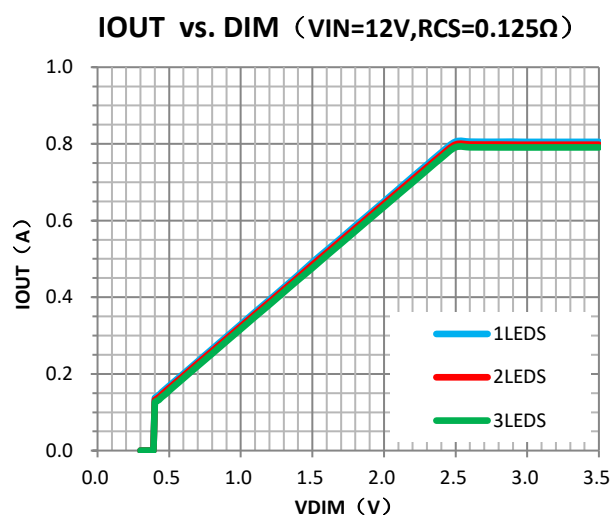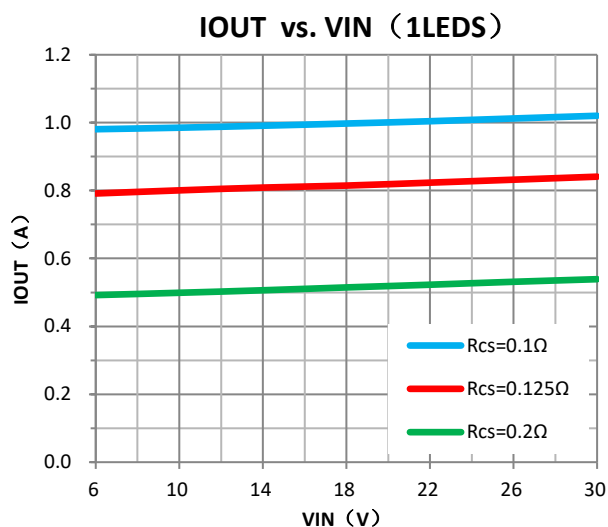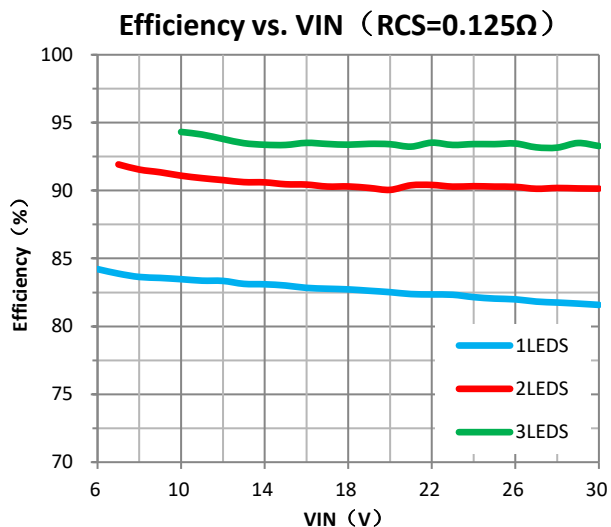

(CH1=Vin, CH2=SW, CH3=Vdim, CH4=Isw)

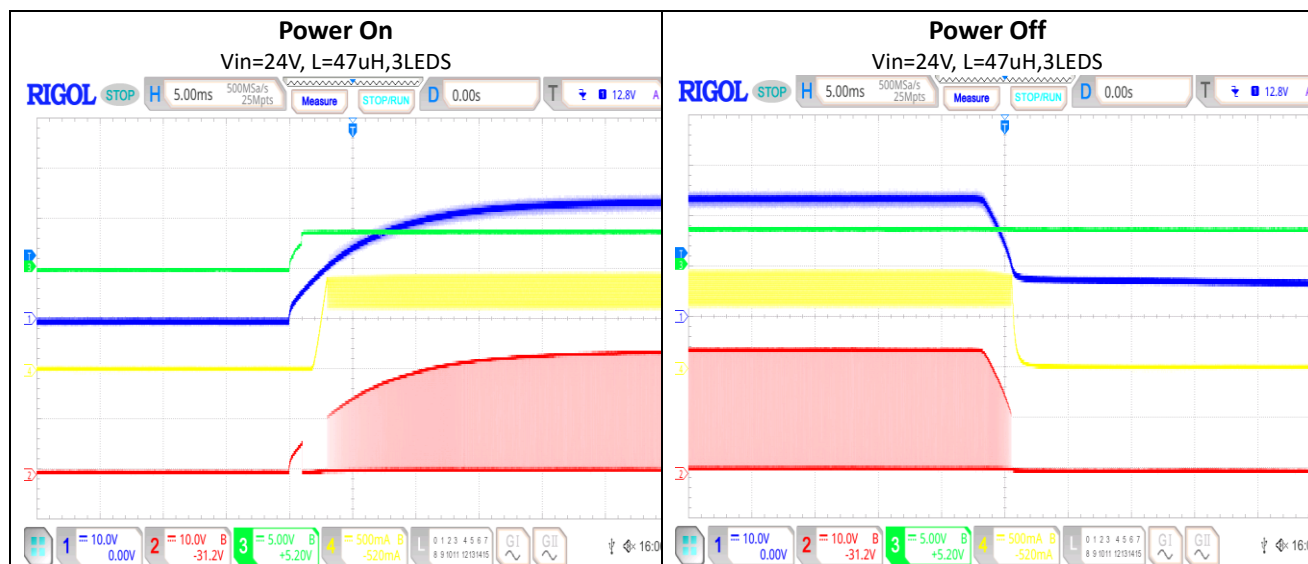

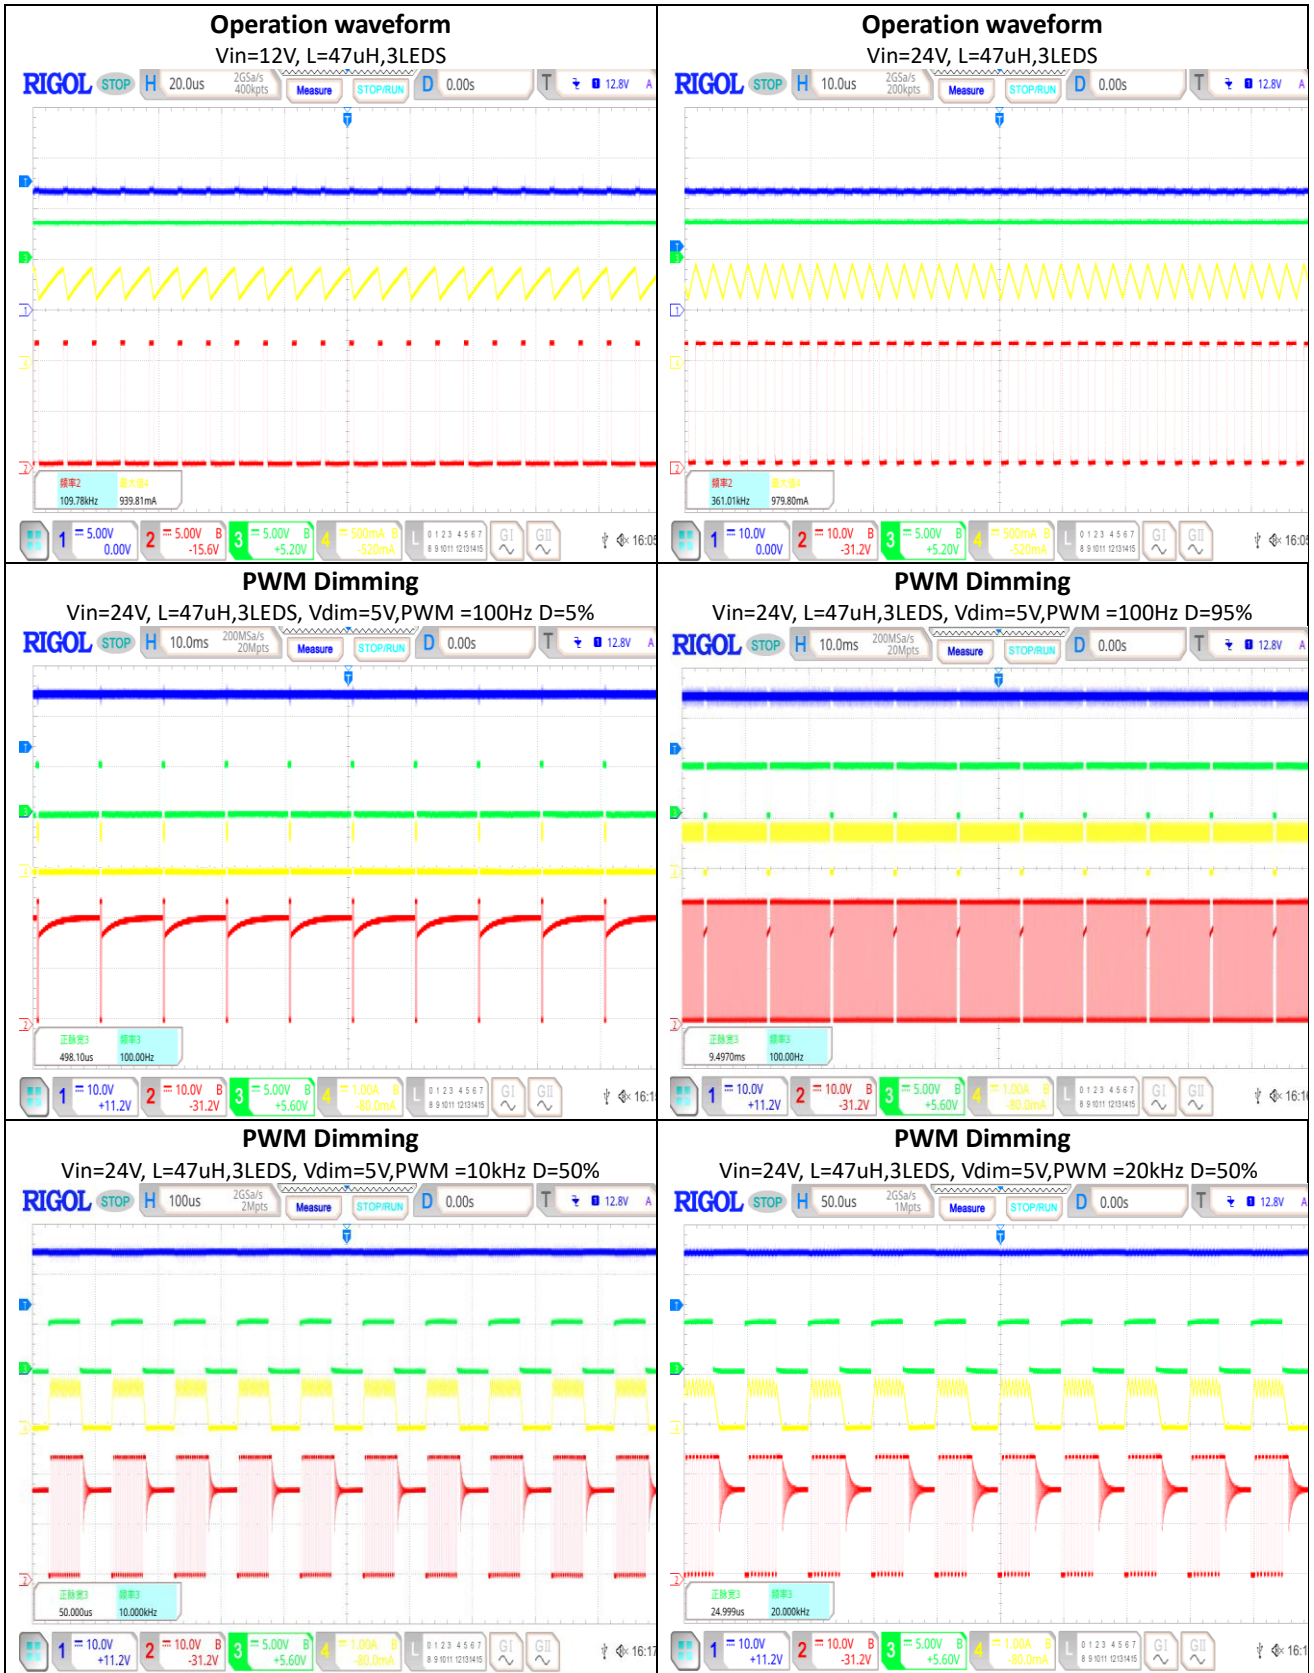

Operation

Steady State

The NDP3310SD is a step-down LED-current convertor that is easily configured for a wide input that ranges from 6V to 30V input. The NDP3310SD uses a High-side current-sense resistor to detect and regulate LED current. The average voltage across the current-sense resistor is measured and regulated in the 100mV range.

The internal 1.2V reference voltage provides a 0.5V reference to enable the part. When DIM>0.5V, the output of the comparator goes high and enables the other blocks. While the internal DIM pin weak pull up to 3.9V.

Dimming Control

The NDP3310SD allows the DIM pin to control both Analog and PWM dimming. Whenever the voltage on DIM is less than 0.3V, the chip turns off. For analog dimming the LED current will change from 0% to 100% of the maximum LED current according to the DIM voltage of 0.5V to 2.5V. If the voltage on DIM pin is higher than 2.5V, output LED current will equal the maximum LED current. For PWM dimming, the signal amplitude must exceed 2.5V. Choose a PWM frequency in range of 100Hz to 20kHz for good dimming linearity.

Applications Information

Setting the LED Current

The LED current is identical and set by the

current sense resistor CS and GND.

$$R_{SENSE}=100\text{mV}/I_{LED}$$

For $R_{SENSE}=0.125\Omega$, the LED current is set to 0.8A. Selecting the Inductor Lower value of inductance can result in a higher switching frequency, which causes a larger switching loss. Choose a switch frequency between 100kHz to 500kHz for most application. According to switching frequency, inductor value can be estimated as:

$$L = \frac{\left(1 - \frac{V_{OUT}}{V_{IN}}\right) \times V_{OUT}}{0.3 \times I_{LED} \times f_{SW}}$$

For higher efficiency, choose an inductor with a DC resistance as small as possible.


Selecting the Input Capacitor

The input capacitor reduces the surge current drawn from the input supply and the switching noise from the device. Choose a capacitor value of 100 μ F for most applications. The voltage rating should be greater than the input voltage. Use a low ESR capacitor for input decoupling.

Layout Consideration


Pay careful attention to the PCB layout and component placement. R_{SENSE} should be placed close to the CS pin and GND pin in order to minimize current sense error. The input loop—including input capacitor, Schottky diode, and MOSFET—should be as short as possible.

Typical Applications

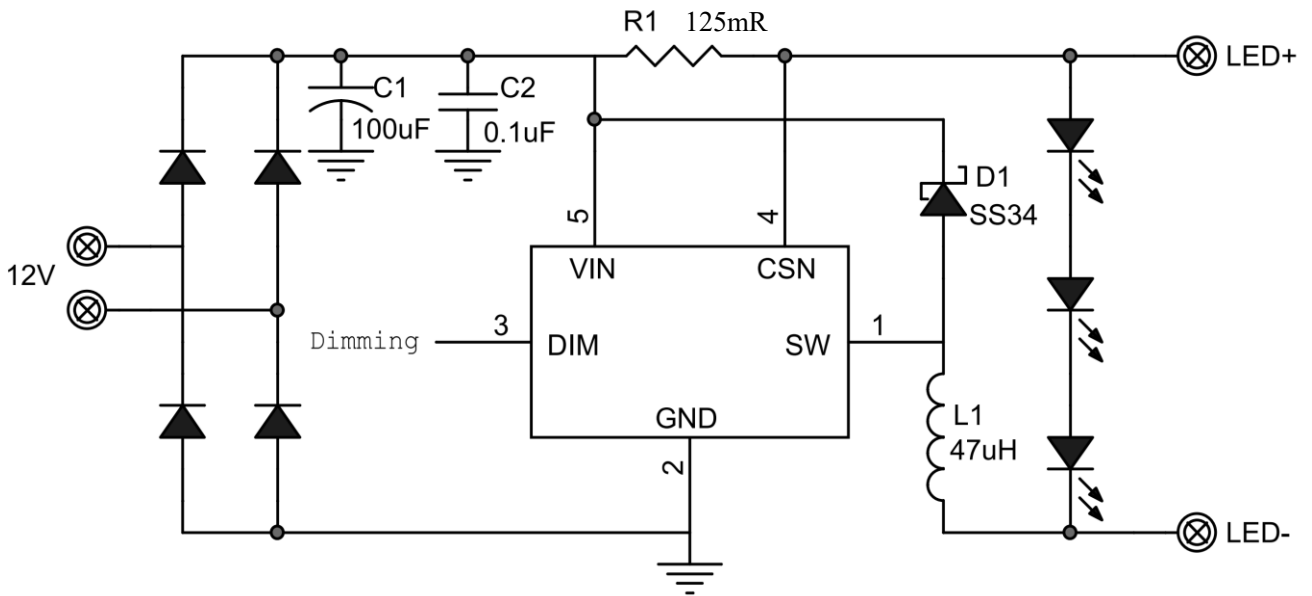

Package Description

Standard Small Outline Package [SOT23-5]

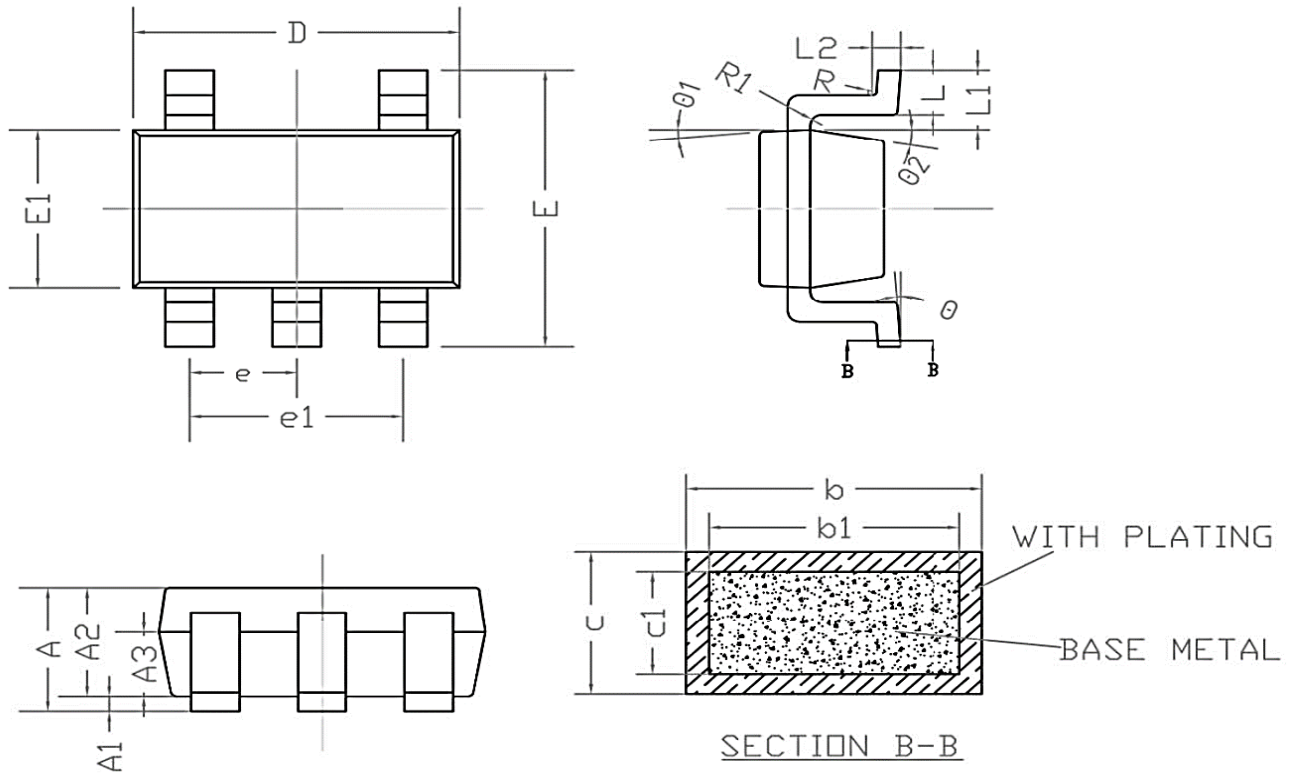

SYMBOL	MILLIMETER		
	MIN	NOR	MAX
A	-	-	1.25
A1	0.04	-	0.15
A2	1.00	1.05	1.10
b	0.36	0.4	0.5
c	0.1	0.15	0.2
c1	0.1	0.15	0.2
D	2.72	2.92	3.12
E	2.60	2.80	3.0
E1	1.40	1.60	1.80
e	0.9	0.95	1.0
e1	1.8	1.9	2.0
L	0.35	0.45	0.6
L1	0.59		
L2	0.25		
R	0.05	-	-
R1	0.05	-	0.2
θ	0	-	8°
θ1	3°	5°	7°
θ2	6°	10°	14°