

# TYPE SN54L99 4-BIT RIGHT-SHIFT LEFT-SHIFT REGISTERS

DECEMBER 1972—REVISED DECEMBER 1983

- N-Bit Serial-to-Parallel Converter
- N-Bit Parallel-to-Serial Converter
- N-Bit Storage Register
- J-K̄ Serial Input

### description


These 4-bit registers feature parallel inputs, parallel outputs, J-K̄ serial inputs, mode control, and two clock inputs. The registers have three modes of operation:

- Parallel (broadside) load
- Shift right (the direction Q<sub>A</sub> toward Q<sub>D</sub>)
- Shift left (the direction Q<sub>D</sub> toward Q<sub>A</sub>)

Parallel loading is accomplished by applying the four bits of data and taking the mode control input high. The data is loaded into the associated flip-flop and appears at the outputs after the high-to-low transition of the clock-2 input. During loading, the entry of serial data is inhibited.

Shift right is accomplished on a high-to-low transition of clock 1 when the mode control is low. Serial data for the right-shift mode is entered at the J-K̄ inputs. These inputs permit the first stage to perform as a J-K̄, a D-type, or T-type flip-flop as shown in the function table. Shift left is accomplished on the high-to-low transition of clock 2 when the mode control is high by connecting the output of each flip-flop to the parallel input of the previous flip-flop (Q<sub>D</sub> to input C, etc.). Serial data for this mode is entered at the D input. The clock input may be applied commonly to clock 1 and clock 2 if both modes can be clocked from the same source. Changes at the mode control input should normally be made while both clock inputs are low; however, conditions described in the last three lines of the function table will also ensure that register contents are protected.

SN54L99 ... J PACKAGE  
(TOP VIEW)



3

TTL DEVICES

FUNCTION TABLE

MODE CONTROL	INPUTS								OUTPUTS				
	CLOCKS		SERIAL		PARALLEL				Q <sub>A</sub>	Q <sub>B</sub>	Q <sub>C</sub>	Q <sub>D</sub>	Q̄ <sub>D</sub>
	2 (L)	1 (R)	J	K̄	A	B	C	D					
H	H	X	X	X	X	X	X	X	Q <sub>A0</sub>	Q <sub>B0</sub>	Q <sub>C0</sub>	Q <sub>D0</sub>	Q̄ <sub>D0</sub>
H	↓	X	X	X	a	b	c	d	Q <sub>Bn</sub>	Q <sub>Cn</sub>	Q <sub>Dn</sub>	d	ā
H	↓	X	X	X	Q <sub>B</sub> †	Q <sub>C</sub> †	Q <sub>D</sub> †	d	Q <sub>Bn</sub>	Q <sub>Cn</sub>	Q <sub>Dn</sub>	d	ā
L	L	H	X	X	X	X	X	X	Q <sub>A0</sub>	Q <sub>B0</sub>	Q <sub>C0</sub>	Q <sub>D0</sub>	Q̄ <sub>D0</sub>
L	X	↓	L	H	X	X	X	X	Q <sub>A0</sub>	Q <sub>A0</sub>	Q <sub>Bn</sub>	Q <sub>Cn</sub>	Q̄ <sub>Cn</sub>
L	X	↓	L	L	X	X	X	X	Q̄ <sub>A0</sub>	Q <sub>An</sub>	Q <sub>Bn</sub>	Q <sub>Cn</sub>	Q̄ <sub>Cn</sub>
L	X	↓	H	H	X	X	X	X	H	Q <sub>An</sub>	Q <sub>Bn</sub>	Q <sub>Cn</sub>	Q̄ <sub>Cn</sub>
L	X	↓	H	L	X	X	X	X	Q̄ <sub>An</sub>	Q <sub>An</sub>	Q <sub>Bn</sub>	Q <sub>Cn</sub>	Q̄ <sub>Cn</sub>
↑	L	L	X	X	X	X	X	X	Q <sub>A0</sub>	Q <sub>B0</sub>	Q <sub>C0</sub>	Q <sub>D0</sub>	Q̄ <sub>D0</sub>
↑	L	L	X	X	X	X	X	X	Q <sub>A0</sub>	Q <sub>B0</sub>	Q <sub>C0</sub>	Q <sub>D0</sub>	Q̄ <sub>D0</sub>
↑	L	H	X	X	X	X	X	X	Q <sub>A0</sub>	Q <sub>B0</sub>	Q <sub>C0</sub>	Q <sub>D0</sub>	Q̄ <sub>D0</sub>
↑	H	L	X	X	X	X	X	X	Q <sub>A0</sub>	Q <sub>B0</sub>	Q <sub>C0</sub>	Q <sub>D0</sub>	Q̄ <sub>D0</sub>
↑	H	H	X	X	X	X	X	X	Q <sub>A0</sub>	Q <sub>B0</sub>	Q <sub>C0</sub>	Q <sub>D0</sub>	Q̄ <sub>D0</sub>

† Shifting left requires external connection of Q<sub>B</sub> to A, Q<sub>C</sub> to B, and Q<sub>D</sub> to C. Serial data is entered at input D.

H = high level (steady state), L = low level (steady state)

X = irrelevant (any input, including transitions)

↓ = transition from high to low level, ↑ = transition from low to high level.

a, b, c, d = the level of steady state input at inputs A, B, C, or D, respectively.

Q<sub>A0</sub>, Q<sub>B0</sub>, Q<sub>C0</sub>, Q<sub>D0</sub> = the level of Q<sub>A</sub>, Q<sub>B</sub>, Q<sub>C</sub>, or Q<sub>D</sub>, respectively, before the indicated steady state input conditions were established.

Q<sub>An</sub>, Q<sub>Bn</sub>, Q<sub>Cn</sub>, Q<sub>Dn</sub> = the level of Q<sub>A</sub>, Q<sub>B</sub>, Q<sub>C</sub>, or Q<sub>D</sub>, respectively, before the most-recent ↓ transition of the clock.

### PRODUCTION DATA


This document contains information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**



POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

TYPE SN54L99  
4-BIT RIGHT-SHIFT LEFT-SHIFT REGISTERS

logic diagram

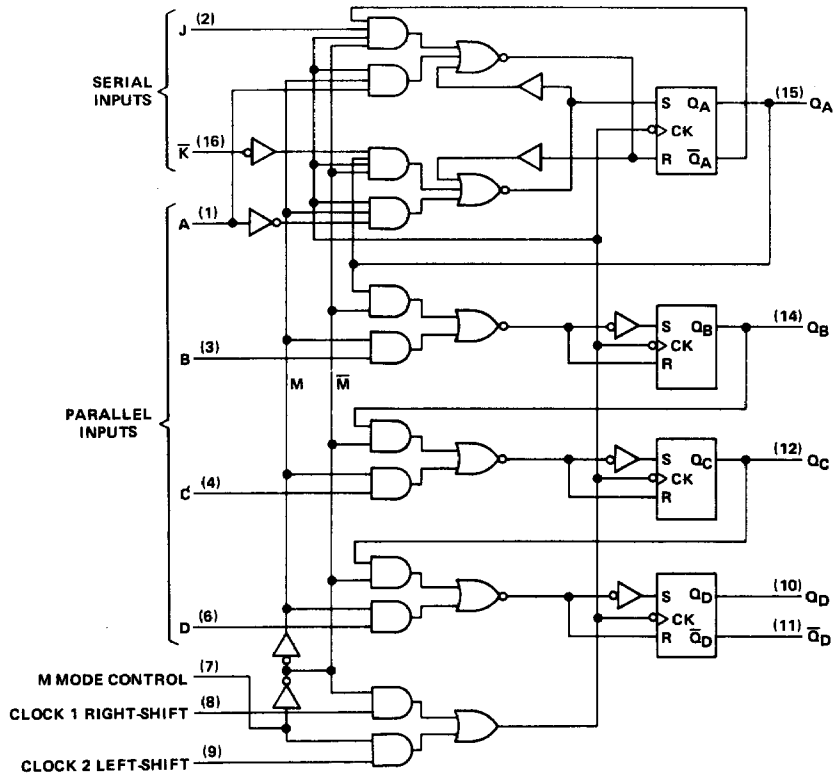

schematics of inputs and outputs

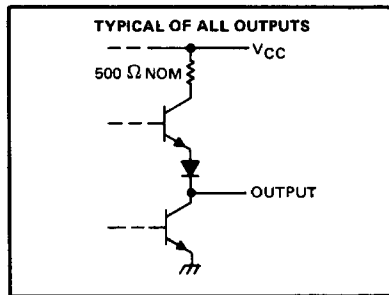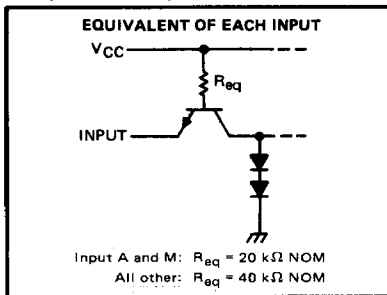

# TYPE SN54L99

## 4-BIT RIGHT-SHIFT LEFT-SHIFT REGISTERS

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, $V_{CC}$ (see Note 1)	8 V
Input voltage (see Note 2)	5.5 V
Operating free-air temperature range	-55°C to 125°C
Storage temperature range	-65°C to 150°C

- NOTES: 1. Voltage values are with respect to network ground terminal.  
2. Input voltages must be zero or positive with respect to network ground terminal.

### recommended operating conditions

	SN54L99	UNIT		
			MIN	NOM
$V_{CC}$ Supply voltage	4.5	5	5.5	V
$V_{IH}$ High-level input voltage	2			V
$V_{IL}$ Low-level input voltage			0.7	V
$I_{OH}$ High-level output current			-0.1	mA
$I_{OL}$ Low-level output current			2	mA
$t_w(\text{clock})$ Width of clock pulse	200			ns
$t_{su}(H)$ Setup time for high-level data at J, $\bar{K}$ , A, B, C, or D inputs	100			ns
$t_{su}(L)$ Setup time for low-level data at J, $\bar{K}$ , A, B, C, or D inputs	120			ns
$t_h$ Hold time at J, $\bar{K}$ , A, B, C, or D inputs	0			ns
$t_{enable 1}$ Time to enable clock 1 (See Figure 1)	225			ns
$t_{enable 2}$ Time to enable clock 2 (See Figure 1)	200			ns
$t_{inhibit 1}$ Time to inhibit clock 1 (See Figure 1)	100			ns
$t_{inhibit 2}$ Time to inhibit clock 2 (See Figure 1)	0			ns
$T_A$ Operating free-air temperature	-55		125	°C

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS †	SN54L99		UNIT
		MIN	TYP ‡	
$V_{OH}$	$V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = 0.7 \text{ V}, I_{OH} = -0.1 \text{ mA}$	2.4	3.3	V
$V_{OL}$	$V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = 0.7 \text{ V}, I_{OL} = 2 \text{ mA}$	0.15	0.3	V
$I_I$	J, $\bar{K}$ , B, C, or D			mA
	M or A		0.1	
$I_{IH}$	J, $\bar{K}$ , B, C, or D		0.2	$\mu\text{A}$
	M or A		10	
$I_{IL}$	J, $\bar{K}$ , B, C, or D		20	mA
	M or A		-0.18	
$I_{OS} §$	$V_{CC} = \text{MAX}$		-0.36	mA
$I_{CC}$	$V_{CC} = \text{MAX}$ , See Note 3	-3	-15	mA
		3.8	9	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.  
‡ All typical values are at  $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$ .

§ Not more than one output should be shorted at a time.

NOTE 3: With all outputs and J and  $\bar{K}$  inputs open, mode control at 4.5 V, inputs A through D grounded,  $I_{CC}$  is measured after a momentary 3 V, then ground is applied to both clock inputs.

3



TTL DEVICES

# TYPE SN54L99 4-BIT RIGHT-SHIFT LEFT-SHIFT REGISTERS

switching characteristics,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$f_{\text{max}}$	Any	Any	$R_L = 4\text{ k}\Omega$ , $C_L = 50\text{ pF}$ See Figures 1 and 2	3	5		MHz
$t_{\text{PLH}}$				115	200		ns
$t_{\text{PHL}}$				125	200		ns

## PARAMETER MEASUREMENT INFORMATION

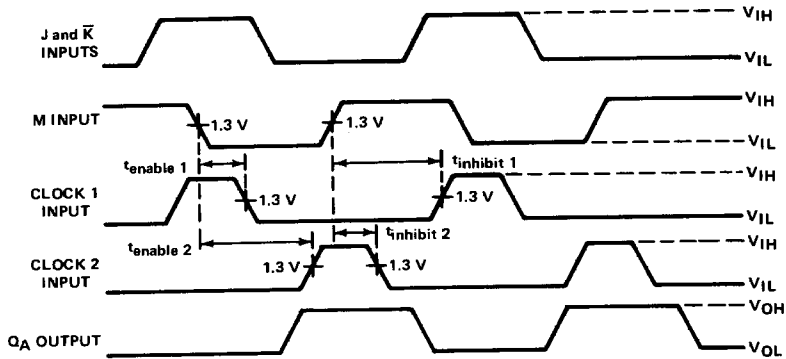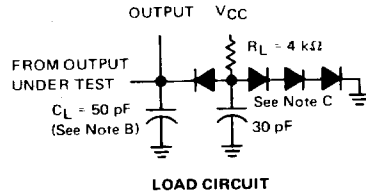

NOTE: A input is at the low level.


- NOTES: A. The input waveforms are supplied by pulse generators having the following characteristics:  $Z_{\text{out}} \approx 50\ \Omega$ . For data pulse generator:  $t_w \geq 150\text{ ns}$ ,  $\text{PRR} \leq 500\text{ kHz}$ ,  $t_{\text{setup(L)}} = 120\text{ ns}$ , and  $t_{\text{setup(H)}} = 100\text{ ns}$ . For clock pulse generator:  $t_w \geq 200\text{ ns}$  and  $\text{PRR} \leq 1\text{ MHz}$ . When testing  $f_{\text{max}}$ , vary PRR.
- B.  $C_L$  includes probe and jig capacitance.
- C. All diodes are 1N3064 or equivalent.
- D. When data input is applied to J and K inputs, the output waveform applies only to output  $Q_A$ .

3

TTL DEVICES

**TYPE SN54L99**  
**4-BIT RIGHT-SHIFT LEFT-SHIFT REGISTERS**

**PARAMETER MEASUREMENT INFORMATION**

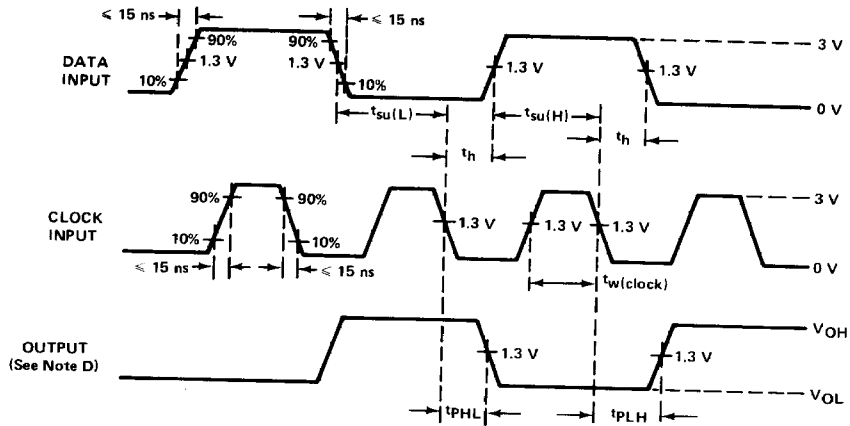

**VOLTAGE WAVEFORMS**  
**FIGURE 2—SWITCHING TIMES**

- NOTES: A. The input waveforms are supplied by pulse generators having the following characteristics:  $Z_{out} \approx 50 \Omega$ . For data pulse generator:  $t_w \geq 150$  ns,  $PRR \leq 500$  kHz,  $t_{setup}(L) = 120$  ns, and  $t_{setup}(H) = 100$  ns. For clock pulse generator:  $t_w \geq 200$  ns and  $PRR \leq 1$  MHz. When testing  $f_{max}$ , vary PRR.
- B.  $C_L$  includes probe and jig capacitance.
- C. All diodes are 1N3064 or equivalent.
- D. When data input is applied to J and K inputs, the output waveform applies only to output  $Q_A$ .

**3**  
**TTL DEVICES**