

# μPD48576109

# μPD48576118

## 576M-BIT Low Latency DRAM Separate I/O

R10DS0064EJ0300  
Rev.3.00  
Oct 01, 2012

### Description

The μPD48576109 is a 67,108,864-word by 9 bit and the μPD48576118 is a 33,554,432 word by 18 bit synchronous double data rate Low Latency RAM fabricated with advanced CMOS technology using one-transistor memory cell.

The μPD48576109 and μPD48576118 integrate unique synchronous peripheral circuitry and a burst counter. All input registers controlled by an input clock pair (CK and CK#) are latched on the positive edge of CK and CK#. These products are suitable for application which require synchronous operation, high speed, low voltage, high density and wide bit configuration.

### Specification

- Density: 576M bit
- Organization
  - Separate I/O: 8M words x 9 bits x 8 banks  
4M words x 18 bits x 8 banks
- Operating frequency: 533 / 400 / 300 MHz
- Interface: HSTL I/O
- Package: 144-pin TAPE FBGA
  - Package size: 18.5 x 11
  - Leaded and Lead free
- Power supply
  - 2.5 V V<sub>EXT</sub>
  - 1.8 V V<sub>DD</sub>
  - 1.5 V or 1.8 V V<sub>DDQ</sub>
- Refresh command
  - Auto Refresh
  - 16K cycle / 32 ms for each bank
  - 128K cycle / 32 ms for total
- Operating case temperature : T<sub>c</sub> = 0 to 95°C

### Features

- SRAM-type interface
- Double-data-rate architecture
- PLL circuitry
- Cycle time:
  - 1.875 ns @ t<sub>RC</sub> = 15 ns
  - 2.5 ns @ t<sub>RC</sub> = 15 ns
  - 2.5 ns @ t<sub>RC</sub> = 20 ns
  - 3.3 ns @ t<sub>RC</sub> = 20 ns
- Non-multiplexed addresses
- Multiplexing option is available.
- Data mask for WRITE commands
- Differential input clocks (CK and CK#)
- Differential input data clocks (DK and DK#)
- Data valid signal (QVLD)
- Programmable burst length: 2 / 4 / 8 (x9 / x18)
- User programmable impedance output (25 Ω - 60 Ω)
- JTAG boundary scan

Ordering Information

| Part number             | Cycle Time<br>ns | Clock Frequency<br>MHz | Random Cycle<br>ns | Organization<br>(word x bit) | Core Supply Voltage<br>(V <sub>EXT</sub> )<br>V | Core Supply Voltage<br>(V <sub>DD</sub> )<br>V | Output Supply Voltage<br>(V <sub>DDQ</sub> )<br>V | Package  |
|-------------------------|------------------|------------------------|--------------------|------------------------------|---|--|---|--|
| μPD48576109FF-E18-DW1-A | 1.875            | 533                    | 15                 | 64 M x 9                     | 2.5 + 0.13<br>2.5 - 0.12                        | 1.8 ± 0.1                                      | 1.5 ± 0.1<br>or<br>1.8 ± 0.1                      | 144-pin<br>TAPE FBGA<br>(18.5 x 11)<br><br>Lead-free |
| μPD48576109FF-E24-DW1-A | 2.5              | 400                    | 15                 |                              |   |  |   |  |
| μPD48576109FF-E25-DW1-A | 2.5              | 400                    | 20                 |                              |   |  |   |  |
| μPD48576109FF-E33-DW1-A | 3.3              | 300                    | 20                 |                              |   |  |   |  |
| μPD48576118FF-E18-DW1-A | 1.875            | 533                    | 15                 | 32 M x 18                    | 2.5 + 0.13<br>2.5 - 0.12                        | 1.8 ± 0.1                                      | 1.5 ± 0.1<br>or<br>1.8 ± 0.1                      | 144-pin<br>TAPE FBGA<br>(18.5 x 11)<br><br>Lead      |
| μPD48576118FF-E24-DW1-A | 2.5              | 400                    | 15                 |                              |   |  |   |  |
| μPD48576118FF-E25-DW1-A | 2.5              | 400                    | 20                 |                              |   |  |   |  |
| μPD48576118FF-E33-DW1-A | 3.3              | 300                    | 20                 |                              |   |  |   |  |
| μPD48576109FF-E18-DW1   | 1.875            | 533                    | 15                 | 64 M x 9                     | 2.5 + 0.13<br>2.5 - 0.12                        | 1.8 ± 0.1                                      | 1.5 ± 0.1<br>or<br>1.8 ± 0.1                      | 144-pin<br>TAPE FBGA<br>(18.5 x 11)<br><br>Lead      |
| μPD48576109FF-E24-DW1   | 2.5              | 400                    | 15                 |                              |   |  |   |  |
| μPD48576109FF-E25-DW1   | 2.5              | 400                    | 20                 |                              |   |  |   |  |
| μPD48576109FF-E33-DW1   | 3.3              | 300                    | 20                 |                              |   |  |   |  |
| μPD48576118FF-E18-DW1   | 1.875            | 533                    | 15                 | 32 M x 18                    | 2.5 + 0.13<br>2.5 - 0.12                        | 1.8 ± 0.1                                      | 1.5 ± 0.1<br>or<br>1.8 ± 0.1                      | 144-pin<br>TAPE FBGA<br>(18.5 x 11)<br><br>Lead      |
| μPD48576118FF-E24-DW1   | 2.5              | 400                    | 15                 |                              |   |  |   |  |
| μPD48576118FF-E25-DW1   | 2.5              | 400                    | 20                 |                              |   |  |   |  |
| μPD48576118FF-E33-DW1   | 3.3              | 300                    | 20                 |                              |   |  |   |  |

## Pin Arrangement

# indicates active LOW signal.

144-pin TAPE FBGA (18.5 x 11)  
(Top View) [Separate I/O x9]

|   | 1                | 2               | 3                | 4                | 5 | 6 | 7 | 8 | 9                | 10               | 11  | 12              |
|---|------------------|-----------------|------------------|------------------|---|---|---|---|------------------|------------------|-----|-----------------|
| A | V <sub>REF</sub> | V <sub>SS</sub> | V <sub>EXT</sub> | V <sub>SS</sub>  |   |   |   |   | V <sub>SS</sub>  | V <sub>EXT</sub> | TMS | TCK             |
| B | V <sub>DD</sub>  | Note 3<br>DNU   | Note 3<br>DNU    | V <sub>SSQ</sub> |   |   |   |   | V <sub>SSQ</sub> | Q0               | D0  | V <sub>DD</sub> |
| C | V <sub>TT</sub>  | Note 3<br>DNU   | Note 3<br>DNU    | V <sub>DDQ</sub> |   |   |   |   | V <sub>DDQ</sub> | Q1               | D1  | V <sub>TT</sub> |
| D | Note 1<br>(A22)  | Note 3<br>DNU   | Note 3<br>DNU    | V <sub>SSQ</sub> |   |   |   |   | V <sub>SSQ</sub> | QK0#             | QK0 | V <sub>SS</sub> |
| E | A21              | Note 3<br>DNU   | Note 3<br>DNU    | V <sub>DDQ</sub> |   |   |   |   | V <sub>DDQ</sub> | Q2               | D2  | A20             |
| F | A5               | Note 3<br>DNU   | Note 3<br>DNU    | V <sub>SSQ</sub> |   |   |   |   | V <sub>SSQ</sub> | Q3               | D3  | QVLD            |
| G | A8               | A6              | A7               | V <sub>DD</sub>  |   |   |   |   | V <sub>DD</sub>  | A2               | A1  | A0              |
| H | BA2              | A9              | V <sub>SS</sub>  | V <sub>SS</sub>  |   |   |   |   | V <sub>SS</sub>  | V <sub>SS</sub>  | A4  | A3              |
| J | Note 2<br>NF     | Note 2<br>NF    | V <sub>DD</sub>  | V <sub>DD</sub>  |   |   |   |   | V <sub>DD</sub>  | V <sub>DD</sub>  | BA0 | CK              |
| K | DK               | DK#             | V <sub>DD</sub>  | V <sub>DD</sub>  |   |   |   |   | V <sub>DD</sub>  | V <sub>DD</sub>  | BA1 | CK#             |
| L | REF#             | CS#             | V <sub>SS</sub>  | V <sub>SS</sub>  |   |   |   |   | V <sub>SS</sub>  | V <sub>SS</sub>  | A14 | A13             |
| M | WE#              | A16             | A17              | V <sub>DD</sub>  |   |   |   |   | V <sub>DD</sub>  | A12              | A11 | A10             |
| N | A18              | Note 3<br>DNU   | Note 3<br>DNU    | V <sub>SSQ</sub> |   |   |   |   | V <sub>SSQ</sub> | Q4               | D4  | A19             |
| P | A15              | Note 3<br>DNU   | Note 3<br>DNU    | V <sub>DDQ</sub> |   |   |   |   | V <sub>DDQ</sub> | Q5               | D5  | DM              |
| R | V <sub>SS</sub>  | Note 3<br>DNU   | Note 3<br>DNU    | V <sub>SSQ</sub> |   |   |   |   | V <sub>SSQ</sub> | Q6               | D6  | V <sub>SS</sub> |
| T | V <sub>TT</sub>  | Note 3<br>DNU   | Note 3<br>DNU    | V <sub>DDQ</sub> |   |   |   |   | V <sub>DDQ</sub> | Q7               | D7  | V <sub>TT</sub> |
| U | V <sub>DD</sub>  | Note 3<br>DNU   | Note 3<br>DNU    | V <sub>SSQ</sub> |   |   |   |   | V <sub>SSQ</sub> | Q8               | D8  | V <sub>DD</sub> |
| V | V <sub>REF</sub> | ZQ              | V <sub>EXT</sub> | V <sub>SS</sub>  |   |   |   |   | V <sub>SS</sub>  | V <sub>EXT</sub> | TDO | TDI             |

- Notes**
- Reserved for future use. This signal is internally connected and has parasitic characteristics of an address input signal. This may optionally be connected to V<sub>SS</sub>, or left open.
  - No function. This signal is internally connected and has parasitic characteristics of a clock input signal. This may optionally be connected to V<sub>SS</sub>, or left open.
  - Do not use. This signal is internally connected and has parasitic characteristics of a I/O. This may optionally be connected to V<sub>SS</sub>.

|           |                           |                  |                              |
|-----------|---------------------------|------------------|------------------------------|
| CK, CK#   | : Input clock             | ZQ               | : Output impedance matching  |
| CS#       | : Chip select             | TMS              | : IEEE 1149.1 Test input     |
| WE#       | : WRITE command           | TDI              | : IEEE 1149.1 Test input     |
| REF#      | : Refresh command         | TCK              | : IEEE 1149.1 Clock input    |
| A0–A21    | : Address inputs          | TDO              | : IEEE 1149.1 Test output    |
| A22       | : Reserved for the future | V <sub>REF</sub> | : HSTL input reference input |
| BA0–BA2   | : Bank address input      | V <sub>EXT</sub> | : Power Supply               |
| D0–D8     | : Data input              | V <sub>DD</sub>  | : Power Supply               |
| Q0–Q8     | : Data output             | V <sub>DDQ</sub> | : DQ Power Supply            |
| DK, DK#   | : Input data clock        | V <sub>SS</sub>  | : Ground                     |
| DM        | : Input data Mask         | V <sub>SSQ</sub> | : DQ Ground                  |
| QK0, QK0# | : Output data clock       | V <sub>TT</sub>  | : Power Supply               |
| QVLD      | : Data Valid              | NF               | : No function                |
|           |                           | DNU              | : Do not use                 |

# indicates active LOW signal.

144-pin TAPE FBGA (18.5 x 11)  
(Top View) [Separate I/O x18]

|   | 1                | 2               | 3                | 4                | 5 | 6 | 7 | 8 | 9                | 10               | 11  | 12              |
|---|------------------|-----------------|------------------|------------------|---|---|---|---|------------------|------------------|-----|-----------------|
| A | V <sub>REF</sub> | V <sub>SS</sub> | V <sub>EXT</sub> | V <sub>SS</sub>  |   |   |   |   | V <sub>SS</sub>  | V <sub>EXT</sub> | TMS | TCK             |
| B | V <sub>DD</sub>  | D4              | Q4               | V <sub>SSQ</sub> |   |   |   |   | V <sub>SSQ</sub> | Q0               | D0  | V <sub>DD</sub> |
| C | V <sub>TT</sub>  | D5              | Q5               | V <sub>DDQ</sub> |   |   |   |   | V <sub>DDQ</sub> | Q1               | D1  | V <sub>TT</sub> |
| D | Note 1<br>(A22)  | D6              | Q6               | V <sub>SSQ</sub> |   |   |   |   | V <sub>SSQ</sub> | QK0#             | QK0 | V <sub>SS</sub> |
| E | Note 1<br>(A21)  | D7              | Q7               | V <sub>DDQ</sub> |   |   |   |   | V <sub>DDQ</sub> | Q2               | D2  | A20             |
| F | A5               | D8              | Q8               | V <sub>SSQ</sub> |   |   |   |   | V <sub>SSQ</sub> | Q3               | D3  | QVLD            |
| G | A8               | A6              | A7               | V <sub>DD</sub>  |   |   |   |   | V <sub>DD</sub>  | A2               | A1  | A0              |
| H | BA2              | A9              | V <sub>SS</sub>  | V <sub>SS</sub>  |   |   |   |   | V <sub>SS</sub>  | V <sub>SS</sub>  | A4  | A3              |
| J | Note 2<br>NF     | Note 2<br>NF    | V <sub>DD</sub>  | V <sub>DD</sub>  |   |   |   |   | V <sub>DD</sub>  | V <sub>DD</sub>  | BA0 | CK              |
| K | DK               | DK#             | V <sub>DD</sub>  | V <sub>DD</sub>  |   |   |   |   | V <sub>DD</sub>  | V <sub>DD</sub>  | BA1 | CK#             |
| L | REF#             | CS#             | V <sub>SS</sub>  | V <sub>SS</sub>  |   |   |   |   | V <sub>SS</sub>  | V <sub>SS</sub>  | A14 | A13             |
| M | WE#              | A16             | A17              | V <sub>DD</sub>  |   |   |   |   | V <sub>DD</sub>  | A12              | A11 | A10             |
| N | A18              | D14             | Q14              | V <sub>SSQ</sub> |   |   |   |   | V <sub>SSQ</sub> | Q9               | D9  | A19             |
| P | A15              | D15             | Q15              | V <sub>DDQ</sub> |   |   |   |   | V <sub>DDQ</sub> | Q10              | D10 | DM              |
| R | V <sub>SS</sub>  | QK1             | QK1#             | V <sub>SSQ</sub> |   |   |   |   | V <sub>SSQ</sub> | Q11              | D11 | V <sub>SS</sub> |
| T | V <sub>TT</sub>  | D16             | Q16              | V <sub>DDQ</sub> |   |   |   |   | V <sub>DDQ</sub> | Q12              | D12 | V <sub>TT</sub> |
| U | V <sub>DD</sub>  | D17             | Q17              | V <sub>SSQ</sub> |   |   |   |   | V <sub>SSQ</sub> | Q13              | D13 | V <sub>DD</sub> |
| V | V <sub>REF</sub> | ZQ              | V <sub>EXT</sub> | V <sub>SS</sub>  |   |   |   |   | V <sub>SS</sub>  | V <sub>EXT</sub> | TDO | TDI             |

**Notes 1.** Reserved for future use. This signal is internally connected and has parasitic characteristics of an address input signal. This may optionally be connected to V<sub>SS</sub>, or left open.

**2.** No function. This signal is internally connected and has parasitic characteristics of a clock input signal. This may optionally be connected to V<sub>SS</sub>, or left open.

|                    |                           |                  |                              |
|--------------------|---------------------------|------------------|------------------------------|
| CK, CK#            | : Input clock             | ZQ               | : Output impedance matching  |
| CS#                | : Chip select             | TMS              | : IEEE 1149.1 Test input     |
| WE#                | : WRITE command           | TDI              | : IEEE 1149.1 Test input     |
| REF#               | : Refresh command         | TCK              | : IEEE 1149.1 Clock input    |
| A0–A20             | : Address inputs          | TDO              | : IEEE 1149.1 Test output    |
| A21–A22            | : Reserved for the future | V <sub>REF</sub> | : HSTL input reference input |
| BA0–BA2            | : Bank address input      | V <sub>EXT</sub> | : Power Supply               |
| D0–D17             | : Data input              | V <sub>DD</sub>  | : Power Supply               |
| Q0–Q17             | : Data output             | V <sub>DDQ</sub> | : DQ Power Supply            |
| DK, DK#            | : Input data clock        | V <sub>SS</sub>  | : Ground                     |
| DM                 | : Input data Mask         | V <sub>SSQ</sub> | : DQ Ground                  |
| QK0–QK1, QK0#–QK1# | : Output data clock       | V <sub>TT</sub>  | : Power Supply               |
| QVLD               | : Data Valid              | NF               | : No function                |


## Pin Description

(1/2)

| Symbol    | Type   | Description   |
|-----------|--------|---|
| CK, CK#   | Input  | <p>Clock inputs:</p> <p>CK and CK# are differential clock inputs. This input clock pair registers address and control inputs on the rising edge of CK. CK# is ideally 180 degrees out of phase with CK.</p>   |
| CS#       | Input  | <p>Chip select</p> <p>CS# enables the commands when CS# is LOW and disables them when CS# is HIGH. When the command is disabled, new commands are ignored, but internal operations continue.</p>  |
| WE#, REF# | Input  | <p>WRITE command pin, Refresh command pin:</p> <p>WE#, REF# are sampled at the positive edge of CK, WE#, and REF# define (together with CS#) the command to be executed.</p>  |
| A0–A21    | Input  | <p>Address inputs:</p> <p>A0–A21 define the row and column addresses for READ and WRITE operations. During a MODE REGISTER SET, the address inputs define the register settings. They are sampled at the rising edge of CK.</p> <p>In the x18 configuration, A21 is reserved for address expansion. This expansion address can be treated as address input, but it does not affect the operation of the device.</p> |
| A22       | Input  | <p>Reserved for future use:</p> <p>These signals should be tied to V<sub>SS</sub> or leave open.</p>  |
| BA0–BA2   | Input  | <p>Bank address inputs;</p> <p>Select to which internal bank a command is being applied.</p>  |
| D0–Dxx    | Input  | <p>Data input:</p> <p>The D signals form the 18-bit input data bus. During WRITE commands, the data is referenced to both edges of DK.</p> <p>x 9 device uses D0 to D8.</p> <p>x18 device uses D0 to D17.</p>   |
| Q0–Qxx    | Output | <p>Data output:</p> <p>The Q signals form the 18-bit output data bus. During READ commands, the data is referenced to both edges of QK.</p> <p>x 9 device uses Q0 to Q8.</p> <p>x18 device uses Q0 to Q17.</p>  |
| QKx, QKx# | Output | <p>Output data clocks:</p> <p>QKx and QKx# are opposite polarity, output data clocks. They are always free running and edge-aligned with data output from the μPD48576109/18. QKx# is ideally 180 degrees out of phase with QKx.</p> <p>For the x18 device, QK0 and QK0# are aligned with Q0–Q8. QK1 and QK1# are aligned with Q9–Q17. For the x9 device, QK0 and QK0# are aligned with Q0–Q8.</p>                  |
| DK, DK#   | Input  | <p>Input data clock;</p> <p>DK and DK# are the differential input data clocks. All input data is referenced to both edges of DK. DK# is ideally 180 degrees out of phase with DK.</p> <p>In both x9 and x18 configurations, all Ds are referenced to DK and DK#.</p>  |
| DM        | Input  | <p>Input data mask;</p> <p>The DM signal is the input mask signal for WRITE data. Input data is masked when DM is sampled HIGH along with the WRITE input data. DM is sampled on both edges of DK. The signal should be V<sub>SS</sub> if not used.</p>   |
| QVLD      | Output | <p>Data valid;</p> <p>The QVLD indicates valid output data. QVLD is edge-aligned with QKx and QKx#.</p>   |

| Symbol           | Type             | Description   |
|------------------|------------------|---|
| ZQ               | Input<br>/Output | External impedance [25 Ω – 60 Ω];<br>This signal is used to tune the device outputs to the system data bus impedance. Q output impedance is set to 0.2 x RQ, where RQ is a resistor from this signal to V <sub>SS</sub> . Connecting ZQ to V <sub>SS</sub> invokes the minimum impedance mode. Connecting ZQ to V <sub>DDQ</sub> invokes the maximum impedance mode. Refer to <b>Figure 2-5. Mode Register Bit Map</b> to activate this function. |
| TMS , TDI        | Input            | JTAG function pins:<br>IEEE 1149.1 test inputs: These balls may be left as no connects if the JTAG function is not used in the circuit  |
| TCK              | Input            | JTAG function pin;<br>IEEE 1149.1 clock input: This ball must be tied to V <sub>SS</sub> if the JTAG function is not used in the circuit.   |
| TDO              | Output           | JTAG function pin;<br>IEEE 1149.1 test output: JTAG output.<br>This ball may be left as no connect if JTAG function is not used.  |
| V <sub>REF</sub> | Input            | Input reference voltage;<br>Nominally V <sub>DDQ</sub> /2. Provides a reference voltage for the input buffers.  |
| V <sub>EXT</sub> | Supply           | Power supply;<br>2.5 V nominal. See <b>Recommended DC Operating Conditions</b> for range.   |
| V <sub>DD</sub>  | Supply           | Power supply;<br>1.8 V nominal. See <b>Recommended DC Operating Conditions</b> for range.   |
| V <sub>DDQ</sub> | Supply           | DQ power supply;<br>Nominally, 1.5 V or 1.8 V. Isolated on the device for improved noise immunity.<br>See <b>Recommended DC Operating Conditions</b> for range.   |
| V <sub>SS</sub>  | Supply           | Ground  |
| V <sub>SSQ</sub> | Supply           | DQ ground;<br>Isolated on the device for improved noise immunity.   |
| V <sub>TT</sub>  | Supply           | Power supply;<br>Isolated termination supply. Nominally, V <sub>DDQ</sub> /2. See <b>Recommended DC Operating Conditions</b> for range.   |
| NF               |                  | No function;<br>These balls may be connected to V <sub>SS</sub> .   |
| DNU              |                  | Do not use;<br>These balls may be connected to V <sub>SS</sub> .  |

### Block Diagram

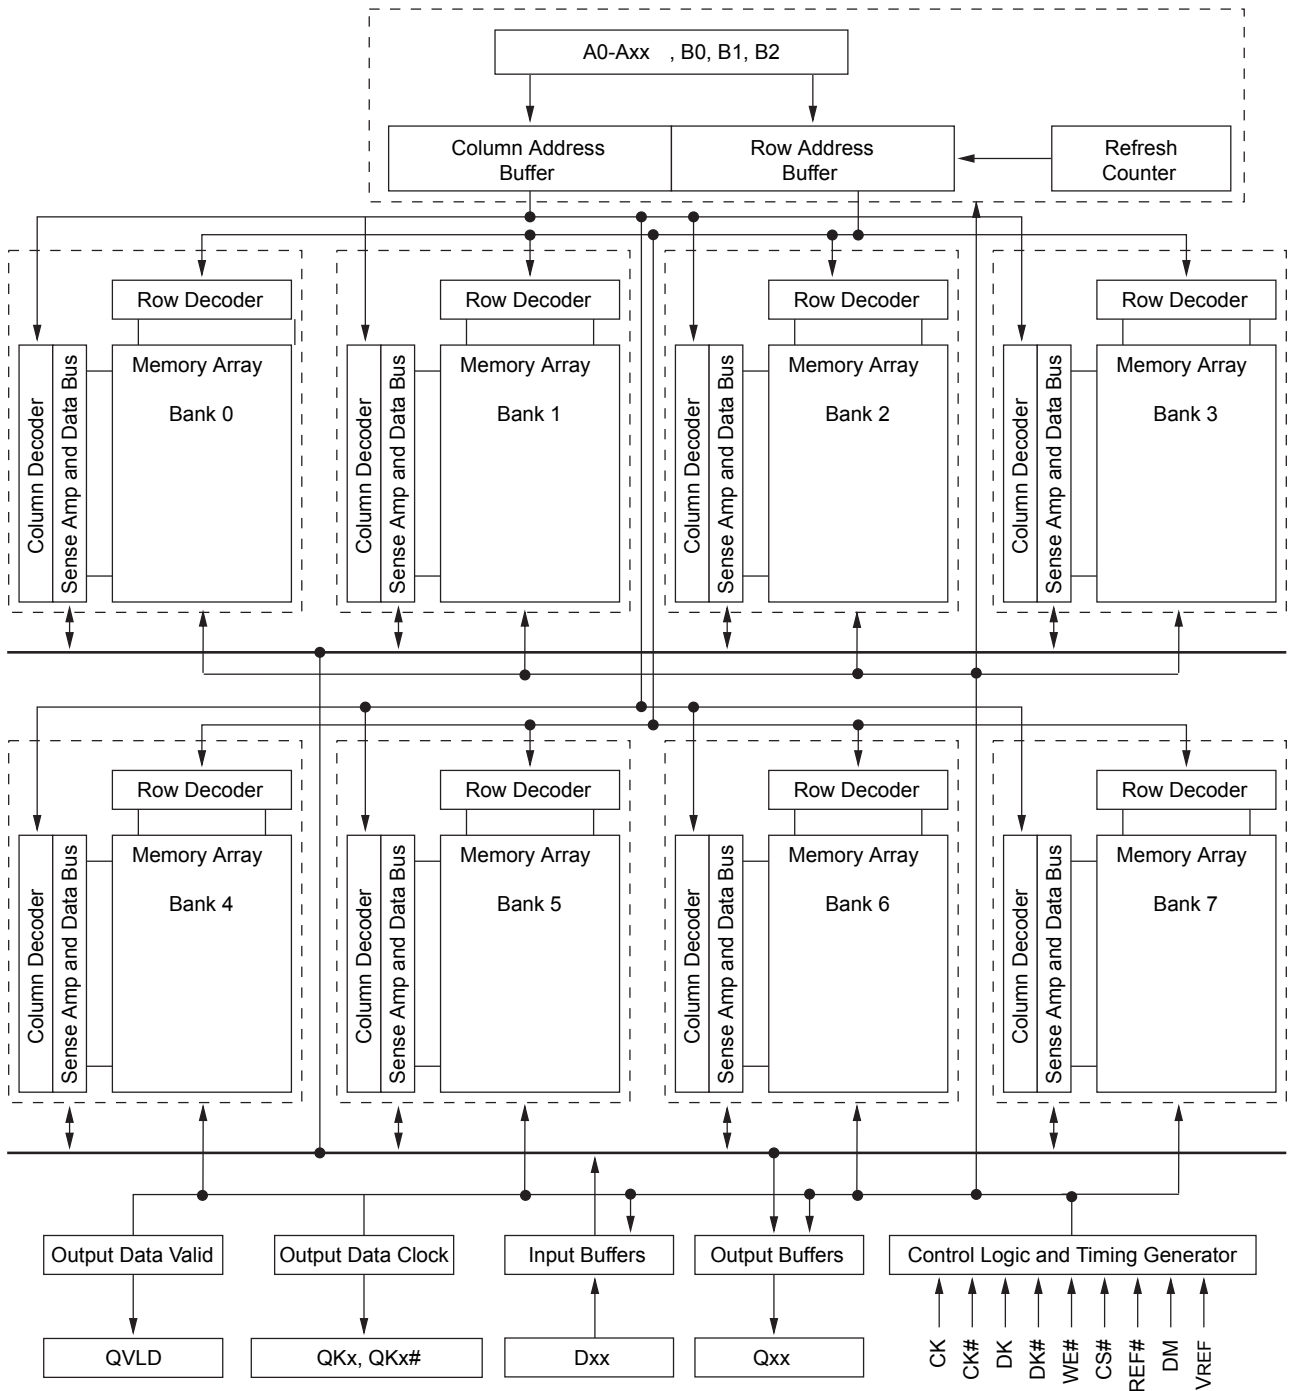

## Contents

|      |   |    |
|------|---|----|
| 1.   | Electrical Characteristics .....                                | 9  |
| 2.   | Operation .....   | 16 |
| 2.1  | Command Operation .....   | 16 |
| 2.2  | Description of Commands .....                                   | 16 |
| 2.3  | Initialization .....  | 17 |
| 2.4  | Power-On Sequence .....   | 18 |
| 2.5  | Programmable Impedance Output Buffer .....                      | 18 |
| 2.6  | PLL Reset .....   | 18 |
| 2.7  | Clock Input .....   | 18 |
| 2.8  | Mode Register Set Command (MRS).....                            | 20 |
| 2.9  | Read & Write configuration (Non Multiplexed Address Mode) ..... | 21 |
| 2.10 | Write Operation (WRITE) .....                                   | 22 |
| 2.11 | Read Operation (READ).....                                      | 25 |
| 2.12 | Refresh Operation: AUTO REFRESH Command (AREF).....             | 30 |
| 2.13 | On-Die Termination.....   | 31 |
| 2.14 | Operation with Multiplexed Address.....                         | 33 |
| 2.15 | Address Mapping in Multiplexed Mode.....                        | 35 |
| 2.16 | Read & Write configuration in Multiplexed Address Mode .....    | 36 |
| 2.17 | Refresh Command in Multiplexed Address Mode.....                | 36 |
| 2.18 | Input Slew Rate Derating.....                                   | 38 |
| 3.   | JTAG Specification .....  | 42 |
| 4.   | Package Dimension .....   | 49 |
| 5.   | Recommended Soldering Condition .....                           | 50 |



## 1. Electrical Characteristics

### Absolute Maximum Ratings

| Parameter   | Symbol                            | Conditions | Rating       | Unit |
|---|-----------------------------------|------------|--------------|------|
| Supply voltage  | V <sub>EXT</sub>                  |            | -0.3 to +2.8 | V    |
| Supply voltage  | V <sub>DD</sub>                   |            | -0.3 to +2.1 | V    |
| Output supply voltage,<br>Input voltage, Input / Output voltage | V <sub>DDQ</sub>                  |            | -0.3 to +2.1 | V    |
| Input / Output voltage  | V <sub>IH</sub> / V <sub>IL</sub> |            | -0.3 to +2.1 | V    |
| Junction temperature  | T <sub>j</sub> MAX.               |            | 110          | °C   |
| Storage temperature   | T <sub>stg</sub>                  |            | -55 to +125  | °C   |

**Caution** Exposing the device to stress above those listed in Absolute Maximum Ratings could cause permanent damage. The device is not meant to be operated under conditions outside the limits described in the operational section of this specification. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

### Recommended DC Operating Conditions

0°C ≤ T<sub>c</sub> ≤ 95°C; 1.7 V ≤ V<sub>DD</sub> ≤ 1.9 V, unless otherwise noted.

| Parameter             | Symbol              | Conditions | MIN.                    | TYP.                   | MAX.                    | Unit | Note    |
|-----------------------|---------------------|------------|-------------------------|------------------------|-------------------------|------|---------|
| Supply voltage        | V <sub>EXT</sub>    |            | 2.38                    | 2.5                    | 2.63                    | V    | 1       |
| Supply voltage        | V <sub>DD</sub>     |            | 1.7                     | 1.8                    | 1.9                     | V    | 1       |
| Output supply voltage | V <sub>DDQ</sub>    |            | 1.4                     |                        | V <sub>DD</sub>         | V    | 1, 2, 3 |
| Reference Voltage     | V <sub>REF</sub>    |            | 0.49 x V <sub>DDQ</sub> | 0.5 x V <sub>DDQ</sub> | 0.51 x V <sub>DDQ</sub> | V    | 1, 4, 5 |
| Termination voltage   | V <sub>TT</sub>     |            | 0.95 x V <sub>REF</sub> | V <sub>REF</sub>       | 1.05 x V <sub>REF</sub> | V    | 1, 6    |
| Input HIGH voltage    | V <sub>IH(DC)</sub> |            | V <sub>REF</sub> + 0.1  |                        |                         | V    | 1       |
| Input LOW voltage     | V <sub>IL(DC)</sub> |            |                         |                        | V <sub>REF</sub> - 0.1  | V    | 1       |

**Notes** 1. All voltage referenced to V<sub>SS</sub> (GND).

2. During normal operation, V<sub>DDQ</sub> must not exceed V<sub>DD</sub>.
3. V<sub>DDQ</sub> can be set to a nominal 1.5 V ± 0.1 V or 1.8 V ± 0.1 V supply.
4. Typically the value of V<sub>REF</sub> is expected to be 0.5 x V<sub>DDQ</sub> of the transmitting device. V<sub>REF</sub> is expected to track variations in V<sub>DDQ</sub>.
5. Peak-to-peak AC noise on V<sub>REF</sub> must not exceed ± 2% V<sub>REF(DC)</sub>.
6. V<sub>TT</sub> is expected to be set equal to V<sub>REF</sub> and must track variations in the DC level of V<sub>REF</sub>.

**DC Characteristics**

0°C ≤ T<sub>C</sub> ≤ 95°C; 1.7 V ≤ V<sub>DD</sub> ≤ 1.9 V, unless otherwise noted

| Parameter                 | Symbol           | Test condition                        | MIN.   | MAX.   | Unit | Note |
|---------------------------|------------------|---------------------------------------|--|--|------|------|
| Input leakage current     | I <sub>LI</sub>  |                                       | -5   | +5   | μA   | 1,2  |
| Output leakage current    | I <sub>LO</sub>  |                                       | -5   | +5   | μA   | 1,2  |
| Reference voltage current | I <sub>REF</sub> |                                       | -5   | +5   | μA   | 1,2  |
| Output high current       | I <sub>OH</sub>  | V <sub>OH</sub> = V <sub>DDQ</sub> /2 | (V <sub>DDQ</sub> /2) / (1.15 × R <sub>Q</sub> /5) | (V <sub>DDQ</sub> /2) / (0.85 × R <sub>Q</sub> /5) | mA   | 3,4  |
| Output low current        | I <sub>OL</sub>  | V <sub>OL</sub> = V <sub>DDQ</sub> /2 | (V <sub>DDQ</sub> /2) / (1.15 × R <sub>Q</sub> /5) | (V <sub>DDQ</sub> /2) / (0.85 × R <sub>Q</sub> /5) | mA   | 3,4  |

- Notes**
1. Outputs are impedance-controlled. | I<sub>OH</sub> | = (V<sub>DDQ</sub>/2)/(R<sub>Q</sub>/5) for values of 125 Ω ≤ R<sub>Q</sub> ≤ 300 Ω.
  2. Outputs are impedance-controlled. I<sub>OL</sub> = (V<sub>DDQ</sub>/2)/(R<sub>Q</sub>/5) for values of 125 Ω ≤ R<sub>Q</sub> ≤ 300 Ω.
  3. I<sub>OH</sub> and I<sub>OL</sub> are defined as absolute values and are measured at V<sub>DDQ</sub>/2. I<sub>OH</sub> flows from the device, I<sub>OL</sub> flows into the device.
  4. If MRS bit A8 is 0, use R<sub>Q</sub> = 250 Ω in the equation in lieu of presence of an external impedance matched resistor.

**Capacitance (T<sub>A</sub> = 25 °C, f = 1MHz)**

| Parameter  | Symbol           | Test conditions        | MIN. | MAX. | Unit |
|--|------------------|------------------------|------|------|------|
| Address / Control Input capacitance                    | C <sub>IN</sub>  | V <sub>IN</sub> = 0 V  | 1.5  | 2.5  | pF   |
| I/O, Output, Other capacitance<br>(D, Q, DM, QK, QVLD) | C <sub>I/O</sub> | V <sub>I/O</sub> = 0 V | 3.5  | 5.0  | pF   |
| Clock Input capacitance                                | C <sub>clk</sub> | V <sub>clk</sub> = 0 V | 2.0  | 3.0  | pF   |
| JTAG pins  | C <sub>J</sub>   | V <sub>J</sub> = 0 V   | 2.0  | 5.0  | pF   |

**Remark** These parameters are periodically sampled and not 100% tested.  
Capacitance is not tested on ZQ pin.

**Recommended AC Operating Conditions**

0°C ≤ T<sub>C</sub> ≤ 95°C; 1.7 V ≤ V<sub>DD</sub> ≤ 1.9 V, unless otherwise noted

| Parameter          | Symbol              | Conditions | MIN.                   | MAX.                   | Unit | Note |
|--------------------|---------------------|------------|------------------------|------------------------|------|------|
| Input HIGH voltage | V <sub>IH(AC)</sub> |            | V <sub>REF</sub> + 0.2 |                        | V    | 1    |
| Input LOW voltage  | V <sub>IL(AC)</sub> |            |                        | V <sub>REF</sub> - 0.2 | V    | 1    |

**Note 1.** Overshoot: V<sub>IH(AC)</sub> ≤ V<sub>DDQ</sub> + 0.7 V for t ≤ t<sub>CK</sub>/2

Undershoot: V<sub>IL(AC)</sub> ≥ -0.5 V for t ≤ t<sub>CK</sub>/2

Control input signals may not have pulse widths less than t<sub>CKH</sub> (MIN.) or operate at cycle rates less than t<sub>CK</sub> (MIN.).

DC Characteristics

I<sub>DD</sub> / I<sub>SB</sub> Operating Conditions


| Parameter                     | Symbol            | Test condition  | MAX.             |      |      |      | Unit |    |
|-------------------------------|-------------------|---|------------------|------|------|------|------|----|
|                               |                   |   | -E18             | -E24 | -E25 | -E33 |      |    |
| Standby current               | I <sub>SB1</sub>  | t <sub>CK</sub> = Idle<br>All banks idle, no inputs toggling  | V <sub>DD</sub>  | 55   | 55   | 55   | 55   | mA |
|                               |                   |   | V <sub>EXT</sub> | 5    | 5    | 5    | 5    |    |
| Active standby current        | I <sub>SB2</sub>  | CS# = HIGH, No commands, half bank / address / data change once every four clock cycles   | V <sub>DD</sub>  | 250  | 215  | 215  | 190  | mA |
|                               |                   |   | V <sub>EXT</sub> | 5    | 5    | 5    | 5    |    |
| Operating current             | I <sub>DD1</sub>  | BL=2, sequential bank access, bank transitions once every t <sub>RC</sub> , half address transitions once every t <sub>RC</sub> , read followed by write sequence, continuous data during WRITE commands. | V <sub>DD</sub>  | 390  | 331  | 321  | 291  | mA |
|                               |                   |   | V <sub>EXT</sub> | 10   | 10   | 10   | 10   |    |
| Operating current             | I <sub>DD2</sub>  | BL=4, sequential bank access, bank transitions once every t <sub>RC</sub> , half address transitions once every t <sub>RC</sub> , read followed by write sequence, continuous data during WRITE commands. | V <sub>DD</sub>  | 422  | 367  | 357  | 336  | mA |
|                               |                   |   | V <sub>EXT</sub> | 10   | 10   | 10   | 10   |    |
| Operating current             | I <sub>DD3</sub>  | BL=8, sequential bank access, bank transitions once every t <sub>RC</sub> , half address transitions once every t <sub>RC</sub> , read followed by write sequence, continuous data during WRITE commands. | V <sub>DD</sub>  | 439  | 381  | 371  | 350  | mA |
|                               |                   |   | V <sub>EXT</sub> | 15   | 15   | 15   | 15   |    |
| Burst refresh current         | I <sub>REF1</sub> | Eight bank cyclic refresh, continuous address/data, command bus remains in refresh for all banks  | V <sub>DD</sub>  | 692  | 540  | 540  | 419  | mA |
|                               |                   |   | V <sub>EXT</sub> | 45   | 30   | 30   | 25   |    |
| Disturbed refresh current     | I <sub>REF2</sub> | Single bank refresh, sequential bank access, half address transitions once every t <sub>RC</sub> , continuous data  | V <sub>DD</sub>  | 286  | 265  | 260  | 194  | mA |
|                               |                   |   | V <sub>EXT</sub> | 10   | 10   | 10   | 10   |    |
| Operating burst write current | I <sub>DD2W</sub> | BL=2, cyclic bank access, half of address bits change every clock cycle, continuous data, measurement is taken during continuous WRITE  | V <sub>DD</sub>  | 1078 | 872  | 872  | 716  | mA |
|                               |                   |   | V <sub>EXT</sub> | 40   | 35   | 35   | 30   |    |
| Operating burst write current | I <sub>DD4W</sub> | BL=4, cyclic bank access, half of address bits change every two clocks, continuous data, measurement is taken during continuous WRITE   | V <sub>DD</sub>  | 784  | 645  | 645  | 538  | mA |
|                               |                   |   | V <sub>EXT</sub> | 25   | 20   | 20   | 20   |    |
| Operating burst write current | I <sub>DD8W</sub> | BL=8, cyclic bank access, half of address bits change every four clocks, continuous data, measurement is taken during continuous WRITE  | V <sub>DD</sub>  | 625  | 520  | 520  | 442  | mA |
|                               |                   |   | V <sub>EXT</sub> | 25   | 20   | 20   | 20   |    |
| Operating burst read current  | I <sub>DD2R</sub> | BL=2, cyclic bank access, half of address bits change every clock cycle, measurement is taken during continuous READ  | V <sub>DD</sub>  | 949  | 735  | 735  | 566  | mA |
|                               |                   |   | V <sub>EXT</sub> | 40   | 35   | 35   | 30   |    |
| Operating burst read current  | I <sub>DD4R</sub> | BL=4, cyclic bank access, half of address bits change every two clocks, measurement is taken during continuous READ   | V <sub>DD</sub>  | 659  | 503  | 503  | 400  | mA |
|                               |                   |   | V <sub>EXT</sub> | 25   | 20   | 20   | 20   |    |
| Operating burst read current  | I <sub>DD8R</sub> | BL=8, cyclic bank access, half of address bits change every four clocks, measurement is taken during continuous READ  | V <sub>DD</sub>  | 497  | 389  | 389  | 308  | mA |
|                               |                   |   | V <sub>EXT</sub> | 25   | 20   | 20   | 20   |    |

- Remarks 1.** I<sub>DD</sub> specifications are tested after the device is properly initialized.  $0^{\circ}\text{C} \leq T_{\text{C}} \leq 95^{\circ}\text{C}$ ;  $1.7\text{ V} \leq V_{\text{DD}} \leq 1.9\text{ V}$ ,  $2.38\text{ V} \leq V_{\text{EXT}} \leq 2.63\text{ V}$ ,  $1.4\text{ V} \leq V_{\text{DDQ}} \leq V_{\text{DD}}$ ,  $V_{\text{REF}} = V_{\text{DDQ}}/2$
2.  $t_{\text{CK}} = t_{\text{DK}} = \text{MIN.}$ ,  $t_{\text{RC}} = \text{MIN.}$
  3. Input slew rate is specified in **Recommended DC Operating Conditions** and **Recommended AC Operating Conditions**.
  4. I<sub>DD</sub> parameters are specified with ODT disabled.
  5. Continuous data is defined as half the D or Q signals changing between HIGH and LOW every half clock cycles (twice per clock).
  6. Continuous address is defined as half the address signals between HIGH and LOW every clock cycles (once per clock).
  7. Sequential bank access is defined as the bank address incrementing by one ever  $t_{\text{RC}}$ .
  8. Cyclic bank access is defined as the bank address incrementing by one for each command access. For BL=4 this is every other clock.
  9. CS# is HIGH unless a READ, WRITE, AREF, or MRS command is registered. CS# never transitions more than per clock cycle.


AC Characteristics

AC Test Conditions


Input waveform

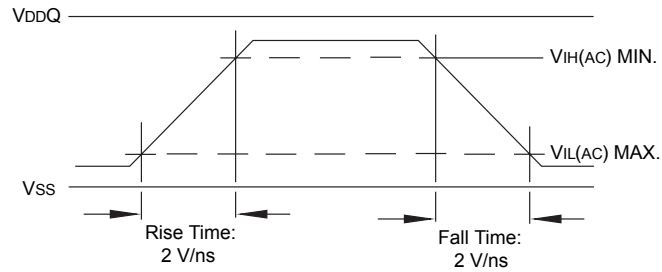

Output waveform



Output load condition



AC Characteristics <Read and Write Cycle>


| Parameter                                   | Symbol                                | -E18<br>(533 MHz) |      | -E24<br>(400 MHz) |      | -E25<br>(400 MHz) |      | -E33<br>(300 MHz) |      | Unit             | Note |
|---|---------------------------------------|-------------------|------|-------------------|------|-------------------|------|-------------------|------|------------------|------|
|   |                                       | MIN.              | MAX. | MIN.              | MAX. | MIN.              | MAX. | MIN.              | MAX. |                  |      |
| <b>Clock</b>                                |                                       |                   |      |                   |      |                   |      |                   |      |                  |      |
| Clock cycle time (CK,CK#,DK,DK#)            | t <sub>CK</sub> , t <sub>DK</sub>     | 1.875             | 5.7  | 2.5               | 5.7  | 2.5               | 5.7  | 3.3               | 5.7  | ns               |      |
| Clock frequency (CK,CK#,DK,DK#)             | t <sub>CK</sub> , t <sub>DK</sub>     | 175               | 533  | 175               | 400  | 175               | 400  | 175               | 300  | MHz              |      |
| Random Cycle time                           | t <sub>RC</sub>                       | 15                |      | 15                |      | 20                |      | 20                |      | ns               |      |
| Clock Jitter: period                        | t <sub>JIT PER</sub>                  | -100              | 100  | -150              | 150  | -150              | 150  | -200              | 200  | ps               | 1, 2 |
| Clock Jitter: cycle-to-cycle                | t <sub>JIT CC</sub>                   |                   | 200  |                   | 300  |                   | 300  |                   | 400  | ps               |      |
| Clock HIGH time (CK,CK#,DK,DK#)             | t <sub>CKH</sub> , t <sub>DKH</sub>   | 0.45              | 0.55 | 0.45              | 0.55 | 0.45              | 0.55 | 0.45              | 0.55 | Cycle            |      |
| Clock LOW time (CK,CK#,DK,DK#)              | t <sub>CKL</sub> , t <sub>DKL</sub>   | 0.45              | 0.55 | 0.45              | 0.55 | 0.45              | 0.55 | 0.45              | 0.55 | Cycle            |      |
| Clock to input data clock                   | t <sub>CKDK</sub>                     | -0.3              | 0.3  | -0.45             | 0.5  | -0.45             | 0.5  | -0.45             | 1.0  | ns               |      |
| Mode register set cycle time to any command | t <sub>MRSC</sub>                     | 6                 |      | 6                 |      | 6                 |      | 6                 |      | Cycle            |      |
| PLL Lock time                               | t <sub>CK Lock</sub>                  | 15                |      | 15                |      | 15                |      | 15                |      | μs               |      |
| Clock static to PLL reset                   | t <sub>CK Reset</sub>                 | 30                |      | 30                |      | 30                |      | 30                |      | ns               |      |
| <b>Output Times</b>                         |                                       |                   |      |                   |      |                   |      |                   |      |                  |      |
| Output data clock HIGH time                 | t <sub>QKH</sub>                      | 0.9               | 1.1  | 0.9               | 1.1  | 0.9               | 1.1  | 0.9               | 1.1  | t <sub>CKH</sub> |      |
| Output data clock LOW time                  | t <sub>QKL</sub>                      | 0.9               | 1.1  | 0.9               | 1.1  | 0.9               | 1.1  | 0.9               | 1.1  | t <sub>CKL</sub> |      |
| QK edge to clock edge skew                  | t <sub>CKQK</sub>                     | -0.2              | 0.2  | -0.25             | 0.25 | -0.25             | 0.25 | -0.3              | 0.3  | ns               |      |
| QK edge to output data edge                 | t <sub>QKQ0</sub> , t <sub>QKQ1</sub> | -0.12             | 0.12 | -0.2              | 0.2  | -0.2              | 0.2  | -0.25             | 0.25 | ns               | 3, 5 |
| QK edge to any output data                  | t <sub>QKQ</sub>                      | -0.22             | 0.22 | -0.3              | 0.3  | -0.3              | 0.3  | -0.35             | 0.35 | ns               | 4, 5 |
| QK edge to QVLD                             | t <sub>QKVLD</sub>                    | -0.22             | 0.22 | -0.3              | 0.3  | -0.3              | 0.3  | -0.35             | 0.35 | ns               |      |
| <b>Setup Times</b>                          |                                       |                   |      |                   |      |                   |      |                   |      |                  |      |
| Address/command and input                   | t <sub>AS</sub> /t <sub>CS</sub>      | 0.3               |      | 0.4               |      | 0.4               |      | 0.5               |      | ns               |      |
| Data-in and data mask to DK                 | t <sub>DS</sub>                       | 0.17              |      | 0.25              |      | 0.25              |      | 0.3               |      | ns               |      |
| <b>Hold Times</b>                           |                                       |                   |      |                   |      |                   |      |                   |      |                  |      |
| Address/command and input                   | t <sub>AH</sub> /t <sub>CH</sub>      | 0.3               |      | 0.4               |      | 0.4               |      | 0.5               |      | ns               |      |
| Data-in and data mask to DK                 | t <sub>DH</sub>                       | 0.17              |      | 0.25              |      | 0.25              |      | 0.3               |      | ns               |      |

**Notes 1.** Clock phase jitter is the variance from clock rising edge to the next expected clock rising edge.

2. Frequency drift is not allowed.
3. t<sub>QKQ0</sub> is referenced to Q0–Q8 and t<sub>QKQ1</sub> is referenced to Q9–Q17 for a x18 device. For a x9 device, Q0–Q8 are referenced to t<sub>QKQ0</sub>.
4. t<sub>QKQ</sub> takes into account the skew between any QKx and any Q.
5. t<sub>QKQ</sub>, t<sub>QKQX</sub> are guaranteed by design.

**Remark** All timing parameters are measured relative to the crossing point of CK/CK#, DK/DK# and to the crossing point with V<sub>REF</sub> of the command, address, and data signals.

Figure 1-1. Clock / Input Data Clock Command / Address Timings

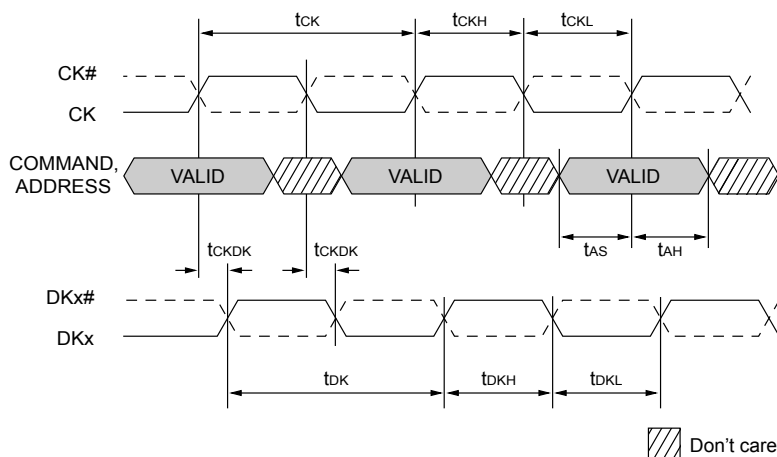

### Temperature and Thermal Impedance

#### Temperature Limits

| Parameter                        | Symbol | MIN. | MAX. | Unit | Note |
|----------------------------------|--------|------|------|------|------|
| Reliability junction temperature | $T_J$  | 0    | +110 | °C   | 1    |
| Operating junction temperature   | $T_J$  | 0    | +100 | °C   | 2    |
| Operating case temperature       | $T_c$  | 0    | +95  | °C   | 3    |

**Notes 1.** Temperatures greater than 110°C may cause permanent damage to the device. This is a stress rating only and functional operation of the device at or above this is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability of the part.

2. Junction temperature depends upon cycle time, loading, ambient temperature, and airflow.
3. MAX operating case temperature;  $T_c$  is measured in the center of the package. Device functionality is not guaranteed if the device exceeds maximum  $T_c$  during operation.

#### Thermal Impedance

| Substrate | Ball      | $\theta_{ja}$ (°C/W) |                  |                  | $\theta_{jb}$<br>(°C/W) | $\theta_{jc}$<br>(°C/W) |
|-----------|-----------|----------------------|------------------|------------------|-------------------------|-------------------------|
|           |           | Air Flow = 0 m/s     | Air Flow = 1 m/s | Air Flow = 2 m/s |                         |                         |
| 4 - Layer | Lead      | 21.49                | 17.33            | 16.15            | 10.29                   | 1.22                    |
| 4 - Layer | Lead free | 21.32                | 17.18            | 16.01            | 10.13                   | 1.22                    |

## 2. Operation

### 2.1 Command Operation

According to the functional signal description, the following command sequences are possible. All input states or sequences not shown are illegal or reserved. All command and address inputs must meet setup and hold times around the rising edge of CK.

**Table 2-1. Address Widths at Different Burst Lengths**

| Burst Length | Configuration |        |
|--------------|---------------|--------|
|              | x9            | x18    |
| BL=2         | A0–A21        | A0–A20 |
| BL=4         | A0–A20        | A0–A19 |
| BL=8         | A0–A19        | A0–A18 |

**Table 2-2. Command Table**

| Operation                      | Code        | CS# | WE# | REF# | A0–An <sup>Note1</sup> | BA0–BA2 | Note |
|--------------------------------|-------------|-----|-----|------|------------------------|---------|------|
| Device DESELECT / No Operation | DESEL / NOP | H   | X   | X    | X                      | X       |      |
| MRS: Mode Register Set         | MRS         | L   | L   | L    | OPCODE                 | X       | 2    |
| READ                           | READ        | L   | H   | H    | A                      | BA      | 3    |
| WRITE                          | WRITE       | L   | L   | H    | A                      | BA      | 3    |
| AUTO REFRESH                   | AREF        | L   | H   | L    | X                      | BA      |      |

- Notes**
1. n = 21.
  2. Only A0–A17 are used for the MRS command.
  3. See **Table 2-1**.

**Remark** X = “Don’t Care”, H = logic HIGH, L = logic LOW, A = valid address, BA = valid bank address

### 2.2 Description of Commands

#### DESEL / NOP<sup>Note1</sup>

The NOP command is used to perform a no operation to the μPD48576209/18/36, which essentially deselects the chip. Use the NOP command to prevent unwanted commands from being registered during idle or wait states. Operations already in progress are not affected. Output values depend on command history.

#### MRS

The mode register is set via the address inputs A0–A17. See **Figure 2-5. Mode Register Bit Map** for further information. The MRS command can only be issued when all banks are idle and no bursts are in progress.

#### READ

The READ command is used to initiate a burst read access to a bank. The value on the BA0–BA2 inputs selects the bank, and the address provided on inputs A0–A21 selects the data location within the bank.

#### WRITE

The WRITE command is used to initiate a burst write access to a bank. The value on the BA0–BA2 inputs selects the bank, and the address provided on inputs A0–A21 selects the data location within the bank. Input data appearing on the D is written to the memory array subject to the DM input logic level appearing coincident with the data. If the DM signal is registered LOW, the corresponding data will be written to memory. If the DM signal is registered HIGH, the corresponding data inputs will be ignored (i.e., this part of the data word will not be written).



**AREF**

The AREF is used during normal operation of the μPD48576109/18 to refresh the memory content of a bank. The command is non-persistent, so it must be issued each time a refresh is required. The value on the BA0–BA2 inputs selects the bank. The refresh address is generated by an internal refresh controller, effectively making each address bit a “Don’t Care” during the AREF command. The μPD48576109/18 requires 64K cycles at an average periodic interval of  $0.244\mu\text{s}$  <sup>Note2</sup> (MAX.). To improve efficiency, eight AREF commands (one for each bank) can be posted to μPD48576109/18 at periodic intervals of  $1.95\mu\text{s}$  <sup>Note3</sup>.

Within a period of 32 ms, the entire memory must be refreshed. The delay between the AREF command and a subsequent command to same bank must be at least  $t_{\text{RC}}$  as continuous refresh. Other refresh strategies, such as burst refresh, are also possible.

**Notes** 1. When the chip is deselected, internal NOP commands are generated and no commands are accepted.

2. Actual refresh is  $32\text{ ms} / 16\text{k} / 8 = 0.244\mu\text{s}$ .

3. Actual refresh is  $32\text{ ms} / 16\text{k} = 1.95\mu\text{s}$ .

**2.3 Initialization**

The μPD48576109/18 must be powered up and initialized in a predefined manner. Operational procedures other than those specified may result in undefined operations or permanent damage to the device. The following sequence is used for Power-Up:


1. Apply power ( $V_{\text{EXT}}$ ,  $V_{\text{DD}}$ ,  $V_{\text{DDQ}}$ ,  $V_{\text{REF}}$ ,  $V_{\text{TT}}$ ) and start clock as soon as the supply voltages are stable. Apply  $V_{\text{DD}}$  and  $V_{\text{EXT}}$  before or at the same time as  $V_{\text{DDQ}}$ . Apply  $V_{\text{DDQ}}$  before or at the same time as  $V_{\text{REF}}$  and  $V_{\text{TT}}$ . Although there is no timing relation between  $V_{\text{EXT}}$  and  $V_{\text{DD}}$ , the chip starts the power-up sequence only after both voltages are at their nominal levels.  $V_{\text{DDQ}}$  supply must not be applied before  $V_{\text{DD}}$  supply.  $\text{CK}/\text{CK}\#$  must meet  $V_{\text{ID(DC)}}$  prior to being applied. Maintain all remaining balls in NOP conditions.

**Note** No rule of apply power sequence is the design target.

2. Maintain stable conditions for  $200\mu\text{s}$  (MIN.).
3. Issue at least three or more consecutive MRS commands: two dummies or more plus one valid MRS. It is recommended that all address pins are held LOW during the dummy MRS commands.
4.  $t_{\text{MRSC}}$  after valid MRS, an AUTO REFRESH command to all 8 banks must be issued and wait for  $15\mu\text{s}$  with  $\text{CK}/\text{CK}\#$  toggling in order to lock the PLL prior to normal operation.
5. After  $t_{\text{RC}}$ , the chip is ready for normal operation.

2.4 Power-On Sequence

Figure 2-1. Power-Up Sequence

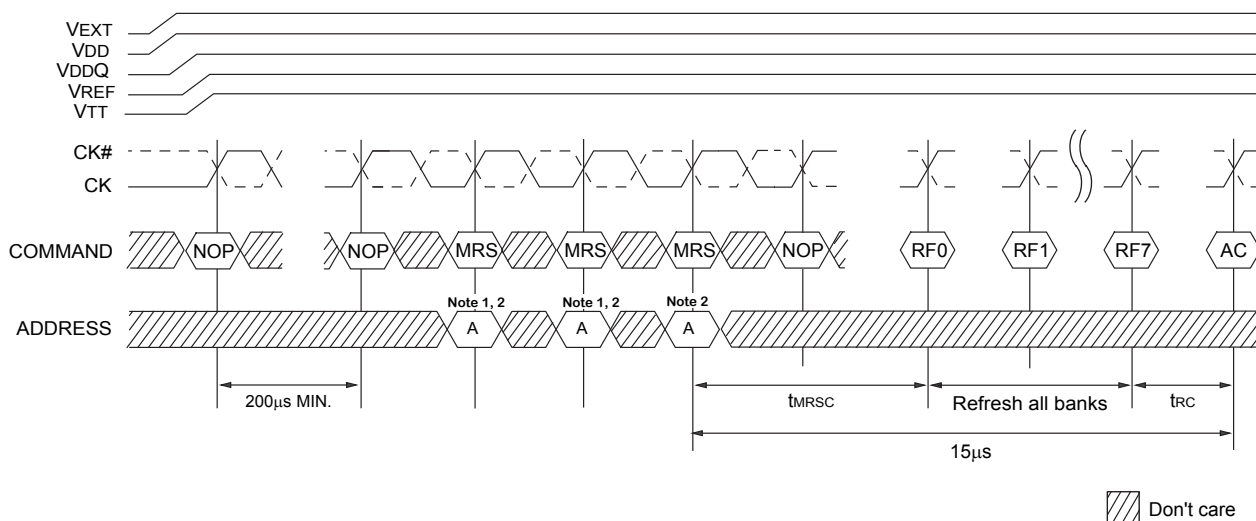

- Notes 1. Recommended all address pins held LOW during dummy MRS commands.
- 2. A10-A17 must be LOW.

Remark MRS : MRS command

RFp : REFRESH bank p

AC : Any command

2.5 Programmable Impedance Output Buffer

The μPD48576109/18 is equipped with programmable impedance output buffers. This allows a user to match the driver impedance to the system. To adjust the impedance, an external precision resistor (RQ) is connected between the ZQ ball and V<sub>SS</sub>. The value of the resistor must be five times the desired impedance. For example, a 300 Ω resistor is required for an output impedance of 60 Ω. To ensure that output impedance is one fifth the value of RQ (within 15 percent), the range of RQ is 125 Ω to 300 Ω. Output impedance updates may be required because, over time, variations may occur in supply voltage and temperature. The device samples the value of RQ. An impedance update is transparent to the system and does not affect device operation. All data sheet timing and current specifications are met during an update.

2.6 PLL Reset


The μPD48576109/18 utilizes internal Phase-locked loops for maximum output, data valid windows. It can be placed into a stopped-clock state to minimize power with a modest restart time of 15 μs. The clock (CK/CK#) must be toggled for 15 μs in order to stabilize PLL circuits for next READ operation.

2.7 Clock Input

Table 2-3. Clock Input Operation Conditions

| Parameter                                | Symbol              | Conditions | MIN.                       | MAX.                       | Unit | Note |
|--|---------------------|------------|----------------------------|----------------------------|------|------|
| Clock Input Voltage Level                | V <sub>IN(DC)</sub> | CK and CK# | -0.3                       | V <sub>DDQ</sub> + 0.3     | V    |      |
| Clock Input Differential Voltage Level   | V <sub>ID(DC)</sub> | CK and CK# | 0.2                        | V <sub>DDQ</sub> + 0.6     | V    | 8    |
| Clock Input Differential Voltage Level   | V <sub>ID(AC)</sub> | CK and CK# | 0.4                        | V <sub>DDQ</sub> + 0.6     | V    | 8    |
| Clock Input Crossing Point Voltage Level | V <sub>IX(AC)</sub> | CK and CK# | V <sub>DDQ</sub> /2 - 0.15 | V <sub>DDQ</sub> /2 + 0.15 | V    | 9    |

Figure 2-2. Clock Input

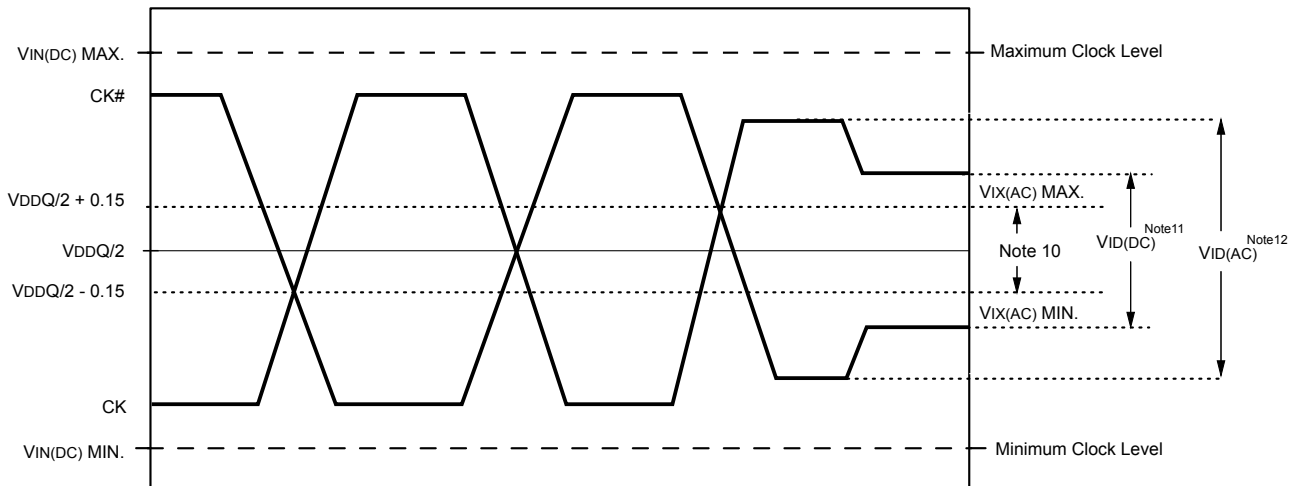


- Notes**
1. DKx and DKx# have the same requirements as CK and CK#.
  2. All voltages referenced to  $V_{SS}$ .
  3. Tests for AC timing, IDD and electrical AC and DC characteristics may be conducted at normal reference/supply voltage levels; but the related specifications and device operations are tested for the full voltage range specified.
  4. AC timing and IDD tests may use a  $V_{IL}$  to  $V_{IH}$  swing of up to 1.5 V in the test environment, but input timing is still referenced to  $V_{REF}$  (or the crossing point for CK/CK#), and parameters specifications are tested for the specified AC input levels under normal use conditions. The minimum slew rate for the input signals used to test the device is 2V/ns in the range between  $V_{IL(AC)}$  and  $V_{IH(AC)}$ .
  5. The AC and DC input level specifications are as defined in the HSTL Standard (i.e. the receiver will effectively switch as a result of the signal crossing the AC input level, and will remain in that state as long as the signal does not ring back above[below] the DC input LOW[HIGH] level).
  6. The CK/CK# input reference level (for timing referenced to CK/CK#) is the point at which CK and CK# cross. The input reference level for signal other than CK/CK# is  $V_{REF}$ .
  7. CK and CK# input slew rate must be  $\geq 2V/ns$  ( $\geq 4V/ns$  if measured differentially).
  8.  $V_{ID}$  is the magnitude of the difference between the input level on CK and input level on CK#.
  9. The value of  $V_{IX}$  is expected to equal  $V_{DDQ}/2$  of the transmitting device and must track variations in the DC level of the same.
  10. CK and CK# must cross within the region.
  11. CK and CK# must meet at least  $V_{ID(DC)}$  (MIN.) when static and centered around  $V_{DDQ}/2$ .
  12. Minimum peak-to-peak swing.

**2.8 Mode Register Set Command (MRS)**

The mode register stores the data for controlling the operating modes of the memory. It programs the μPD48576109/18 configuration, burst length, and I/O options. During a MRS command, the address inputs A0–A17 are sampled and stored in the mode register.  $t_{MRSC}$  must be met before any command can be issued to the μPD48576109/18. The mode register may be set at any time during device operation. However, any pending operations are not guaranteed to successfully complete, and all memory cell data are not guaranteed.

Since MRS is used for internal test mode entry, bits A10–A17 must be set to all “0” at the MRS setting.


**Figure 2-3. Mode Register Set Timing**

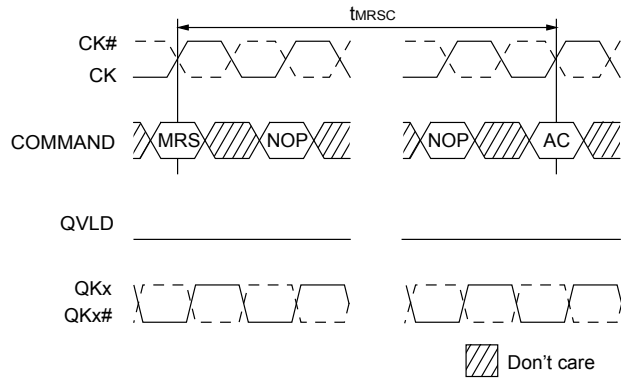

**Remark** MRS : MRS command


AC : any command

**Figure 2-4. Mode Register Set**

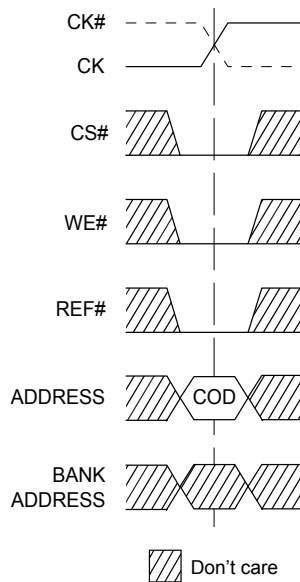

**Remark** COD: code to be loaded into the register.

Figure 2-5. Mode Register Bit Map

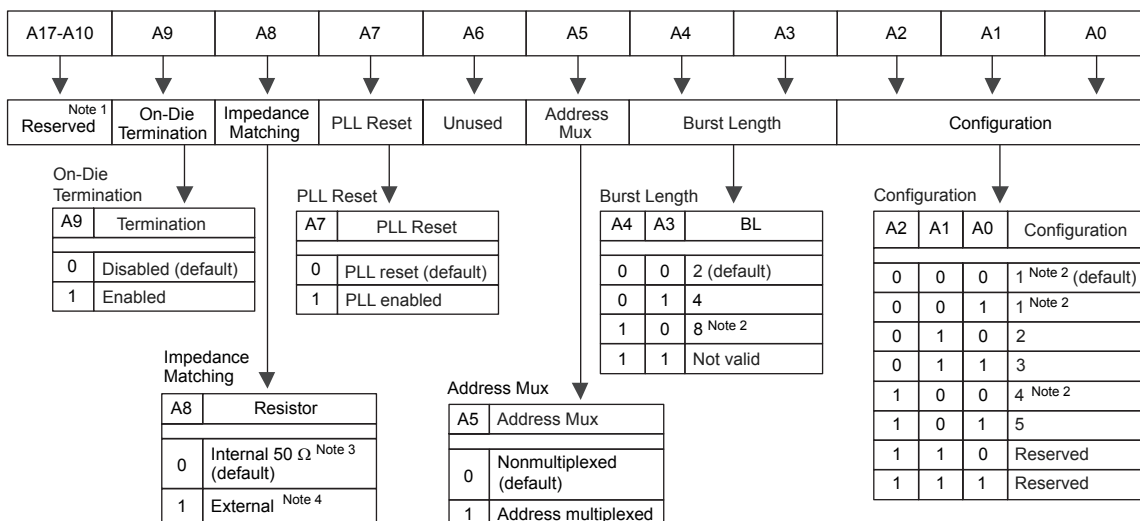

Notes 1. Bits A10–A17 must be set to all ‘0’. A18–An are “Don’t Care”.

- 2. BL=8 is not available for configuration 1 and 4.
- 3. ±30% temperature variation.
- 4. Within 15%.

### 2.9 Read & Write configuration (Non Multiplexed Address Mode)

Table 2-4 shows, for different operating frequencies, the different μPD48576109/18 configurations that can be programmed into the mode register. The READ and WRITE latency (t<sub>RL</sub> and t<sub>WL</sub>) values along with the row cycle times (t<sub>RC</sub>) are shown in clock cycles as well as in nanoseconds.

Table 2-4. Configuration Table

| Parameter             | Configuration         |         |         |                          |         | Unit            |
|-----------------------|-----------------------|---------|---------|--------------------------|---------|-----------------|
|                       | <sup>Note2</sup><br>1 | 2       | 3       | <sup>Note2, 3</sup><br>4 | 5       |                 |
| t <sub>RC</sub>       | 4                     | 6       | 8       | 3                        | 5       | t <sub>CK</sub> |
| t <sub>RL</sub>       | 4                     | 6       | 8       | 3                        | 5       | t <sub>CK</sub> |
| t <sub>WL</sub>       | 5                     | 7       | 9       | 4                        | 6       | t <sub>CK</sub> |
| Valid frequency range | 266-175               | 400-175 | 533-175 | 200-175                  | 333-175 | MHz             |

Notes 1. Apply to the entire table. t<sub>RC</sub> < 20 ns in any configuration only available with –E24 and –E18 speed grades.

- 2. BL= 8 is not available.
- 3. The minimum t<sub>RC</sub> is typically 3 cycles, except in the case of a WRITE followed by a READ to the same bank. In this instance the minimum t<sub>RC</sub> is 4 cycles.


**2.10 Write Operation (WRITE)**

Write accesses are initiated with a WRITE command, as shown in **Figure 2-6**. Row and bank addresses are provided together with the WRITE command. During WRITE commands, data will be registered at both edges of DK according to the programmed burst length (BL). A WRITE latency (WL) one cycle longer than the programmed READ latency (RL + 1) is present, with the first valid data registered at the first rising DK edge WL cycles after the WRITE command.

Any WRITE burst may be followed by a subsequent READ command. **Figure 2-10. WRITE Followed By READ: BL=2, RL=4, WL=5, Configuration 1** and **Figure 2-11. WRITE Followed By READ: BL=4, RL=4, WL=5, Configuration 1** illustrate the timing requirements for a WRITE followed by a READ for bursts of two and four, respectively.

Setup and hold times for incoming input data relative to the DK edges are specified as  $t_{DS}$  and  $t_{DH}$ . The input data is masked if the corresponding DM signal is HIGH. The setup and hold times for data mask are also  $t_{DS}$  and  $t_{DH}$ .

**Figure 2-6. WRITE Command**

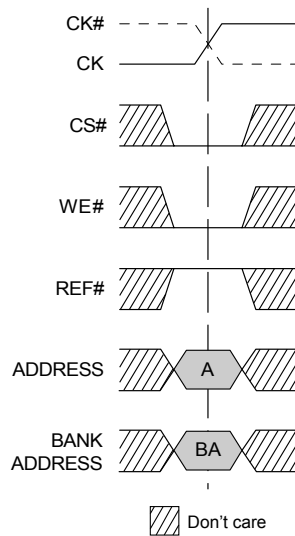

**Remark** A : Address  
 BA: Bank address

**Figure 2-7. Basic WRITE Burst / DM Timing**

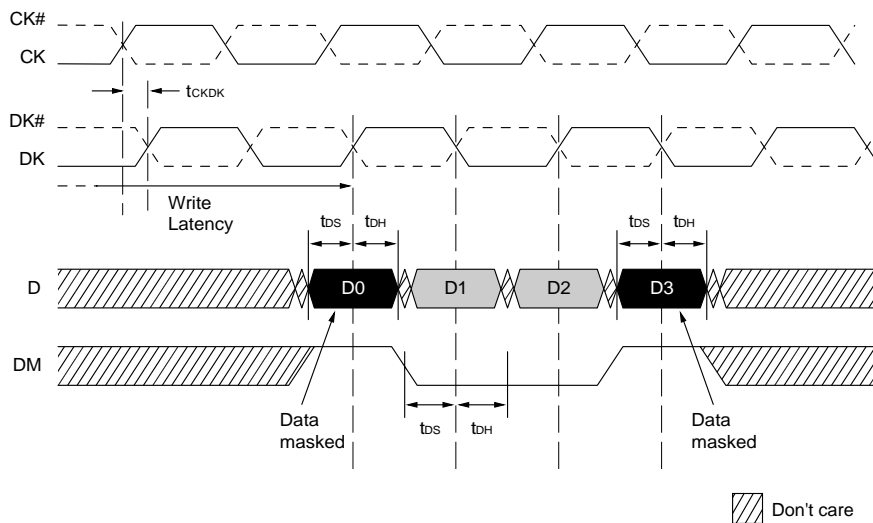


Figure 2-8. WRITE Burst Basic Sequence: BL=2, RL=4, WL=5, Configuration 1


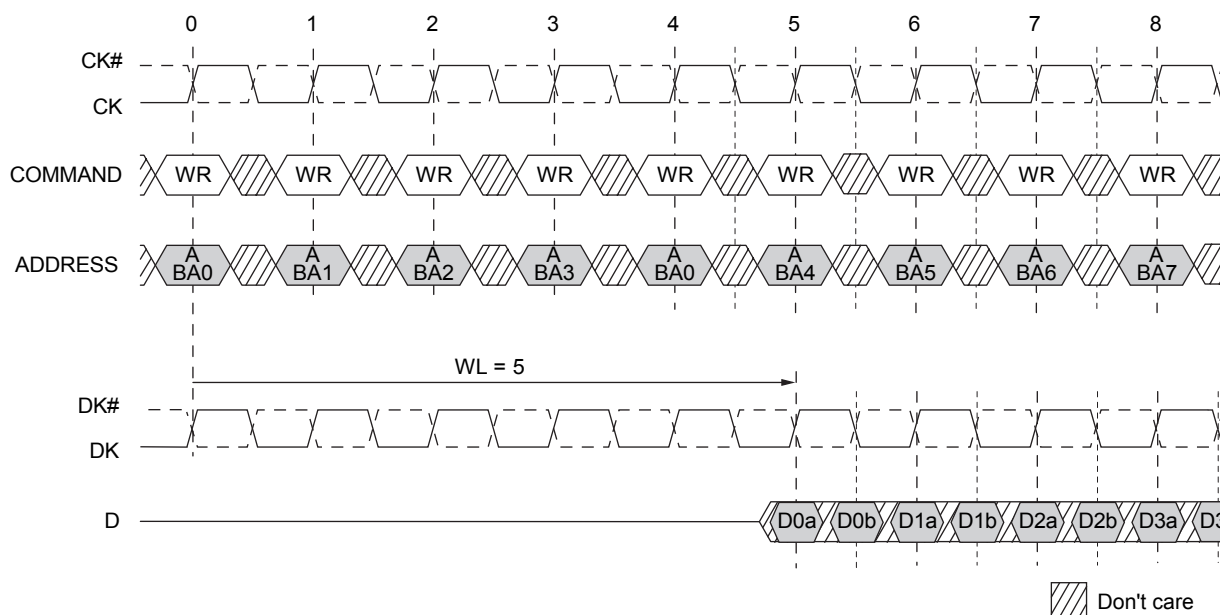


Figure 2-9. WRITE Burst Basic Sequence: BL=4, RL=4, WL=5, Configuration 1

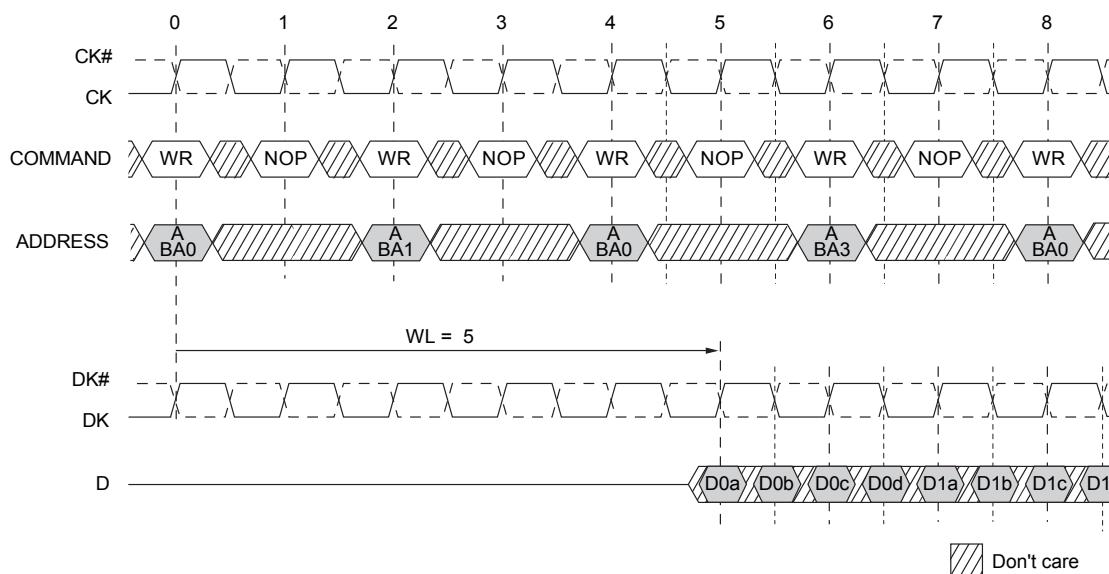

- Remarks 1.**
- WR : WRITE command
  - A/Bap : Address A of bank p
  - WL : WRITE latency
  - Dpq : Data q to bank p
- 2.** Any free bank may be used in any given command. The sequence shown is only one example of a bank sequence.

Figure 2-10. WRITE Followed By READ: BL=2, RL=4, WL=5, Configuration 1


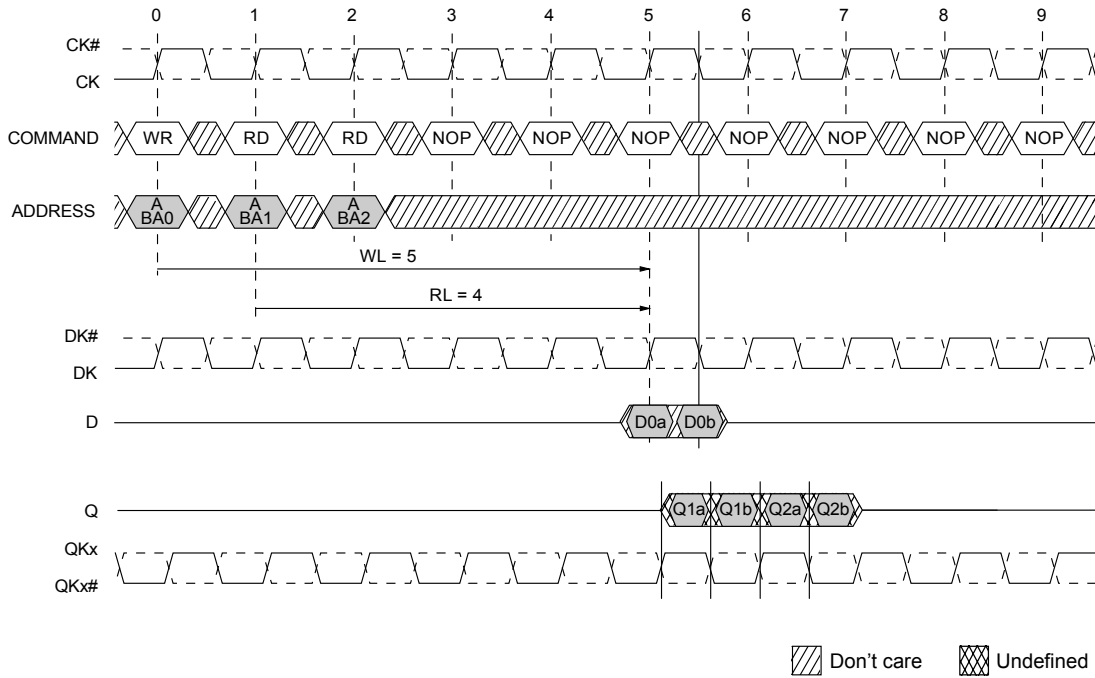


Figure 2-11. WRITE Followed By READ: BL=4, RL=4, WL=5, Configuration 1



**Remark**

- WR : WRITE command
- RD : READ command
- A/BAp : Address A of bank p
- WL : WRITE latency
- RL : READ latency
- Dpq : Data q to bank p
- Qpq : Data q from bank p

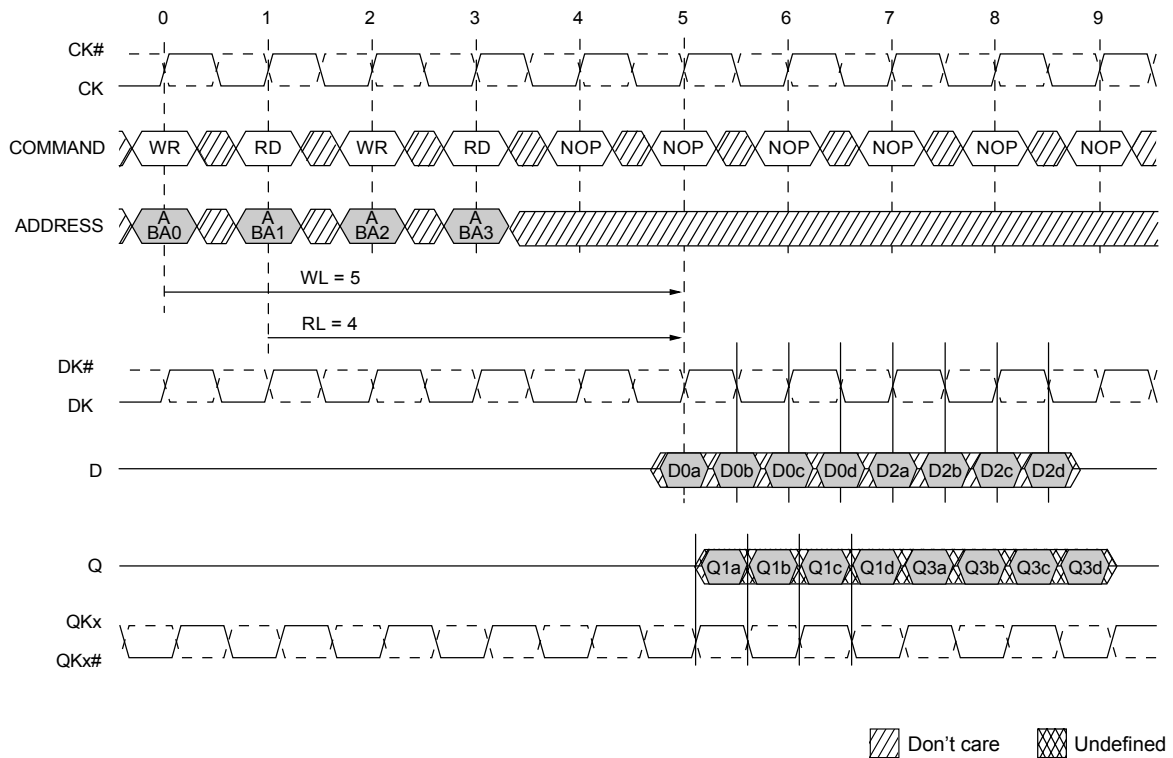

**2.11 Read Operation (READ)**

Read accesses are initiated with a READ command, as shown in **Figure 2-12**. Row and bank addresses are provided with the READ command.

During READ bursts, the memory device drives the read data edge-aligned with the QK signal. After a programmable READ latency, data is available at the outputs. The data valid signal indicates that valid data will be present in the next half clock cycle.


The skew between QK and the crossing point of CK is specified as  $t_{CKQK}$ .  $t_{QKQ0}$  is the skew between QK0 and the last valid data edge considered the data generated at the Q0–Q8.  $t_{QKQ1}$  is the skew between QK1 and the last valid data edge considered the data generated at the Q9–Q17.  $t_{QKQx}$  is derived at each QKx clock edge and is not cumulative over time.

After completion of a burst, assuming no other commands have been initiated, Q will go High-Z. Back-to-back READ commands are possible, producing a continuous flow of output data.

Minimum READ data valid window can be expressed as  $\text{MIN.}(t_{QKH}, t_{QKL}) - 2 \times \text{MAX.}(t_{QKQx})$


Any READ burst may be followed by a subsequent WRITE command. **Figure 2-16. READ followed by WRITE, BL=2, RL=4, WL=5, Configuration 1** and **Figure 2-17. READ followed by WRITE, BL=4, RL=4, WL=5, Configuration 1** illustrate the timing requirements for a READ followed by a WRITE.

**Figure 2-12. READ Command**

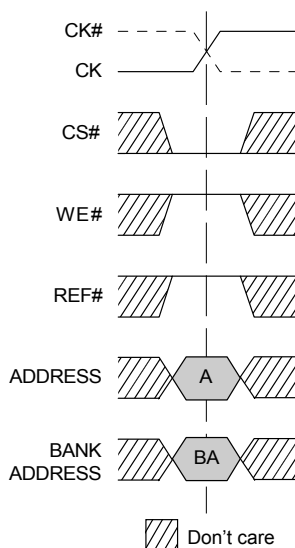

**Remark** A : Address  
 BA: Bank address

Figure 2-13. Basic READ Burst Timing

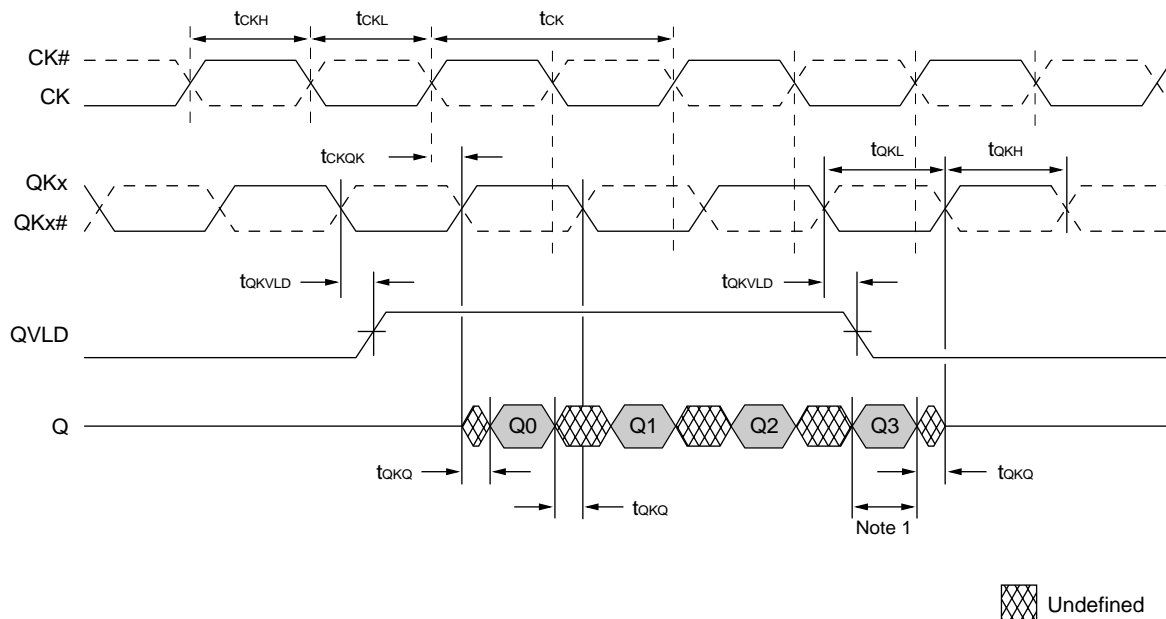

**Note 1.** Minimum READ data valid window can be expressed as  $\text{MIN.}(t_{QKH}, t_{QKL}) - 2 \times \text{MAX.}(t_{QKQx})$   
 $t_{CKH}$  and  $t_{CKL}$  are recommended to have 50% / 50% duty.

- Remarks**
1.  $t_{QKQ0}$  is referenced to Q0–Q8.  
 $t_{QKQ1}$  is referenced to Q9–Q17.
  2.  $t_{QKQ}$  takes into account the skew between any QKx and any Q.
  3.  $t_{CKQK}$  is specified as CK rising edge to QK rising edge.

Figure 2-14. READ Burst Basic Sequence: BL=2, RL=4, Configuration 1


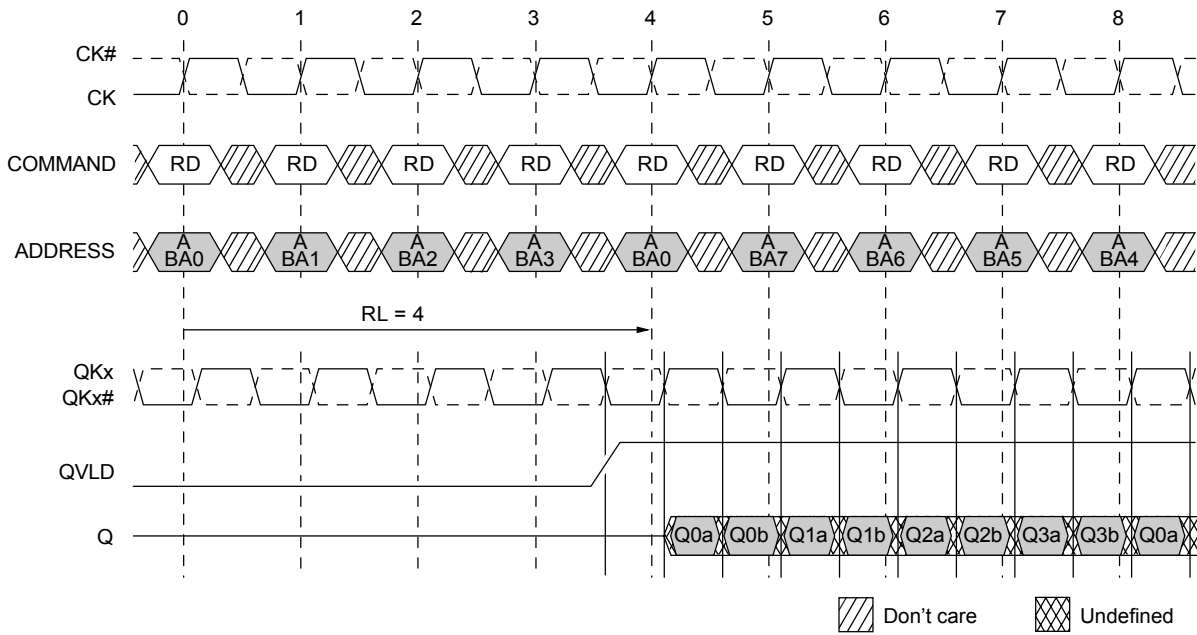


Figure 2-15. READ Burst Basic Sequence: BL=4, RL=4, Configuration 1

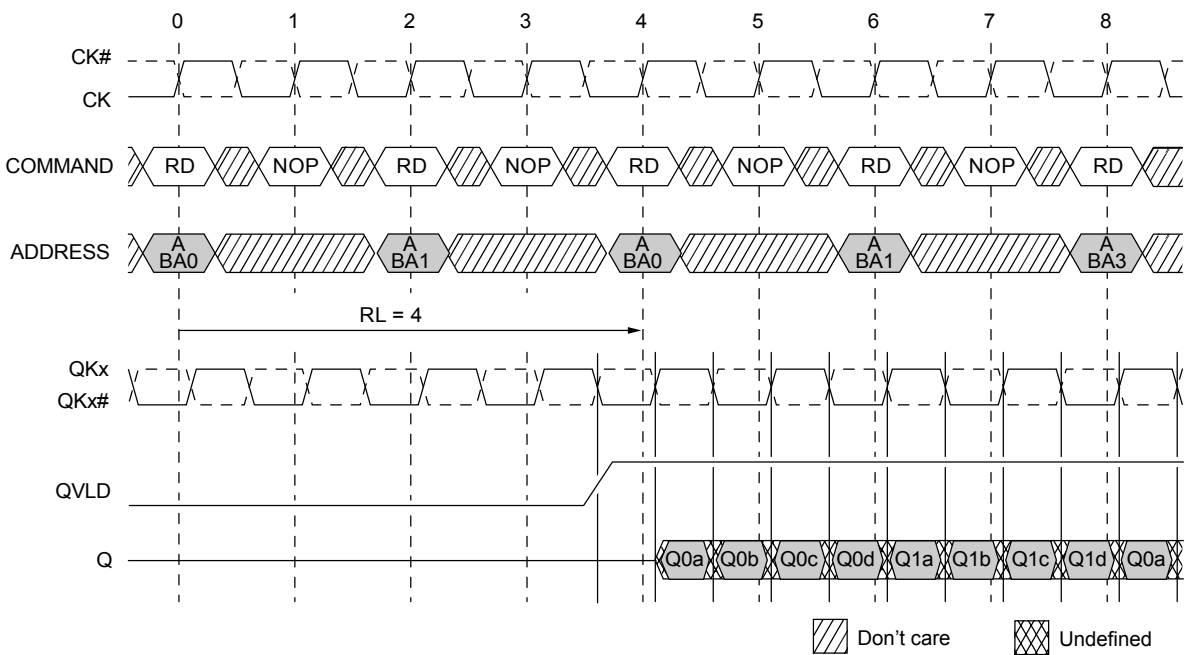

**Remark** RD : READ command  
 A/BAp : Address A of bank p  
 RL : READ latency  
 Qpq : Data q from bank p

Figure 2-16. READ followed by WRITE, BL=2, RL=4, WL=5, Configuration 1


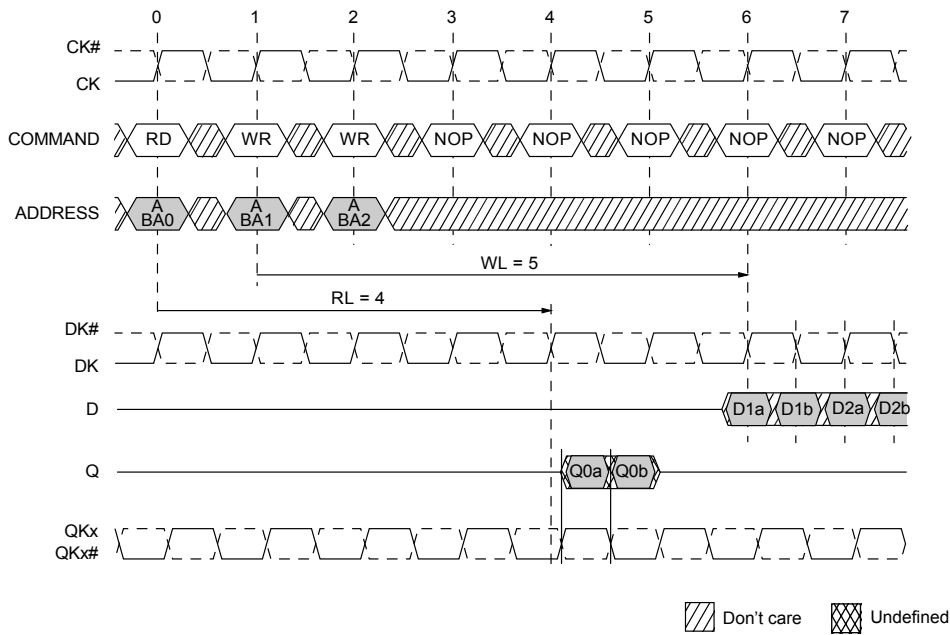


Figure 2-17. READ followed by WRITE, BL=4, RL=4, WL=5, Configuration 1

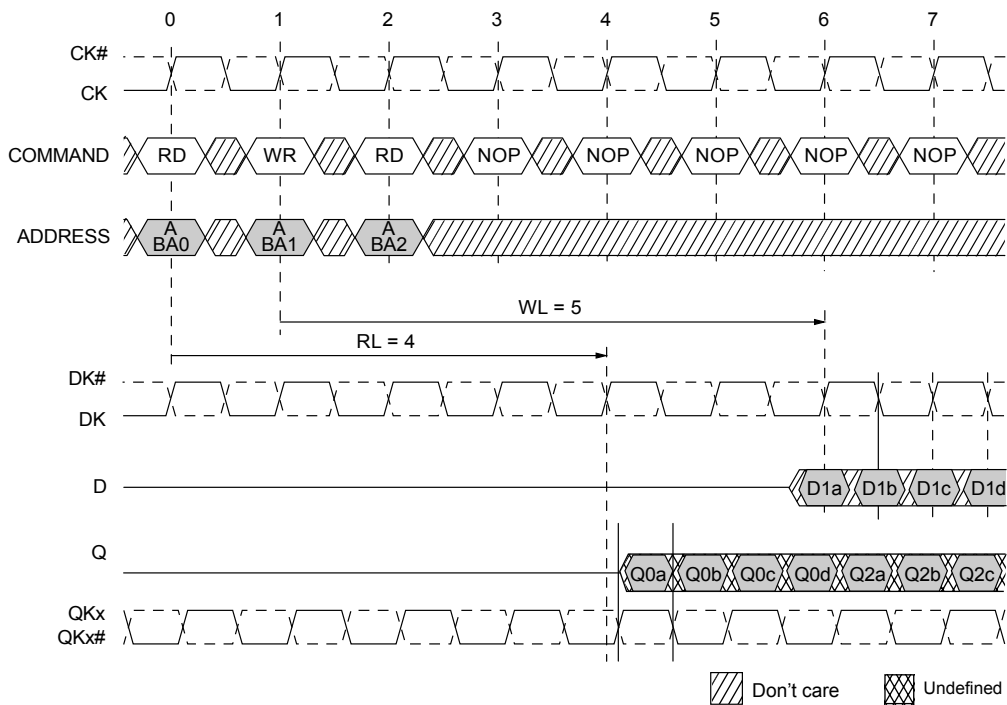

- Remark**
- WR : WRITE command
  - RD : READ command
  - A/BA<sub>p</sub> : Address A of bank p
  - WL : WRITE latency
  - RL : READ latency
  - D<sub>pq</sub> : Data q to bank p
  - Q<sub>pq</sub> : Data q from bank p

Figure 2-18. READ/WRITE Interleave: BL=4, t<sub>RC</sub>=6, WL=7, Configuration 2


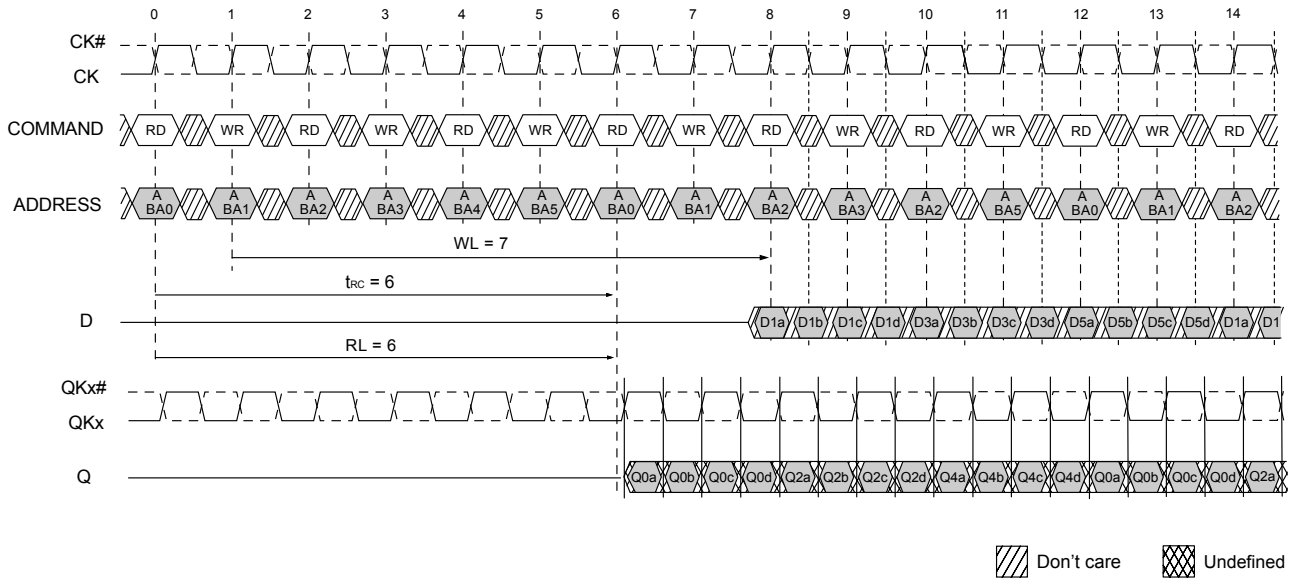


Figure 2-19. READ/WRITE Interleave: BL=4, t<sub>RC</sub>=8, WL=9, Configuration 3

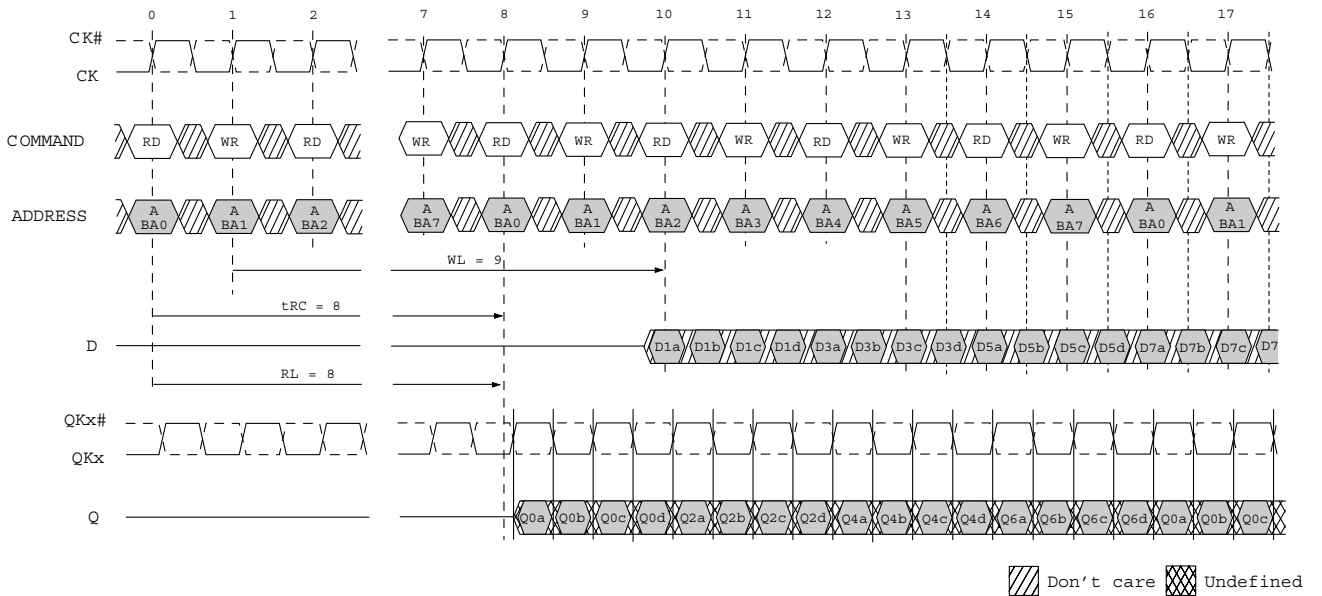


**Remark** WR : WRITE command  
 RD : READ command  
 A/BA<sub>p</sub> : Address A of bank p  
 WL : WRITE latency  
 RL : READ latency  
 D<sub>pq</sub> : Data q to bank p  
 Q<sub>pq</sub> : Data q from bank p

**2.12 Refresh Operation: AUTO REFRESH Command (AREF)**

AREF is used to perform a REFRESH cycle on one row in a specific bank. The row addresses are generated by an internal refresh counter; external address balls are “Don’t Care.” The delay between the AREF command and a subsequent command to the same bank must be at least  $t_{RC}$ .


Within a period of 32 ms ( $t_{REF}$ ), the entire memory must be refreshed. **Figure 2-21** illustrates an example of a continuous refresh sequence. Other refresh strategies, such as burst refresh, are also possible.

**Figure 2-20. AUTO REFRESH Command**

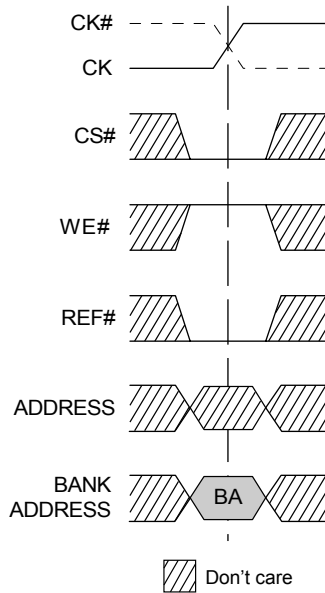

**Remark** BA: Bank address

**Figure 2-21. AUTO REFRESH Cycle**

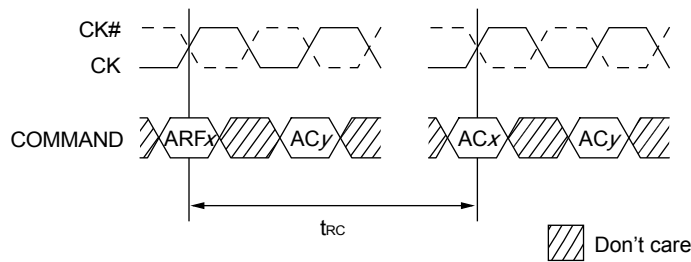

- Remarks**
1. ACx : Any command on bank x  
 ARFx : Auto refresh bank x  
 ACy : Any command on different bank.
  2.  $t_{RC}$  is configuration-dependent. Refer to **Table 2-4. Configuration Table**.

**2.13 On-Die Termination**


On-die termination (ODT) is enabled by setting A9 to “1” during an MRS command. With ODT on, all the Ds and DM are terminated to  $V_{TT}$  with a resistance  $R_{TT}$ . The command, address, and clock signals are not terminated. **Figure 2-22.** below shows the equivalent circuit of a D receiver with ODT. ODTs are dynamically switched off during READ commands and are designed to be off prior to the μPD48576109/18 driving the bus. Similarly, ODTs are designed to switch on after the μPD48576109/18 has issued the last piece of data. ODT at the D inputs and DM are always on.

**Table 2-5. On-Die Termination DC Parameters**


| Description         | Symbol   | MIN.                  | MAX.                  | Units    | Note |
|---------------------|----------|-----------------------|-----------------------|----------|------|
| Termination voltage | $V_{TT}$ | $0.95 \times V_{REF}$ | $1.05 \times V_{REF}$ | V        | 1, 2 |
| On-Die termination  | $R_{TT}$ | 125                   | 185                   | $\Omega$ | 3    |

- Notes**
1. All voltages referenced to  $V_{SS}$  (GND).
  2.  $V_{TT}$  is expected to be set equal to  $V_{REF}$  and must track variations in the DC level of  $V_{REF}$ .
  3. The  $R_{TT}$  value is measured at 95°C  $T_c$ .

**Figure 2-22. On- Die Termination-Equivalent Circuit**



**Figure 2-23. READ Burst with ODT: BL=2, Configuration 1**

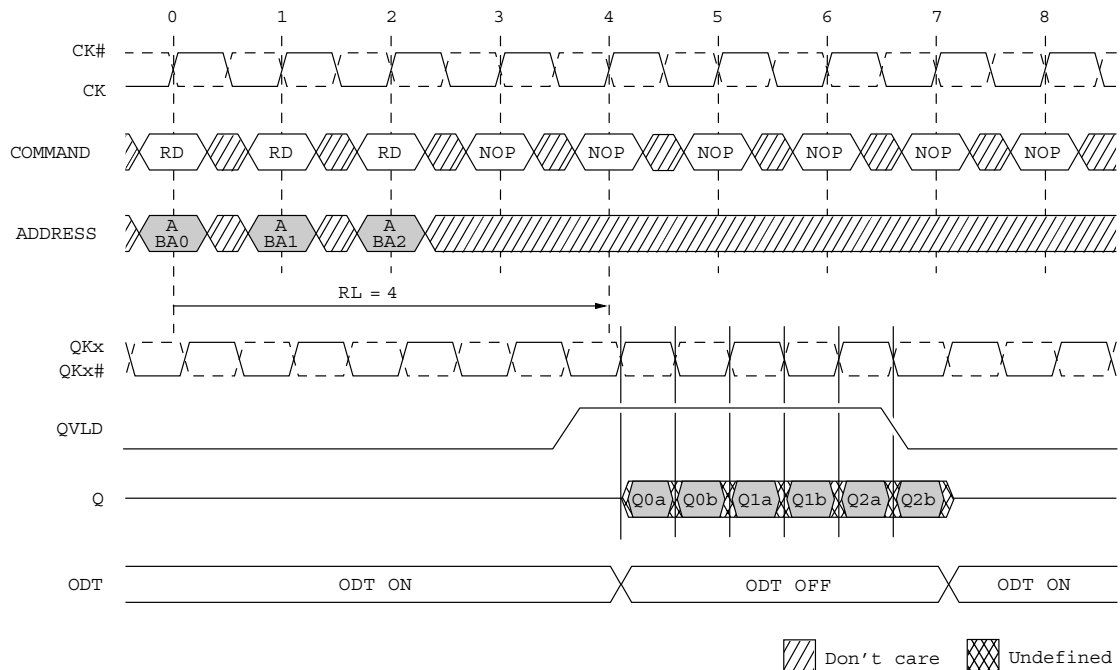

- Remark**
- RD : READ command
  - A/BAp : Address A of bank p
  - RL : READ latency
  - Qpq : Data q from bank p

Figure 2-24. READ NOP READ with ODT: BL=2, Configuration 1


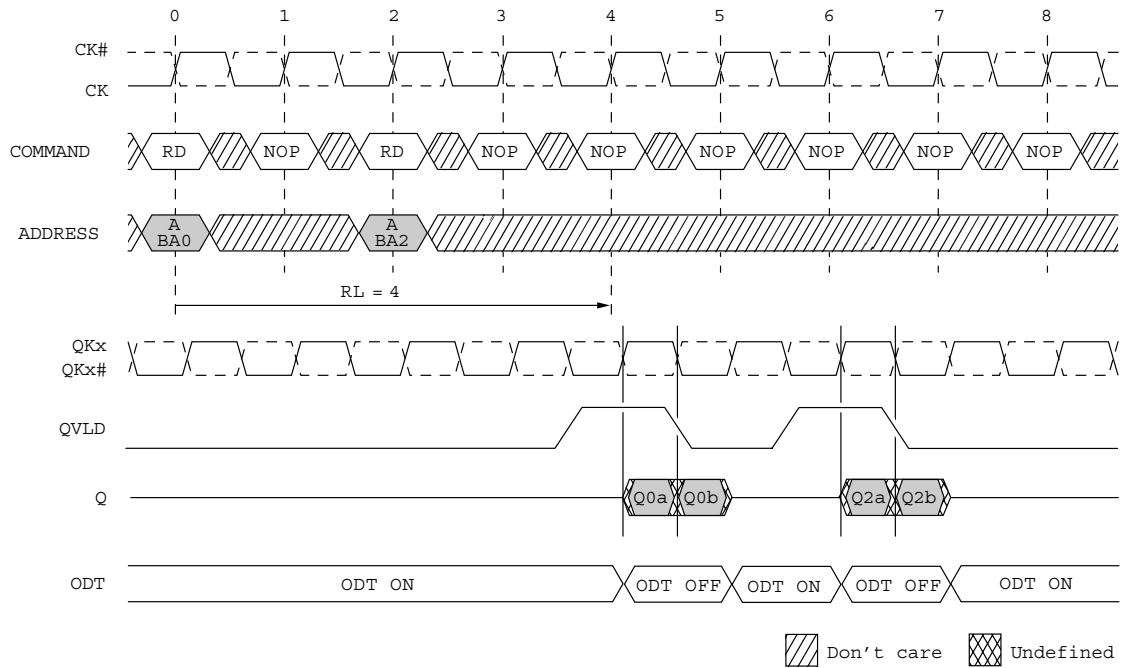


Figure 2-25. READ NOP NOP READ with ODT: BL=2, Configuration 1



**Remark** RD : READ command  
 A/BAp : Address A of bank p  
 RL : READ latency  
 Qpq : Data q from bank p

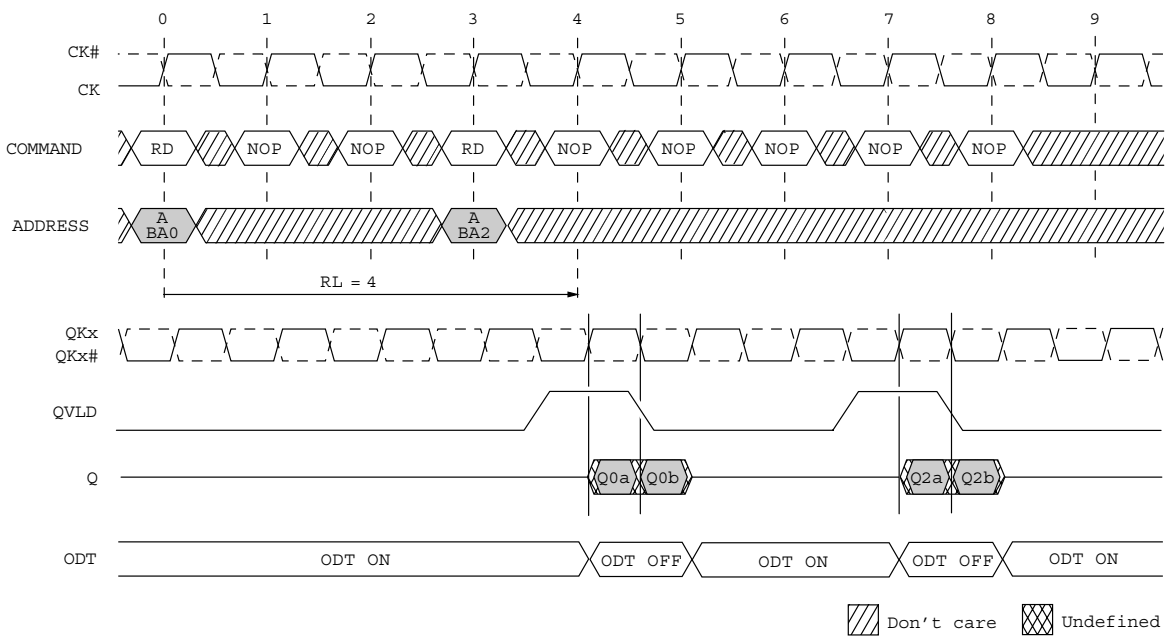


**2.14 Operation with Multiplexed Address**

In multiplexed address mode, the address can be provided to the μPD48576109/18 in two parts that are latched into the memory with two consecutive rising clock edges. This provides the advantage that a maximum of 11 address balls are required to control the μPD48576109/18, reducing the number of balls on the controller side. The data bus efficiency in continuous burst mode is not affected for BL=4 and BL=8 since at least two clocks are required to read the data out of the memory. The bank addresses are delivered to the μPD48576109/18 at the same time as the WRITE command and the first address part, Ax.


This option is available by setting bit A5 to “1” in the mode register. Once this bit is set, the READ, WRITE, and MRS commands follow the format described in **Figure 2-26**. See **Figure 2-28. Power-Up Sequence in Multiplexed Address Mode** for the power-up sequence.

**Figure 2-26. Command Description in Multiplexed**

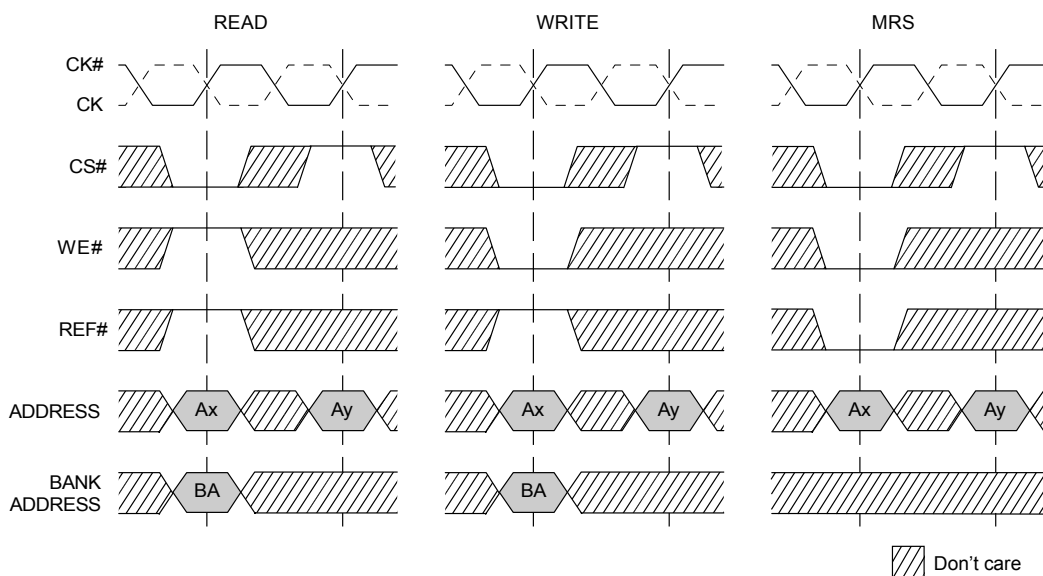

- Remarks**
1. Ax, Ay : Address  
BA : Bank Address
  2. The minimum setup and hold times of the two address parts are defined tAS and tAH.


Figure 2-27. Mode Register Set Command in Multiplexed Address Mode

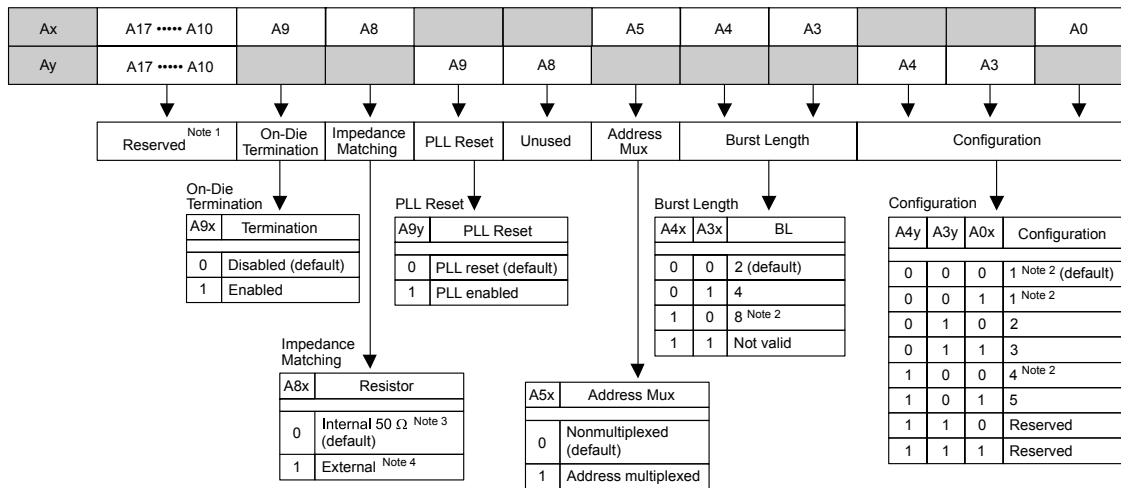

- Notes**
1. Bits A10–A17 must be set to all ‘0’.
  2. BL=8 is not available for configuration 1 and 4.
  3. ±30% temperature variation.
  4. Within 15%.

**Remark** The address A0, A3, A4, A5, A8, and A9 must be set as follows in order to activate the mode register in the multiplexed address mode.

Figure 2-28. Power-Up Sequence in Multiplexed Address Mode

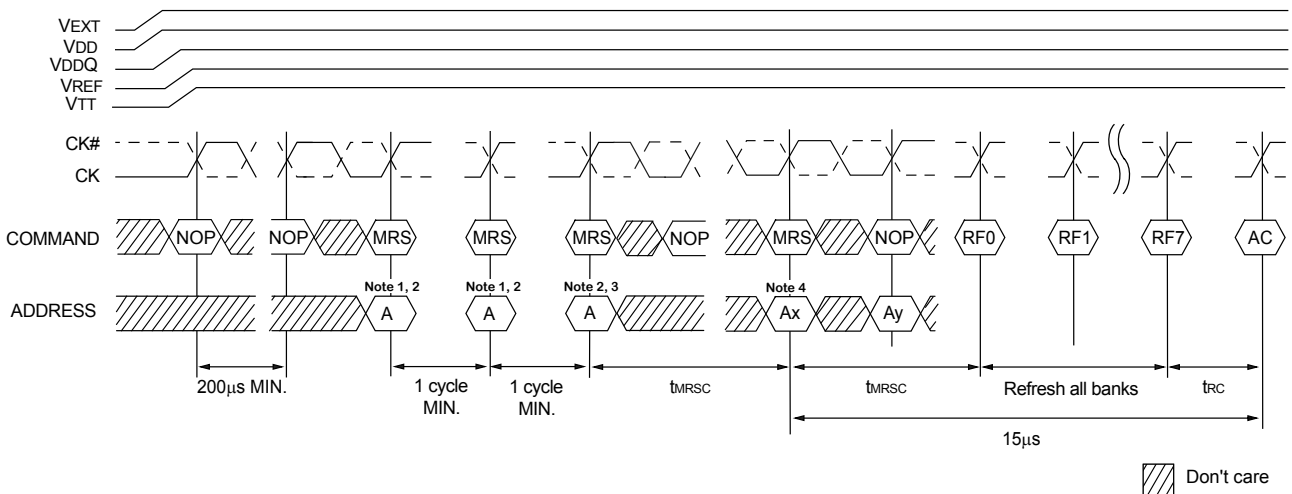

- Notes**
1. Recommended all address pins held LOW during dummy MRS command.
  2. A10-A17 must be LOW.
  3. Address A5 must be set HIGH (muxed address mode setting when μPD48576209/18/36 is in normal mode of operation).
  4. Address A5 must be set HIGH (muxed address mode setting when μPD48576209/18/36 is already in muxed address mode).

**Remark** MRS : MRS command  
 RFp : REFRESH Bank p  
 AC : any command

**2.15 Address Mapping in Multiplexed Mode**

The address mapping is described in **Table 2-6** as a function of data width and burst length.

**Table 2-6. Address Mapping in Multiplexed Address Mode**

| Data Width | Burst Length | Ball | Address |    |    |     |    |    |     |     |     |     |     |
|------------|--------------|------|---------|----|----|-----|----|----|-----|-----|-----|-----|-----|
|            |              |      | A0      | A3 | A4 | A5  | A8 | A9 | A10 | A13 | A14 | A17 | A18 |
| x18        | BL=2         | Ax   | A0      | A3 | A4 | A5  | A8 | A9 | A10 | A13 | A14 | A17 | A18 |
|            |              | Ay   | A20     | A1 | A2 | X   | A6 | A7 | A19 | A11 | A12 | A16 | A15 |
|            | BL=4         | Ax   | A0      | A3 | A4 | A5  | A8 | A9 | A10 | A13 | A14 | A17 | A18 |
|            |              | Ay   | X       | A1 | A2 | X   | A6 | A7 | A19 | A11 | A12 | A16 | A15 |
|            | BL=8         | Ax   | A0      | A3 | A4 | A5  | A8 | A9 | A10 | A13 | A14 | A17 | A18 |
|            |              | Ay   | X       | A1 | A2 | X   | A6 | A7 | X   | A11 | A12 | A16 | A15 |
| x9         | BL=2         | Ax   | A0      | A3 | A4 | A5  | A8 | A9 | A10 | A13 | A14 | A17 | A18 |
|            |              | Ay   | A20     | A1 | A2 | A21 | A6 | A7 | A19 | A11 | A12 | A16 | A15 |
|            | BL=4         | Ax   | A0      | A3 | A4 | A5  | A8 | A9 | A10 | A13 | A14 | A17 | A18 |
|            |              | Ay   | A20     | A1 | A2 | X   | A6 | A7 | A19 | A11 | A12 | A16 | A15 |
|            | BL=8         | Ax   | A0      | A3 | A4 | A5  | A8 | A9 | A10 | A13 | A14 | A17 | A18 |
|            |              | Ay   | X       | A1 | A2 | X   | A6 | A7 | A19 | A11 | A12 | A16 | A15 |

**Remark** X means “Don’t care”.

### 2.16 Read & Write configuration in Multiplexed Address Mode

In multiplexed address mode, the READ and WRITE latencies are increased by one clock cycle. The μPD48576109/18 cycle time remains the same, as described in **Table 2-7**.

**Table 2-7. Configuration in Multiplexed Address Mode**

| Parameter             | Configuration |         |         |               |         | Unit            |
|-----------------------|---------------|---------|---------|---------------|---------|-----------------|
|                       | Note2<br>1    | 2       | 3       | Note2, 3<br>4 | 5       |                 |
| t <sub>RC</sub>       | 4             | 6       | 8       | 3             | 5       | t <sub>CK</sub> |
| t <sub>RL</sub>       | 5             | 7       | 9       | 4             | 6       | t <sub>CK</sub> |
| t <sub>WL</sub>       | 6             | 8       | 10      | 5             | 7       | t <sub>CK</sub> |
| Valid frequency range | 266-175       | 400-175 | 533-175 | 200-175       | 333-175 | MHz             |


**Notes** 1. Apply to the entire table. t<sub>RC</sub> < 20 ns in any configuration is only available with –E24 and –E18 speed grades.

- 2. BL = 8 is not available.
- 3. The minimum t<sub>RC</sub> is typically 3 cycles, except in the case of a WRITE followed by a READ to the same bank. In this instance the minimum t<sub>RC</sub> is 4 cycles.

### 2.17 Refresh Command in Multiplexed Address Mode

Similar to other commands, the refresh command is executed on the next rising clock edge when in the multiplexed address mode. However, since only bank address is required for AREF, the next command can be applied on the following clock. The operation of the AREF command and any other command is represented in **Figure 2-29**.

**Figure 2-29. Burst REFRESH Operation**

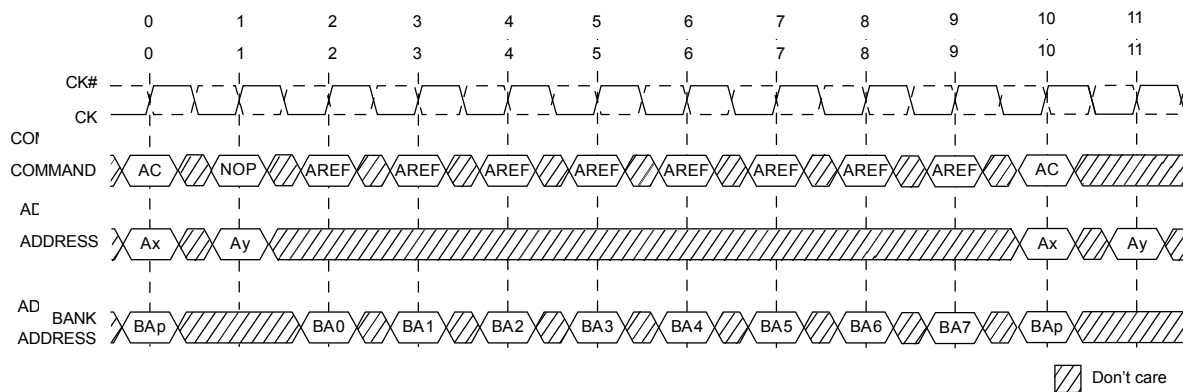

- Remark**
- AREF : AUTO REFRESH
  - AC : Any command
  - Ax : First part Ax of address
  - Ay : Second part Ay of address
  - BAp : Bank p is chosen so that t<sub>RC</sub> is met.

Figure 2-30. WRITE Burst Basic Sequence: BL=4, with Multiplexed Addresses, Configuration 1


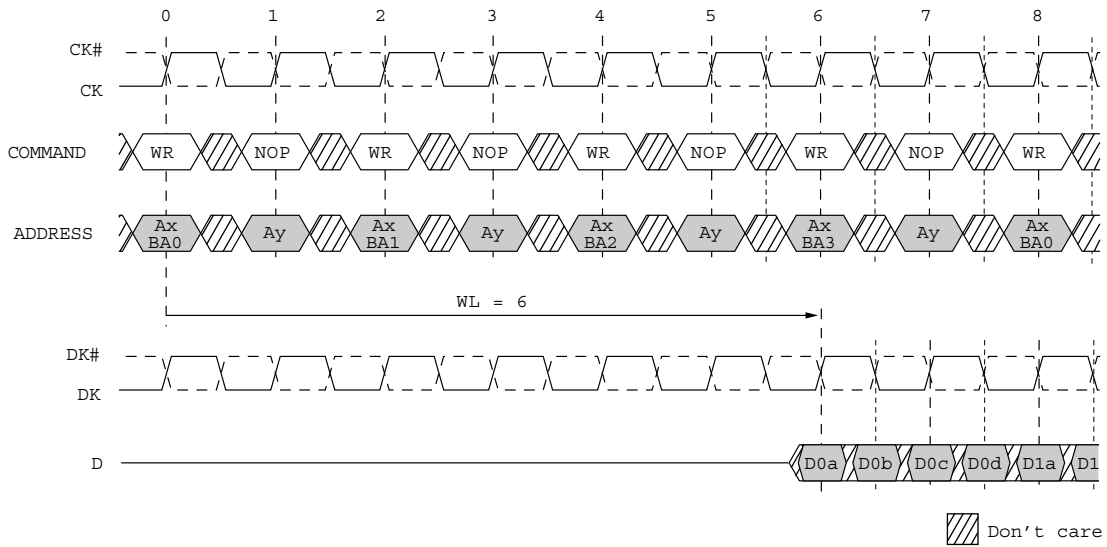


Figure 2-31. READ Burst Basic Sequence: BL=4, with Multiplexed Addresses, Configuration 1, RL=5

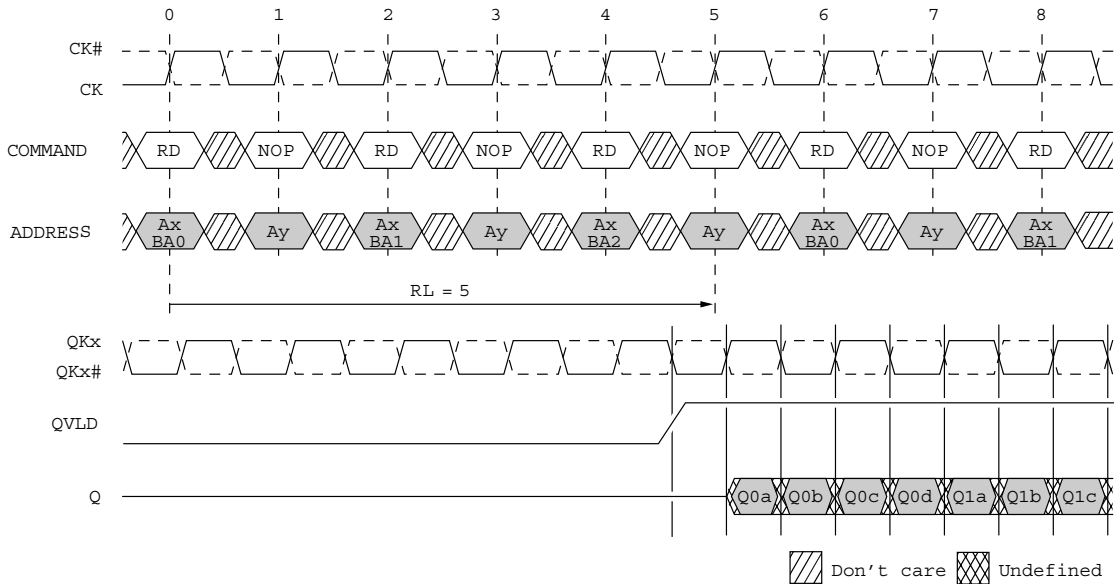

- Remark**
- WR : WRITE command
  - RD : READ command
  - Ax/BAp : Address Ax of bank p
  - Ay : Address Ay of bank p
  - Dpq : Data q to bank p
  - Qpq : Data q from bank p
  - WL : WRITE latency
  - RL : READ latency

## 2.18 Input Slew Rate Derating

**Table 2-8** on page 39 and **Table 2-9** on page 40 define the address, command, and data setup and hold derating values. These values are added to the default tAS/tCS/tDS and tAH/tCH/tDH specifications when the slew rate of any of these input signals is less than the 2 V/ns the nominal setup and hold specifications are based upon.

To determine the setup and hold time needed for a given slew rate, add the tAS/tCS default specification to the “tAS/tCS V<sub>REF</sub> to CK/CK# Crossing” and the tAH/tCH default specification to the “tAH/tCH CK/CK# Crossing to V<sub>REF</sub>” derated values on **Table 2-8**. The derated data setup and hold values can be determined in a like manner using the “tDS V<sub>REF</sub> to CK/CK# Crossing” and “tDH to CK/CK# Crossing to V<sub>REF</sub>” values on **Table 2-9**.

The derating values on **Table 2-8** and **Table 2-9** apply to all speed grades.

The setup times on **Table 2-8** and **Table 2-9** represent a rising signal. In this case, the time from which the rising signal crosses V<sub>IH(AC)</sub> MIN to the CK/CK# cross point is static and must be maintained across all slew rates. The derated setup timing represents the point at which the rising signal crosses V<sub>REF(DC)</sub> to the CK/CK# cross point. This derated value is calculated by determining the time needed to maintain the given slew rate and the delta between V<sub>IH(AC)</sub> MIN and the CK/CK# cross point. The setup values in **Table 2-8** and **Table 2-9** are also valid for falling signals (with respect to V<sub>IL[AC]</sub> MAX and the CK/CK# cross point).

The hold times in **Table 2-8** and **Table 2-9** represent falling signals. In this case, the time from the CK/CK# cross point to when the signal crosses V<sub>IH(DC)</sub> MIN is static and must be maintained across all slew rates. The derated hold timing represents the delta between the CK/CK# cross point to when the falling signal crosses V<sub>REF(DC)</sub>. This derated value is calculated by determining the time needed to maintain the given slew rate and the delta between the CK/CK# cross point and V<sub>IH(DC)</sub>. The hold values in **Table 2-8** and **Table 2-9** are also valid for rising signals (with respect to V<sub>IL[DC]</sub> MAX and the CK and CK# cross point).

Note: The above descriptions also pertain to data setup and hold derating when CK/CK# are replaced with DK/DK#.

Table 2-8. Address and Command Setup and Hold Derating Values


| Command/<br>Address Slew<br>Rate (V/ns)  | tAS/tCS VREF to<br>CK/CK#<br>Crossing | tAS/tCS VIH(AC)<br>MIN to CK/CK#<br>Crossing | tAH/tCH<br>CK/CK#<br>Crossing to<br>VREF | tAH/tCH<br>CK/CK#<br>Crossing to<br>VIH(DC) MIN | Unit |
|--|---------------------------------------|--|--|---|------|
| CK, CK# Differential Slew Rate: 2.0 V/ns |                                       |  |  |   |      |
| 2.0                                      | 0                                     | -100   | 0  | -50   | ps   |
| 1.9                                      | 5                                     | -100   | 3  | -50   | ps   |
| 1.8                                      | 11                                    | -100   | 6  | -50   | ps   |
| 1.7                                      | 18                                    | -100   | 9  | -50   | ps   |
| 1.6                                      | 25                                    | -100   | 13                                       | -50   | ps   |
| 1.5                                      | 33                                    | -100   | 17                                       | -50   | ps   |
| 1.4                                      | 43                                    | -100   | 22                                       | -50   | ps   |
| 1.3                                      | 54                                    | -100   | 27                                       | -50   | ps   |
| 1.2                                      | 67                                    | -100   | 34                                       | -50   | ps   |
| 1.1                                      | 82                                    | -100   | 41                                       | -50   | ps   |
| 1.0                                      | 100                                   | -100   | 50                                       | -50   | ps   |
| CK, CK# Differential Slew Rate: 1.5 V/ns |                                       |  |  |   |      |
| 2.0                                      | 30                                    | -70  | 30                                       | -20   | ps   |
| 1.9                                      | 35                                    | -70  | 33                                       | -20   | ps   |
| 1.8                                      | 41                                    | -70  | 36                                       | -20   | ps   |
| 1.7                                      | 48                                    | -70  | 39                                       | -20   | ps   |
| 1.6                                      | 55                                    | -70  | 43                                       | -20   | ps   |
| 1.5                                      | 63                                    | -70  | 47                                       | -20   | ps   |
| 1.4                                      | 73                                    | -70  | 52                                       | -20   | ps   |
| 1.3                                      | 84                                    | -70  | 57                                       | -20   | ps   |
| 1.2                                      | 97                                    | -70  | 64                                       | -20   | ps   |
| 1.1                                      | 112                                   | -70  | 71                                       | -20   | ps   |
| 1.0                                      | 130                                   | -70  | 80                                       | -20   | ps   |
| CK, CK# Differential Slew Rate: 1.0 V/ns |                                       |  |  |   |      |
| 2.0                                      | 60                                    | -40  | 60                                       | 10  | ps   |
| 1.9                                      | 65                                    | -40  | 63                                       | 10  | ps   |
| 1.8                                      | 71                                    | -40  | 66                                       | 10  | ps   |
| 1.7                                      | 78                                    | -40  | 69                                       | 10  | ps   |
| 1.6                                      | 85                                    | -40  | 73                                       | 10  | ps   |
| 1.5                                      | 93                                    | -40  | 77                                       | 10  | ps   |
| 1.4                                      | 103                                   | -40  | 82                                       | 10  | ps   |
| 1.3                                      | 114                                   | -40  | 87                                       | 10  | ps   |
| 1.2                                      | 127                                   | -40  | 94                                       | 10  | ps   |
| 1.1                                      | 142                                   | -40  | 101                                      | 10  | ps   |
| 1.0                                      | 160                                   | -40  | 110                                      | 10  | ps   |

Table 2-9. Data Setup and Hold Derating Values

| Data Slew Rate (V/ns)                    | tDS V <sub>REF</sub> to DK/DK# Crossing | tDS V <sub>IH(AC)</sub> MIN to DK/DK# Crossing | tDH DK/DK# Crossing to V <sub>REF</sub> | tDH DK/DK# Crossing to V <sub>IH(DC)</sub> MIN | Unit |
|--|---|--|---|--|------|
| DK, DK# Differential Slew Rate: 2.0 V/ns |   |  |   |  |      |
| 2.0                                      | 0                                       | -100   | 0                                       | -50  | ps   |
| 1.9                                      | 5                                       | -100   | 3                                       | -50  | ps   |
| 1.8                                      | 11                                      | -100   | 6                                       | -50  | ps   |
| 1.7                                      | 18                                      | -100   | 9                                       | -50  | ps   |
| 1.6                                      | 25                                      | -100   | 13                                      | -50  | ps   |
| 1.5                                      | 33                                      | -100   | 17                                      | -50  | ps   |
| 1.4                                      | 43                                      | -100   | 22                                      | -50  | ps   |
| 1.3                                      | 54                                      | -100   | 27                                      | -50  | ps   |
| 1.2                                      | 67                                      | -100   | 34                                      | -50  | ps   |
| 1.1                                      | 82                                      | -100   | 41                                      | -50  | ps   |
| 1.0                                      | 100                                     | -100   | 50                                      | -50  | ps   |
| DK, DK# Differential Slew Rate: 1.5 V/ns |   |  |   |  |      |
| 2.0                                      | 30                                      | -70  | 30                                      | -20  | ps   |
| 1.9                                      | 35                                      | -70  | 33                                      | -20  | ps   |
| 1.8                                      | 41                                      | -70  | 36                                      | -20  | ps   |
| 1.7                                      | 48                                      | -70  | 39                                      | -20  | ps   |
| 1.6                                      | 55                                      | -70  | 43                                      | -20  | ps   |
| 1.5                                      | 63                                      | -70  | 47                                      | -20  | ps   |
| 1.4                                      | 73                                      | -70  | 52                                      | -20  | ps   |
| 1.3                                      | 84                                      | -70  | 57                                      | -20  | ps   |
| 1.2                                      | 97                                      | -70  | 64                                      | -20  | ps   |
| 1.1                                      | 112                                     | -70  | 71                                      | -20  | ps   |
| 1.0                                      | 130                                     | -70  | 80                                      | -20  | ps   |
| DK, DK# Differential Slew Rate: 1.0 V/ns |   |  |   |  |      |
| 2.0                                      | 60                                      | -40  | 60                                      | 10   | ps   |
| 1.9                                      | 65                                      | -40  | 63                                      | 10   | ps   |
| 1.8                                      | 71                                      | -40  | 66                                      | 10   | ps   |
| 1.7                                      | 78                                      | -40  | 69                                      | 10   | ps   |
| 1.6                                      | 85                                      | -40  | 73                                      | 10   | ps   |
| 1.5                                      | 93                                      | -40  | 77                                      | 10   | ps   |
| 1.4                                      | 103                                     | -40  | 82                                      | 10   | ps   |
| 1.3                                      | 114                                     | -40  | 87                                      | 10   | ps   |
| 1.2                                      | 127                                     | -40  | 94                                      | 10   | ps   |
| 1.1                                      | 142                                     | -40  | 101                                     | 10   | ps   |
| 1.0                                      | 160                                     | -40  | 110                                     | 10   | ps   |



Figure 2-32. Nominal tAS/tCS/tDS and tAH/tCH/tDH Slew Rate

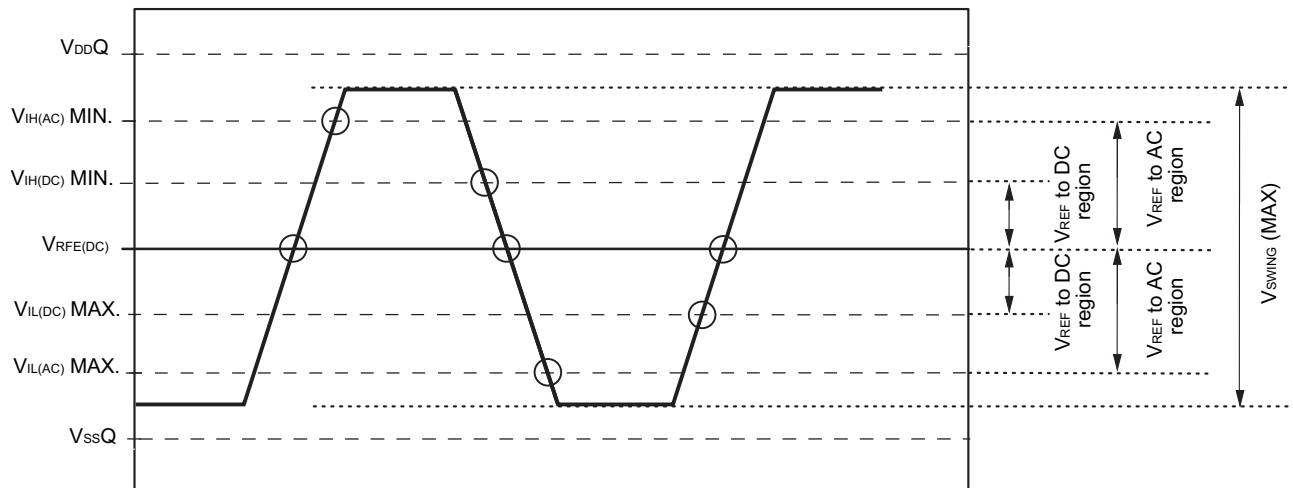

### 3. JTAG Specification

These products support a limited set of JTAG functions as in IEEE standard 1149.1.

**Table 3-1. Test Access Port (TAP) Pins**

| Pin name | Pin assignments | Description  |
|----------|-----------------|--|
| TCK      | 12A             | Test Clock Input. All input are captured on the rising edge of TCK and all outputs propagate from the falling edge of TCK.   |
| TMS      | 11A             | Test Mode Select. This is the command input for the TAP controller state   |
| TDI      | 12V             | Test Data Input. This is the input side of the serial registers placed between TDI and TDO. The register placed between TDI and TDO is determined by the state of the TAP controller state machine and the instruction that is currently |
| TDO      | 11V             | Test Data Output. This is the output side of the serial registers placed between TDI and TDO. Output changes in response to the falling edge of TCK.   |

**Remark** The device does not have TRST (TAP reset). The Test-Logic Reset state is entered while TMS is held HIGH for five rising edges of TCK. The TAP controller state is also reset on the POWER-UP.

**Table 3-2. JTAG DC Characteristics (0°C ≤ Tc ≤ 95°C, 1.7 V ≤ VDD ≤ 1.9 V, unless otherwise noted)**


| Parameter                  | Symbol           | Conditions  | MIN.                    | MAX.                    | Unit | Notes |
|----------------------------|------------------|---|-------------------------|-------------------------|------|-------|
| JTAG Input leakage current | I <sub>LI</sub>  | 0 V ≤ V <sub>IN</sub> ≤ V <sub>DD</sub>                         | -5.0                    | +5.0                    | μA   |       |
| JTAG I/O leakage current   | I <sub>LO</sub>  | 0 V ≤ V <sub>IN</sub> ≤ V <sub>DD</sub> Q ,<br>Outputs disabled | -5.0                    | +5.0                    | μA   |       |
| JTAG input HIGH voltage    | V <sub>IH</sub>  |   | V <sub>REF</sub> + 0.15 | V <sub>DD</sub> + 0.3   | V    | 1, 2  |
| JTAG input LOW voltage     | V <sub>IL</sub>  |   | V <sub>SSQ</sub> - 0.3  | V <sub>REF</sub> - 0.15 | V    | 1, 2  |
| JTAG output HIGH voltage   | V <sub>OH1</sub> | I <sub>OHC</sub>   = 100 μA                                     | V <sub>DDQ</sub> - 0.2  |                         | V    |       |
|                            | V <sub>OH2</sub> | I <sub>OHT</sub>   = 2 mA                                       | V <sub>DDQ</sub> - 0.4  |                         | V    |       |
| JTAG output LOW voltage    | V <sub>OL1</sub> | I <sub>OLC</sub> = 100 μA                                       |                         | 0.2                     | V    | 1     |
|                            | V <sub>OL2</sub> | I <sub>OLT</sub> = 2 mA   |                         | 0.4                     | V    | 1     |

**Note**


- All voltages referenced to V<sub>SS</sub> (GND).
- Overshoot: V<sub>IH(AC)</sub> ≤ V<sub>DD</sub> + 0.7 V for t ≤ t<sub>CK</sub>/2.  
Undershoot: V<sub>IL(AC)</sub> ≥ -0.5 V for t ≤ t<sub>CK</sub>/2.  
During normal operation, V<sub>DDQ</sub> must not exceed V<sub>DD</sub>.

### JTAG AC Test Conditions

#### Input waveform

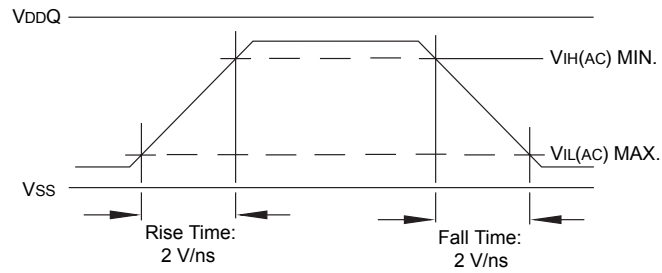

#### Output waveform



#### Output load condition





Table 3-3. JTAG AC Characteristics (0°C ≤ Tc ≤ 95°C)

| Parameter               | Symbol            | Conditions | MIN. | MAX. | Unit | Note |
|-------------------------|-------------------|------------|------|------|------|------|
| <b>Clock</b>            |                   |            |      |      |      |      |
| Clock cycle time        | t <sub>THTH</sub> |            | 20   |      | ns   |      |
| Clock frequency         | f <sub>TF</sub>   |            |      | 50   | MHz  |      |
| Clock HIGH time         | t <sub>HTHL</sub> |            | 10   |      | ns   |      |
| Clock LOW time          | t <sub>LTHT</sub> |            | 10   |      | ns   |      |
| <b>Output time</b>      |                   |            |      |      |      |      |
| TCK LOW to TDO          | t <sub>TLOX</sub> |            | 0    |      | ns   |      |
| TCK LOW to TDO valid    | t <sub>TLOV</sub> |            |      | 10   | ns   |      |
| <b>Setup time</b>       |                   |            |      |      |      |      |
| TMS setup time          | t <sub>MVTH</sub> |            | 5    |      | ns   |      |
| TDI valid to TCK HIGH   | t <sub>DVTH</sub> |            | 5    |      | ns   |      |
| Capture setup time      | t <sub>CSJ</sub>  |            | 5    |      | ns   | 1    |
| <b>Hold time</b>        |                   |            |      |      |      |      |
| TMS hold time           | t <sub>THMX</sub> |            | 5    |      | ns   |      |
| TCK HIGH to TDI invalid | t <sub>THDX</sub> |            | 5    |      | ns   |      |
| Capture hold time       | t <sub>CHJ</sub>  |            | 5    |      | ns   | 1    |

**Note 1.** t<sub>CSJ</sub> and t<sub>CHJ</sub> refer to the setup and hold time requirements of latching data from the boundary scan register.

**JTAG Timing Diagram**

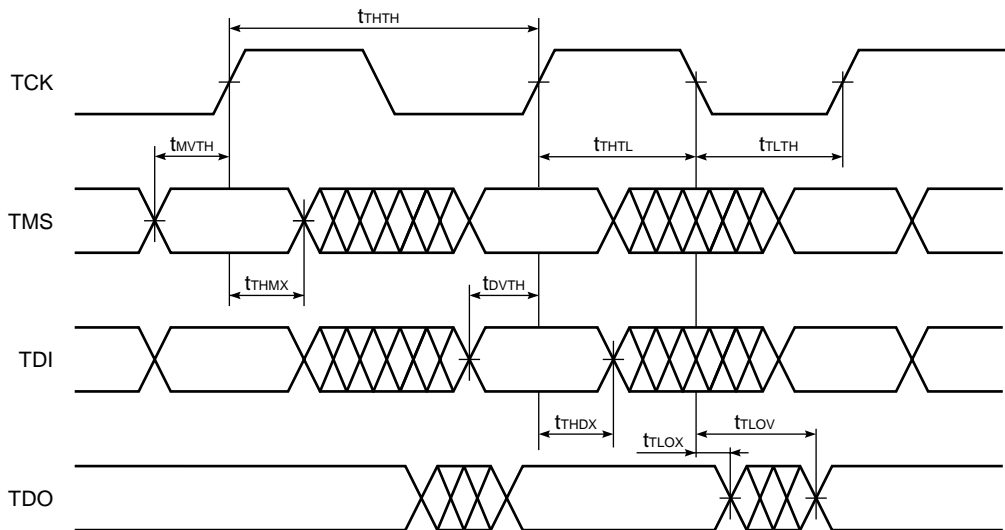

**Table 3-4. Scan Register Definition (1)**

| Register name        | Description  |
|----------------------|--|
| Instruction register | The 8 bit instruction registers hold the instructions that are executed by the TAP controller. The register can be loaded when it is placed between the TDI and TDO pins. The instruction register is automatically preloaded with the IDCODE instruction at power-up whenever the controller is placed in test-logic-reset state.   |
| Bypass register      | The bypass register is a single bit register that can be placed between TDI and TDO. It allows serial test data to be passed through the RAMs TAP to another device in the scan chain with as little delay as possible. The bypass register is set LOW (VSS) when the bypass instruction is executed.  |
| ID register          | The ID Register is a 32 bit register that is loaded with a device and vendor specific 32 bit code when the controller is put in capture-DR state with the IDCODE command loaded in the instruction register. The register is then placed between the TDI and TDO pins when the controller is moved into shift-DR state.  |
| Boundary register    | The boundary register, under the control of the TAP controller, is loaded with the contents of the RAMs I/O ring when the controller is in capture-DR state and then is placed between the TDI and TDO pins when the controller is moved to shift-DR state. Several TAP instructions can be used to activate the boundary register.<br>The Scan Exit Order tables describe which device bump connects to each boundary register location. The first column defines the bit's position in the boundary register. The second column is the name of the input or I/O at the bump and the third column is the bump number. |

**Table 3-5. Scan Register Definition (2)**

| Register name        | Bit size | Unit |
|----------------------|----------|------|
| Instruction register | 8        | bit  |
| Bypass register      | 1        | bit  |
| ID register          | 32       | bit  |
| Boundary register    | 113      | bit  |

**Table 3-6. ID Register Definition**

| Part number   | Organization | ID [31:28] vendor revision no. | ID [27:12] part no. | ID [11:1] vendor ID no. | ID [0] fix bit |
|---------------|--------------|--------------------------------|---------------------|-------------------------|----------------|
| μPD48576109-A | 64M x 9      | 0000                           | 0001 1001 1010 0111 | 00000010000             | 1              |
| μPD48576118-A | 32M x 18     | 0001                           | 0001 1001 1010 0111 | 00000010000             | 1              |

Table 3-7. SCAN Exit Order

| Bit no. | Signal name |      | Bump ID |
|---------|-------------|------|---------|
|         | x9          | x18  |         |
| 1       | DK          | DK   | K1      |
| 2       | DK#         | DK#  | K2      |
| 3       | CS#         | CS#  | L2      |
| 4       | REF#        | REF# | L1      |
| 5       | WE#         | WE#  | M1      |
| 6       | A17         | A17  | M3      |
| 7       | A16         | A16  | M2      |
| 8       | A18         | A18  | N1      |
| 9       | A15         | A15  | P1      |
| 10      | DNU         | Q14  | N3      |
| 11      | DNU         | Q14  | N3      |
| 12      | DNU         | D14  | N2      |
| 13      | DNU         | D14  | N2      |
| 14      | DNU         | Q15  | P3      |
| 15      | DNU         | Q15  | P3      |
| 16      | DNU         | D15  | P2      |
| 17      | DNU         | D15  | P2      |
| 18      | DNU         | QK1  | R2      |
| 19      | DNU         | QK1# | R3      |
| 20      | DNU         | D16  | T2      |
| 21      | DNU         | D16  | T2      |
| 22      | DNU         | Q16  | T3      |
| 23      | DNU         | Q16  | T3      |
| 24      | DNU         | D17  | U2      |
| 25      | DNU         | D17  | U2      |
| 26      | DNU         | Q17  | U3      |
| 27      | DNU         | Q17  | U3      |
| 28      | ZQ          | ZQ   | V2      |
| 29      | Q8          | Q13  | U10     |
| 30      | Q8          | Q13  | U10     |
| 31      | D8          | D13  | U11     |
| 32      | D8          | D13  | U11     |
| 33      | Q7          | Q12  | T10     |
| 34      | Q7          | Q12  | T10     |
| 35      | D7          | D12  | T11     |
| 36      | D7          | D12  | T11     |
| 37      | Q6          | Q11  | R10     |
| 38      | Q6          | Q11  | R10     |

| Bit no. | Signal name |      | Bump ID |
|---------|-------------|------|---------|
|         | x9          | x18  |         |
| 39      | D6          | D11  | R11     |
| 40      | D6          | D11  | R11     |
| 41      | D5          | D10  | P11     |
| 42      | D5          | D10  | P11     |
| 43      | Q5          | Q10  | P10     |
| 44      | Q5          | Q10  | P10     |
| 45      | D4          | D9   | N11     |
| 46      | D4          | D9   | N11     |
| 47      | Q4          | Q9   | N10     |
| 48      | Q4          | Q9   | N10     |
| 49      | DM          | DM   | P12     |
| 50      | A19         | A19  | N12     |
| 51      | A11         | A11  | M11     |
| 52      | A12         | A12  | M10     |
| 53      | A10         | A10  | M12     |
| 54      | A13         | A13  | L12     |
| 55      | A14         | A14  | L11     |
| 56      | BA1         | BA1  | K11     |
| 57      | CK#         | CK#  | K12     |
| 58      | CK          | CK   | J12     |
| 59      | BA0         | BA0  | J11     |
| 60      | A4          | A4   | H11     |
| 61      | A3          | A3   | H12     |
| 62      | A0          | A0   | G12     |
| 63      | A2          | A2   | G10     |
| 64      | A1          | A1   | G11     |
| 65      | A20         | A20  | E12     |
| 66      | QVLD        | QVLD | F12     |
| 67      | Q3          | Q3   | F10     |
| 68      | Q3          | Q3   | F10     |
| 69      | D3          | D3   | F11     |
| 70      | D3          | D3   | F11     |
| 71      | Q2          | Q2   | E10     |
| 72      | Q2          | Q2   | E10     |
| 73      | D2          | D2   | E11     |
| 74      | D2          | D2   | E11     |
| 75      | QK0         | QK0  | D11     |
| 76      | QK0#        | QK0# | D10     |

| Bit no. | Signal name |     | Bump ID |
|---------|-------------|-----|---------|
|         | x9          | x18 |         |
| 77      | D1          | D1  | C11     |
| 78      | D1          | D1  | C11     |
| 79      | Q1          | Q1  | C10     |
| 80      | Q1          | Q1  | C10     |
| 81      | D0          | D0  | B11     |
| 82      | D0          | D0  | B11     |
| 83      | Q0          | Q0  | B10     |
| 84      | Q0          | Q0  | B10     |
| 85      | DNU         | Q4  | B3      |
| 86      | DNU         | Q4  | B3      |
| 87      | DNU         | D4  | B2      |
| 88      | DNU         | D4  | B2      |
| 89      | DNU         | Q5  | C3      |
| 90      | DNU         | Q5  | C3      |
| 91      | DNU         | D5  | C2      |
| 92      | DNU         | D5  | C2      |
| 93      | DNU         | Q6  | D3      |
| 94      | DNU         | Q6  | D3      |
| 95      | DNU         | D6  | D2      |
| 96      | DNU         | D6  | D2      |
| 97      | DNU         | D7  | E2      |
| 98      | DNU         | D7  | E2      |
| 99      | DNU         | Q7  | E3      |
| 100     | DNU         | Q7  | E3      |
| 101     | DNU         | D8  | F2      |
| 102     | DNU         | D8  | F2      |
| 103     | DNU         | Q8  | F3      |
| 104     | DNU         | Q8  | F3      |
| 105     | A21         | A21 | E1      |
| 106     | A5          | A5  | F1      |
| 107     | A6          | A6  | G2      |
| 108     | A7          | A7  | G3      |
| 109     | A8          | A8  | G1      |
| 110     | BA2         | BA2 | H1      |
| 111     | A9          | A9  | H2      |
| 112     | NF          | NF  | J2      |
| 113     | NF          | NF  | J1      |

**Note** Any unused balls that are in the order will read as a logic “0”.

**JTAG Instructions**


Many different instructions (2<sup>8</sup>) are possible with the 8-bit instruction register. All used combinations are listed in **Table 3-8**, Instruction Codes. These six instructions are described in detail below. The remaining instructions are reserved and should not be used.

The TAP controller used in this RAM is fully compliant to the 1149.1 convention. Instructions are loaded into the TAP controller during the Shift-IR state when the instruction register is placed between TDI and TDO. During this state, instructions are shifted through the instruction register through the TDI and TDO balls. To execute the instruction once it is shifted in, the TAP controller needs to be moved into the Update-IR state.

**Table 3-8**

| Instructions            | Instruction Code [7:0] | Description  |
|-------------------------|------------------------|--|
| EXTEST                  | 0000 0000              | The EXTEST instruction allows circuitry external to the component package to be tested. Boundary-scan register cells at output pins are used to apply test vectors, while those at input pins capture test results. Typically, the first test vector to be applied using the EXTEST instruction will be shifted into the boundary scan register using the PRELOAD instruction. Thus, during the update-IR state of EXTEST, the output drive is turned on and the PRELOAD data is driven onto the output pins.  |
| IDCODE                  | 0010 0001              | The IDCODE instruction causes the ID ROM to be loaded into the ID register when the controller is in capture-DR mode and places the ID register between the TDI and TDO pins in shift-DR mode. The IDCODE instruction is the default instruction loaded in at power up and any time the controller is placed in the test-logic-reset state.  |
| SAMPLE / PRELOAD        | 0000 0101              | SAMPLE / PRELOAD is a Standard 1149.1 mandatory public instruction. When the SAMPLE / PRELOAD instruction is loaded in the instruction register, moving the TAP controller into the capture-DR state loads the data in the RAMs input and Q pins into the boundary scan register. Because the RAM clock(s) are independent from the TAP clock (TCK) it is possible for the TAP to attempt to capture the I/O ring contents while the input buffers are in transition (i.e., in a metastable state). Although allowing the TAP to sample metastable input will not harm the device, repeatable results cannot be expected. RAM input signals must be stabilized for long enough to meet the TAPs input data capture setup plus hold time (t <sub>CS</sub> plus t <sub>CH</sub> ). The RAMs clock inputs need not be paused for any other TAP operation except capturing the I/O ring contents into the boundary scan register. Moving the controller to shift-DR state then places the boundary scan register between the TDI and TDO pins. |
| CLAMP                   | 0000 0111              | When the CLAMP instruction is loaded into the instruction register, the data driven by the output balls are determined from the values held in the boundary scan register. Selects the bypass register to be connected between TDI and TDO. Data driven by output balls are determined from values held in the boundary scan register.   |
| High-Z                  | 0000 0011              | The High-z instruction causes the boundary scan register to be connected between the TDI and TDO. This places all RAMs outputs into a High-Z state. Selects the bypass register to be connected between TDI and TDO. All outputs are forced into high impedance state.   |
| BYPASS                  | 1111 1111              | When the BYPASS instruction is loaded in the instruction register, the bypass register is placed between TDI and TDO. This occurs when the TAP controller is moved to the shift-DR state. This allows the board level scan path to be shortened to facilitate testing of other devices in the scan path.   |
| Reserved for Future Use | –                      | The remaining instructions are not implemented but are reserved for future use. Do not use these instructions.   |



TAP Controller State Diagram

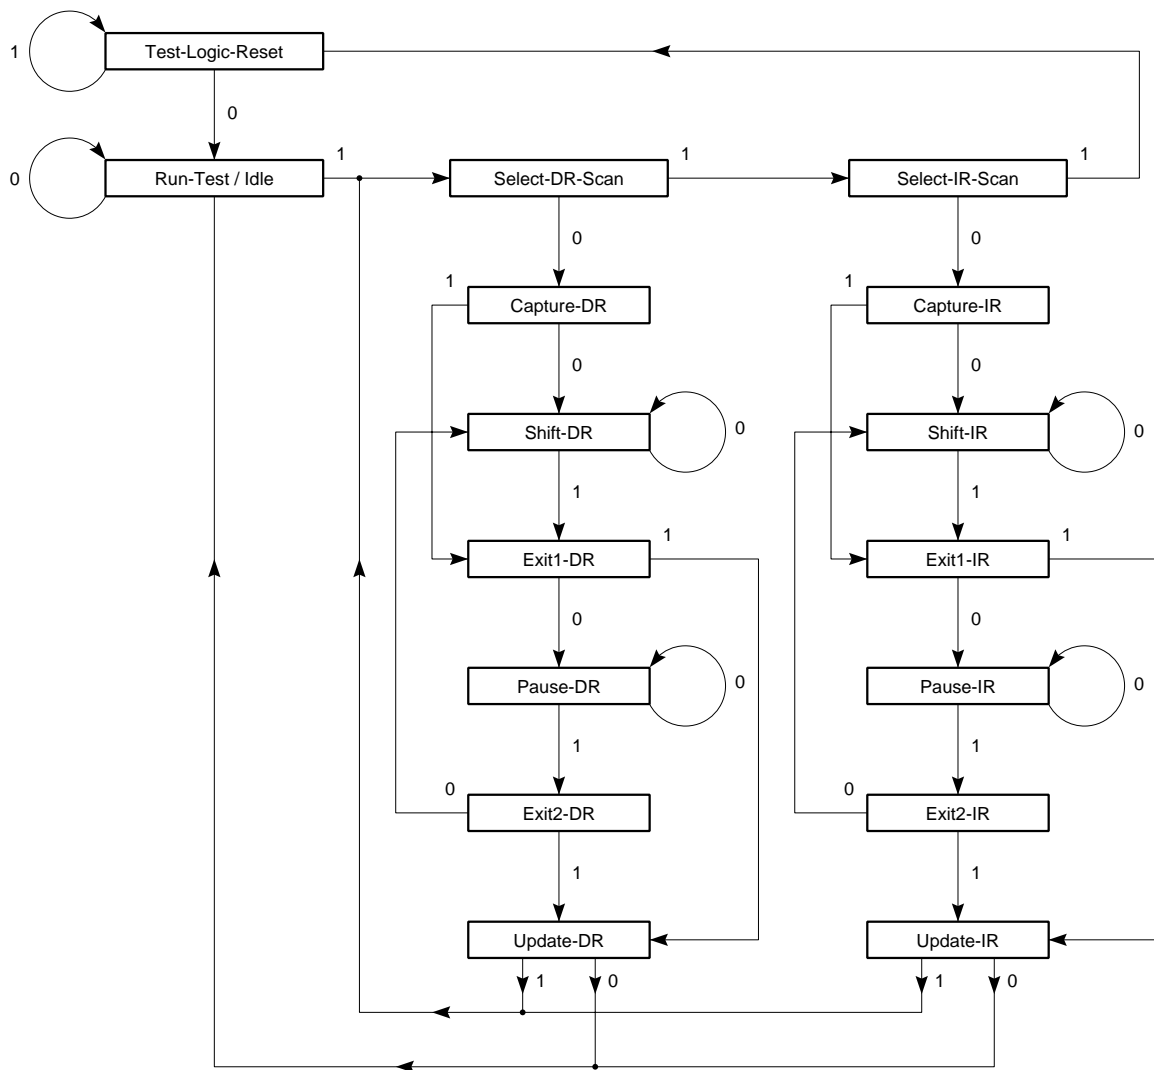




4. Package Dimension

144-PIN TAPE FBGA (μBGA) (18.5x11)

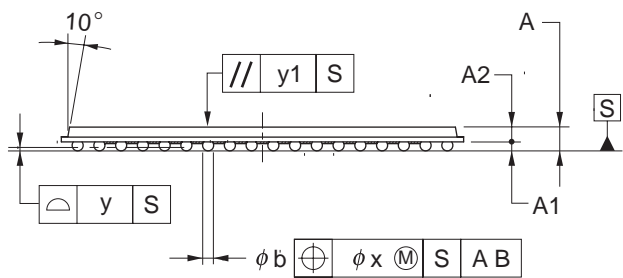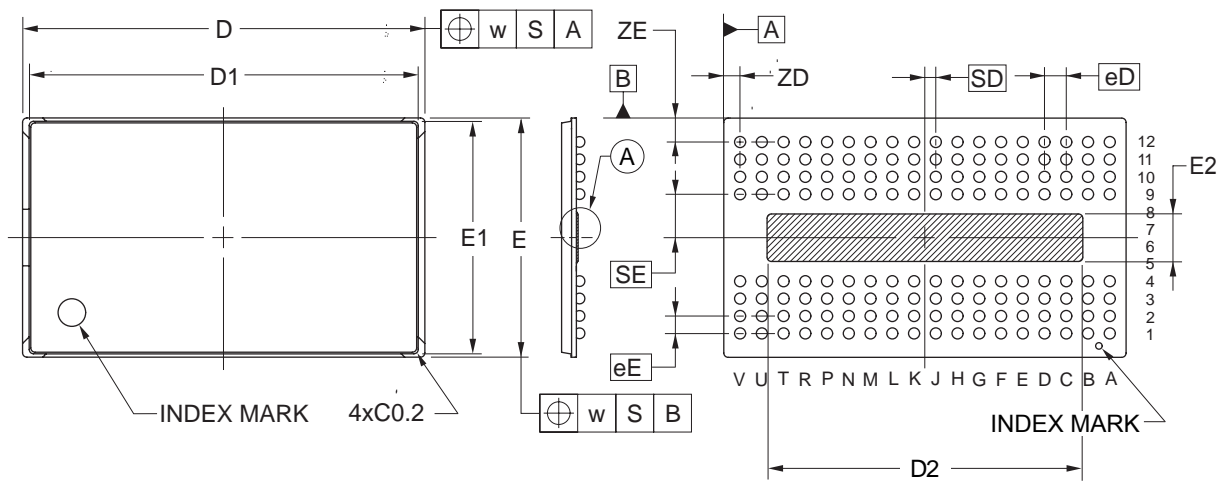

Detail of (A) part



(UNIT:mm)

| ITEM | DIMENSIONS |
|------|------------|
| D    | 18.50±0.10 |
| D1   | 17.90      |
| D2   | 14.52      |
| E    | 11.00±0.10 |
| E1   | 10.70      |
| E2   | 2.184      |
| w    | 0.20       |
| A    | 1.07±0.10  |
| A1   | 0.39±0.05  |
| A2   | 0.68       |
| A3   | 0.08 MAX.  |
| eD   | 1.00       |
| eE   | 0.80       |
| SD   | 0.50       |
| SE   | 2.00       |
| b    | 0.51±0.05  |
| x    | 0.15       |
| y    | 0.10       |
| y1   | 0.20       |
| ZD   | 0.75       |
| ZE   | 1.10       |

P144FF-80-DW1

## **5. Recommended Soldering Condition**

Please consult with our sales offices for soldering conditions of these products.

### **Types of Surface Mount Devices**

μPD48576109FF-DW1 : 144-pin TAPE FBGA (18.5 x 11)

μPD48576118FF-DW1 : 144-pin TAPE FBGA (18.5 x 11)

### **Quality Grade**

- A quality grade of the products is “Standard”.
- Anti-radioactive design is not implemented in the products.
- Semiconductor devices have the possibility of unexpected defects by affection of cosmic ray that reach to the ground and so forth.

**Revision History****μPD48576109, μPD48576118**

| Rev.     | Date      | Description           |  |
|----------|-----------|-----------------------|--|
|          |           | Page                  | Summary  |
| Rev.0.01 | '10.11.08 | -                     | New Preliminary Data Sheet   |
| Rev.1.00 | '11.09.27 | -<br>P3<br>P11<br>P15 | New Data Sheet<br>Add Lead device<br>Update DC Characteristics<br>Update Thermal Impedance |
| Rev.2.00 | '12.05.10 | P38, P39<br>P40, P41  | Update Input Slew Rate Derating  |
| Rev.3.00 | '12.10.01 | P17,P18<br>P34        | Update Power-On Sequence   |

All trademarks and registered trademarks are the property of their respective owners.

## Notice

- All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
- Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
- You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
- Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
- When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
- Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
- Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.  
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.  
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.  
"Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
- You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
- Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
- Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
- Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.  
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.  
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



### SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

**Renesas Electronics America Inc.**  
2880 Scott Boulevard Santa Clara, CA 95050-2554, U.S.A.  
Tel: +1-408-588-6000, Fax: +1-408-588-6130

**Renesas Electronics Canada Limited**  
1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada  
Tel: +1-905-898-5441, Fax: +1-905-898-3220

**Renesas Electronics Europe Limited**  
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.  
Tel: +44-1628-585-100, Fax: +44-1628-585-900

**Renesas Electronics Europe GmbH**  
Arcadiastrasse 10, 40472 Düsseldorf, Germany  
Tel: +49-211-65030, Fax: +49-211-6503-1327

**Renesas Electronics (China) Co., Ltd.**  
7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China  
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

**Renesas Electronics (Shanghai) Co., Ltd.**  
Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China  
Tel: +86-21-5877-1818, Fax: +86-21-6887-7858 / -7898

**Renesas Electronics Hong Kong Limited**  
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong  
Tel: +852-2886-9318, Fax: +852 2886-9022/9044

**Renesas Electronics Taiwan Co., Ltd.**  
13F, No. 363, Fu Shing North Road, Taipei, Taiwan  
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

**Renesas Electronics Singapore Pte. Ltd.**  
1 HarbourFront Avenue, #06-10, Keppel Bay Tower, Singapore 098632  
Tel: +65-6213-0200, Fax: +65-6278-8001

**Renesas Electronics Malaysia Sdn.Bhd.**  
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jin Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

**Renesas Electronics Korea Co., Ltd.**  
11F., Samik Lavied' or Bldg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea  
Tel: +82-2-558-3737, Fax: +82-2-558-5141