



ANT-GNCP-C25L12100

L1/L2 Active Ceramic Patch GNSS Antenna

The GNCP-C25L12100 is a global navigation satellite system (GNSS) ceramic patch antenna with integrated low noise amplifier (LNA), supporting GPS, Galileo, GLONASS, Beidou, and QZSS systems in the L1/E1/B1 and L2/E5/B2B bands. The LNA provides high gain with a low noise figure. The antenna has a 100 mm cable terminated in an MHF1/U.FL-type plug (female socket) connector.

FEATURES

- Performance at 1575.42 MHz
 - VSWR: ≤ 1.6
 - Peak Gain: 33.0 dBi
 - Axial Ratio: 30.2 dB
- Performance at 1227.6 MHz
 - VSWR: ≤ 2.3
 - Peak Gain: 29.6 dBi
 - Axial Ratio: 23.9 dB
- 29 dB (Typ.) LNA
- Ground plane independent
- Directional radiation pattern orthogonal to antenna surface
- Right-hand circularly polarized (RHCP)
- U.FL-type plug (female socket) compatible with MHF1, AMC, UMCC

APPLICATIONS

- Global navigation
 - GPS L1C, L1C/A, L2
 - Galileo E1, E5B
 - GLONASS L1, L2
 - Beidou B2B, B1C
 - QZSS L1, L2C
- Timing solutions

ORDERING INFORMATION

Part Number	Description
ANT-GNCP-C25L12100	GNSS L1/L2 band ceramic patch antenna with MHF1/U.FL-type plug (female socket) on 100 mm of 1.13 mm coaxial cable

Available from Linx Technologies and select distributors and representatives.

TABLE 1. ELECTRICAL SPECIFICATIONS, ANTENNA PLUS LNA

Frequency	GPS Bands	VSWR (max.)	Return Loss (dB)	Peak Gain (dBi)	Axial Ratio (dB)
1202/1207 MHz	Galileo E5B, Beidou B2B, GLONASS L3	2.3	-8.0	29.6	4.8
1228 MHz	GPS L2, QZSS L2	2.3	-8.0	29.6	23.9
1246/1248 MHz	GLONASS L2	1.5	-14.4	17.1	13.4
1561 MHz	Beidou B1I	1.6	-12.7	23.8	29.1
1575 MHz	GPS L1C, GPS L1C/A, Galileo E1, Beidou B1C, QZSS L1	1.6	-12.7	33.0	30.2
1601/1602 MHz	GLONASS L1	1.4	-14.9	29.2	26.9
Output Impedance	50 Ω				
Polarization	RHCP				
Radiation	Directional radiation pattern orthogonal to antenna surface				
Electrical Type	Radiating Patch plus LNA				
Input Voltage	Min. 3.0 V, Typ. 3.3 V, Max. 5.0 V				
Current Consumption @3.3V	Typ. 10.0 mA, Max. 15.0 mA				
Noise Figure (dB)	1.1 (1227.6 MHz), 0.9 (1575.42 MHz)				
ESD Sensitivity	ESD sensitive device. As a best practice, Linx uses ESD packaging.				

TABLE 2. MECHANICAL SPECIFICATIONS, ANTENNA PLUS LNA

Parameter	
Operating Temp. Range	-40 °C to +85 °C
Connection	MHF1/U.FL-type plug (female socket) on 100 mm (3.94 in) of 1.13 mm coaxial cable
Weight	18.4 g (0.65 oz)
Dimensions	25.1 mm x 25.1 mm x 12.0 mm (0.99 in x 0.99 in x 0.47 in)

GROUND PLANE INDEPENDENT

Because of the significant signal gain provided by the antenna's LNA, the ground plane typically required for passive GNSS antenna gain performance is not required for active GNSS antennas.

MOUNTING

The GNCP-C25L12100 may be mounted by mechanical means (e.g. bracket, not included) or using an adhesive patch (not included). Alternatively, the antenna may be mounted by soldering the LNA base to a printed circuit board (PCB) - see application note, AN-00504 on the Linx website for more information.

PACKAGING INFORMATION

The ANT-GNCP-C25L12100 antenna is packaged in a protective plastic tray in quantities of 30. Antenna trays are bundled and packaged in a carton of 120 antennas. Distribution channels may offer alternative packaging options.

PRODUCT DIMENSIONS

Figure 1 provides dimensions of the ANT-GNCP-C25L12100.

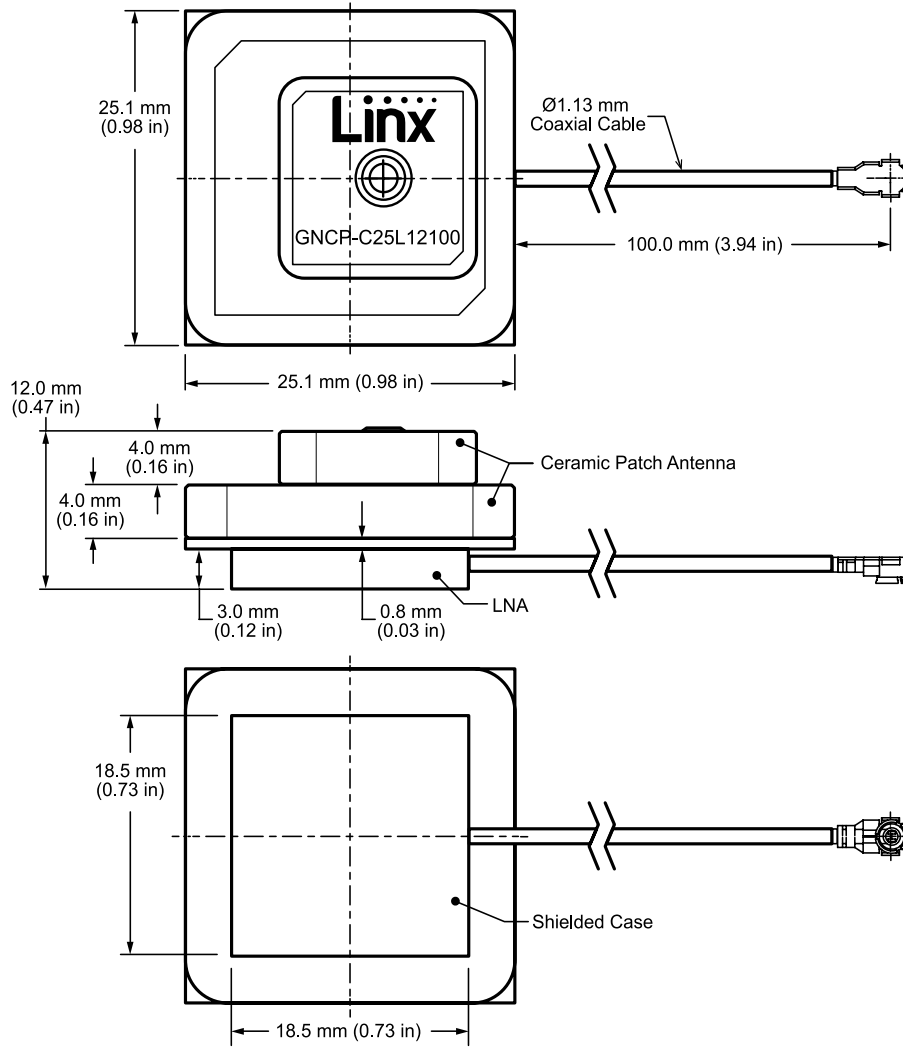


Figure 1. ANT-GNCP-C25L12100 Antenna Dimensions

VSWR

Figure 2 provides the voltage standing wave ratio (VSWR) across the L1 band, and Figure 3 provides VSWR across the L2 band.

VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

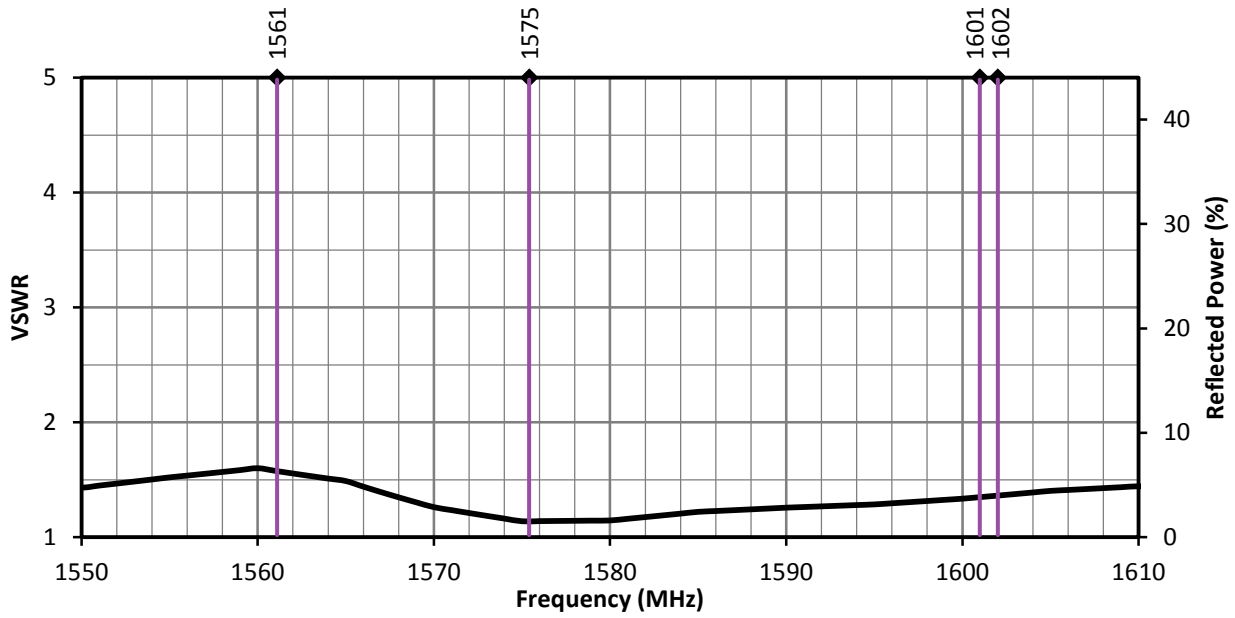


Figure 2. ANT-GNCP-C25L12100 VSWR, L1 Band

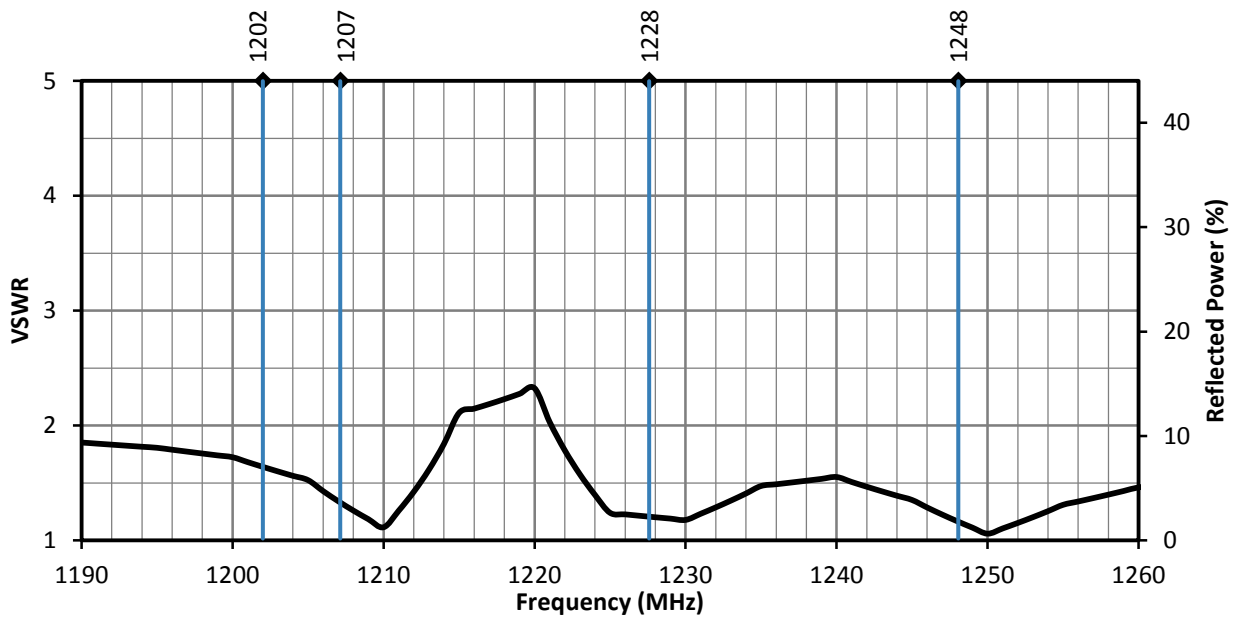


Figure 3. ANT-GNCP-C25L12100 VSWR, L2 Band

RETURN LOSS

Return loss, shown in Figure 4 (L1 band) and Figure 5 (L2 band) represents the loss in power at the antenna due to reflected signals. Like VSWR, a lower return loss value indicates better antenna performance at a given frequency.

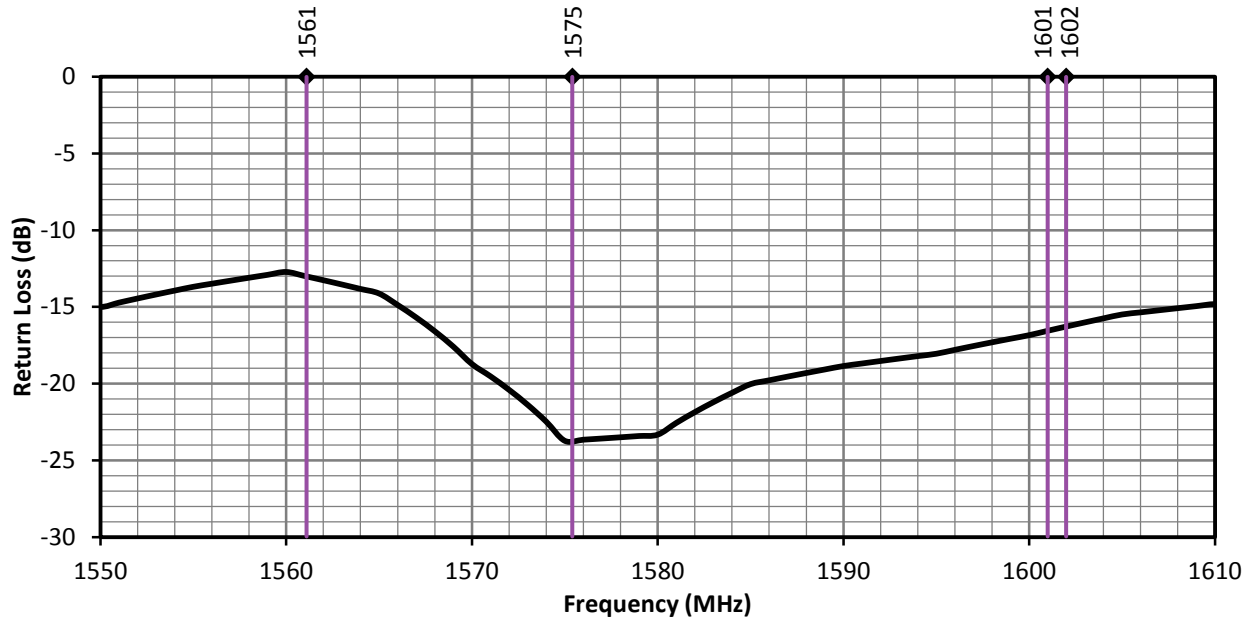


Figure 4. ANT-GNCP-C25L12100 Return Loss, L1 Band

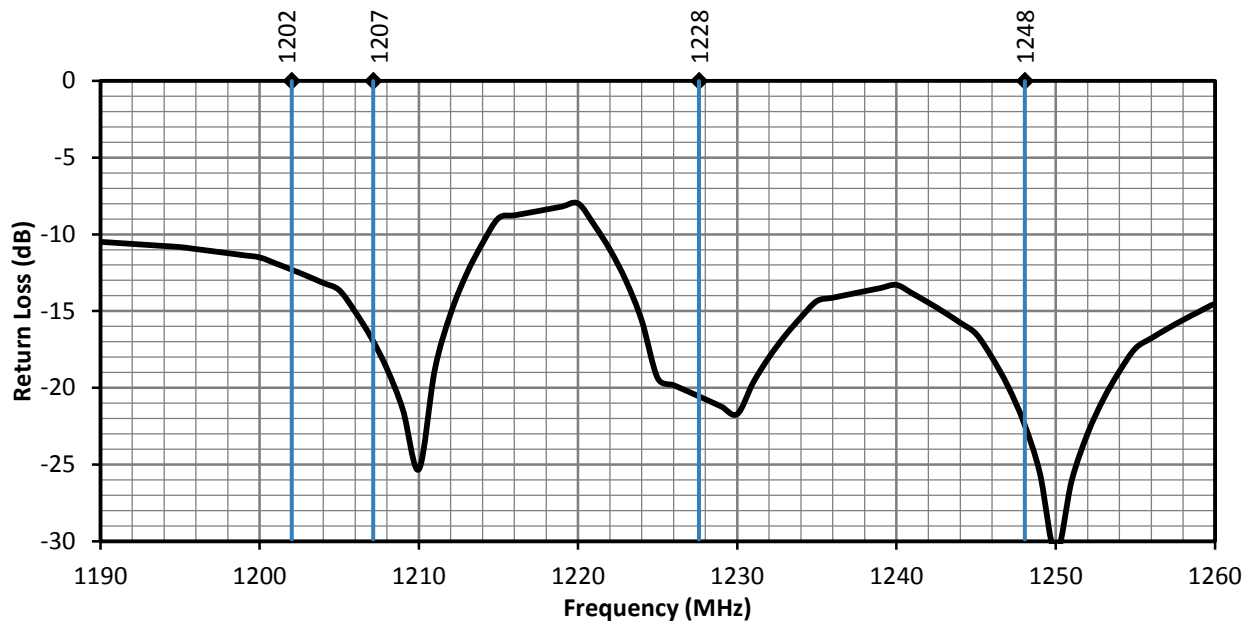


Figure 5. ANT-GNCP-C25L12100 Return Loss, L2 Band

PEAK GAIN

The peak gain across the antenna bandwidth is shown in Figure 6 (L1 band) and Figure 7 (L2 band). Peak gain represents the maximum antenna input power concentration across 3-dimensional space, and therefore peak performance at a given frequency, but does not consider any directionality in the gain pattern.

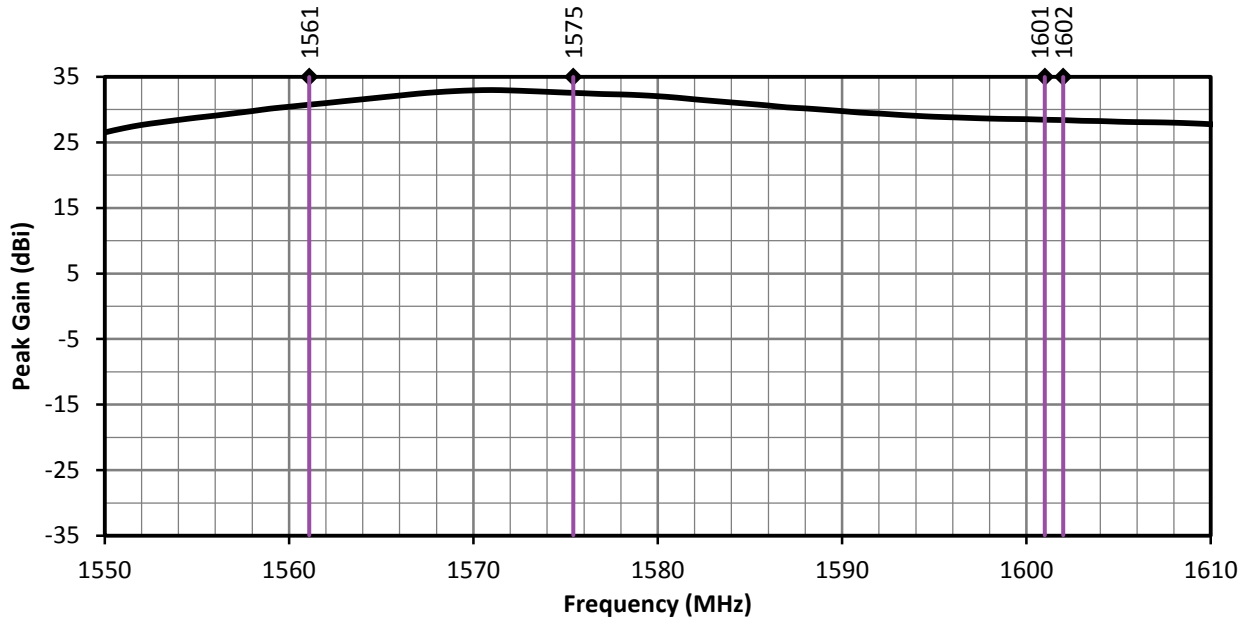


Figure 6. ANT-GNCP-C25L12100 Peak Gain, L1 Band

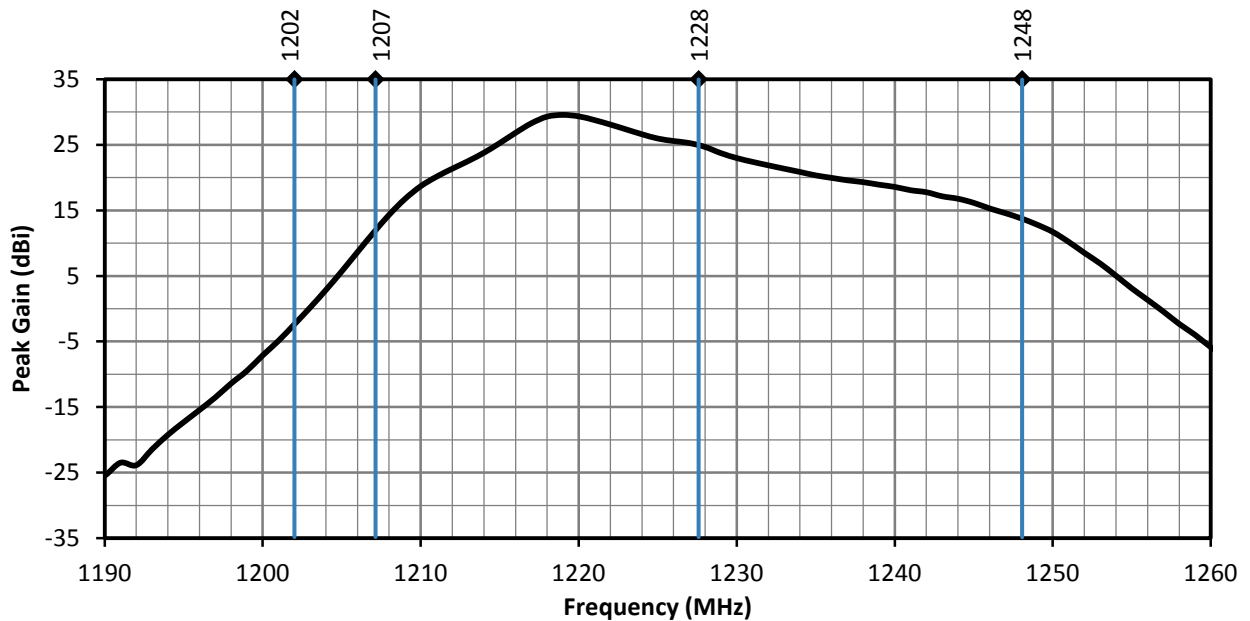


Figure 7. ANT-GNCP-C25L12100 Peak Gain, L2 Band

AXIAL RATIO

Axial ratio provides a measure of the quality of circular polarization of an antenna, the lower the value (in dB), the better the circular polarization. A circularly polarized antenna field comprises two orthogonal E-field components. These fields are ideally of equal amplitude, resulting in an axial ratio equal to unity (0 dB). In practice, no antenna is perfectly circular in polarization, the polarization is elliptical as one field has larger magnitude. As the axial ratio increases the antenna gain degrades away from the main beam orthogonal to the antenna surface. The axial ratio for the ANT-GNCP-C25L12100 antenna is shown in Figure 8 (L1 band) and Figure 9 (L2 band).

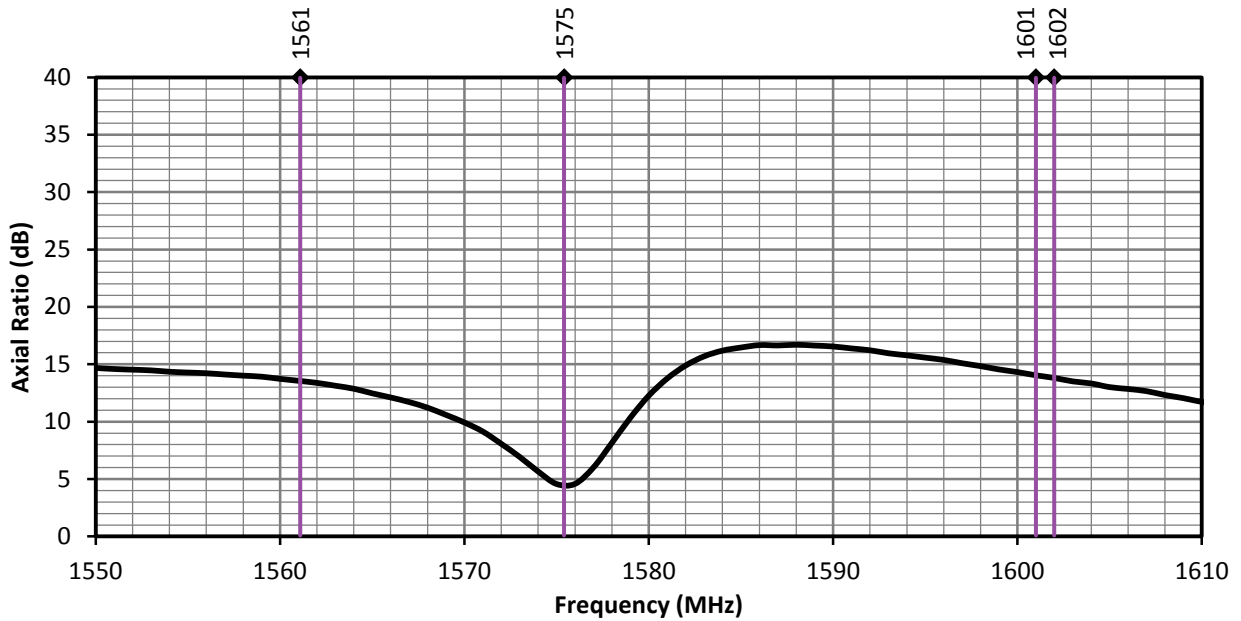


Figure 8. ANT-GNCP-C25L12100 Antenna Axial Ratio, L1 Band


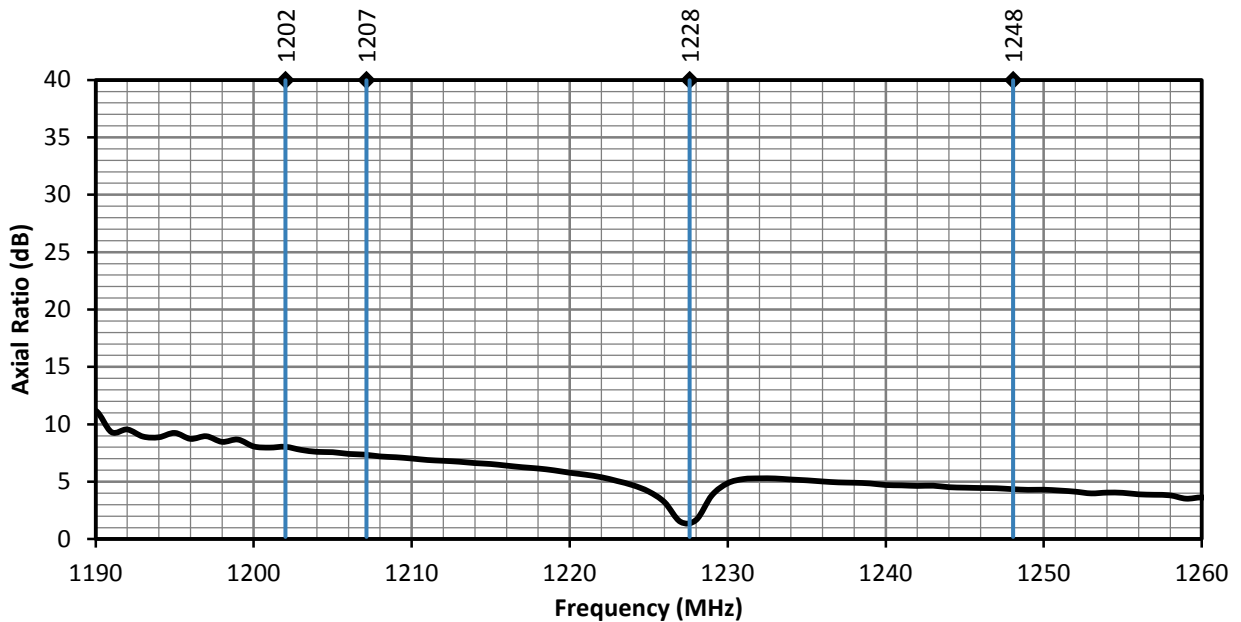


Figure 9. ANT-GNCP-C25L12100 Antenna Axial Ratio, L2 Band

RADIATION PATTERNS

Radiation patterns provide information about the directionality and 3-dimensional gain performance of the antenna by plotting gain at specific frequencies in three orthogonal planes. Antenna radiation patterns are shown in Figure 10 using polar plots covering 360 degrees. The antenna graphic at the top of the page provides reference to the plane of the column of plots below it. Note: when viewed with typical PDF viewing software, zooming into radiation patterns is possible to reveal fine detail.

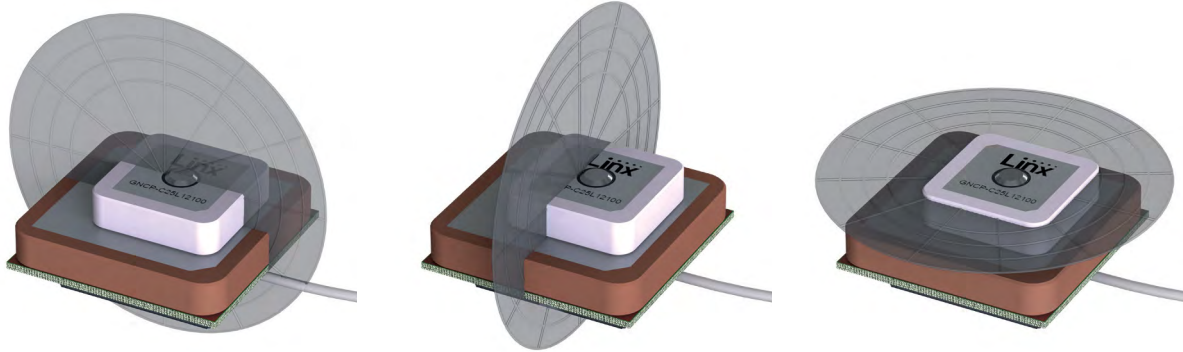


XZ-Plane Gain

YZ-Plane Gain

XY-Plane Gain

1197 MHz to 1218 MHz (1202 MHz)

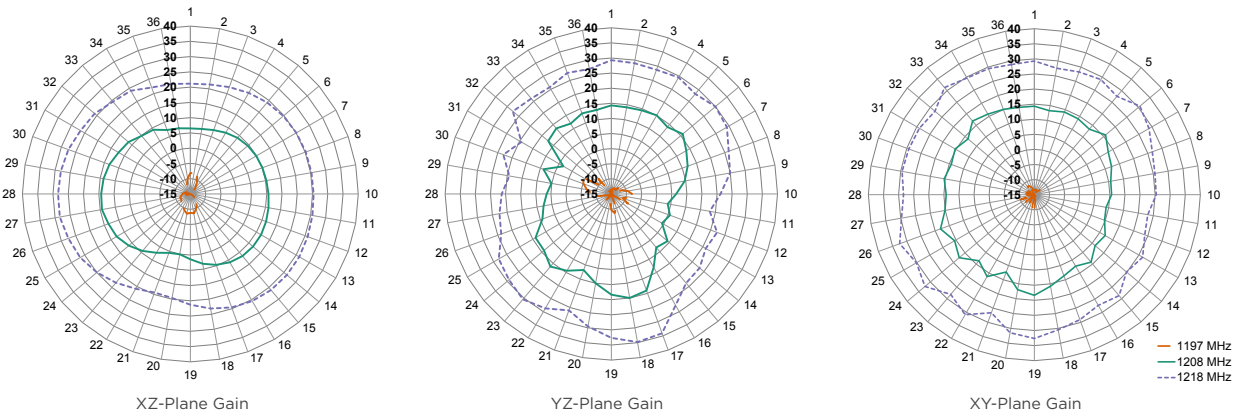


XZ-Plane Gain

YZ-Plane Gain

XY-Plane Gain

1215 MHz to 1240 MHz (1228 MHz)

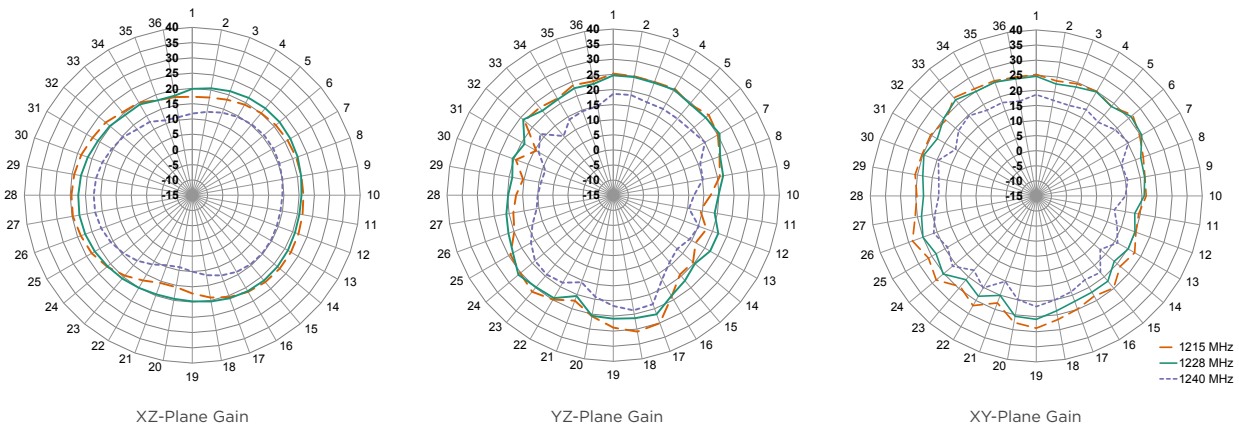


XZ-Plane Gain


YZ-Plane Gain

XY-Plane Gain


1243 MHz to 1250 MHz (1248 MHz)

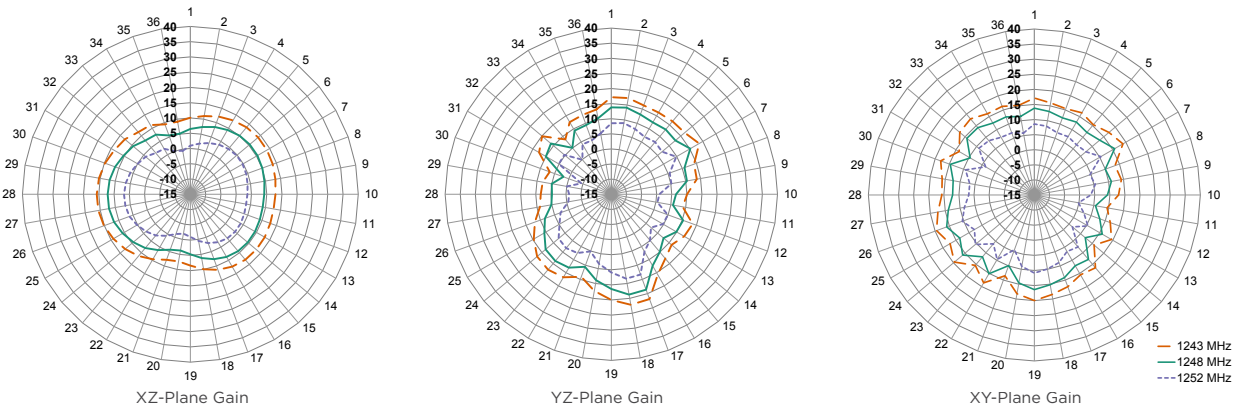

1559 MHz to 1563 MHz (1561 MHz)

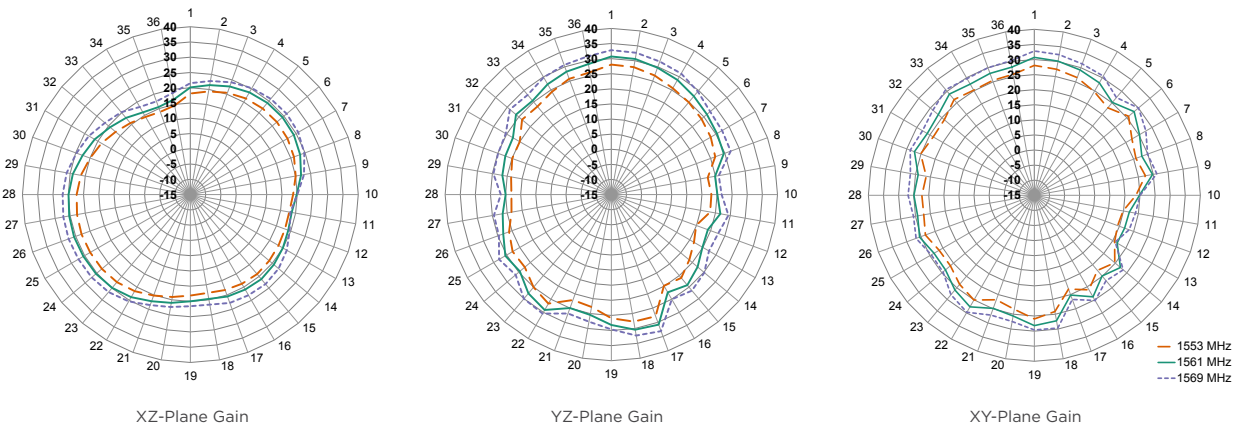

1559 MHz to 1592 MHz (1575 MHz)

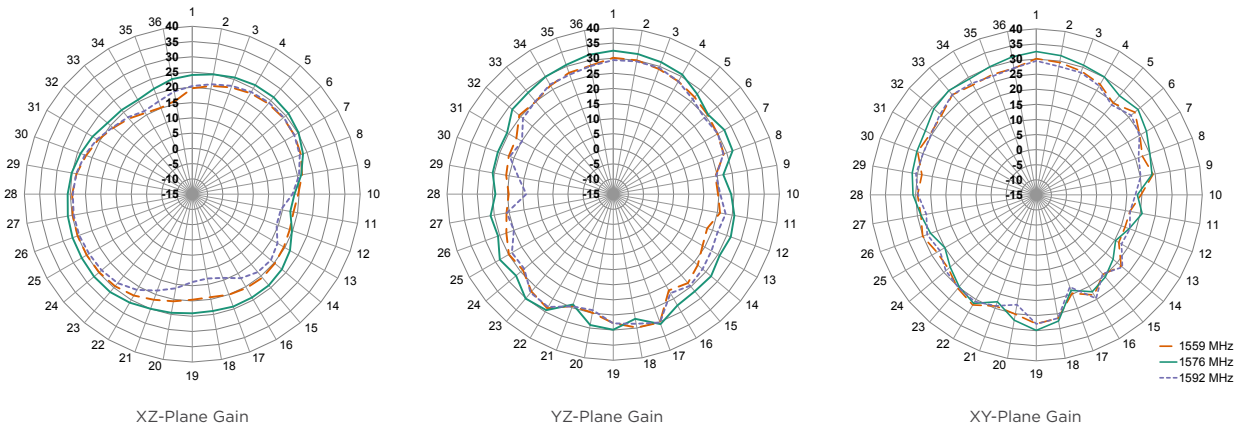

1598 MHz to 1606 MHz (1601 MHz)

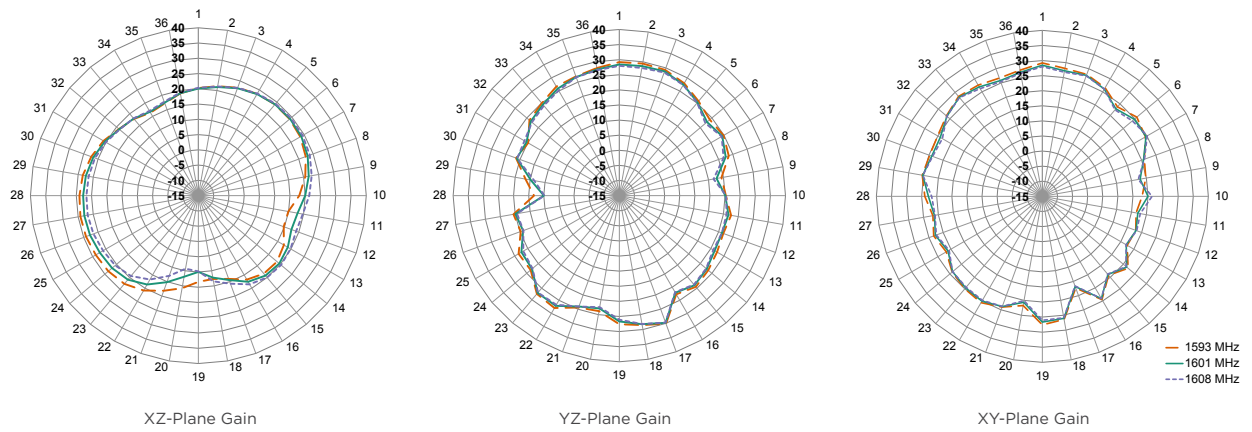


Figure 10. ANT-GNCP-C25L12100 Radiation Patterns

ANTENNA DEFINITIONS AND USEFUL FORMULAS

VSWR - Voltage Standing Wave Ratio. VSWR is a unitless ratio that describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. VSWR is easily derived from Return Loss.

$$\text{VSWR} = \frac{10^{\left[\frac{\text{Return Loss}}{20}\right]} + 1}{10^{\left[\frac{\text{Return Loss}}{20}\right]} - 1}$$

Return Loss - Return loss represents the loss in power at the antenna due to reflected signals, measured in decibels. A lower return loss value indicates better antenna performance at a given frequency. Return Loss is easily derived from VSWR.

$$\text{Return Loss} = -20 \log_{10} \left[\frac{\text{VSWR} - 1}{\text{VSWR} + 1} \right]$$

Efficiency (η) - The total power radiated from an antenna divided by the input power at the feed point of the antenna as a percentage.

Total Radiated Efficiency - (TRE) The total efficiency of an antenna solution comprising the radiation efficiency of the antenna and the transmitted (forward) efficiency from the transmitter.

$$\text{TRE} = \eta \cdot \left(1 - \left(\frac{\text{VSWR} - 1}{\text{VSWR} + 1} \right)^2 \right)$$

Gain - The ratio of an antenna's efficiency in a given direction (G) to the power produced by a theoretical lossless (100% efficient) isotropic antenna. The gain of an antenna is almost always expressed in decibels.

$$G_{\text{db}} = 10 \log_{10}(G)$$

$$G_{\text{dBd}} = G_{\text{dBi}} - 2.51\text{dB}$$

Peak Gain - The highest antenna gain across all directions for a given frequency range. A directional antenna will have a very high peak gain compared to average gain.

Average Gain - The average gain across all directions for a given frequency range.

Maximum Power - The maximum signal power which may be applied to an antenna feed point, typically measured in watts (W).

Reflected Power - A portion of the forward power reflected back toward the amplifier due to a mismatch at the antenna port.

$$\left(\frac{\text{VSWR} - 1}{\text{VSWR} + 1} \right)^2$$

decibel (dB) - A logarithmic unit of measure of the power of an electrical signal.

decibel isotropic (dBi) - A comparative measure in decibels between an antenna under test and an isotropic radiator.

decibel relative to a dipole (dBd) - A comparative measure in decibels between an antenna under test and an ideal half-wave dipole.

Dipole - An ideal dipole comprises a straight electrical conductor measuring 1/2 wavelength from end to end connected at the center to a feed point for the radio.

Isotropic Radiator - A theoretical antenna which radiates energy equally in all directions as a perfect sphere.

Omnidirectional - Term describing an antenna radiation pattern that is uniform in all directions. An isotropic antenna is the theoretical perfect omnidirectional antenna. An ideal dipole antenna has a donut-shaped radiation pattern and other practical antenna implementations will have less perfect but generally omnidirectional radiation patterns which are typically plotted on three axes.

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE Connectivity, TE, TE connectivity (logo), Linx and Linx Technologies are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

10/22 Original