Pb Free Product



NCE N-Channel Super Trench Power MOSFET

Description

The NCEP01T12 uses Super Trench technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of $R_{DS(ON)}$ and Q_g . This device is ideal for high-frequency switching and synchronous rectification.

General Features


- V_{DS} =100V,I_D =129A $R_{DS(ON)}$ <5.0m Ω @ V_{GS} =10V
- Excellent gate charge x R_{DS(on)} product
- Very low on-resistance R_{DS(on)}
- 175 °C operating temperature
- Pb-free lead plating
- 100% UIS tested

Application

- DC/DC Converter
- Ideal for high-frequency switching and synchronous rectification

100% UIS TESTED!

100% ΔVds TESTED!





Marking and pin assignment



TO-220-3L top view

Package Marking and Ordering Information

	<u> </u>				
Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
NCEP01T12	NCEP01T12	TO-220-3L	-	-	-

Absolute Maximum Ratings (T_c=25 ℃unless otherwise noted)

Parameter	Symbol	Limit	Unit	
Drain-Source Voltage	V _{DS}	100	V	
Gate-Source Voltage	V _G S	±20	V	
Drain Current-Continuous	I _D	129	Α	
Drain Current-Continuous(T _C =100 °C)	I _D (100℃)	92	Α	
Pulsed Drain Current	I _{DM}	480	А	
Maximum Power Dissipation	P _D	185	W	
Derating factor		1.3	W/℃	
Single pulse avalanche energy (Note 5)	E _{AS}	1000	mJ	
Operating Junction and Storage Temperature Range	T_{J} , T_{STG}	-55 To 175	$^{\circ}\!\mathbb{C}$	



http://www.ncepower.com

NCEP01T12

Thermal Characteristic

Thermal Resistance, Junction-to-Case ^(Note 2)	R _{eJC}	0.7	°C/W
--	------------------	-----	------

Electrical Characteristics (T_C=25°C unless otherwise noted)

					1
BV _{DSS}	V _{GS} =0V I _D =250µA	100		-	V
I _{DSS}	V _{DS} =100V,V _{GS} =0V	-	-	1	μA
I _{GSS}	V_{GS} =±20 V , V_{DS} =0 V	-	-	±100	nA
<u> </u>					
$V_{GS(th)}$	$V_{DS}=V_{GS}$, $I_{D}=250\mu A$	2.5		4.5	V
R _{DS(ON)}	V _{GS} =10V, I _D =60A	-	4.5	5.0	mΩ
g FS	V _{DS} =10V,I _D =60A	60	-	-	S
<u> </u>					
C _{lss}	\/ -50\/\/ -0\/	-	5600	-	PF
Coss		-	641	-	PF
C _{rss}	F=1.UMHZ	-	28	-	PF
<u> </u>					
t _{d(on)}		-	16	-	nS
t _r	V_{DD} =50 V , I_D =60 A	-	67	-	nS
t _{d(off)}	V_{GS} =10 V , R_{G} =4.7 Ω	-	45	-	nS
t _f		-	14	-	nS
Qg	\/ F0\/ C0 A	-	84.7		nC
Q _{gs}		-	30.6		nC
Q_{gd}	V _{GS} =10V	-	18.3		nC
<u> </u>					
V_{SD}	V _{GS} =0V,I _S =129A	-		1.2	V
Is		-	-	129	Α
t _{rr}	$T_J = 25^{\circ}C$, $I_F = I_S$	-	60		nS
Qrr	$di/dt = 100A/\mu s^{(Note3)}$	-	140		nC
	IDSS IGSS IGSS VGS(th) RDS(ON) GFS CISS CI	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	IDSS	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	IDSS


Notes:

- ${\it 1. Repetitive Rating: Pulse width limited by maximum junction temperature.}\\$
- 2. Surface Mounted on FR4 Board, t \leq 10 sec.
- 3. Pulse Test: Pulse Width \leq 300 μ s, Duty Cycle \leq 2%.
- 4. Guaranteed by design, not subject to production
- 5. EAS condition : Tj=25 $^{\circ}$ C,V_{DD}=50V,V_G=10V,L=0.5mH,Rg=25 Ω




Test Circuit


1) E_{AS} test Circuit

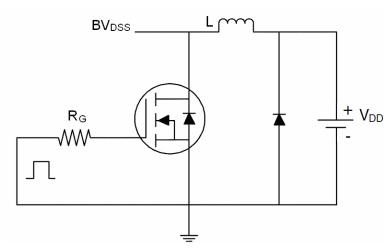

2) Gate charge test Circuit

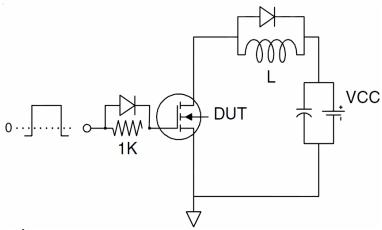

3) Switch Time Test Circuit

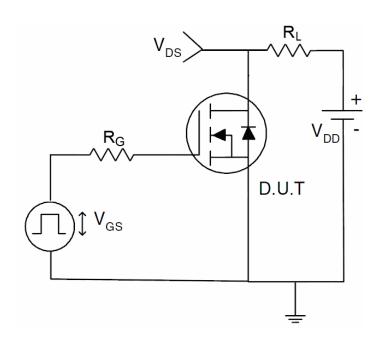








Figure 1 Output Characteristics




Figure 2 Transfer Characteristics




Figure 3 Rdson- Drain Current




Figure 4 Rdson-JunctionTemperature




Figure 5 Gate Charge





Figure 6 Source- Drain Diode Forward

1.2





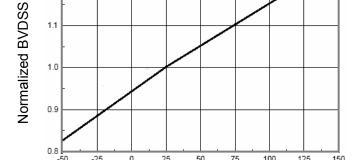



Figure 7 Capacitance vs Vds

 $\label{eq:TJ-Junction} T_{\text{J}}\text{-Junction Temperature}(^{\circ}\!\mathbb{C})$ Figure 9 BV_{DSS} vs Junction Temperature






Figure 8 Safe Operation Area

Figure 10 Current De-rating


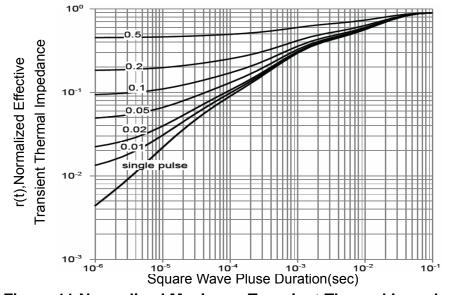


Figure 11 Normalized Maximum Transient Thermal Impedance

Pb Free Product



TO-220-3L Package Information

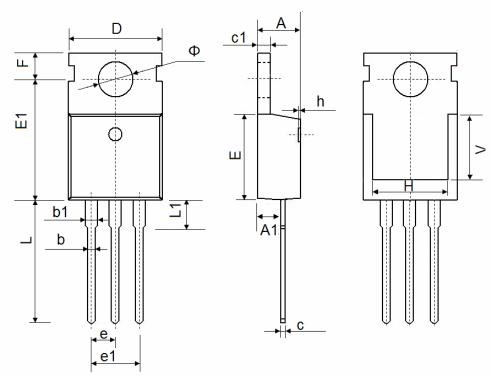

Symbol	Dimensions	In Millimeters	Dimensions In Inches		
	Min.	Max.	Min.	Max.	
А	4.400	4.600	0.173	0.181	
A1	2.250	2.550	0.089	0.100	
b	0.710	0.910	0.028	0.036	
b1	1.170	1.370	0.046	0.054	
С	0.330	0.650	0.013	0.026	
c1	1.200	1.400	0.047	0.055	
D	9.910	10.250	0.390	0.404	
E	8.9500	9.750	0.352	0.384	
E1	12.650	12.950	0.498	0.510	
е	2.540 TYP.		0.100	TYP.	
e1	4.980	5.180	0.196	0.204	
F	2.650	2.950	0.104	0.116	
Н	7.900	8.100	0.311	0.319	
h	0.000	0.300	0.000	0.012	
L	12.900	13.400	0.508	0.528	
L1	2.850	3.250	0.112	0.128	
V	7.500 REF.		0.295 REF.		
Ф	3.400	3.800	0.134	0.150	



http://www.ncepower.com

NCEP01T12

Attention:

- Any and all NCE power products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your NCE power representative nearest you before using any NCE power products described or contained herein in such applications.
- NCE power assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all NCE power products described or contained herein.
- Specifications of any and all NCE power products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- NCE power Semiconductor CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all NCE power products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of NCE power Semiconductor CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. NCE power believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the NCE power product that you intend to use.
- This catalog provides information as of Sep.2010. Specifications and information herein are subject to change without notice.