EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet

0805 Package Chip LED(1.0mm Height)

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free
- The product itself will remain within RoHS compliant version

Descriptions


- The 17-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide


Dant No	Chip	Emitted Color	Resin Color	
Part No.	Material	Emitted Color		
17-21/T1D-CP2R1TY/3T	InGaN	Pure White	Yellow Diffused	




17-21/T1D-CP2R1TY/3T




Package Outline Dimensions







17-21/T1D-CP2R1TY/3T



For reflow soldering (Propose)





Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Absolute Maximum Ratings (Ta=25°C)

(1a-25 C)				
Parameter	Symbol	Rating	Unit	
Reverse Voltage	V _R	5	V	
Forward Current	$I_{\rm F}$	25	mA	
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	100	mA	
Power Dissipation	P_d	110	mW	
Electrostatic Discharge(HBM)	ESD	150	v	
Operating Temperature	Topr	-40 ~ +85	°C	
Storage Temperature	Tstg	-40 ~ +90	°C	
Soldering Temperature	Tsol	Reflow Soldering : 260° C for 10sec. Hand Soldering : 350° C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	I_V	57.0		140	mcd	
Viewing Angle	2 0 1/2		150		deg	I _F =5mA
Forward Voltage	$V_{\rm F}$	2.60		3.00	V	
Reverse Current	I _R			50	μA	V _R =5V

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Forward Voltage ±0.1V

Bin Range Of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
P2	57.0	72.0		I _F =5mA
Q1	72.0	90.0	1	
Q2	90.0	112	– mcd	
R1	112	140		

Bin Range Of Forward Voltage

Symbol	Bin Code	Min.	Max.	Unit	Condition	
Т	28	2.60	2.70			
	29	2.70	2.80	V	I _F =5mA	
	30	2.80	2.90	v		
	31	2.90	3.00			

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Forward Voltage ±0.1V

Chromaticity Coordinates Specifications for Bin Grading

IF = 5mA


Group	Bin Code	CIE_x	CIE_y	Condition
		0.274	0.226	
		0.274	0.258	
	1	0.294	0.286	
		0.294	0.254	
		0.274	0.258	
	2	0.274	0.291	
		0.294	0.319	
C		0.294	0.286	T- 5 A
С	3	0.294	0.254	IF=5mA
		0.294	0.286	
		0.314	0.315	
		0.314	0.282	
	4	0.294	0.286	
		0.294	0.319	
		0.314	0.347	
		0.314	0.315	

Notes:

EVERLIGHT

1.The C.I.E. 1931 chromaticity diagram (Tolerance ± 0.01).

2. The products are sensitive to static electricity and care must be fully taken when handling products.

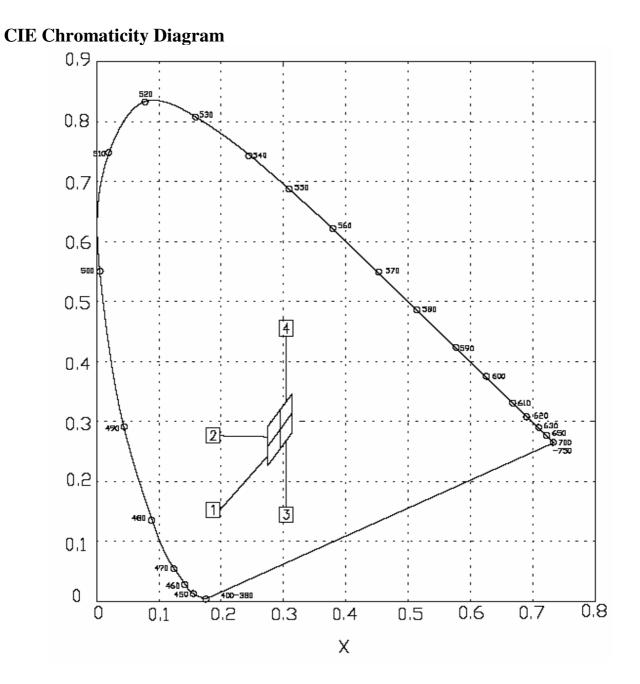



EVERLIGHT ELECTRONICS CO., LTD.

17-21/T1D-CP2R1TY/3T

Typical Electro-Optical Characteristics Curves

EVERLIGHT

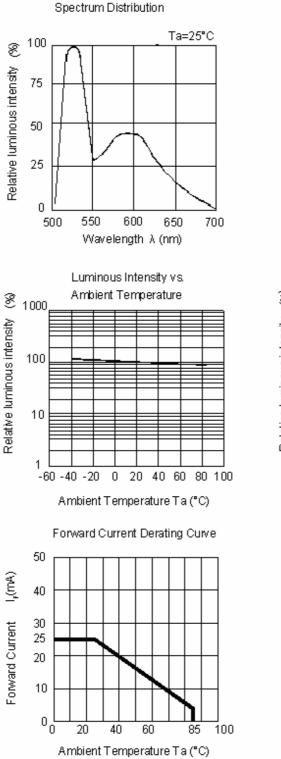

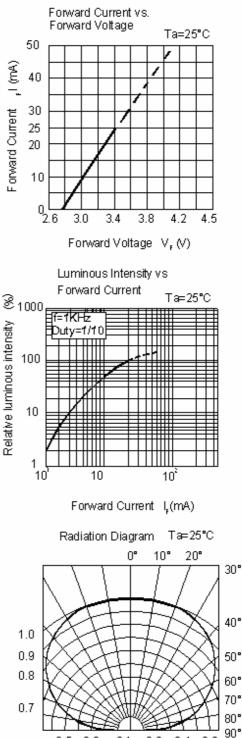

0.3

0.1

0.5

Everlight Electronics Co., Ltd. Device No. : SZDSE-171-T17 http://www.everlight.com Prepared date:1-Aug-2007 Rev. 1 Page: 7 of 12 Prepared by : CaiXiangMei


0.4

0.2

0.6


Label explanation

CAT: Luminous Intensity Rank HUE: Chromaticity Coordinates REF: Forward Voltage Rank

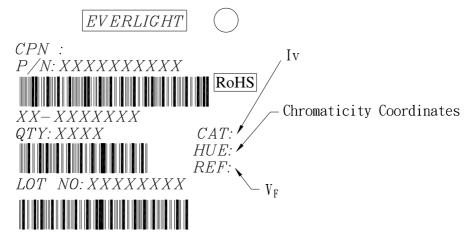

MADE IN TAIWAN

Reel Dimensions

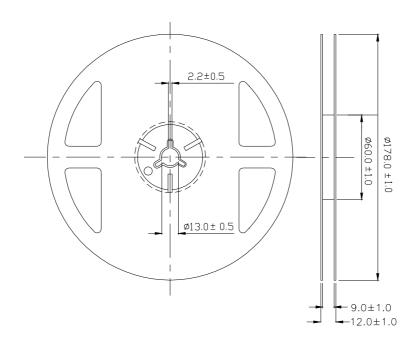


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.


17-21/T1D-CP2R1TY/3T

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

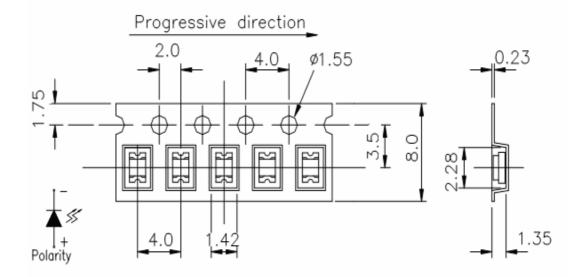

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

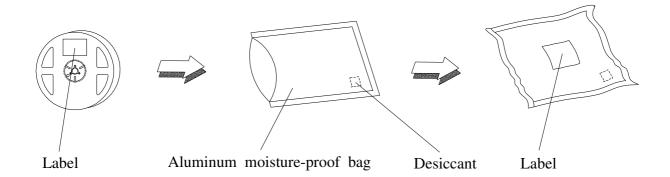

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min $\int 5 \text{ min}$ L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100°C 5min \int 10 sec L : -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30° C or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 1 year under 30° C or less and 60% RH or less.

If unused LEDs remain, it should be stored in moisture proof packages.

- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
 Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

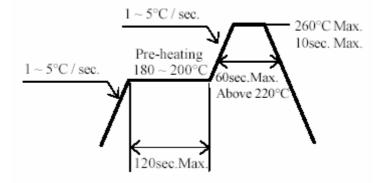


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

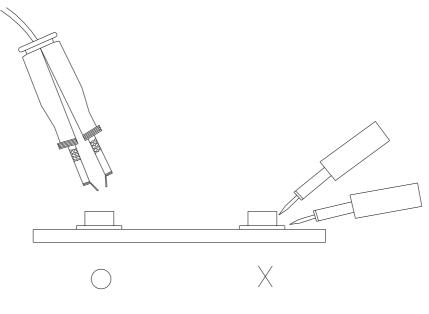

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

http://www.everlight.com Prepared date:1-Aug-2007