



# NCE N-Channel Enhancement Mode Power MOSFET

## Description

The NCE6020AK uses advanced trench technology and design to provide excellent  $R_{DS(ON)}$  with low gate charge. It can be used in a wide variety of applications.

#### **General Features**

- V<sub>DS</sub> =60V,I<sub>D</sub> =20A
  R<sub>DS(ON)</sub> <35mΩ @ V<sub>GS</sub>=10V
- High density cell design for ultra low Rdson
- Fully characterized avalanche voltage and current
- Good stability and uniformity with high E<sub>AS</sub>
- Excellent package for good heat dissipation
- Special process technology for high ESD capability

## Application

- Power switching application
- Hard switched and high frequency circuits
- Uninterruptible power supply

100% UIS TESTED!


100% ΔVds TESTED!

#### Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
NCE6020AK	NCE6020AK	TO-252-2L	-	-	-

#### Absolute Maximum Ratings (Tc=25°C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	Vds	60	V
Gate-Source Voltage	Vgs	±20	V
Drain Current-Continuous	Ι <sub>D</sub>	20	А
Drain Current-Continuous(T <sub>C</sub> =100℃)	I <sub>D</sub> (100℃)	14	А
Pulsed Drain Current	I <sub>DM</sub>	60	А
Maximum Power Dissipation	PD	45	W
Derating factor		0.3	W/℃
Single pulse avalanche energy (Note 5)	E <sub>AS</sub>	72	mJ
Operating Junction and Storage Temperature Range	T <sub>J</sub> ,T <sub>STG</sub>	-55 To 175	°C

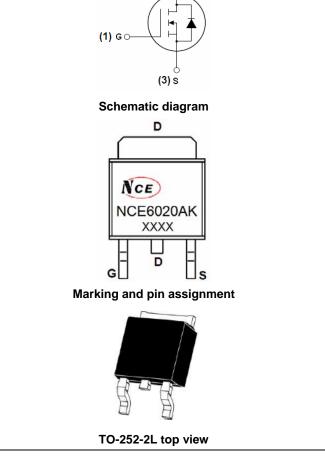

(2) D





#### **Thermal Characteristic**

Thermal Resistance, Junction-to-CaseNote 2)R <sub>0JC</sub> 3.3°C/W
---

#### Electrical Characteristics (T<sub>c</sub>=25 $^{\circ}$ Cunless otherwise noted)

BV <sub>DSS</sub>	V <sub>GS</sub> =0V Ι <sub>D</sub> =250μΑ	1			
	V <sub>GS</sub> =0V I <sub>D</sub> =250µA				
I <sub>DSS</sub>		60	-	-	V
	V <sub>DS</sub> =60V,V <sub>GS</sub> =0V	-	-	1	μA
I <sub>GSS</sub>	V <sub>GS</sub> =±20V,V <sub>DS</sub> =0V	-	-	±100	nA
V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> ,I <sub>D</sub> =250µA	1.2	1.6	2.5	V
R <sub>DS(ON)</sub>	V <sub>GS</sub> =10V, I <sub>D</sub> =20A	-	27	35	mΩ
<b>g</b> fs	V <sub>DS</sub> =5V,I <sub>D</sub> =5A	11	-	-	S
			•		
C <sub>lss</sub>		-	500	-	PF
C <sub>oss</sub>		-	60	-	PF
C <sub>rss</sub>	F=1.0MHZ	-	25	-	PF
		•			
t <sub>d(on)</sub>		-	5	-	nS
tr	V <sub>DD</sub> =30V,I <sub>D</sub> =2A,R <sub>L</sub> =6.7Ω	-	2.6	-	nS
t <sub>d(off)</sub>	V <sub>GS</sub> =10V,R <sub>G</sub> =3Ω	-	16.1	-	nS
t <sub>f</sub>		-	2.3	-	nS
Qg	)/ 00)//L 4.5A	-	47		nC
Q <sub>gs</sub>		-	6		nC
Q <sub>gd</sub>	V <sub>GS</sub> =10V	-	14		nC
		•			
V <sub>SD</sub>	V <sub>GS</sub> =0V,I <sub>S</sub> =20A	-		1.2	V
I <sub>S</sub>		-	-	20	А
t <sub>rr</sub>	TJ = 25°C, IF =20A	-	35	-	nS
Qrr	di/dt = 100A/µs <sup>(Note3)</sup>	-	53	-	nC
t <sub>on</sub>	Intrinsic turn-on time is negligible (turn-on is dominated by LS+LD				y LS+LD)
	IGSS        VGS(th)        RDS(ON)        gFS        Clss        Coss        Crss        td(on)        tr        dd(off)        tf        Qg        Qgs        Qgd        VSD        Is        trr        Qrr	$\begin{tabular}{ c c c c c } \hline I_{GSS} & V_{GS} = \pm 20V, V_{DS} = 0V \\ \hline V_{GS(th)} & V_{DS} = V_{GS}, I_D = 250 \mu A \\ \hline R_{DS(ON)} & V_{GS} = 10V, I_D = 20A \\ \hline g_{FS} & V_{DS} = 5V, I_D = 5A \\ \hline \hline C_{ISS} & V_{DS} = 30V, V_{GS} = 0V, \\ \hline C_{\sigmass} & F = 1.0 MHz \\ \hline \hline C_{rss} & V_{DD} = 30V, I_D = 2A, R_L = 6.7\Omega \\ \hline t_{d(off)} & V_{DD} = 30V, I_D = 2A, R_L = 6.7\Omega \\ \hline t_{d(off)} & V_{DS} = 10V, R_G = 3\Omega \\ \hline t_{f} & V_{DS} = 10V, R_G = 3\Omega \\ \hline t_{f} & V_{DS} = 30V, I_D = 4.5A, \\ \hline Q_{gg} & V_{DS} = 30V, I_D = 4.5A, \\ \hline V_{GS} = 10V \\ \hline Q_{gd} & V_{GS} = 0V, I_S = 20A \\ \hline I_S & I_T & TJ = 25^{\circ}C, IF = 20A \\ \hline d_{I}/dt = 100A/\mu s^{(Note3)} \\ \hline \end{tabular}$	$\begin{array}{ c c c c c c } I_{GSS} & V_{GS} = \pm 20V, V_{DS} = 0V & - \\ \hline & V_{GS}(th) & V_{DS} = V_{GS}, I_D = 250 \mu A & 1.2 \\ \hline & R_{DS}(ON) & V_{GS} = 10V, I_D = 20A & - \\ \hline & g_{FS} & V_{DS} = 5V, I_D = 5A & 11 \\ \hline & & & \\ \hline & C_{ISS} & & V_{DS} = 30V, V_{GS} = 0V, & - \\ \hline & C_{rss} & & F = 1.0MHz & - \\ \hline & C_{rss} & & & & \\ \hline & & & & \\ \hline & t_{d}(on) & & & & \\ \hline & t_{r} & V_{DD} = 30V, I_D = 2A, R_L = 6.7\Omega & - \\ \hline & t_{d}(off) & V_{GS} = 10V, R_G = 3\Omega & - \\ \hline & t_{f} & & & & \\ \hline & Q_{gg} & & V_{DS} = 30V, I_D = 4.5A, & - \\ \hline & Q_{gg} & & V_{GS} = 10V & - \\ \hline & V_{SD} & V_{GS} = 0V, I_S = 20A & - \\ \hline & I_S & & & - \\ \hline & t_{rr} & TJ = 25^{\circ}C, IF = 20A & - \\ \hline & Q_{rr} & di/dt = 100A/\mu s^{(Note3)} & - \\ \hline \end{array}$	$\begin{array}{ c c c c c c c c } & V_{GS}=\pm 20V, V_{DS}=0V & - & - & \\ \hline V_{GS(th)} & V_{DS}=V_{GS}, I_{D}=250 \mu A & 1.2 & 1.6 \\ \hline R_{DS(ON)} & V_{GS}=10V, I_{D}=20A & - & 27 \\ \hline g_{FS} & V_{DS}=5V, I_{D}=5A & 11 & - & \\ \hline \hline C_{ISS} & & & & & & & \\ \hline C_{OSS} & & & & & & & & \\ \hline C_{rss} & & & & & & & & \\ \hline C_{rss} & & & & & & & & \\ \hline & V_{DS}=30V, V_{GS}=0V, & & & & & & & \\ \hline & & & & & & & & & \\ \hline C_{rss} & & & & & & & & \\ \hline & & & & & & & & \\ \hline & & & &$	$\begin{tabular}{ c c c c c c } \hline I_{GSS} & V_{GS}=\pm 20V, V_{DS}=0V & - & - & \pm 100 \\ \hline V_{GS(th)} & V_{DS}=V_{GS}, I_{D}=250 \mu A & 1.2 & 1.6 & 2.5 \\ \hline R_{DS(ON)} & V_{GS}=10V, I_{D}=20A & - & 27 & 35 \\ \hline g_{FS} & V_{DS}=5V, I_{D}=5A & 11 & - & - \\ \hline \hline C_{Iss} & V_{DS}=30V, V_{GS}=0V, & - & 60 & - \\ \hline C_{rss} & F=1.0MHz & - & 60 & - \\ \hline C_{rss} & F=1.0MHz & - & 25 & - \\ \hline t_{d(on)} & & & & \\ \hline t_{d(on)} & & & & & \\ \hline t_{d(off)} & V_{DD}=30V, I_{D}=2A, R_{L}=6.7\Omega & - & 2.6 & - \\ \hline t_{d(off)} & V_{GS}=10V, R_{G}=3\Omega & - & 16.1 & - \\ \hline c_{Qg} & & V_{DS}=30V, I_{D}=4.5A, & & & \\ \hline Q_{gd} & V_{DS}=30V, I_{D}=4.5A, & & & & \\ \hline V_{SD} & V_{GS}=10V & & & & & \\ \hline \hline V_{SD} & V_{GS}=0V, I_{S}=20A & - & & & 1.2 \\ \hline I_{S} & & & & & - & 20 \\ \hline t_{rr} & TJ = 25^{\circ}C, IF = 20A & - & & & 35 & - \\ \hline Q_{rr} & di/dt = 100A/\mu s^{(Note3)} & - & 53 & - \\ \hline \end{tabular}$

Notes:

- 1. Repetitive Rating: Pulse width limited by maximum junction temperature.
- **2.** Surface Mounted on FR4 Board,  $t \le 10$  sec.
- **3.** Pulse Test: Pulse Width  $\leq$  300µs, Duty Cycle  $\leq$  2%.
- 4. Guaranteed by design, not subject to production
- 5. EAS condition: Tj=25  $^{\circ}$ C, VDD=30V, VG=10V, L=0.5mH, Rg=25 $\Omega$




http://www.ncepower.com







## Test Circuit 1) E<sub>AS</sub> test Circuit

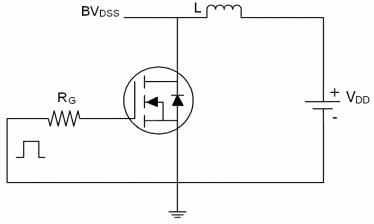

## 2) Gate charge test Circuit

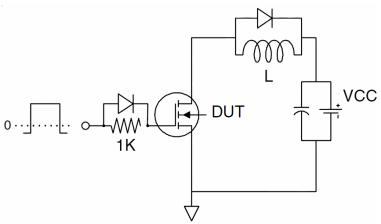


3) Switch Time Test Circuit

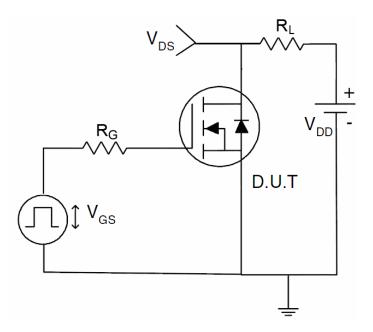








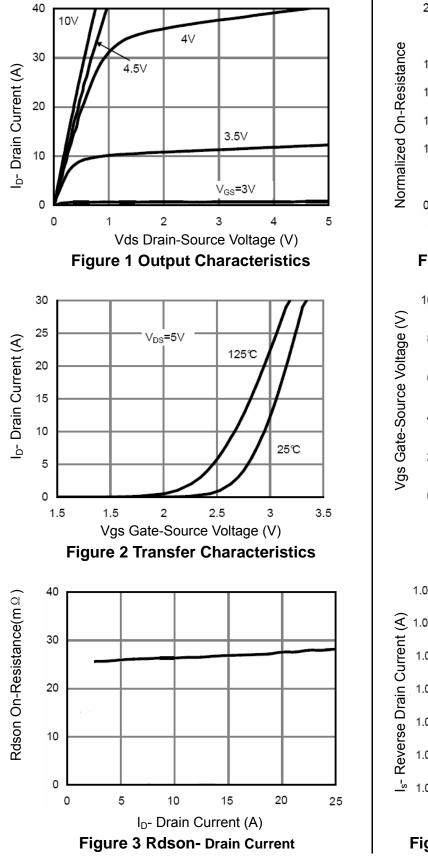

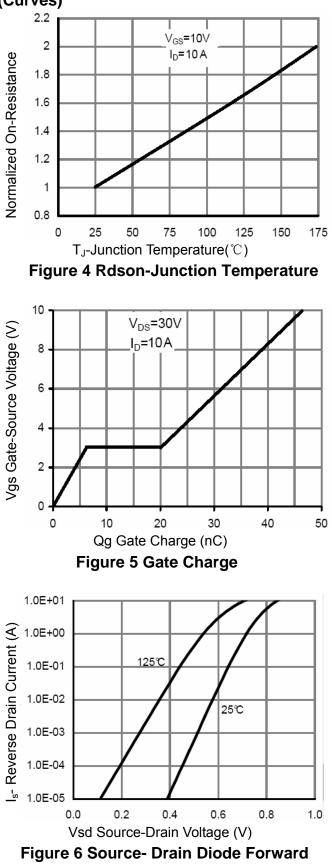




http://www.ncepower.com





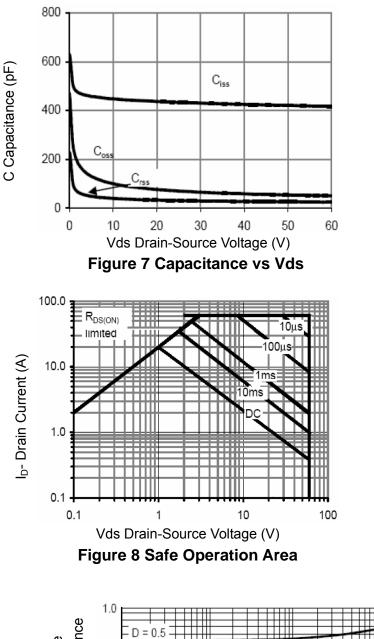

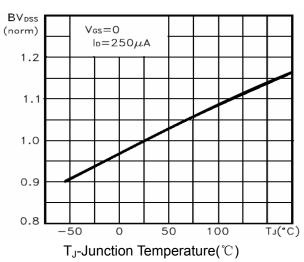


Figure 9 BV<sub>DSS</sub> vs Junction Temperature



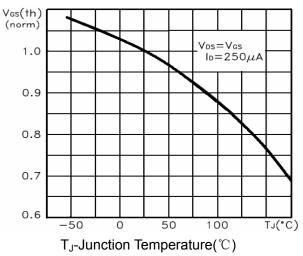


Figure 10 V<sub>GS(th)</sub> vs Junction Temperature



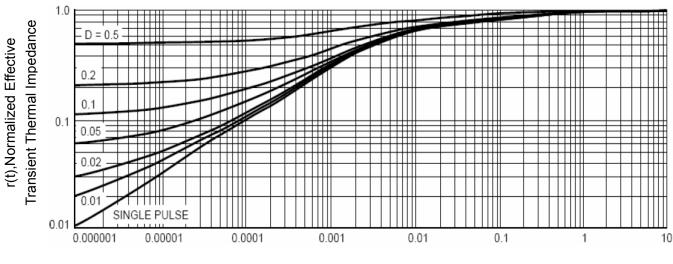




http://www.ncepower.com



## **TO-252 Package Information**

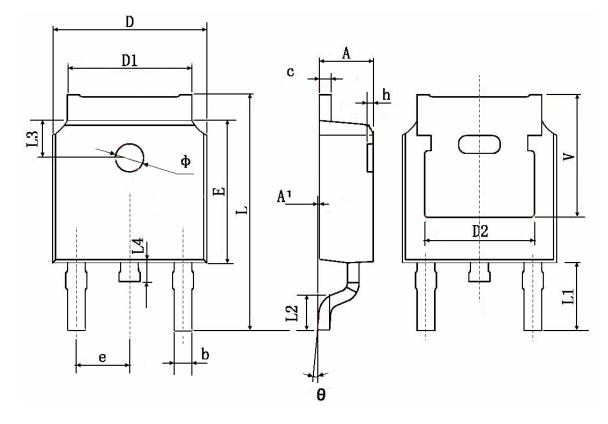

Symbol	Dimensions In Millimeters		Dimensions In Inches		
	Min.	Max.	Min.	Max.	
А	2.200	2.400	0.087	0.094	
A1	0.000	0.127	0.000	0.005	
b	0.660	0.860	0.026	0.034	
С	0.460	0.580	0.018	0.023	
D	6.500	6.700	0.256	0.264	
D1	5.100	5.460	0.201	0.215	
D2	0.483 TYP.		0.190 TYP.		
E	6.000	6.200	0.236	0.244	
е	2.186	2.386	0.086	0.094	
L	9.800	10.400	0.386	0.409	
L1	2.900 TYP.		0.114 TYP.		
L2	1.400	1.700	0.055	0.067	
L3	1.600 TYP.		0.063 TYP.		
L4	0.600	1.000	0.024	0.039	
Φ	1.100	1.300	0.043	0.051	
θ	0°	8°	0°	8°	
h	0.000	0.300	0.000	0.012	
V	5.350	) TYP.	0.211 TYP.		







#### Attention:

- Any and all NCE power products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your NCE power representative nearest you before using any NCE power products described or contained herein in such applications.
- NCE power assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all NCE power products described or contained herein.
- Specifications of any and all NCE power products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- NCE power Semiconductor CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all NCE power products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of NCE power Semiconductor CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. NCE power believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the NCE power product that you intend to use.
- This catalog provides information as of Sep.2010. Specifications and information herein are subject to change without notice.