

# Technical Data Sheet 0603 Package Chip LED(0.8mm Height)

### 19-21/GPC-FL1M2B/3T

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version

#### **Descriptions**

- The 19-21 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

#### **Applications**

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.


#### **Device Selection Guide**

D. (N	Chip	F 1.0.1	Resin Color	
Part No.	Material	Emitted Color		
19-21/GPC-FL1M2B/3T	AlGaInP	Pure Green	Water Clear	




Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 1 of 10 Device No.: DSE-0002649 Prepared date:04-Nov-2009 Prepared by: Niu Yanling


#### **Package Outline Dimensions**







For reflow soldering (Propose)

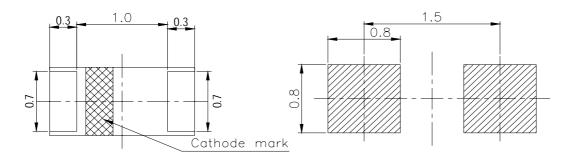

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Rev.2



### **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit	
Reverse Voltage	$V_R$	5	V	
Forward Current	$I_{F}$	25	mA	
Peak Forward Current (Duty 1/10 @1KHz)	${ m I}_{ m FP}$	60	mA	
Power Dissipation	Pd	60	mW	
Electrostatic Discharge(HBM)	ESD	2000	V	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$	
Soldering Temperature	Tsol	Reflow Soldering : 260°C for 10sec. Hand Soldering : 350°C for 3 sec		

# **Electro-Optical Characteristics (Ta=25°C)**

			- /			
Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	11.5		28.5	mcd	
Peak Wavelength	λр		561		nm	
Dominant Wavelength	λd	557.5		565.5	nm	
Spectrum Radiation Bandwidth	Δλ		20		nm	$I_F = 20mA$
Viewing Angle	2 \theta 1/2		100		deg	
Forward Voltage	$V_{\mathrm{F}}$	1.75		2.35	V	
Reverse Current	$I_R$			10	$\mu$ A	V <sub>R</sub> =5V

#### **Notes:**

- 1.Tolerance of Luminous Intensity ±11%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 3 of 10

Device No.: DSE-0002649 Prepared date:04-Nov-2009 Prepared by: Niu Yanling



### Bin Range Of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition	
F	C10	557.5	559.5			
	C11	559.5	561.5	nm	$I_F = 20 \text{mA}$	
	C12	561.5	563.5			
	C13	563.5	565.5			

### **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition	
L1	11.5	14.5	mcd		
L2	14.5	18.0		I <sub>F</sub> =20mA	
M1	18.0	22.5			
M2	22.5	28.5			

#### **Bin Range Of Forward Voltage**


Group	Bin	Min	Max	Unit	Condition
	0	1.75	1.95		
В	1	1.95	2.15	V	$I_F = 20 \text{mA}$
	2	2.15	2.35		

#### **Notes:**

- 1.Tolerance of Luminous Intensity ±11%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.1V

Device No.: DSE-0002649 Prepared date:04-Nov-2009 Prepared by: Niu Yanling

### **Typical Electro-Optical Characteristics Curves**

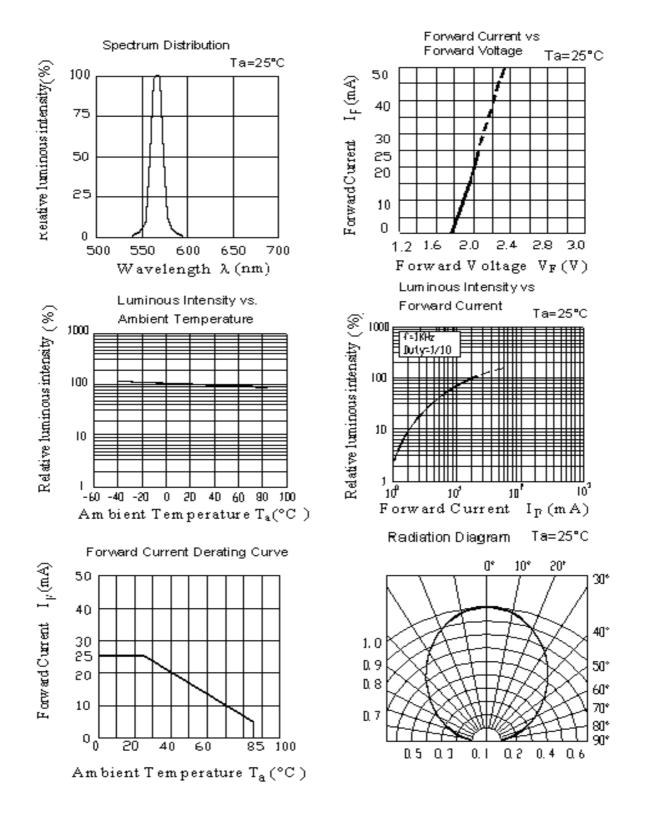

# 1<u>9-21/GPC-FL1M2B/3T</u>

### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 



#### **Reel Dimensions**

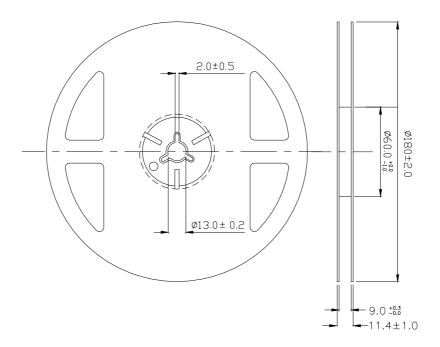

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd.

http://www.everlight.com

Pre

Rev.2


Page: 6 of 10

Device No.: DSE-0002649

Prepared date:04-Nov-2009


Prepared by: Niu Yanling

# Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

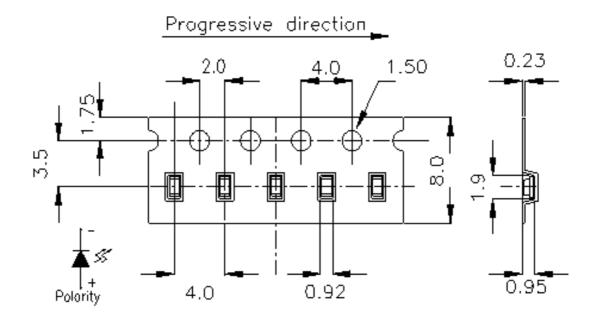

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

## **Moisture Resistant Packaging**

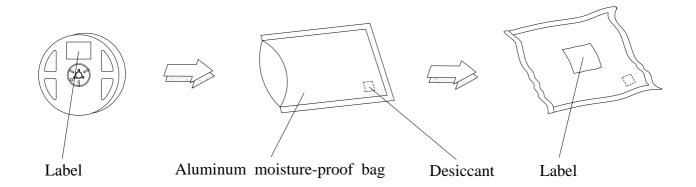

Everlight Electronics Co., Ltd.

Device No.: DSE-0002649

http://www.everlight.com

Prepared date:04-Nov-2009

Rev.2

Page: 7 of 10

Prepared by: Niu Yanling

### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90 %


LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Rc
1	Reflow	Temp. : 260°C±5°C Min. 5 sec.	6 min.	22 Pcs.	0/1
2	Temperature Cycle	$H: +100^{\circ}C$ 15 min. $\int 5 \text{ min.}$ $L: -40^{\circ}C$ 15 min.	300 Cycles	22 Pcs.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5 min. $\int 10 \text{ sec.}$ $L: -10^{\circ}\mathbb{C}$ 5 min.	300 Cycles	22 Pcs.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	Temp. : -55°℃	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}/25^{\circ}\text{C}$	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 Hrs.	22 Pcs.	0/1

#### **Precautions For Use**

- 1. Over-current-proof
  - Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).
- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

  Baking treatment: 60±5°C for 24 hours..
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

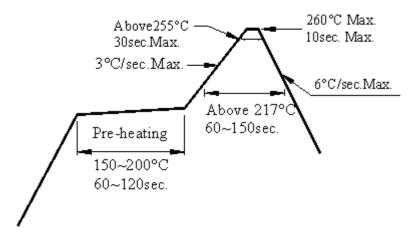

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.




#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

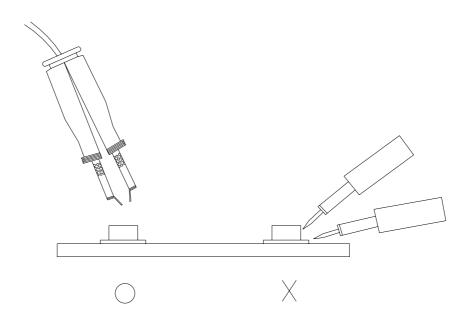

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936 Fax: 886-2267-6244, 2267-6189, 2267-6306 http://www.everlight.com

Device No.: DSE-0002649 Prepared date:04-Nov-2009 Prepared by: Niu Yanling