

Technical Data Sheet

1.9mm Round Subminiature Lead LEDs

Features

- Package in 12mm tape on 7" diameter reels.
- Compatible with automatic placement equipment.
- EIA Std. package.
- Mono-color type.
- Pb-free
- The product itself will remain within RoHS compliant version.

Descriptions

- The 91-21 SMD taping is much smaller than leaded components.

 Thus enable smaller board size.

 Higher packing density. Reduced storage space and finally smaller equipment to be obtained.
- Besides, light weight makes them ideal for miniature applications.
- Furthermore by automation assembly machines the accuracy is anticipated.


Applications

- Small indicator for indoor applications.
- Flat backlight for LCD, switches and symbols.
- Indicator and backlight in office equipment.
- Indicator and backlight for battery driven equipment.
- Indicator and backlight for audio and video equipment.
- Automotive : backlighting in dashboards and switches.
- Telecommunication: indicator and backlighting in telephone and fax.

Device Selection Guide

Chip		I and Caller
Material	Emitted Color	Lens Color
AlGaInP	Brilliant Orange	Water Clear

91-21UYOC/S530-XX/XXX

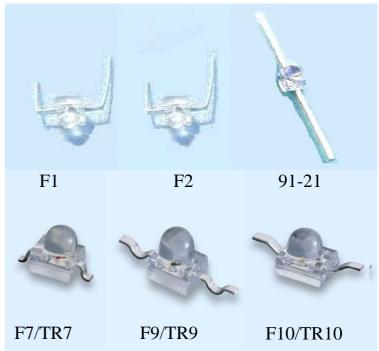


Everlight Electronics Co., Ltd. http://www.sowinled.com Rev. 2.1 Page: 1 of 10




91-21UYOC/S530-XX/XXX


Package Outline Dimensions

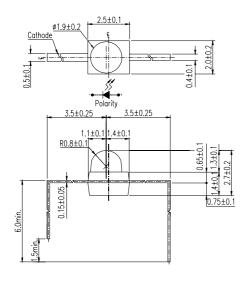






91-21




2.5±0.25
Polarity 2.5±0.25
1.1±0.11.4±0.1
R0.8±0.1
0.75±0.1

91-21/F2



91-21F7/TR7



91-21F10/TR10

Everlight Electronics Co., Ltd.

Device No.: DLE-912-305

http://www.sowinled.com

Rev. 2.1

Page: 2 of 10

Prepared date: 07-29-2005

Prepared by: Forrest Chen



91-21UYOC/S530-XX/XXX

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	5	V	
Forward Current	${ m I}_{ m F}$	25	mA	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +100	$^{\circ}\!\mathbb{C}$	
Soldering Temperature	Tsol	260 for 5 Sec.	$^{\circ}\!\mathbb{C}$	
Electrostatic Discharge	ESD	2000	V	
Power Dissipation	Pd	60	mW	
Peak Forward Current(Duty 1/10 @ 1KHz)	Ifp	60	mA	


Electro-Optical Characteristics (Ta=25°C)


Parameter	Symbol	Chip Rank	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Iv	A2		32		mcd	I _F =2mA
			198	529			I _F =20mA
		A3		43			I _F =2mA
			463	714			I _F =20mA
		A4		54			I _F =2mA
			661	892			I _F =20mA
		A5		69			I _F =2mA
			793	1156			I _F =20mA
		A6		87			I _F =2mA
			991	1454			I _F =20mA
Viewing Angle	2 \theta 1/2			25		deg	
Peak Wavelength	λp			611		nm	IF=20mA
Dominant Wavelength	λd			605		nm	
Spectrum Radiation Bandwidth	Δλ			17		nm	
Forward Voltage	VF			2.0	2.4	V	
Reverse Current	IR				10	μ A	V _R =5V


Everlight Electronics Co., Ltd. http://www.sowinled.com Rev. 2.1 Page: 3 of 10


91-21UYOC/S530-XX/XXX


Typical Electro-Optical Characteristics Curves

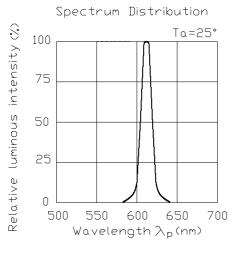




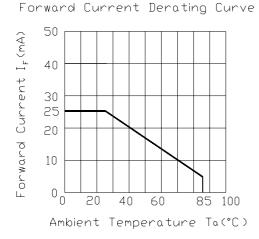

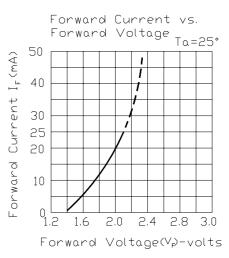





Everlight Electronics Co., Ltd. http://www.sowinled.com Rev. 2.1 Page: 4 of 10



91-21UYOC/S530-XX/XXX

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel & Carrier Tape Dimensions

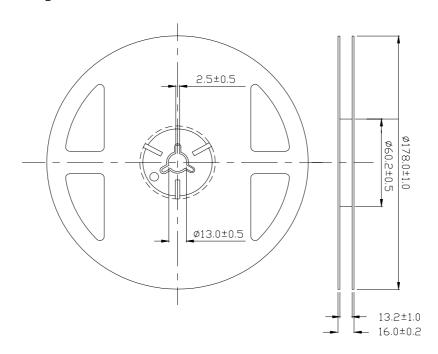


Everlight Electronics Co., Ltd. http://www.sowinled.com Rev. 2.1 Page: 5 of 10




91-21UYOC/S530-XX/XXX

Loaded quantity per reel 1000 PCS/reel

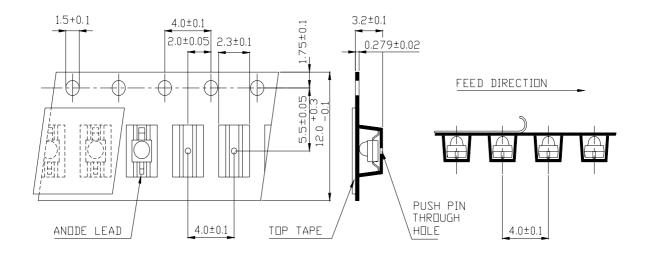

TR7

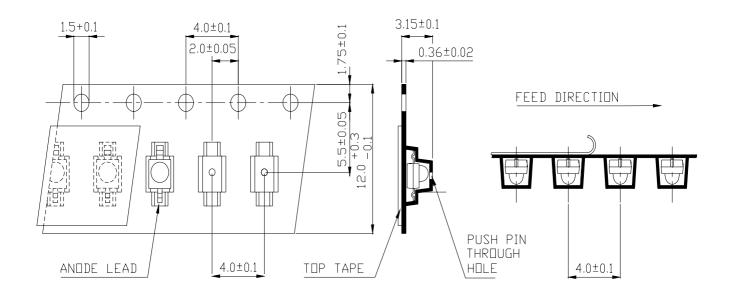


TR9

Everlight Electronics Co., Ltd. http://www.sowinled.com Rev. 2.1 Page: 6 of 10 **Device No.: DLE-912-305** Prepared date: 07-29-2005 Prepared by: Forrest Chen




91-21UYOC/S530-XX/XXX

Loaded quantity per reel 1000 PCS/reel

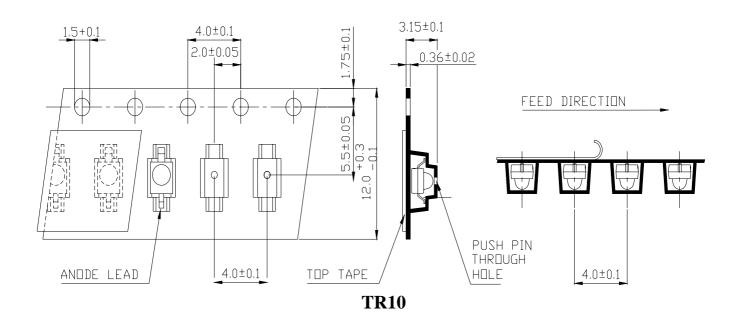

Unit:mm

Moisture Resistant Packaging

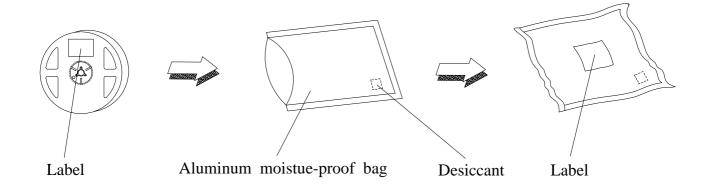

Everlight Electronics Co., Ltd.

http://www.sowinled.com

Rev. 2.1

Page: 7 of 10

Device No. : DLE-912-305 Prepared date: 07-29-2005

Prepared by: Forrest Chen



91-21UYOC/S530-XX/XXX

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90 %

LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5 sec.	6 Min.	22 Pcs.	0/1
2	Temperature Cycle	$H: +100^{\circ}C$ 15 min. $\int 5 \text{ min.}$ $L: -40^{\circ}C$ 15 min.	300 Cycles	22 Pcs.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5 min. $\int 10 \text{ sec.}$ $L: -10^{\circ}\mathbb{C}$ 5 min.	300 Cycles	22 Pcs.	0/1
4	High Temperature Storage	Temp. : 100°℃	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 Pcs.	0/1

Everlight Electronics Co., Ltd. http://www.sowinled.com Rev. 2.1 Page: 8 of 10



91-21UYOC/S530-XX/XXX

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
 - 2.3 The LEDs should be used within a year.
 - 2.4 After opening the package, the LEDs should be kept at 30° C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

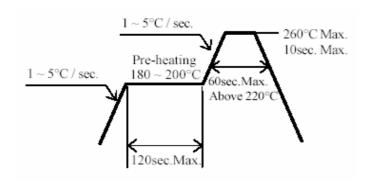

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.


Everlight Electronics Co., Ltd. http://www.sowinled.com Rev. 2.1 Page: 9 of 10 **Device No.: DLE-912-305** Prepared date: 07-29-2005 Prepared by: Forrest Chen



91-21UYOC/S530-XX/XXX

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

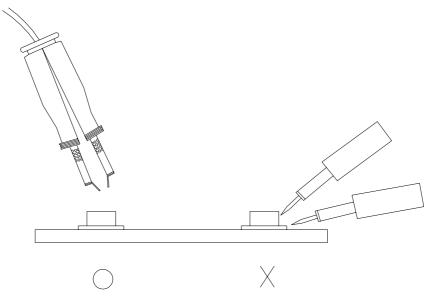

Everlight Electronics Co., Ltd. http://www.sowinled.com Rev. 2.1 Page: 10 of 10