

N&P-Channel MOSFET

General Description

The WSP4067B is the highest performance trench N-ch and P-ch MOSFET with extreme high cell density, which provide excellent RDSON and gate charge for most of the synchronous buck converter applications.

The WSP4067B meet the RoHS and Green Product requirement, 100% EAS guaranteed with full function reliability approved.

Features

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- 100% EAS Guaranteed
- Green Device Available

Product Summery


BVDSS	RDSON	ID
40V	25mΩ	6.0A
-40V	40mΩ	-5.1A

Applications

- High Frequency Point-of-Load Synchronous Buck Converter.
- Networking DC-DC Power System
- Load Switch

SOP-8 Pin Configuration





Absolute Maximum Ratings

		Rating		
Symbol	Parameter		P-Channel	Units
V _{DS}	Drain-Source Voltage	40	-40	V
V _{GS}	Gate-Source Voltage	±20	±20	V
I _D @T _C =25℃	Continuous Drain Current	6.0	-5.1	А
I _D @T _C =70℃	Continuous Drain Current	3.9	-3.2	А
I _{DM}	Pulsed Drain Current	24	-20	А
P _D @T _C =25℃	Total Power Dissipation		2	W
T _J /T _{STG}	Operating Temperature /Storage Temperature Range	-55 to 150		°C

Thermal Data

Symbol	Parameter	Тур.	Max.	Unit
R _{eja}	Thermal Resistance Junction-Ambient ¹		62.5	°C/W
R _{θJC}	Thermal Resistance Junction-Case ¹		50	°C/W



Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =250uA	40			V
$\triangle BV_{DSS} / \triangle T_J$	BV _{DSS} Temperature Coefficient	Reference to 25 $^\circ\!\!\!\mathrm{C}$, I_D=1mA		0.067		V/℃
Р	Otatia Dania Ocumen On Danistanan	V _{GS} =10V , I _D =6A		25	35	
R _{DS(ON)}	Static Drain-Source On-Resistance	V _{GS} =4.5V , I _D =5A		40	55	mΩ
V _{GS(th)}	Gate Threshold Voltage		1.0	1.6	2.2	V
	V _{GS(th)} Temperature Coefficient	──_V _{GS} =V _{DS} , I _D =250uA		-5.24		mV/℃
	Drain Source Lookage Current	V _{DS} =32V , V _{GS} =0V , T _J =85℃			1	
I _{DSS}	Drain-Source Leakage Current	V _{DS} =32V , V _{GS} =0V , T _J =85℃			30	uA
I _{GSS}	Gate-Source Leakage Current	V_{GS} = $\pm20V$, V_{DS} = $0V$			±100	nA
Qg	Total Gate Charge			11		
Q _{gs}	Gate-Source Charge	V_{DS} =20V , V_{GS} =10V , I_{D} =6A		2		nC
Q _{gd}	Gate-Drain Charge			2.2		
T _{d(on)}	Turn-On Delay Time			1.9		
Tr	Rise Time	$ \begin{array}{c} & \\ \hline \\ & \\ & \\ & \\ & \\ & \\ & \\ & \\ & \\$		18.6		
T _{d(off)}	Turn-Off Delay Time			8.7		ns
T _f	Fall Time			2.6		
C _{iss}	Input Capacitance	V _{DS} =20V , V _{GS} =0V , f=1MHz		600		
C _{oss}	Output Capacitance			62		pF
C _{rss}	Reverse Transfer Capacitance			48		

N-Channel Electrical Characteristics (TJ=25 °C, unless otherwise noted)

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
ls	Continuous Source Current	TA=25°C.			2.6	А
V _{SD}	Diode Forward Voltage	V _{GS} =0V , I _S =1A			1.3	V

A: The value of R & JA is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with TA=25°C. The value in any given

application depends on the user's specific board design.

B: Repetitive rating, pulse width limited by junction temperature.

C: The current rating is based on the t≤ 10s junction to ambient thermal resistance rating.



Symbol **Parameter** Conditions Min. Тур. Max. Unit **BV**_{DSS} Drain-Source Breakdown Voltage V_{GS}=0V , I_D=-250uA -40 V ---△BV_{DSS}/△T_J BV_{DSS} Temperature Coefficient Reference to 25°C, ID=-1mA -0.03 V/℃ ------V_{GS}=-10V , I_D=-4A 40 50 ---Static Drain-Source On-Resistance R_{DS(ON)} $\text{m}\Omega$ V_{GS}=-4.5V , I_D=-3A 55 75 $V_{\text{GS(th)}}$ -1.6 Gate Threshold Voltage $V_{GS}=V_{DS}$, $I_D = -250 uA$ -1.0 -2.2 V V_{DS}=-32V , V_{GS}=0V , T_J=85℃ -1 ------Drain-Source Leakage Current uA IDSS V_{DS}=-32V , V_{GS}=0V , T_J=85℃ -30 ------- $V_{GS}=\pm 20V$, $V_{DS}=0V$ IGSS Gate-Source Leakage Current ------ ± 100 nA Qq Total Gate Charge 20 ------Gate-Source Charge V_{DS}=-20V , V_{GS}=-10V , I_D=-5.1A 5.7 --nC Q_{gs} ---Gate-Drain Charge 4.6 Q_{gd} ------Turn-On Delay Time 6.8 T_{d(on)} ------ V_{DD} =-20V , V_{GS} =-10V , 33 T_{r} Rise Time ------ $R_{G}=3.3\Omega$, ns 30 $T_{d(off)}$ Turn-Off Delay Time ---____ I_D=-5.1A,RL=3.9Ω. 12 Fall Time T_{f} -------1100 C_{iss} Input Capacitance ------V_{DS}=-15V , V_{GS}=0V , f=1MHz 100 Coss Output Capacitance pF ------80 Reverse Transfer Capacitance C_{rss} ---

P-Channel Electrical Characteristics (T_J=25 $^{\circ}$ C, unless otherwise noted)

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
Is	Continuous Source Current	TA=25°C.			-2.6	А
V_{SD}	Diode Forward Voltage	V _{GS} =0V , I _S =-1A .			-1.2	V

A: The value of R BJA is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with TA=25°C. The value in any given

application depends on the user's specific board design.


B: Repetitive rating, pulse width limited by junction temperature.

C: The current rating is based on the t \leq 10s junction to ambient thermal resistance rating.




N&P-Channel MOSFET


N-Channel Typical Characteristics

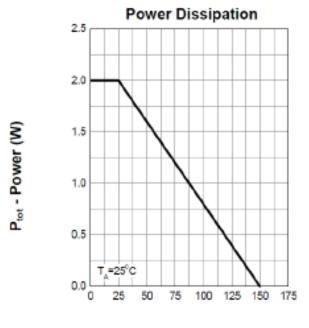


T_j – Junction Temperature (°C)

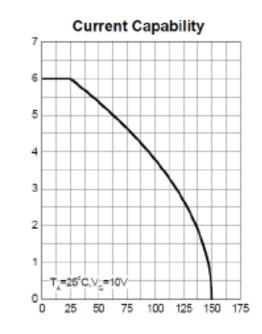

T_j – Junction Temperature(°C)

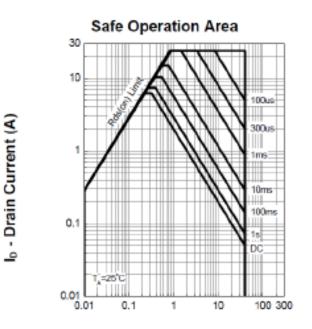

V_{DS} - Drain-Source Voltage (V)

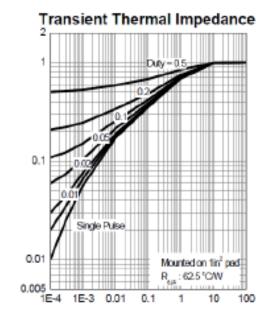

Square Wave Pulse Duration (sec)

Normalized Effective Transient


I_D - Drain Current (A)



N&P-Channel MOSFET

I_D - Drain Current (A)

R_{DS(ON)} - On Resistance (mΩ)

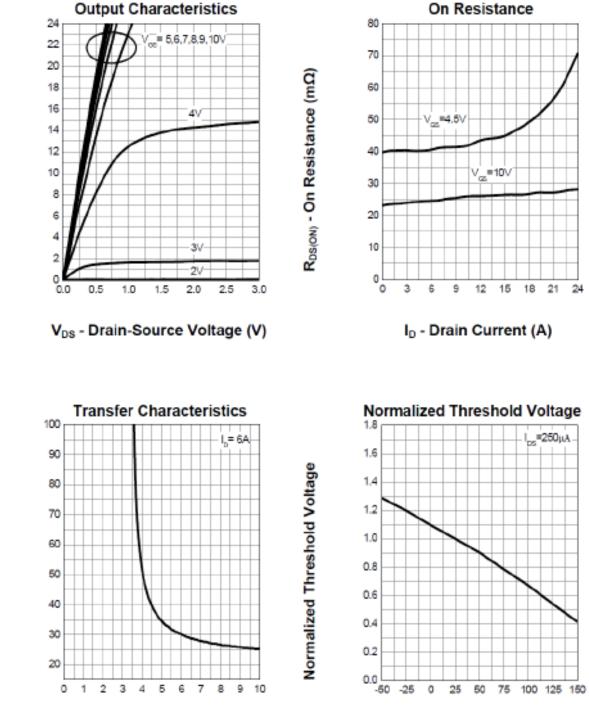


T_J - Junction Temperature (°C)


V_{GS} - Gate-Source Voltage (V)



WSP4067B

Normalized On Resistance

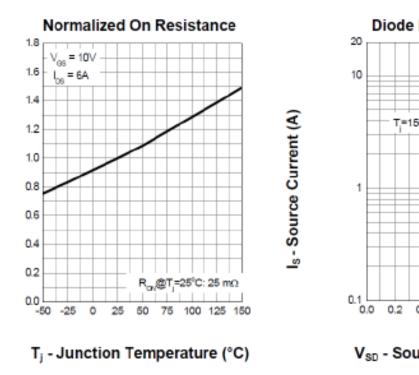


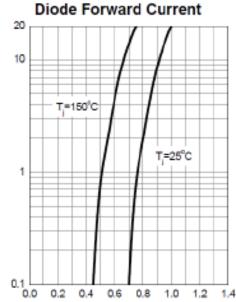

V_{SD} - Source-Drain Voltage (V)

Gate Charge

C - Capacitance (pF)

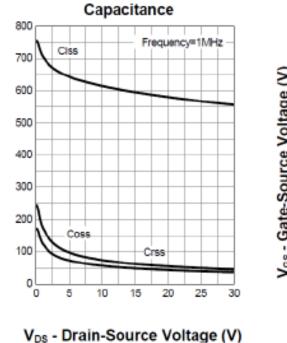

V₆₈ - Gate-Source Voltage (V)

10

9

8

7

6 5

4

3

2

1

٥ ا

0

2

4

V_s=20V

_= 6A



6

8


10

12


www.winsok.tw






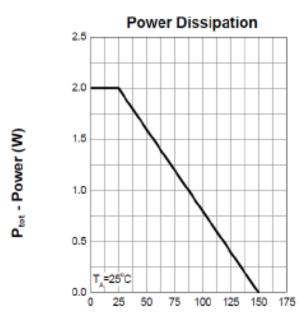




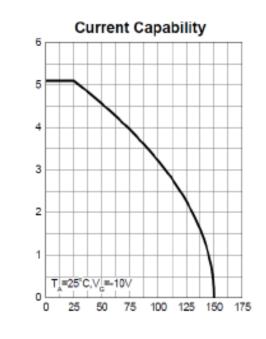

T_j – Junction Temperature (°C)

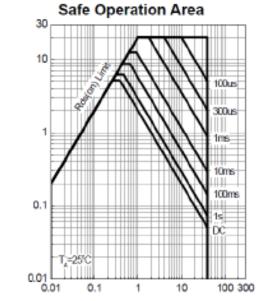

- V_{DS} - Drain-Source Voltage (V)

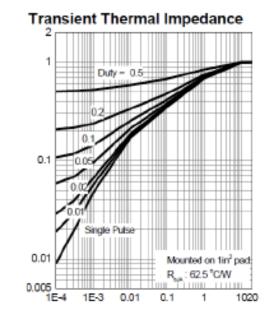

Square Wave Pulse Duration (sec)

-I₀ - Drain Current (A)

Normalized Effective Transient

-I_o - Drain Current (A)



Output Characteristics


-V_{GS} - Gate-Source Voltage (V)

WSP4067B

N&P-Channel MOSFET

On Resistance

-Io - Drain Current (A)

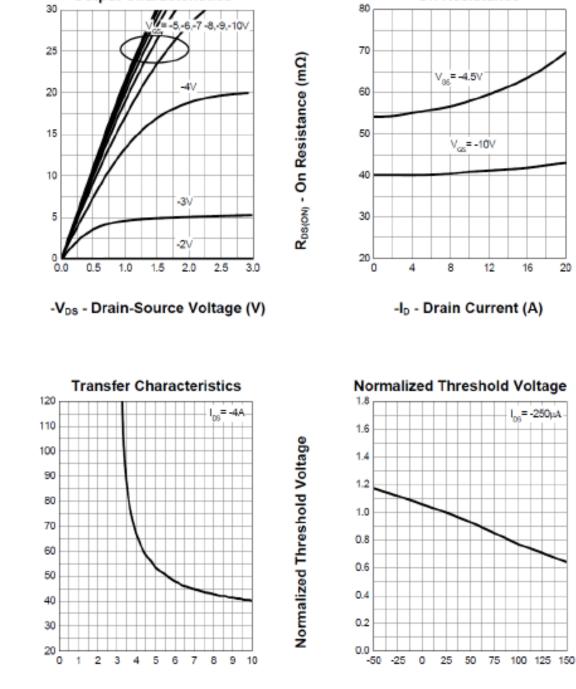

T_j - Junction Temperature (°C)


www.winsok.tw


R_{DS(ON)} - On Resistance (mΩ)



N&P-Channel MOSFET


Normalized On Resistance

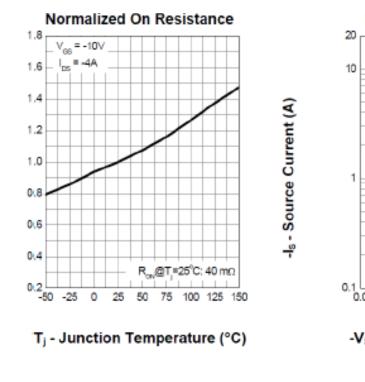


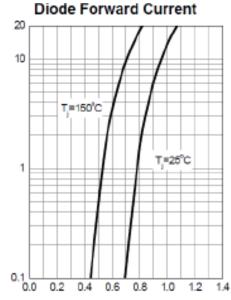

-V_{SD} - Source-Drain Voltage (V)

C - Capacitance (pF)

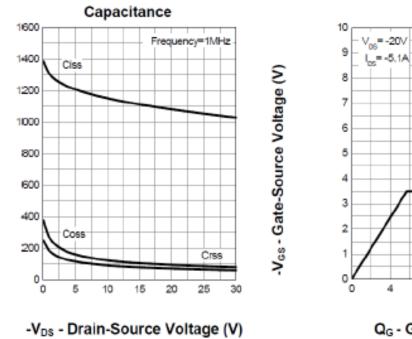

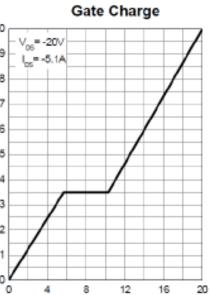

Q_G - Gate Charge (nC)



Attention

1, Any and all Winsok power products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your Winsok power representative nearest you before using any Winsok power products described or contained herein in such applications.

2, Winsok power assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all Winsok power products described or contained herein.

3, Specifications of any and all Winsok power products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

4, Winsok power Semiconductor CO., LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

5, In the event that any or all Winsok power products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

6, No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of Winsok power Semiconductor CO., LTD.

7, Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. Winsok power believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

8, Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the Winsok power product that you Intend to use.

9, this catalog provides information as of Sep.2014. Specifications and information herein are subject to change without notice.