NCE N-Channel Enhancement Mode Power MOSFET

Description

The NCE3065K uses advanced trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. It can be used in a wide variety of applications.

General Features

V_{DS} =30V,I_D =65A

 $R_{DS(ON)}$ <7.0m Ω @ V_{GS} =10V


 $R_{DS(ON)}$ < 9.5m Ω @ V_{GS} =5V

- High density cell design for ultra low Rdson
- Fully characterized avalanche voltage and current
- Good stability and uniformity with high E_{AS}
- Excellent package for good heat dissipation

Application

- Power switching application
- Hard switched and high frequency circuits
- Uninterruptible power supply

100% UIS TESTED!

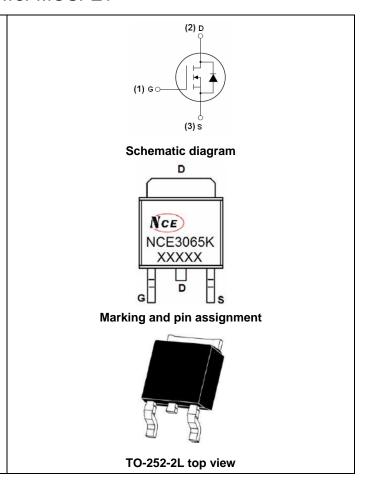

Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
NCE3065K	NCE3065K	TO-252-2L	-	-	-

Absolute Maximum Ratings (T_c=25 ℃ unless otherwise noted)

Parameter	Symbol	Limit	Unit	
Drain-Source Voltage	V _{DS}	30	V	
Gate-Source Voltage	V _{GS}	±20	V	
Drain Current-Continuous	I _D	65	Α	
Drain Current-Continuous(T _C =100 °C)	I _D (100℃)	46	Α	
Pulsed Drain Current	I _{DM}	200	Α	
Maximum Power Dissipation	P _D	65	W	
Derating factor		0.43	W/℃	
Single pulse avalanche energy (Note 5)	Eas	150	mJ	
Operating Junction and Storage Temperature Range	T_{J}, T_{STG}	-55 To 175	$^{\circ}$ C	

Thermal Characteristic

Thermal Resistance,Junction-to-Case ^(Note 2)	$R_{ heta JC}$	2.3	°C/W



Electrical Characteristics (TC=25°C unless otherwise noted)


V _{GS} =0V I _D =250μA V _{DS} =30V,V _{GS} =0V	30				
V _{DS} =30V,V _{GS} =0V	30				
		-	-	V	
\/ -+20\/\/ -0\/	-	-	1	μΑ	
V_{GS} =±20 V , V_{DS} =0 V	-	-	±100	nA	
$V_{DS}=V_{GS}$, $I_{D}=250\mu A$	1	1.5	2.5	V	
V _{GS} =10V, I _D =20A	-	5.7	7.0	mΩ	
V _{GS} =4.5V, I _D =20A	-	7.7	9.5		
V _{DS} =5V,I _D =20A	20	-	-	S	
\\ 45\\\\ 0\\	-	1400	-	PF	
V_{DS} =15V, V_{GS} =0V,	-	205	-	PF	
F=1.0MHz	-	177	-	PF	
	-	9	-	nS	
V_{DD} =5 V , I_D =20 A	-	8	-	nS	
V_{GS} =10 V , R_{GEN} =6 Ω	-	28	-	nS	
	-	5	-	nS	
\/ -45\/1 -204	-	32.3	-	nC	
	-	4.9	-	nC	
V _{GS} =10V	-	6.9	-	nC	
V _{GS} =0V,I _S =20A	-	0.85	1.2	V	
	-	-	65	Α	
TJ = 25°C, I _F = 20A	-	-	27	nS	
$di/dt = 100A/us^{(Note3)}$			20	nC	
anat 1007 t po	-	, -	20	110	
	V_{GS} =10V, R_{GEN} =6 Ω V_{DS} =15V, I_{D} =20A, V_{GS} =10V V_{GS} =0V, I_{S} =20A	$V_{DD} = 5V, I_{D} = 20A \qquad - \\ V_{GS} = 10V, R_{GEN} = 6\Omega \qquad - \\ - \\ V_{DS} = 15V, I_{D} = 20A, \\ V_{GS} = 10V \qquad - \\ \\ V_{GS} = 0V, I_{S} = 20A \qquad - \\ - \\ TJ = 25^{\circ}C, I_{F} = 20A \qquad - \\ - \\ - \\ - \\ - \\ - \\ - \\ - \\ - \\ -$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	

Notes:


- $\textbf{1.} \ \textbf{Repetitive Rating: Pulse width limited by maximum junction temperature}.$
- **2.** Surface Mounted on FR4 Board, $t \le 10$ sec.
- **3.** Pulse Test: Pulse Width ≤ 300μ s, Duty Cycle ≤ 2%.
- 4. Guaranteed by design, not subject to production
- **5.** EAS condition: Tj=25 $^{\circ}$ C,V_{DD}=15V,V_G=10V,L=0.5mH,Rg=25 Ω

Test Circuit


1) E_{AS} Test Circuits

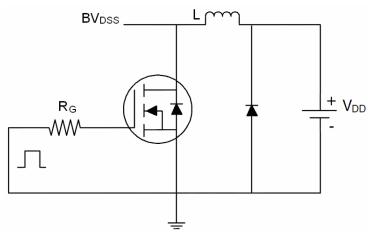

2) Gate Charge Test Circuit

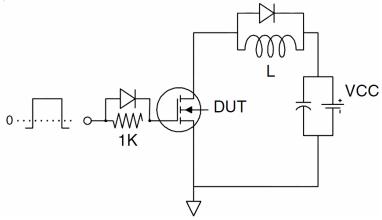


3) Switch Time Test Circuit






Typical Electrical and Thermal Characteristics (Curves)




Vds Drain-Source Voltage (V)





Vgs Gate-Source Voltage (V)
Figure 2 Transfer Characteristics



Rdson On-Resistance Normalized

Figure 3 Rdson- Drain Current





Figure 4 Rdson-JunctionTemperature



Qg Gate Charge (nC)
Figure 5 Gate Charge




Figure 6 Source- Drain Diode Forward



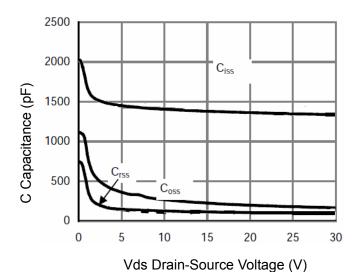


Figure 7 Capacitance vs Vds




Figure 9 Power De-rating




Figure 8 Safe Operation Area

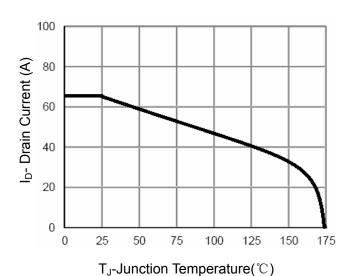


Figure 10 ID Current- Junction Temperature


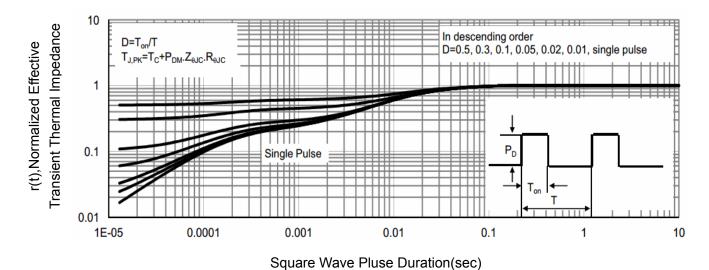


Figure 11 Normalized Maximum Transient Thermal Impedance

TO-252 Package Information

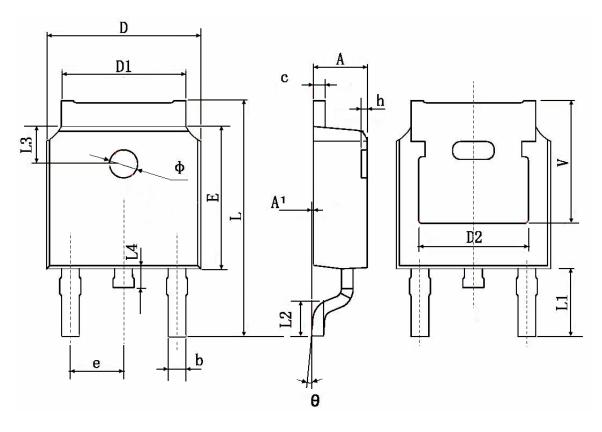

Symbol	Dimensions In Millimeters		Dimensions In Inches		
	Min.	Max.	Min.	Max.	
А	2.200	2.400	0.087	0.094	
A1	0.000	0.127	0.000	0.005	
b	0.660	0.860	0.026	0.034	
С	0.460	0.580	0.018	0.023	
D	6.500	6.700	0.256	0.264	
D1	5.100	5.460	0.201	0.215	
D2	4.830 TYP.		0.190 TYP.		
Е	6.000	6.200	0.236	0.244	
е	2.186	2.386	0.086	0.094	
L	9.800	10.400	0.386	0.409	
L1	2.900 TYP.		0.114 TYP.		
L2	1.400	1.700	0.055	0.067	
L3	1.600 TYP.		0.063 TYP.		
L4	0.600	1.000	0.024	0.039	
Ф	1.100	1.300	0.043	0.051	
θ	0°	8°	0°	8°	
h	0.000	0.300	0.000	0.012	
V	5.350 TYP.		0.211	TYP.	

- Any and all NCE power products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your NCE power representative nearest you before using any NCE power products described or contained herein in such applications.
- NCE power assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all NCE power products described or contained herein.
- Specifications of any and all NCE power products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- NCE power Semiconductor CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all NCE power products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of NCE power Semiconductor CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. NCE power believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the NCE power product that you intend to use.
- This catalog provides information as of Sep.2010. Specifications and information herein are subject to change without notice.