EVERLIGHT ELECTRONICS CO.,LTD.

Technical Data Sheet

1206 Package Chip LED (1.0mm Height)

15-21/R8C-AP1Q2B/2T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint version.

Descriptions

- The 15-21 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

DADEN	Chip	F '44 1.G 1	D : Cl	
PART No.	Material	Emitted Color	Resin Color	
15-21/R8C-AP1Q2B/2T	AlGaInP	Deep-Red	Water Clear	



Everlight Electronics Co., Ltd.

Device No:DSE-0000313

http://www.everlight.com


Prepared by: Wuhongmei


Rev


Page: 1 of 10

Prepared date: 6-Nov-2008


Package Outline Dimensions








Recommend Sodering Pad





Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:DSE-0000313

http://www.everlight.com

Prepared date: 6-Nov-2008

Rev

Page: 2 of 10

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	VR	5	V	
Forward Current	IF	25	mA	
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	60	mA	
Power Dissipation	Pd	60	mW	
Electrostatic Discharge(HBM)	ESD	2000	V	
Operating Temperature	Topr	- 40 ∼ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!$	
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	45.0		112	mcd	
Viewing Angle	2 \theta 1/2		130		deg	
Peak Wavelength	λр		650		nm	
Dominant Wavelength	λd	629.5		645.5	nm	I _F =20mA
Spectrum Radiation Bandwidth	Δλ		20		nm	
Forward Voltage	V_{F}	1.75		2.35	V	
Reverse Current	I_R			10	μΑ	V _R =5V

Notes:

- 1.Tolerance of Luminous Intensity ±11%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3. Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 3 of 10

Page: 4 of 10

Bin Range Of Luminous Intensity

	<u>v</u>				
Bin	Min	Max	Unit	Condition	
P1	45.0	57.0	mcd		
P2	57.0	72.0		I _F =20mA	
Q1	72.0	90.0			
Q2	90.0	112			

Bin Range Of Dom. Wavelength

Groups	Bin	Min	Max	Unit	Condition	
A	E7	629.5	633.5			
	E8	633.5	637.5		I _F =20mA	
	E9	637.5	641.5	nm		
	E10	641.5	645.5			

Bin Rang Of Forward Voltage

Groups	Bin	Min	Max	Unit	Condition	
	0	1.75	1.95			
В	1	1.95	2.15	V	I _F =20mA	
	2	2.15	2.35			

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Dominant Wavelength ±1nm

3. Tolerance of Forward Voltage ±0.10V


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1


Relative luminous intensity (%)

15-21/R8C-AP1Q2B/2T


Typical Electro-Optical Characteristics


Spectrum Distribution





Luminous Intensity vs.






Forward Current I_F (mA)


10¹

Forward Current Derating Curve



Radiation Diagram

102



Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

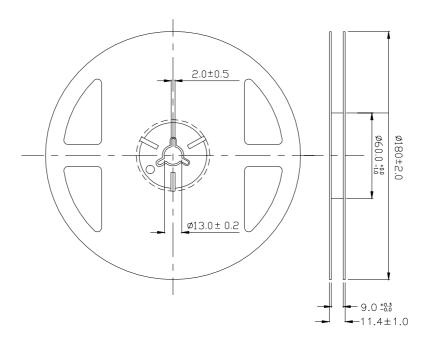


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:DSE-0000313

http://www.everlight.com Prepared date: 6-Nov-2008 Rev


Page: 6 of 10

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

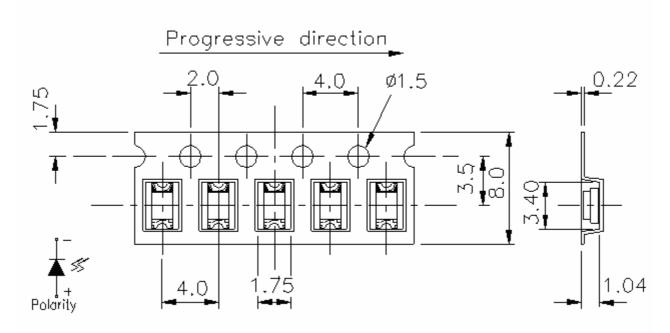

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

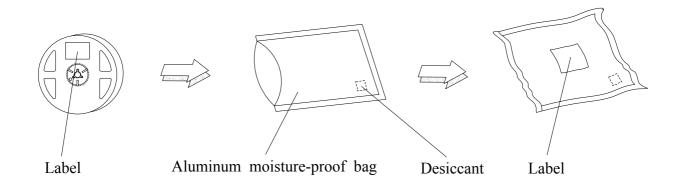

Everlight Electronics Co., Ltd. Device No:DSE-0000313

http://www.everlight.com Prepared date: 6-Nov-2008 Rev 1

Page: 7 of 10

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C 5 sec.	6 Min.	22 Pcs.	0/1
2	Temperature Cycle	H:+100°C 15min ∫ 5 min L:-40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/85% RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. Device No:DSE-0000313

http://www.everlight.com Prepared date: 6-Nov-2008 Rev 1

Page: 8 of 10


Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

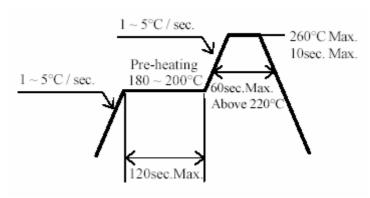

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 9 of 10




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

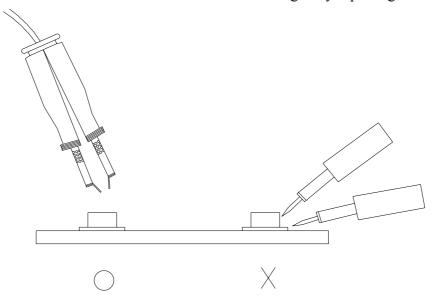

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 10 of 10