




## Low-Power, Slew-Rate-Limited RS-485/RS-422 Transceivers

### General Description

The HT3085 is low-power transceivers for RS-485-3.3 and RS-422-3.3 communication. IC contains one driver and one receiver. The driver slew rates of the HT3485 is not limited, allowing them to transmit up to 2.5Mbps.


These transceivers draw between 120 $\mu$ A and 500 $\mu$ A of supply current when unloaded or fully loaded with disabled drivers. All parts operate from a single 3.3V supply. Drivers are short-circuit current limited and are protected against excessive power dissipation by thermal shutdown circuitry that places the driver outputs into a high-impedance state. The receiver input has a fail-safe feature that guarantees a logic-high output if the input is open circuit.

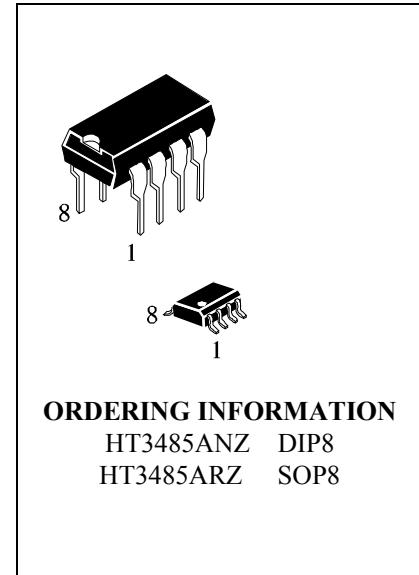

### Features

- Low Quiescent Current: 300 $\mu$ A
- -7V to +12V Common-Mode Input Voltage Range
- Three-State Outputs
- 30ns Propagation Delays, 5ns Skew
- Full-Duplex and Half-Duplex Versions Available
- Operate from a Single 3.3V Supply
- Allows up to 32 Transceivers on the Bus
- Data rate: 2,5 Mbps
- Current-Limiting and Thermal Shutdown for Driver Overload Protection
- The transmitter outputs and receiver inputs are protected to  $\pm 15kV$  Air ESD.

Pinning

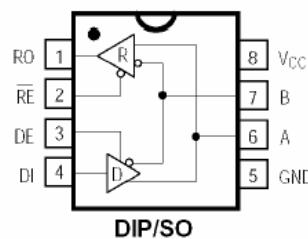

## ABSOLUTE MAXIMUM RATINGS

Supply Voltage ( $V_{CC}$ ) 7V	Continuous Power Dissipation ( $T_A = +70^\circ C$ )
Control Input Voltage -0.3V to 7V	8-Pin Plastic DIP (derate 9.09mW/ $^\circ C$ above $+70^\circ C$ ) 727mW
Driver Input Voltage (DI) -0.3V to 7V	8-Pin SOP (derate 5.88mW/ $^\circ C$ above $+70^\circ C$ ) 471mW
Driver Output Voltage (A, B) -7.5V to +12.5V	Operating Temperature Ranges $0^\circ C$ to $+70^\circ C$
Receiver Input Voltage (A, B) -7.5V to +12.5V	Storage Temperature Range $-65^\circ C$ to $+160^\circ C$
Receiver Output Voltage (RO) -0.3V to ( $V_{CC}+0.3V$ )	Lead Temperature (soldering, 10sec) $+300^\circ C$

## DC ELECTRICAL CHARACTERISTICS

( $V_{CC} = 3.3V \pm 10\%$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.) (Notes 1, 2)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Differential Driver Output (no load)	$V_{OD1}$			2			V
Differential Driver Output (with load)	$V_{OD2}$	$R = 100$ (RS-422)		1			V
		$R = 54$ (RS-485), Figure 4		0.8			
Change in Magnitude of Driver Differential Output Voltage for Complementary Output States	$\Delta V_{OD}$	$R = 54$ or $100$ , Figure 4				0.2	V
Driver Common-Mode Output Voltage	$V_{OC}$	$R = 54$ or $100$ , Figure 4				2	V
Change in Magnitude of Driver Common-Mode Output Voltage for Complementary Output States	$\Delta V_{OD}$	$R = 54$ or $100$ , Figure 4				0.2	V
Input High Voltage	$V_{IH}$	DE, DI, RE		2.0			V
Input Low Voltage	$V_{IL}$	DE, DI, RE				0.8	V
Input Current	$I_{IN1}$	DE, DI, RE				$\pm 2$	$\mu A$
Input Current (A, B)	$I_{IN2}$	DE = 0V; $V_{IN} = 12V$				1.0	mA
		$V_{CC} = 0V$ or $5.25V$ , $V_{IN} = -7V$				-0.8	
Receiver Differential Threshold Voltage	$V_{TH}$	$-7V \leq V_{CM} \leq 12V$		-0.2		0.2	V
Receiver Input Hysteresis	$\Delta V_{TH}$	$V_{CM} = 0V$			70		mV
Receiver Output High Voltage	$V_{OH}$	$Io = -1.5mA$ , VID = $200mV$		2.5			V
Receiver Output Low Voltage	$V_{OL}$	$Io = 2.5mA$ , VID = $-200mV$				0.4	V
Three-State (high impedance) Output Current at Receiver	$I_{OZR}$	$0.4V \leq Vo \leq 2.4V$				$\pm 1$	$\mu A$
Receiver Input Resistance	$R_{IN}$	$-7V \leq V_{CM} \leq 12V$		12			k

**DC ELECTRICAL CHARACTERISTICS (continued)**

 (V<sub>CC</sub> = 3.3V ±10%, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted.) (Notes 1, 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
No-Load Supply Current (Note 3)	I <sub>CC</sub>	DE = V <sub>CC</sub>		500	800	
		RE = 0V or V <sub>CC</sub>		300	400	μA
		DE = 0V				
Driver Short-Circuit Current, Vo = High	I <sub>OSD1</sub>	-7V ≤ Vo ≤ 12V (Note 4)			250	mA
Driver Short-Circuit Current, Vo = Low	I <sub>OSD2</sub>	-7V ≤ Vo ≤ 12V (Note 4)			250	mA
Receiver Short-Circuit Current	I <sub>OSR</sub>	0V ≤ Vo ≤ V <sub>CC</sub>	±6.5		95	mA

**SWITCHING CHARACTERISTICS**

 (V<sub>CC</sub> = 3.3V ±10%, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted.) (Notes 1, 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Driver Input to Output	t <sub>PLH</sub>	R <sub>DIFF</sub> = 54Ω	10	30	60	ns
	t <sub>PHL</sub>	C <sub>L1</sub> = C <sub>L2</sub> = 100pF	10	30	60	
Driver Output Skew to Output	t <sub>SKEW</sub>	R <sub>DIFF</sub> = 54Ω, CL1 = CL2 = 100pF		5	10	ns
Driver Enable to Output High	t <sub>ZH</sub>	C <sub>L</sub> = 100pF, S2 closed		45	90	ns
Driver Enable to Output Low	t <sub>ZL</sub>	C <sub>L</sub> = 100pF, S1 closed		45	90	ns
Driver Disable Time from Low	t <sub>LZ</sub>	C <sub>L</sub> = 15pF, S1 closed		40	80	ns
Driver Disable Time from High	t <sub>HZ</sub>	C <sub>L</sub> = 15pF, S2 closed		40	80	ns
t <sub>PLH</sub> - t <sub>PHL</sub>   Differential	t <sub>SKD</sub>	R <sub>DIFF</sub> = 54Ω		13		ns
Receiver Skew		C <sub>L1</sub> = C <sub>L2</sub> = 100pF				
Receiver Enable to Output Low	t <sub>ZL</sub>	C <sub>RL</sub> = 15pF, S1 closed			50	ns
Receiver Enable to Output High	t <sub>ZH</sub>	C <sub>RL</sub> = 15pF, S2 closed		20	50	ns
Receiver Disable Time from Low	t <sub>LZ</sub>	C <sub>RL</sub> = 15pF, S1 closed		20	50	ns
Receiver Disable Time from High	t <sub>HZ</sub>	C <sub>RL</sub> = 15pF, S2 closed		20	50	ns
Maximum Data Rate	f <sub>MAX</sub>		2.5			Mbps

**Note 1:** All currents into device pins are positive; all currents out of device pins are negative. All voltages are referenced to device ground unless otherwise specified.

**Note 2:** All typical specifications are given for V<sub>CC</sub> = 3.3V and T<sub>A</sub> = +25°C.

**Note 3:** Supply current specification is valid for loaded transmitters when DE = 0V.

**Note 4:** Applies to peak current. See *Typical Operating Characteristics*.

### Test Circuits

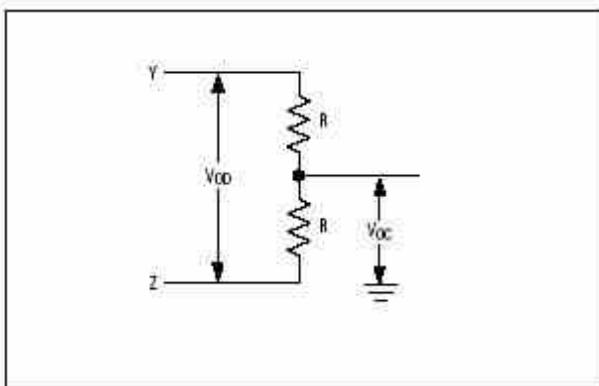


Figure 4. Driver DC Test Load.

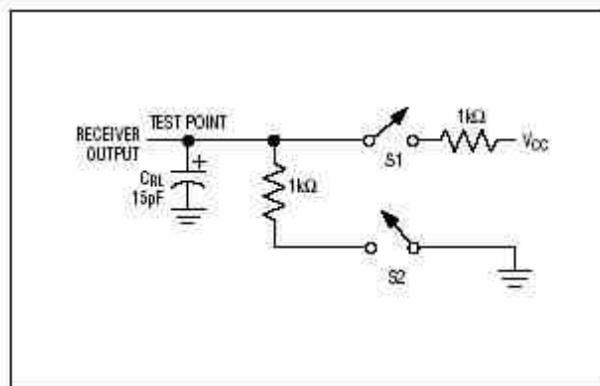


Figure 5. Receiver Timing Test Load.

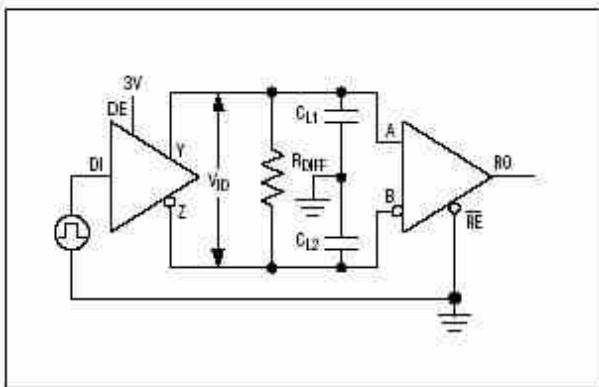


Figure 6. Driver/Receiver Timing Test Circuit


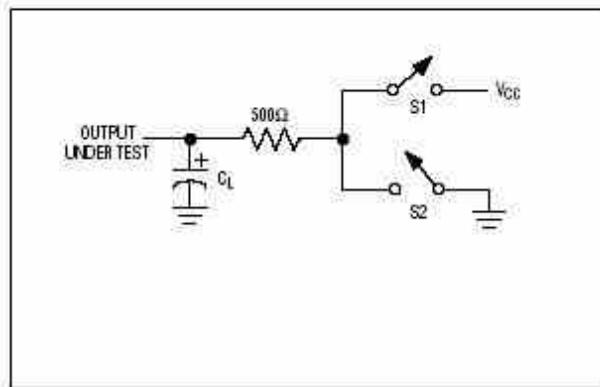


Figure 7. Driver Timing Test Load

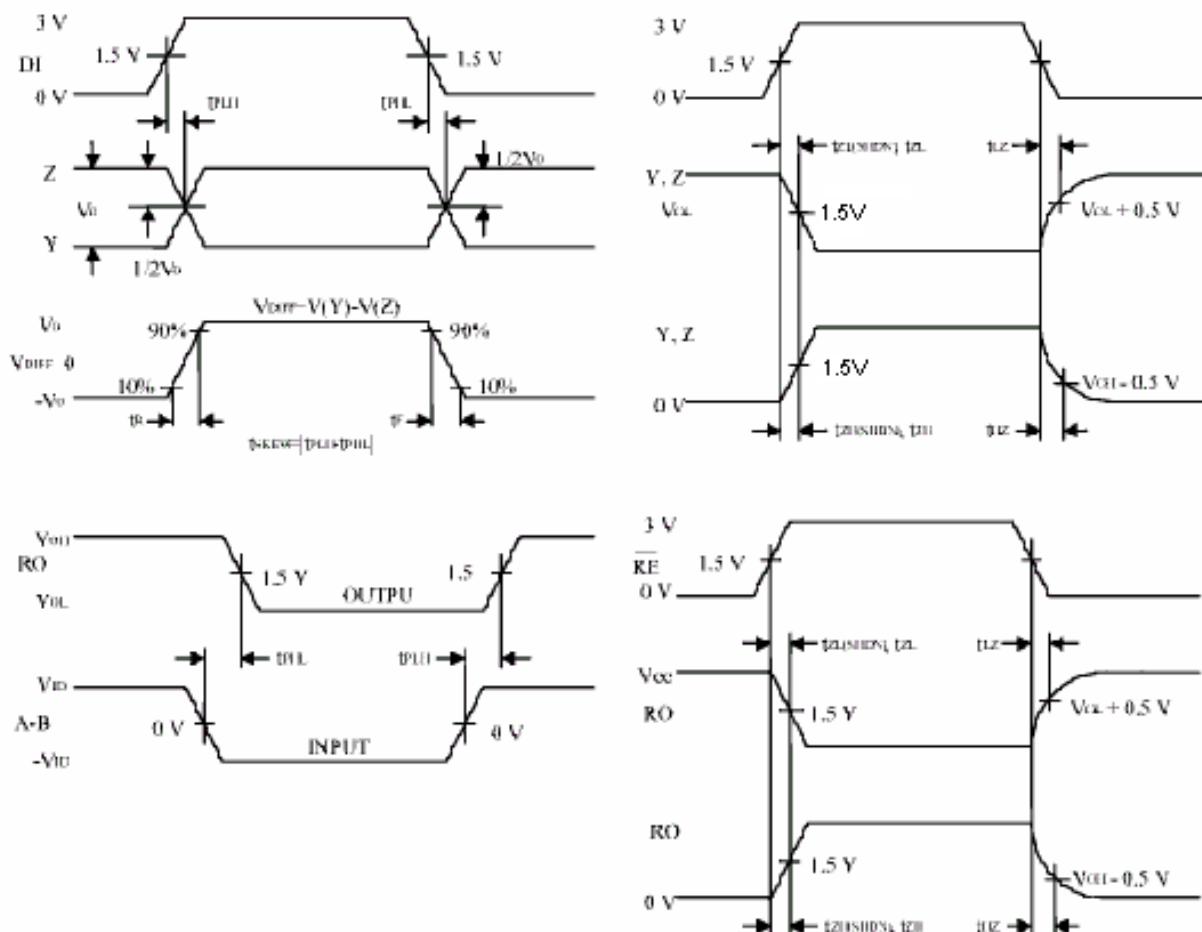

### Operation timing diagrams of HT3485



**Table of ILX 3485 operation**



Transmitting			Receiving			Inputs	
Inputs		DE	Outputs X		Inputs		RO
RE	DE	DI	Z	Y	RE	DE	A-B
X	1	1	0	1	0	0	+0.2V
X	1	0	1	0	0	0	-0.2V
0	0	X	Z	Z	0	0	open
1	0	X	Z	Z	1	0	X
							Z

X-don't care

Z-high impedance




(DIP8)

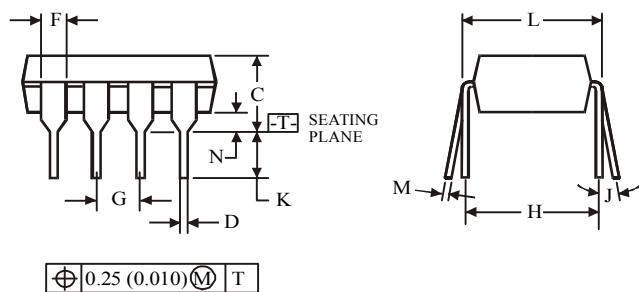




**NOTES:**

- Dimensions "A", "B" do not include mold flash or protrusions.
- Maximum mold flash or protrusion 0.25 mm (0.010) per side.



Symbol	Dimension, mm	
	MIN	MAX
<b>A</b>	8.51	10.16
<b>B</b>	6.1	7.11
<b>C</b>		5.33
<b>D</b>	0.36	0.56
<b>F</b>	1.14	1.78
<b>G</b>		2.54
<b>H</b>		7.62
<b>J</b>	0°	10°
<b>K</b>	2.92	3.81
<b>L</b>	7.62	8.26
<b>M</b>	0.2	0.36
<b>N</b>	0.38	

(SOP8)

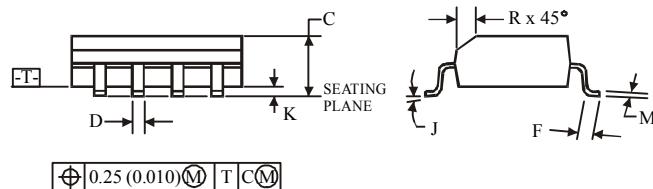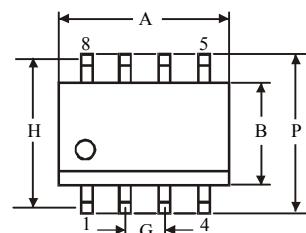

Symbol	Dimension, mm	
	MIN	MAX
<b>A</b>	4.8	5
<b>B</b>	3.8	4
<b>C</b>	1.35	1.75
<b>D</b>	0.33	0.51
<b>F</b>	0.4	1.27
<b>G</b>		1.27
<b>H</b>		5.72
<b>J</b>	0°	8°
<b>K</b>	0.1	0.25
<b>M</b>	0.19	0.25
<b>P</b>	5.8	6.2
<b>R</b>	0.25	0.5

**NOTES:**

- Dimensions A and B do not include mold flash or protrusion.
- Maximum mold flash or protrusion 0.15 mm (0.006) per side for A; for B - 0.25 mm (0.010) per side.