



# AK310H

## Ultra Low Noise Coreless Current Sensor

### 1. General Description

AK310H is an open-type current sensor using a Hall sensor which outputs the analog voltage in proportion to the AC/DC current. Ultra low noise property is realized by a III-V compound semiconductor Hall element of high sensitivity and signal processing technology. In addition, since AK310H has a coreless structure and does not contain magnetic material, it has no hysteresis and is suitable for audio applications. AK310H is especially suitable for a Motional Feedback system that feedbacks the current of voice coils of the speaker to the amplifier and controls the movement of the voice coils.

AK310H adopts an ultra-small coreless package which is compliant with safety standards, suitable for applications such as motor control for industrial equipments. Since AK310H has ultra low noise, it can detect the current by high resolution, which contributes to high-precision torque control of the motor.

### 2. Features

- ☐ Ultra low noise : -108 dBm /  $\sqrt{\text{Hz}}$  (integrated noise 0.35 mV<sub>rms</sub>, 100 Hz to 200 kHz integration)
- ☐ No hysteresis output, because of not containing the magnetic material
- ☐ Very small primary conductor resistance : 1.6 m $\Omega$
- ☐ High Accuracy : 1.5% F.S. ( $T_a = -40$  to  $90$  °C Typ.)
- ☐ Small and thin surface mount package : 7.9 mm  $\times$  7.6 mm  $\times$  1.15 mm
- ☐ Certified with safety standards of IEC / UL 60950, UL 1577 certification pending
- ☐ Isolation voltage : 3.0 kV<sub>rms</sub> (AC 50/60 Hz, 60 s)
- ☐ Fast Response Time : 2 $\mu$ s Typ.
- ☐ Ratiometric output
- ☐ Operated by single power supply : V<sub>DD</sub> = 5 V



### 3. Applications

- ☐ Speaker current detection (Motional Feedback)
- ☐ Motor Driver
- ☐ General-purpose inverter
- ☐ UPS
- ☐ Power Conditioner

Also, AK310H is suitable for applications requiring quite small current resolution, and current measurement with isolation.

4. Table of Contents

1. General Description ..... 1

2. Features ..... 1

3. Applications ..... 1

4. Table of Contents ..... 2

5. Block Diagram and Functions ..... 3

6. Pin Configurations and Functions ..... 4

7. Absolute Maximum Ratings ..... 5

8. Recommended Operating Conditions ..... 5

9. Electrical Characteristics ..... 7

10. Characteristics Definitions ..... 8

11. Recommended External Circuits ..... 10

12. Thermal Resistance Measurement Board ..... 11

13. Package ..... 12

14. Reliability Tests ..... 15

15. Precautions ..... 16

    IMPORTANT NOTICE ..... 17

## 5. Block Diagram and Functions

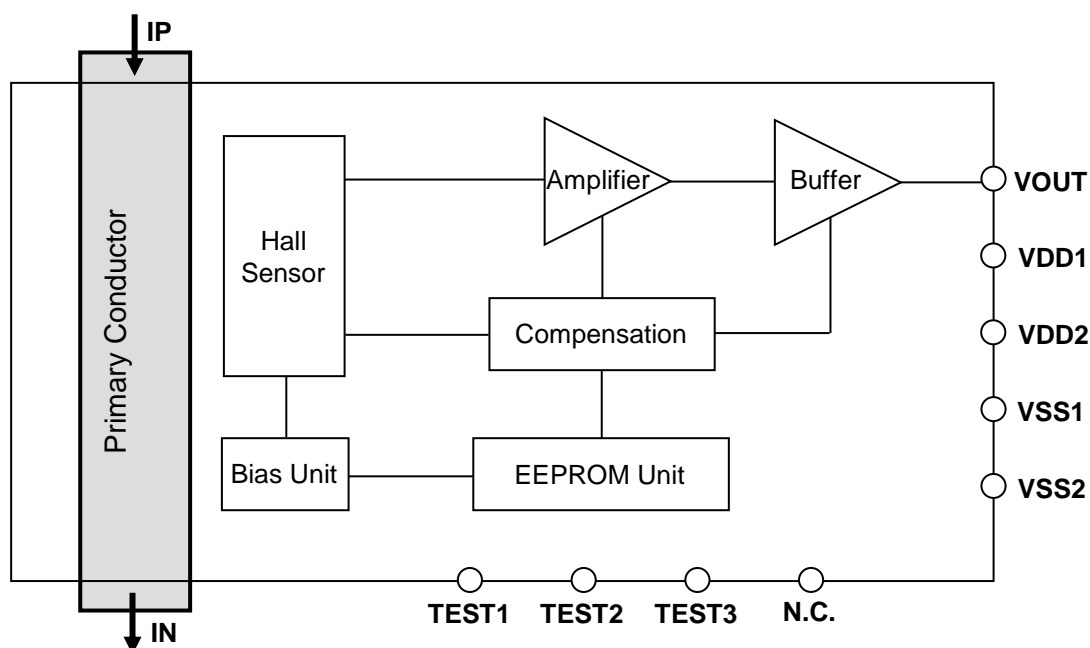


Figure 1. Functional block diagram of AK310H

Table 1. Explanation of circuit blocks

| Circuit Block     | Function  |
|-------------------|---|
| Primary Conductor | Conductor which measured current is applied.  |
| Hall Sensor       | Hall element which detects magnetic flux density generated from the measured current.   |
| Amplifier         | Amplifier of Hall element's output.   |
| Buffer            | Output buffer with gain. This block outputs the voltage ( $V_{OUT}$ ) proportional to the current applied to the primary conductor. |
| Compensation      | Compensation circuit which adjusts the absolute value and temperature drifts of sensitivity and zero-current output voltage.        |
| Bias Unit         | Drive circuit for Hall element.   |
| EEPROM Unit       | Non-volatile memory for setting adjustment parameters.  |

## 6. Pin Configurations and Functions

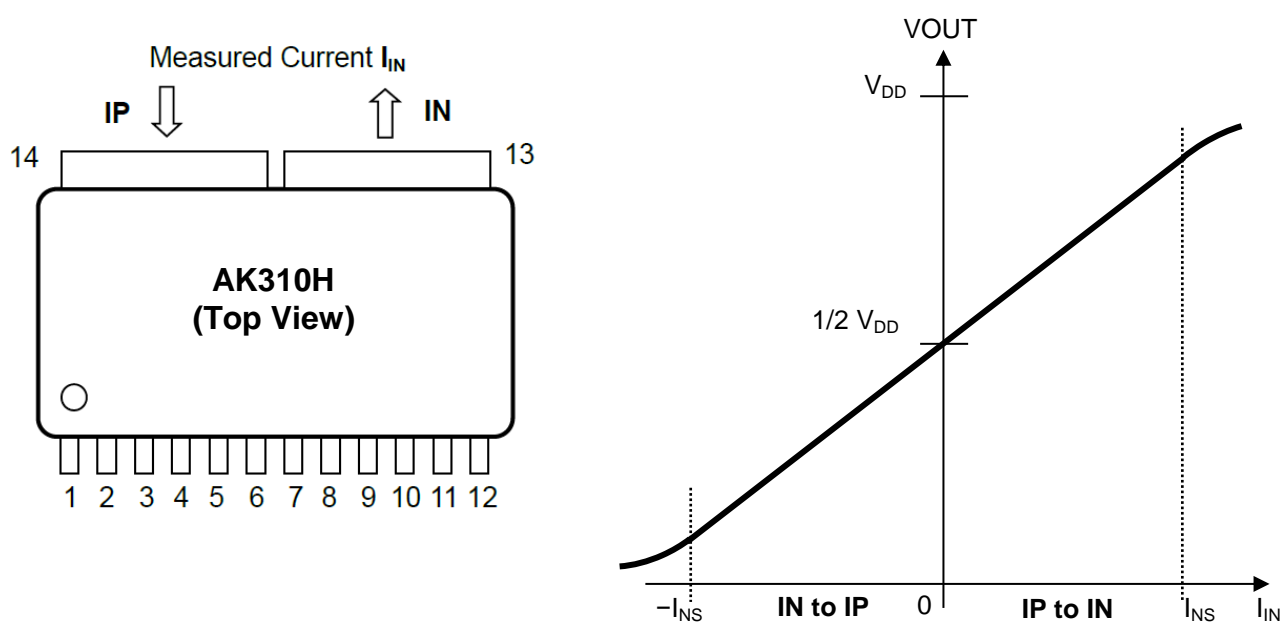


Table 2. Pin configuration and functions of AK310H

| No. | Pin Name | I/O | Function                                |
|-----|----------|-----|---|
| 1   | VSS1     | GND | Ground pin (0V)                         |
| 2   | VSS1     | GND | Ground pin (0V)                         |
| 3   | N.C.     | -   | N.C. pin, recommended to connect to GND |
| 4   | TEST1    | -   | Test pin, recommended to connect to GND |
| 5   | VDD1     | PWR | Power supply pin, 5.0V                  |
| 6   | VDD2     | PWR | Power supply pin, 5.0V                  |
| 7   | TEST2    | -   | Test pin, recommended to connect to GND |
| 8   | VOUT     | O   | Sensor output pin                       |
| 9   | TEST3    | -   | Test pin, recommended to connect to GND |
| 10  | N.C.     | -   | N.C. pin, recommended to connect to GND |
| 11  | VSS2     | GND | Ground pin (0V)                         |
| 12  | VSS2     | GND | Ground pin (0V)                         |
| 13  | IN       | I   | Primary conductor pin ( - )             |
| 14  | IP       | I   | Primary conductor pin ( + )             |

## 7. Absolute Maximum Ratings

Table 3. Absolute maximum ratings

| Parameter             | Symbol    | Min. | Max. | Units | Notes           |
|-----------------------|-----------|------|------|-------|-----------------|
| Supply Voltage        | $V_{DD}$  | -0.3 | 6.5  | V     | VDD1, VDD2 pins |
| Analog Output Current | $I_{OUT}$ | -10  | 10   | mA    | VOUT pin        |
| Junction Temperature  | $T_J$     | -40  | 125  | °C    |                 |
| Storage Temperature   | $T_{STG}$ | -40  | 125  | °C    |                 |

WARNING: Operation at or beyond these limits may result in permanent damage to the device. Normal operation is not guaranteed at these extremes.


## 8. Recommended Operating Conditions

Table 4. Recommended operating conditions

| Parameter                              | Symbol       | Min. | Typ. | Max. | Units     | Notes   |
|--|--------------|------|------|------|-----------|---|
| Supply Voltage                         | $V_{DD}$     | 4.5  | 5.0  | 5.5  | V         | VDD1, VDD2 pins   |
| Analog Output Current                  | $I_{OUT}$    | -0.5 |      | 0.5  | mA        | VOUT pin  |
| Output Load Capacitance                | $C_L$        |      |      | 100  | pF        | Between VOUT and VSS1, VOUT and VSS2                            |
| Maximum Primary Current (RMS) (Note 1) | $I_{RMSmax}$ |      |      | 20   | $A_{rms}$ | DC value or RMS value which can be applied to primary conductor |
| Operating Ambient Temperature (Note 1) | $T_a$        | -40  |      | 90   | °C        |   |

WARNING: Electrical characteristics are not guaranteed when operated at or beyond these conditions.

Note 1. Maximum Primary Current is regulated by derating curve, see Figure 3.

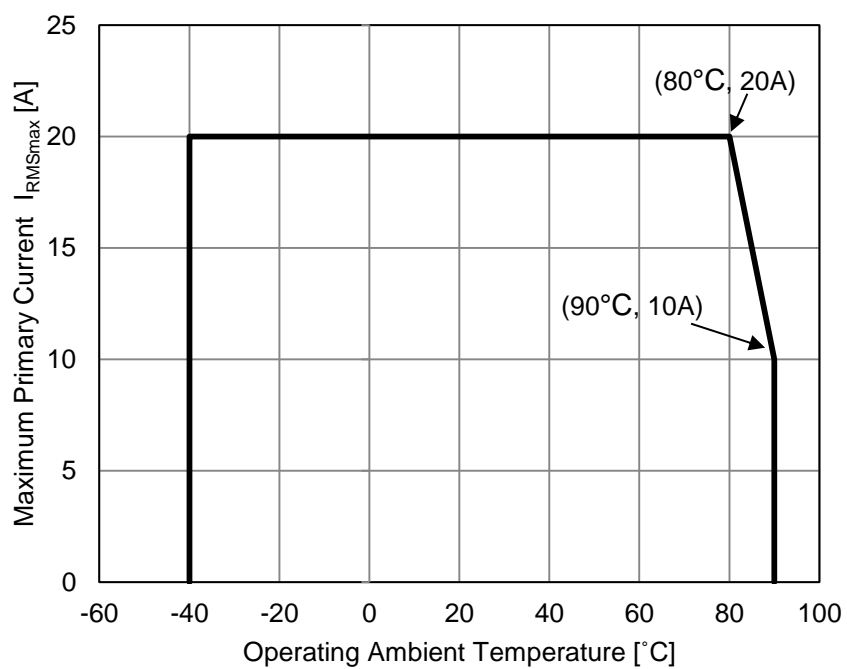

Conditions: Mounted on the test board shown in Chapter 12.  $V_{DD} = 5V$ , without any cooling.  
Note: Cooling or thermal radiation will improve the derating curve above.

Figure 3. Primary current derating curve of AK310H

## 9. Electrical Characteristics

Table 5. Electrical characteristics

Conditions (unless otherwise specified):  $T_a = 35^\circ\text{C}$ ,  $V_{DD} = 5\text{V}$ 

| Parameter  | Symbol     | Conditions  | Min. | Typ. | Max. | Units                      |
|--|------------|---|------|------|------|----------------------------|
| Current Consumption                              | $I_{DD}$   | No loads, $I_{IN}=0\text{A}$                                    |      | 14   | 20   | mA                         |
| Sensitivity (Note 2)                             | $V_h$      | See paragraph 10.1<br>$I_{IN}=\pm 10\text{A}$ , 35ms            | 49.5 | 50.0 | 50.5 | mV/A                       |
| Zero-Current Output Voltage (Note 2)             | $V_{of}$   | $I_{IN}=0\text{A}$ , See paragraph 10.1                         | 2.48 | 2.50 | 2.52 | V                          |
| Linear Sensing Range (Note 3)                    | $I_{NS}$   |   | -42  |      | 42   | A                          |
| Linearity Error (Note 2)                         | $\rho$     | See paragraph 10.1  | -0.6 |      | 0.6  | %F.S.                      |
| Rise Response Time                               | $t_r$      | $C_L = 100\text{pF}$ ,<br>see paragraph 10.5                    |      | 2    |      | $\mu\text{s}$              |
| Fall Response Time                               | $t_f$      | $C_L = 100\text{pF}$ ,<br>see paragraph 10.5                    |      | 2    |      | $\mu\text{s}$              |
| Bandwidth  | $f_T$      | -3dB, $C_L = 100\text{pF}$                                      |      | 210  |      | kHz                        |
| Output Noise                                     | $V_{Nrms}$ | 100Hz to 200kHz<br>integration                                  |      | 0.35 |      | mV <sub>rms</sub>          |
|  | $V_N$      | 50Hz to 200Hz<br>Termination 50 $\Omega$                        |      | -108 |      | dBm/<br>$\sqrt{\text{Hz}}$ |
| Ratiometric Error of Sensitivity                 | $V_{h-R}$  | $V_{DD} = 4.5\text{V}$ to $5.5\text{V}$<br>see paragraph 10.2   | -1.0 |      | 1.0  | %                          |
| Ratiometric Error of Zero-Current Output Voltage | $V_{of-R}$ | $V_{DD} = 4.5\text{V}$ to $5.5\text{V}$ ,<br>see paragraph 10.3 | -0.5 |      | 0.5  | %F.S.                      |
| Power On Time (Note 4)                           | $t_{on}$   | $I_{IN}=0\text{A}$<br>$V_{DD}$ 4.5V to $V_{OUT} \pm 10\%$       |      |      | 35   | ms                         |
| Primary Conductor Resistance (Note 3)            | $R_P$      |   |      | 1.6  |      | m $\Omega$                 |
| Isolation Voltage (Note 5)                       | $V_{INS}$  | AC 50/60Hz, 60s   | 3.0  |      |      | kV <sub>rms</sub>          |
| Isolation Resistance (Note 3)                    | $R_{INS}$  | DC 1kV  | 500  |      |      | M $\Omega$                 |

Table 6. Temperature drift characteristics

Conditions (unless otherwise specified):  $T_a = -40$  to  $90^\circ\text{C}$ ,  $V_{DD} = 5\text{V}$ 

| Parameter   | Symbol      | Conditions  | Min. | Typ.      | Max. | Units |
|---|-------------|---|------|-----------|------|-------|
| Temperature Drift of Sensitivity (Note 6)                 | $V_{h-d}$   | $T_a = -40$ to $90^\circ\text{C}$<br>Drift from the value at $T_a = 35^\circ\text{C}$                         |      | $\pm 1.7$ |      | %     |
| Temperature Drift of Zero-Current Output Voltage (Note 6) | $V_{of-d}$  | $T_a = -40$ to $90^\circ\text{C}$<br>Drift from the value at $T_a = 35^\circ\text{C}$<br>$I_{IN} = 0\text{A}$ |      | $\pm 3$   |      | mV    |
| Total Accuracy (Note 6)                                   | $E_{total}$ | $T_a = -40$ to $90^\circ\text{C}$   |      | $\pm 1.5$ |      | %F.S. |

Note 2. These values can be drifted by long-term use or reflow process. Please see '14. Reliability Tests' for the reference of drift values.

Note 3. These parameters are guaranteed by design. Mass production test is not performed.

Note 4. This parameter is tested in wafer.

Note 5. This parameter is tested in mass-production line for all devices, 3.6kV<sub>rms</sub>, 1s.

Note 6. The typical value is defined as the "average value  $\pm 1\sigma$ " of the actual measurement result in a certain lot. VOUT pin condition is no loads.

## 10. Characteristics Definitions

10.1. Sensitivity  $V_h$  [mV/A], Zero-Current Output Voltage  $V_{of}$  [V], and Linearity error  $\rho$  [%F.S.] are defined as below:

Sensitivity is defined as the slope of the approximate straight line calculated by the least square method, using the data of VOUT pin voltage ( $V_{OUT}$ ) when the primary current ( $I_{IN}$ ) is swept within the range of linear sensing range ( $I_{NS}$ ). Zero-current output voltage is defined as the  $V_{out}$  when  $I_{IN}=0A$ .

Linearity error is defined as the ratio of the maximum error voltage ( $V_d$ ) to the full scale (F.S.), where  $V_d$  is the maximum difference between the VOUT pin voltage ( $V_{OUT}$ ) and the approximate straight line calculated in the sensitivity and zero-current output voltage definition. Definition formula is shown as below:

$$\rho = \frac{V_d}{F.S.} \times 100$$

Full scale (F.S.) is defined as 4.4V ( $V_{DD} = 5V$ ).

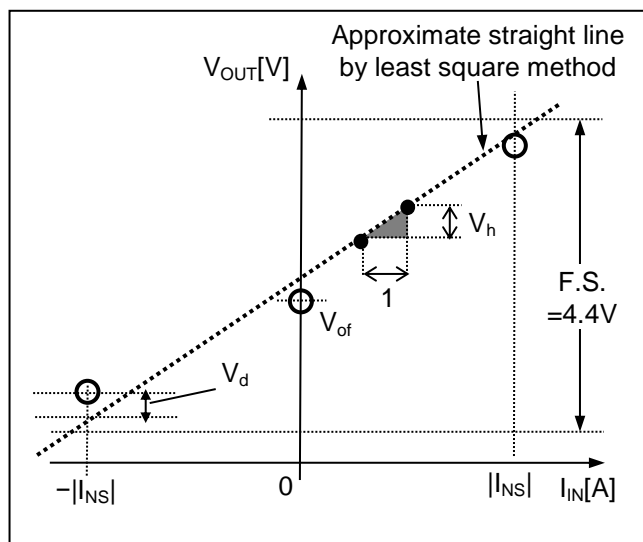


Figure 4. Characteristic definitions of AK310H

10.2. Ratiometric Error of Sensitivity  $V_{h-R}$  [%] is defined as below:

$$V_{h-R} = 100 \times \frac{\left\{ \frac{V_h(V_{DD})}{V_h(5V)} - \frac{V_{DD}}{5} \right\}}{\frac{V_{DD}}{5}}$$

10.3. Ratiometric Error of Zero-Current Output Voltage  $V_{of-R}$  [%F.S.] is defined as below:

$$V_{of-R} = 100 \times \frac{\left\{ V_{of}(V_{DD}) - \frac{V_{of}(5V) \times V_{DD}}{5} \right\}}{F.S.}$$



10.4. Total Accuracy  $E_{total}$  [%F.S.] is defined as below ( $V_{DD} = 5V$ ):

$$E_{total} = \left| 100 \times \frac{V_{h\_meas} - V_h}{V_h} \right| \times \frac{|I_{NS}|}{F.S. \times 1000} + \left| 100 \times \frac{V_{of\_meas} - V_{of\_meas\_35}}{F.S.} \right| + |\rho_{meas}|$$

$V_{h\_meas}$ : Measured Sensitivity [mV/A]

$V_{of\_meas}$ : Measured Zero-current Output Voltage [V]

$V_{of\_meas\_35}$ : Measured Zero-current Output Voltage [V] at  $T_a = 35^\circ C$

$\rho_{meas}$ : Measured Linearity Error [%F.S.]

F.S. = 4.4 [V]

10.5. Rise Response Time  $t_r$  [ $\mu sec$ ] and Fall Response Time  $t_f$  [ $\mu sec$ ] are defined as below:

Rise response time (or fall response time) is defined as the time delay from the 90% (or 10%) of input primary current ( $I_{IN}$ ) to the 90% (or 10%) of the VOUT pin voltage ( $V_{OUT}$ ) under the pulse input of primary current (Figure 5).

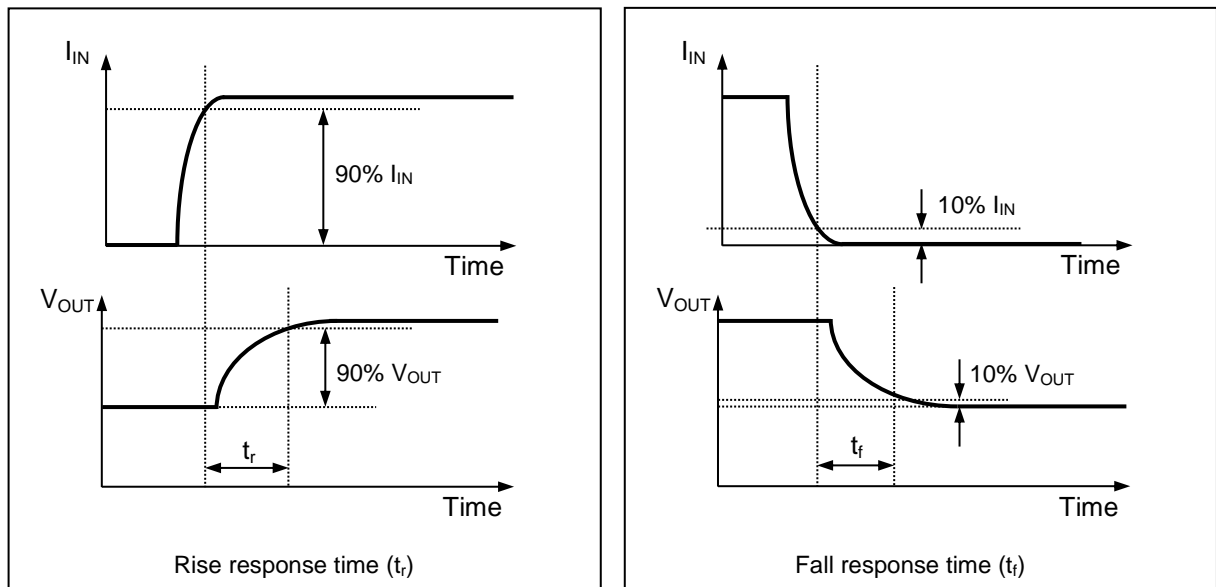


Figure 5. Definition of response time

## 11. Recommended External Circuits

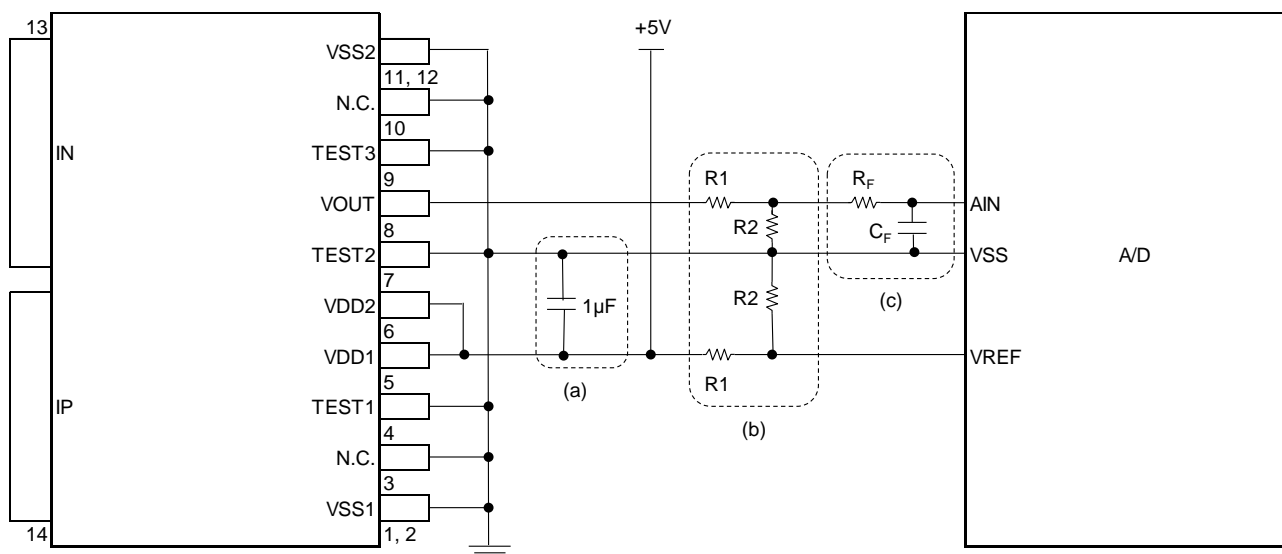


Figure 6. Recommended external circuits of AK310H

- (a)  $1\mu\text{F}$  bypass capacitor should be placed close to the AK310H.
- (b) AK310H has the ratiometric output. By making the supply voltage of AK310H and the reference voltage of A/D converter common, the A/D conversion error caused by the fluctuation of supply voltage is decreased. Voltage dividers (R1 and R2) are required if the reference voltage of A/D converter is less than +5V.


For example, if the reference voltage of A/D converter is +3.3V which is its supply voltage level,  $R1=20\text{k}\Omega$ ,  $R2=39\text{k}\Omega$  are recommended. If the reference voltage of A/D converter is different from its supply voltage level, other voltage divider is required.

- (c) Add a low-pass filter if it is necessary.


**12. Thermal Resistance Measurement Board**

Table 7. Board Information

|                        |                 |
|------------------------|-----------------|
| Board Size             | 43.1mm × 46.9mm |
| Layer number           | 2               |
| Copper layer thickness | 70μm            |
| Board thickness        | 1.6mm           |

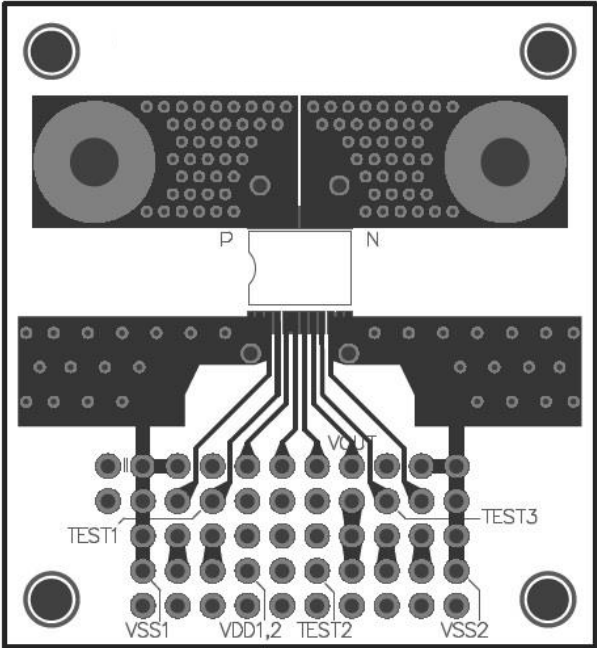

(a) Top pattern

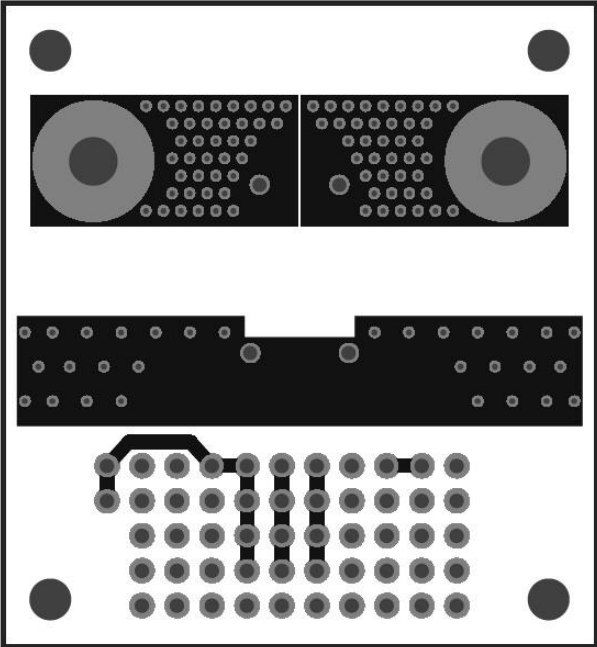


(b) Bottom pattern

Figure 7. Thermal Resistance Measurement Board of AK310H

## 13. Package

### 13.1. Outline Dimensions

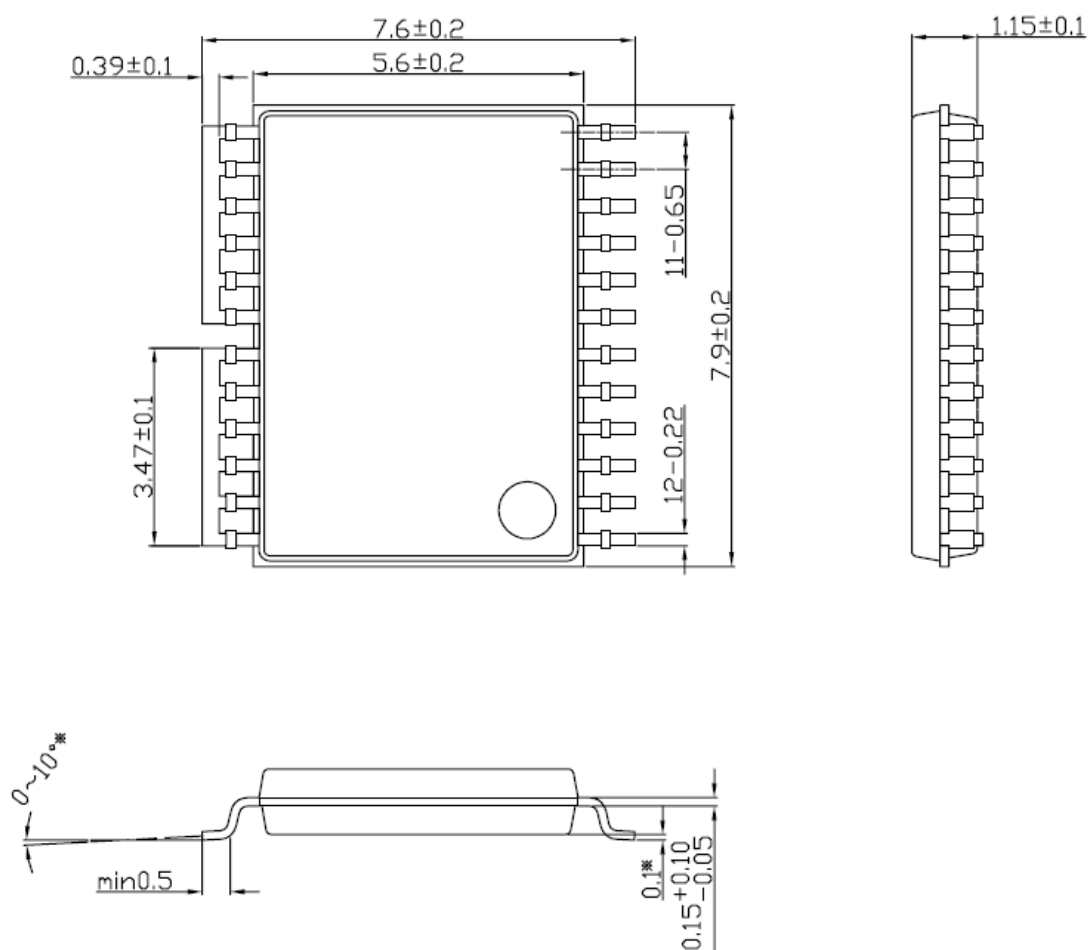

Unit: mm

The tolerances of dimensions without any mention are  $\pm 0.1$  mm.  
The symbol of “\*” are design target.

Figure 8. Outline dimensions of AK310H

Terminals: Cu

Plating for Terminals: Sn-Bi

Package material: RoHS compliant, halogen-free

Table 8. Package Characteristics

| Parameter          | Symbol | Min. | Typ. | Max. | Units |
|--------------------|--------|------|------|------|-------|
| Clearance Distance | $C_l$  | 5.0  |      |      | mm    |
| Creepage Distance  | $C_r$  | 5.0  |      |      | mm    |

\*Flammability standard is V0. (According to UL94)

\*Comparative tracking index (CTI) is 600V. Material Group is “I”.

## 13.2. Standards

- IEC/UL 60950-1 – Information Technology Equipment – Edition 2. (File No.E359197)
- CSA C22.2 NO. 60950-1-07 – Information Technology Equipment – Edition 2. (File No. E359197)

## 13.3. Recommended Pad Dimensions

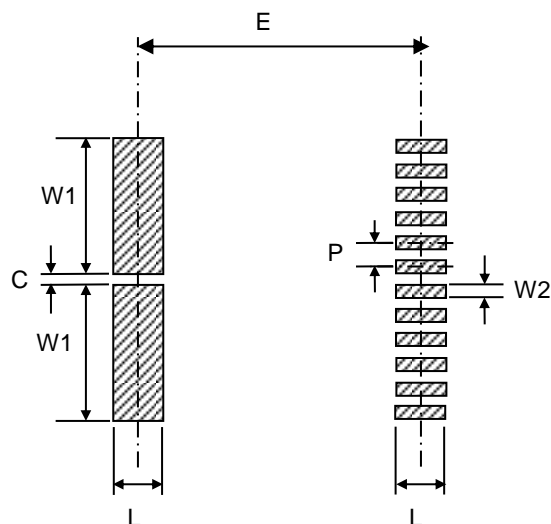


Figure 9. Recommended Pad dimensions of AK310H

Table 9. Recommended pad dimensions

|    |      |
|----|------|
| L  | 1.42 |
| E  | 7.62 |
| W1 | 3.60 |
| W2 | 0.35 |
| C  | 0.30 |
| P  | 0.65 |

Unit: mm

If two or more trace layers are used as the current paths, please make enough number of through-holes to flow current between the trace layers. In order to make heat dissipation better, it is recommended that Pad on Via should be provided on the pad of the primary conductor.

## 13.4. Marking

Production information is printed on the package surface by laser marking. Markings consist of 10 characters excluding AKM logo.

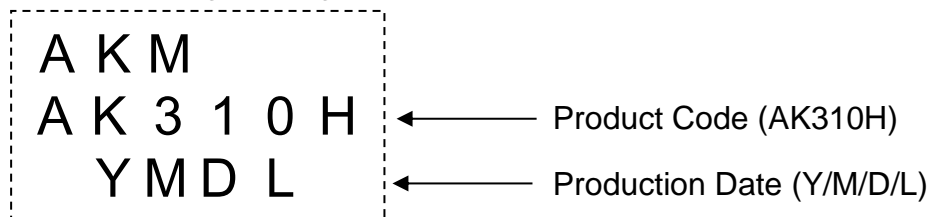


Figure 10. Markings of AK310H

Table 10. Production date code table

| Y         |      | M         |           | D         |     | L         |         |
|-----------|------|-----------|-----------|-----------|-----|-----------|---------|
| Character | Year | Character | Month     | Character | Day | Character | Lot No. |
| 8         | 2018 | C         | January   | 1         | 1   | 1         | 1       |
| 9         | 2019 | D         | February  | 2         | 2   | 2         | 2       |
| A         | 2020 | E         | March     | 3         | 3   | 3         | 3       |
| B         | 2021 | F         | April     | 4         | 4   | 4         | 4       |
| C         | 2022 | G         | May       | 5         | 5   | 5         | 5       |
| D         | 2023 | H         | June      | 6         | 6   | 6         | 6       |
| E         | 2024 | J         | July      | 7         | 7   | 7         | 7       |
| F         | 2025 | K         | August    | 8         | 8   | 8         | 8       |
| G         | 2026 | L         | September | 9         | 9   | 9         | 9       |
| H         | 2027 | M         | October   | 0         | 10  | 0         | 10      |
| J         | 2028 | N         | November  | A         | 11  | A         | 11      |
| K         | 2029 | P         | December  | B         | 12  | B         | 12      |
| L         | 2030 |           |           | C         | 13  | C         | 13      |
| N         | 2031 |           |           | D         | 14  | D         | 14      |
| P         | 2032 |           |           | E         | 15  | E         | 15      |
| R         | 2033 |           |           | F         | 16  | F         | 16      |
| S         | 2034 |           |           | G         | 17  | G         | 17      |
| T         | 2035 |           |           | H         | 18  | H         | 18      |
| U         | 2036 |           |           | J         | 19  | J         | 19      |
| V         | 2037 |           |           | K         | 20  | K         | 20      |
| W         | 2038 |           |           | L         | 21  | L         | 21      |
| X         | 2039 |           |           | N         | 22  | M         | 22      |
|           |      |           |           | P         | 23  | N         | 23      |
|           |      |           |           | R         | 24  | P         | 24      |
|           |      |           |           | S         | 25  | R         | 25      |
|           |      |           |           | T         | 26  | S         | 26      |
|           |      |           |           | U         | 27  | T         | 27      |
|           |      |           |           | V         | 28  | U         | 28      |
|           |      |           |           | W         | 29  | V         | 29      |
|           |      |           |           | X         | 30  | W         | 30      |
|           |      |           |           | Y         | 31  | X         | 31      |
|           |      |           |           |           |     | Y         | 32      |
|           |      |           |           |           |     | Z         | 33      |

|                              |
|------------------------------|
| <b>14. Reliability Tests</b> |
|------------------------------|

Table 11. Test parameters and conditions of reliability tests

| No. | Test Parameter                 | Test Conditions  | n  | Test Time  |
|-----|--------------------------------|--|----|------------|
| 1   | Highly Accelerated Stress Test | 【JEITA ED-4701 102】<br>$T_a = 130^{\circ}\text{C}$ , 85%RH, continuous operation   | 22 | 200h       |
| 2   | High Temperature Bias Test     | 【JEITA ED-4701 101】<br>$T_a = 150^{\circ}\text{C}$ , continuous operation  | 22 | 1000h      |
| 3   | High Temperature Storage Test  | 【JEITA ED-4701 201】<br>$T_a = 150^{\circ}\text{C}$   | 22 | 1000h      |
| 4   | Low Temperature Operating Test | $T_a = -40^{\circ}\text{C}$ , continuous operation   | 22 | 1000h      |
| 5   | Heat Cycle Test                | 【JEITA ED-4701 105】<br>$-65^{\circ}\text{C} \Leftrightarrow 150^{\circ}\text{C}$<br>30min. $\Leftrightarrow$ 30min<br>Tested in vapor phase. | 22 | 200 cycles |

Tested samples are pretreated as below before each reliability test:

Desiccation:  $125^{\circ}\text{C}/24\text{h} \rightarrow$  Moisture Absorption:  $60^{\circ}\text{C}/60\%\text{RH}/120\text{h} \rightarrow$  Reflow: 3 times (JEDEC Level 2a)

Criteria :

Products whose drifts between after pretreatment and after the reliability tests do not exceed the values below are considered to be in spec.

Sensitivity  $V_h$  ( $T_a=35^{\circ}\text{C}$ ) : Within  $\pm 3\%$   
 Zero-Current Voltage  $V_{of}$  ( $T_a=35^{\circ}\text{C}$ ) : Within  $\pm 20\text{mV}$   
 Linearity Error  $\rho$  ( $T_a=35^{\circ}\text{C}$ ) : Within  $\pm 1\%\text{F.S.}$   
 EEPROM : No change

## 15. Precautions

### <Storage Environment>

Products should be stored at an appropriate temperature (5 to 35°C), and at as low humidity as possible by using desiccator. It is recommended to use the products within 4 weeks since packing was opened. Keep products away from chlorine and corrosive gas. When stored in an inappropriate environment, it can affect the product properties.

### <Long-term Storage>

Long-term storage may result in poor lead solderability and degraded electrical performance even under proper conditions. For those parts, which stored long-term should be checked as for solderability before it is used.

For storage longer than 1 year, it is recommended to store in nitrogen atmosphere. Oxygen of atmosphere oxidizes leads of products and lead solderability get worse.

### <Other Precautions>

- 1) This product should not be used under the environment with corrosive gas including chlorine or sulfur.
- 2) This product is lead (Pb) free. All leads are plated with Sn-Bi. Do not store this product alone in high temperature and high humidity environment. Moreover, this product should be mounted on substrate within six months after delivery.
- 3) This product is damaged when it is used on the following conditions:
  - Supply voltage is applied in the opposite way.
  - Overvoltage which is larger than the value indicated in the specification.
- 4) This product will be damaged if it is used for a long time with the current (effective current) which exceeds the current rating. Careful attention must be paid so that maximum effective current is smaller than current rating.
- 5) The characteristics can be changed by the influences of nearby current and magnetic field and electric field. Please make sure of the mounting position.

As this product contains gallium arsenide, observe the following procedures for safety.

- 1) Do not alter the form of this product into a gas, powder, liquid, through burning, crushing, or chemical processing.
- 2) Observe laws and company regulations when discarding this product.



**IMPORTANT NOTICE**

0. Asahi Kasei Microdevices Corporation ("AKM") reserves the right to make changes to the information contained in this document without notice. When you consider any use or application of AKM product stipulated in this document ("Product"), please make inquiries the sales office of AKM or authorized distributors as to current status of the Products.
1. All information included in this document are provided only to illustrate the operation and application examples of AKM Products. AKM neither makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any license to any intellectual property rights or any other rights of AKM or any third party with respect to the information in this document. You are fully responsible for use of such information contained in this document in your product design or applications. AKM ASSUMES NO LIABILITY FOR ANY LOSSES INCURRED BY YOU OR THIRD PARTIES ARISING FROM THE USE OF SUCH INFORMATION IN YOUR PRODUCT DESIGN OR APPLICATIONS.
2. The Product is neither intended nor warranted for use in equipment or systems that require extraordinarily high levels of quality and/or reliability and/or a malfunction or failure of which may cause loss of human life, bodily injury, serious property damage or serious public impact, including but not limited to, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. Do not use Product for the above use unless specifically agreed by AKM in writing.
3. Though AKM works continually to improve the Product's quality and reliability, you are responsible for complying with safety standards and for providing adequate designs and safeguards for your hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of the Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption.
4. Do not use or otherwise make available the Product or related technology or any information contained in this document for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). When exporting the Products or related technology or any information contained in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. The Products and related technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
5. Please contact AKM sales representative for details as to environmental matters such as the RoHS compatibility of the Product. Please use the Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. AKM assumes no liability for damages or losses occurring as a result of noncompliance with applicable laws and regulations.
6. Resale of the Product with provisions different from the statement and/or technical features set forth in this document shall immediately void any warranty granted by AKM for the Product and shall not create or extend in any manner whatsoever, any liability of AKM.
7. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of AKM.

Rev.1