

DATA SHEET

PART NO. : L-604UW5C

REV: A / 4

CUSTOMER'S APPROVAL: _____


DCC: _____

1.9*3.1*4.0 mm RECTANGULAR LED LAMP

L-604UW5C

REV:A / 4

PACKAGE DIMENSIONS

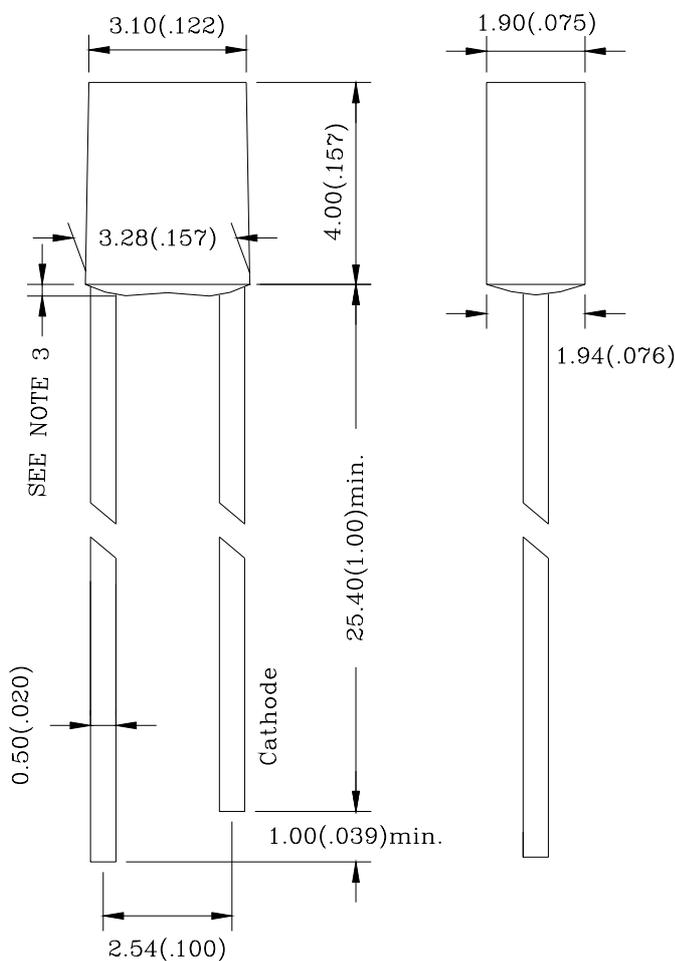

| ITEM | MATERIALS |
|------------|-----------------------|
| RESIN | Epoxy Resin |
| LEAD FRAME | Sn Plating iron Alloy |

Note:

- 1.All Dimensions are in millimeters.
- 2.Tolerance is $\pm 0.25\text{mm}$ (0.010 ") Unless otherwise specified.
- 3.Protruded resin under flange is 1.5mm(0.059 ") max.
- 4.Lead spacing is measured where the leads emerge from the package.
- 5.Specification are subject to change without notice
- 6.ESD <-500V
7. The lamps have sharp and hard points that may injure human eyes or fingers etc., so please pay enough care in the handling.

1.9*3.1*4.0 mm RECTANGULAR LED LAMP

L-604UW5C

REV:A / 4

FEATURES

- * SUITABLE HIGH PULSE CURRENT OPERATION
- * EXTRA HIGH RADIANT INTENSITY
- * HIGH RELIABILITY
- * LOW FORWARD VOLTAGE
- * Pb FREE PRODUCTS

CHIP MATERIALS

- * Dice Material : GaInN/GaN
- * Light Color : ULTRA WHITE
- * Lens Color : WATER CLEAR

ABSOLUTE MAXIMUM RATING:(Ta = 25°C)

| SYMBOL | DESCRIPTION | ULTRA WHITE | UNIT |
|--------|------------------------------------|---------------|-------|
| PD | Power Dissipation Per Chip | 120 | mW |
| VR | Reverse Voltage Per Chip | 5 | V |
| IF | Average Forward Current Per Chip | 30 | mA |
| - | Derating Linear From 25°C Per Chip | 0.4 | mA/°C |
| Topr | Operating Temperature Range | -25°C to 85°C | |
| Tstg | Storage Temperature Range | -40°C to 85°C | |

IFP Conditions : Pulse Width≤10msec. And Duty≤1/10

ELECTRO-OPTICAL CHARACTERISTICS:(Ta=25°C)


| SYMBOL | DESCRIPTION | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--------|--------------------------|----------------|------|------|------|------|
| VF | Forward Voltage | IF = 20mA | | 3.5 | 4.0 | V |
| IR | Reverse Current | VR = 5V | | | 100 | µA |
| 2θ1/2 | Half Intensity Angle | IF = 20mA | | 120 | | deg |
| IV | Luminous Intensity | IF = 20mA | 180 | 450 | | mcd |
| X | Chromaticity Coordinates | IF = 20mA | | 0.29 | | |
| Y | | IF = 20mA | | 0.30 | | |

1.9*3.1*4.0 mm RECTANGULAR LED LAMP


L-604UW5C

REV:A / 4


■ Forward Voltage vs. Forward Current

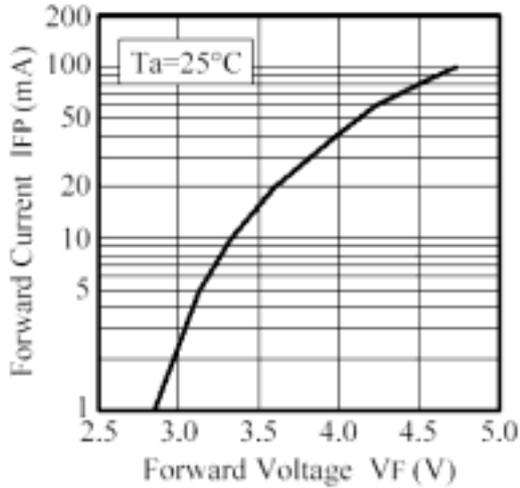


■ Forward Current vs. Relative Luminosity

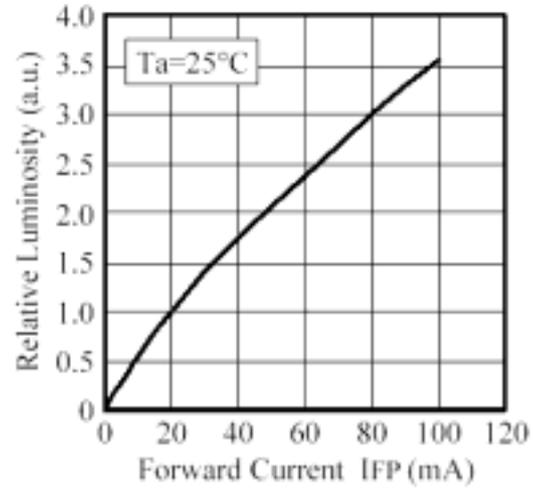

■ Duty Ratio vs. Allowable Forward Current

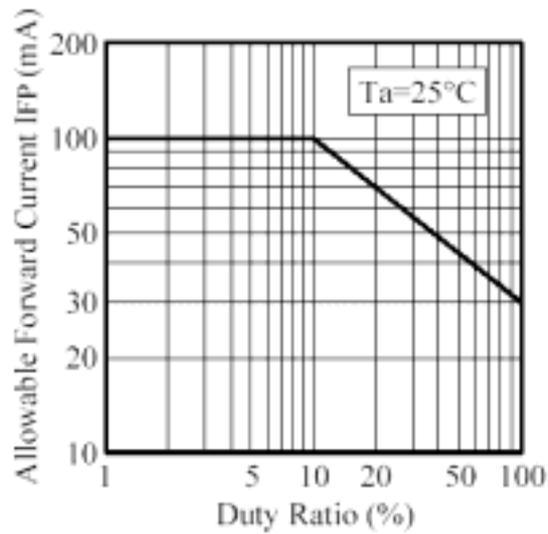

■ Ambient Temperature vs. Forward Voltage

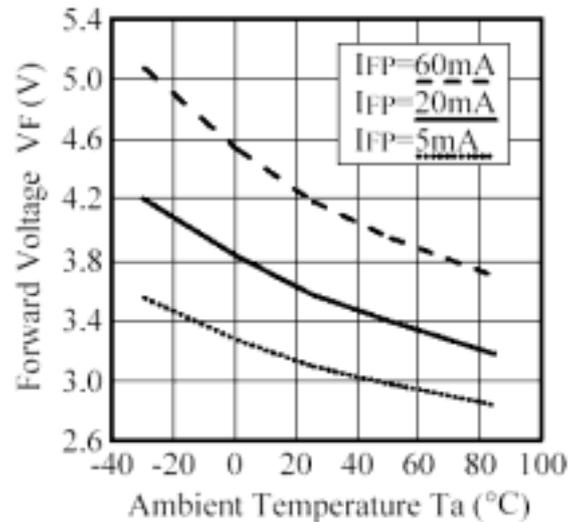


1.9*3.1*4.0 mm RECTANGULAR LED LAMP


L-604UW5C

REV:A / 4


■ Ambient Temperature vs. Relative Luminosity

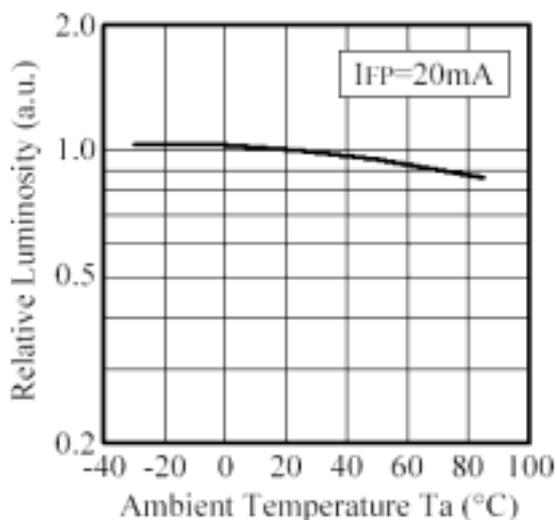


■ Ambient Temperature vs. Allowable Forward Current

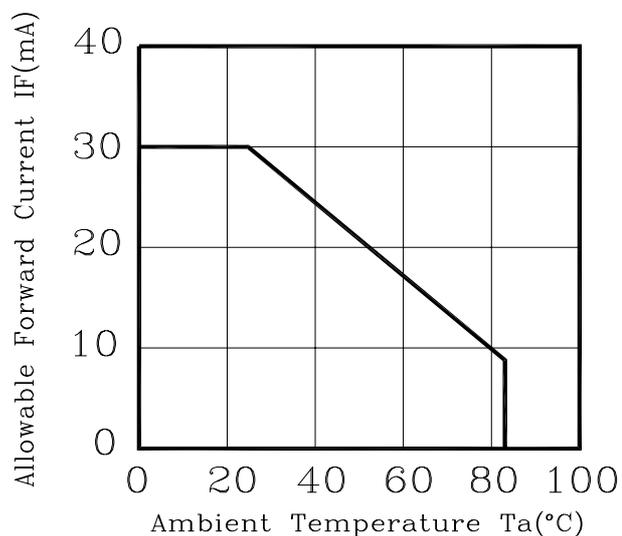

■ Forward Current vs. Chromaticity Coordinate

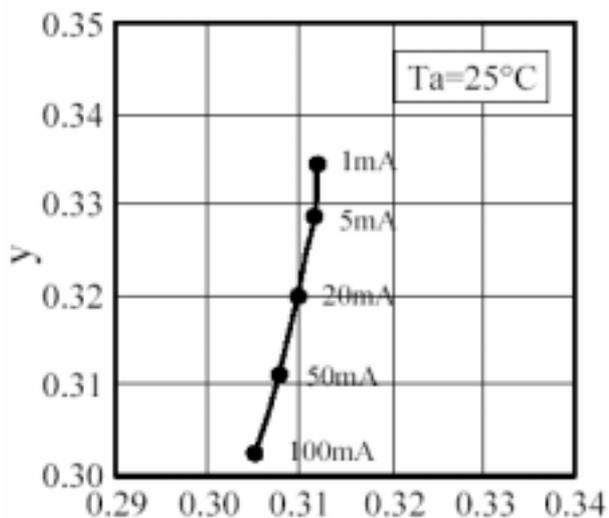


■ Spectrum

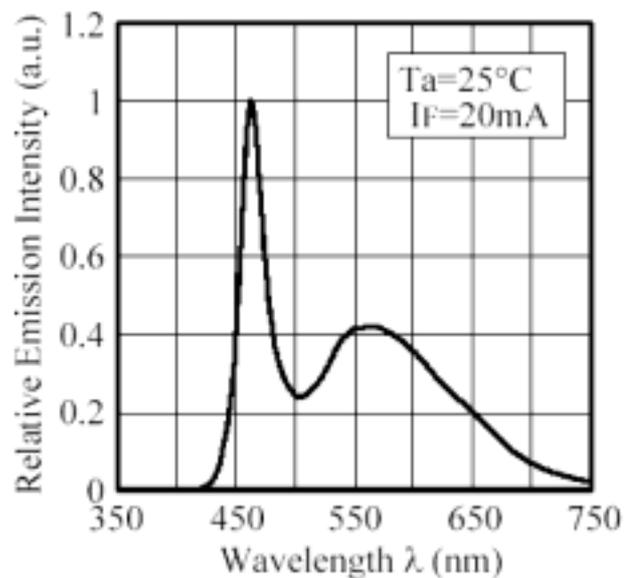

1.9*3.1*4.0 mm RECTANGULAR LED LAMP

L-604UW5C

REV:A / 4

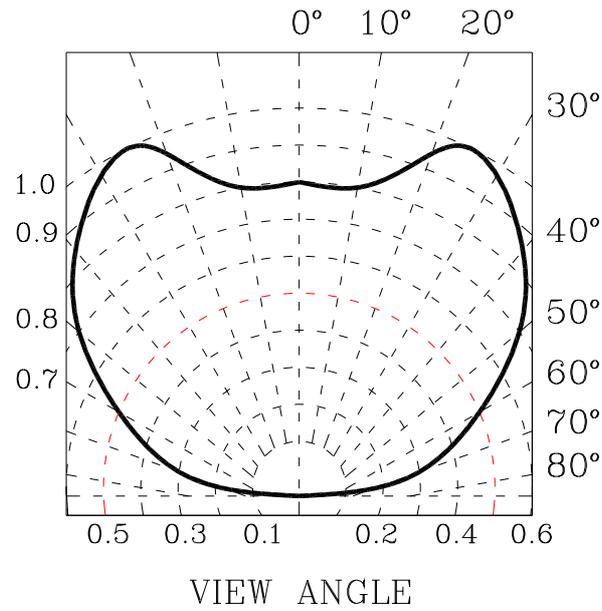

1.9*3.1*4.0 mm RECTANGULAR LED LAMP

L-604UW5C

REV:A / 4

Label Explanation

| | |
|------------|-----------|
| PARA NO. : | |
| LOT NO. : | INSPECTED |
| BIN : | |
| Q' TY : | PCS |
| N. W : | g |

PARA NO. : Refer to p14

LOT NO. : E L L 4 7 0009

A B C D E F

A---E: For series number

B---L: Local F: Foreign

C---L: LAMP

D---Year

E---Month

F---SPEC.

BIN : actual code will be base on page 14-15 specification

N'W : Net Weight

1.9*3.1*4.0 mm RECTANGULAR LED LAMP


L-604UW5C

REV:A / 4


•SOLDERING

| METHOD | SOLDERING CONDITIONS | REMARK |
|----------------|---|---|
| DIP SOLDERING | Bath temperature: 260 Immersion time: with 5 sec, 1 time | <ul style="list-style-type: none"> Solder no closer than 3mm from the base of the package Using soldering flux," RESIN FLUX" is recommended. Attached data of temperature cure for your reference |
| SOLDERING IRON | Soldering iron: 30W or smaller Temperature at tip of iron: 260 or lower Soldering time: within 5 sec. | <ul style="list-style-type: none"> During soldering, take care not to press the tip of iron against the lead. (To prevent heat from being transferred directly to the lead, hold the lead with a pair of tweezers while soldering) |

1) When soldering the lead of LED in a condition that the package is fixed with a panel (See Fig.1), be careful not to stress the leads with iron tip.

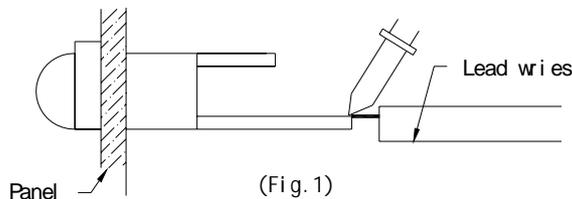

2) When soldering wire to the lead, work with a Fig (See Fig.2) to avoid stressing the package.

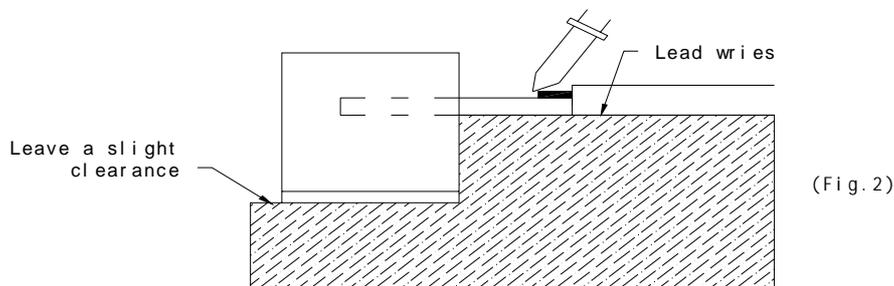


Regarding solution in the tinning oven for product-tinning, compound sub-solution made of tin & copper and silver is proposed with the temperature of Celsius 260. The proportion of the alloyed solution is tin 95.5: copper 3.5: silver 0.5 by percentage. The time of tinning is constantly 3 seconds.

1.9*3.1*4.0 mm RECTANGULAR LED LAMP

L-604UW5C

REV:A / 4

- 3) Similarly, when a jig is used to solder the LED to PC board, take care as much as possible to avoid steering the leads (See Fig.3).

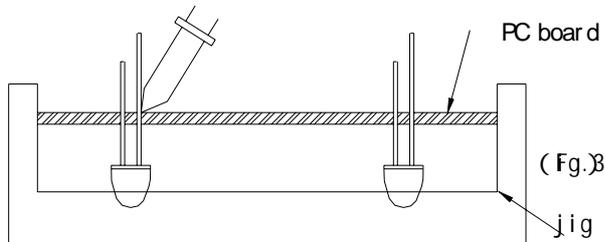

- 4) Repositioning after soldering should be avoided as much as possible. If inevitable, be sure to preserve the soldering conditions with irons stated above: select a best-suited method that assures the least stress to the LED.
- 5) Lead cutting after soldering should be performed only after the LED temperature has returned to normal temperature.

- STORAGE

- 1) The LEDs should be stored at 30 °C or less and 70% RH or less after being shipped from PARA and the storage life limits are 3 months .
- 2) PARA LED lead frames are comprised of a stannum plated iron alloy. The silver surface may be affected by environments which contain corrosive gases and so on. Please avoid conditions which may cause the LEDs to corrode, tarnish or discolor. This corrosion or discoloration may cause difficulty during soldering operations. It is recommended that the LEDs be used as soon as possible.
- 3) Please avoid rapid transitions in ambient temperature, especially, in high humidity environments where condensation can occur.

1.9*3.1*4.0 mm RECTANGULAR LED LAMP

L-604UW5C

REV:A / 4

• STATIC ELECTRICITY

- 1) Static electricity or surge voltage damages the LEDs.
It is recommended that a wrist band or an anti-electrostatic glove be used when handling the LEDs.
- 2) All devices, equipment and machinery must be properly grounded. It is recommended that measures be taken against surge voltage to the equipment that mounts the LEDs.
- 3) When inspecting the final products in which LEDs were assembled, it is recommended to check whether the assembled LEDs are damaged by static electricity or not. It is easy to find static-damaged LEDs by a light-on test or a VF test at a lower current (below 1mA is recommended).
- 4) Damaged LEDs will show some unusual characteristics such as the leak current remarkably increases, the forward voltage becomes lower, or the LEDs do not light at the low current .
Criteria : ($V_F > 2.0V$ at $I_F = 0.5mA$)

• LED MOUNTING METHOD

- 4) When mounting the LED by using a case, as shown Fig.4, ensure that the mounting holds on the PC board match the pitch of the leads correctly-tolerance of dimensions of the respective components including the LED should be taken into account especially when designing the case, PC board, etc. to prevent pitch misalignment between the leads and board holes, the diameter of the board holes should be slightly larger than the size of the lead. Alternatively, the shape of the holes should be made oval. (See Fig.4)

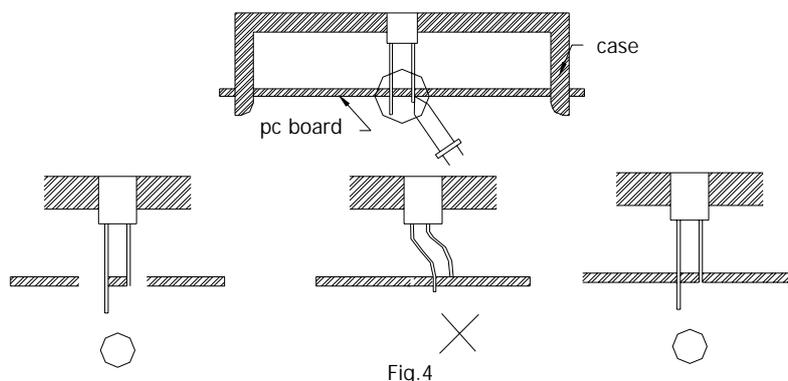




Fig.4

1.9*3.1*4.0 mm RECTANGULAR LED LAMP

L-604UW5C


REV:A / 4

5) Use LEDs with stand-off (Fig.5) or the tube or spacer made of resin (Fig.6) to position the LEDs.




●FORMED LEAD

1) The lead should be bent at a point located at least 2mm away from the package. Bending should be performed with base fixed means of a jig or pliers (Fig.7)

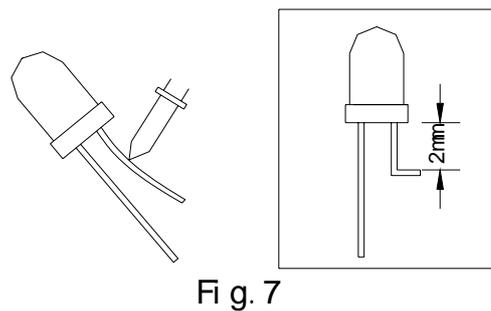

2) Forming lead should be carried out prior to soldering and never during or after soldering.

3) Form the lead to ensure alignment between the leads and the hole on board, so that stress against the LED is prevented. (Fig.8)

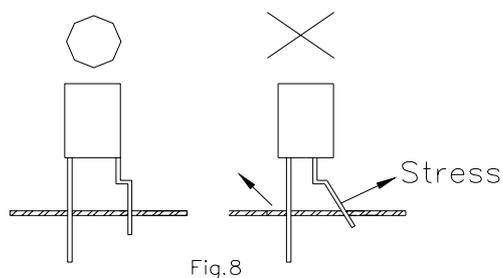

1.9*3.1*4.0 mm RECTANGULAR LED LAMP

L-604UW5C

REV:A / 4

•LEAD STRENGTH

1) Bend strength

Do not bend the lead more than twice. (Fig.9)




Fig.9

2) Tensile strength (@Room Temperature)

If the force is 1kg or less, there will be no problem. (Fig.10)




Fig.10

• HEAT GENERATION

- 1) Thermal design of the end product is of paramount importance. Please consider the heat generation of the LED when making the system design. The coefficient of temperature increase per input electric power is affected by the thermal resistance of the circuit board and density of LED placement on the board, as well as other components. It is necessary to avoid intense heat generation and operate within the maximum ratings given in this specification.
- 2) The operating current should be decided after considering the ambient maximum temperature of LEDs.

1.9*3.1*4.0 mm RECTANGULAR LED LAMP

L-604UW5C

REV:A / 4

●CHEMICAL RESISTANCE

- 1) Avoid exposure to chemicals as it may attack the LED surface and cause discoloration.
- 2) When washing is required, refer to the following table for the proper chemical to be used.
(Immersion time: within 3 minutes at room temperature.)

| SOLVENT | ADAPTABILITY |
|-------------------|--------------|
| Freon TE | |
| Chloroethene | |
| Isopropyl Alcohol | |
| Thinner | |
| Acetone | |
| Trichloroethylene | |

--Usable --Do not use.

NOTE: Influences of ultrasonic cleaning of the LED resin body differ depending on such factors as the oscillator output, size of the PC board and the way in which the LED is mounted. Therefore, ultrasonic cleaning should only be performed after confirming there is no problem by conducting a test under practical.

●OTHERS

- 1) Care must be taken to ensure that the reverse voltage will not exceed the absolute maximum rating when using the LEDs with matrix drive.
- 2) Flashing lights have been known to cause discomfort in people; you can prevent this by taking precautions during use. Also, people should be cautious when using equipment that has had LEDs incorporated into it.
- 3) The LEDs described in this brochure are intended to be used for ordinary electronic equipment (such as office equipment, communications equipment, measurement instruments and household appliances). Consult PARA's sales staff in advance for information on the applications in which exceptional quality and reliability are required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as for airplanes, aerospace, submersible repeaters, nuclear reactor control systems, automobiles, traffic control equipment, life support systems and safety devices).
- 4) User shall not reverse engineer by disassembling or analysis of the LEDs without having prior written consent from PARA. When defective LEDs are found, the User shall inform PARA directly before disassembling or analysis.
- 5) The formal specifications must be exchanged and signed by both parties before large volume purchase begins.
- 6) The appearance and specifications of the product may be modified for improvement without notice.

1.9*3.1*4.0 mm RECTANGULAR LED LAMP

L-604UW5C

REV:A / 4

Bin Code List:

| Luminous Intensity(IV), Unit:mcd@20mA | | |
|---------------------------------------|-----|------|
| Bin Code | Min | Max |
| C | 180 | 308 |
| D | 252 | 429 |
| E | 351 | 605 |
| F | 495 | 847 |
| G | 639 | 1188 |

Including test tolerance

| Forward Voltage (VF), Unit:v@20mA | | |
|-----------------------------------|------|------|
| Bin Code | Min | Max |
| V1 | 2.88 | 3.33 |
| V2 | 3.07 | 3.54 |
| V3 | 3.16 | 3.74 |
| V4 | 3.46 | 3.95 |
| V5 | 3.65 | 4.0 |

Including test tolerance

1.9*3.1*4.0 mm RECTANGULAR LED LAMP

L-604UW5C

REV:A / 4

| | | | | | | | | | |
|---|-------|-------|-------|-------|---|-------|-------|-------|-------|
| | WA1 | | | | | WA2 | | | |
| X | 0.22 | 0.22 | 0.23 | 0.23 | X | 0.23 | 0.23 | 0.24 | 0.24 |
| Y | 0.15 | 0.21 | 0.22 | 0.16 | Y | 0.16 | 0.22 | 0.235 | 0.175 |
| | WA3 | | | | | WA4 | | | |
| X | 0.24 | 0.24 | 0.25 | 0.25 | X | 0.25 | 0.25 | 0.26 | 0.26 |
| Y | 0.175 | 0.235 | 0.25 | 0.19 | Y | 0.19 | 0.25 | 0.265 | 0.205 |
| | WA5 | | | | | a0 | | | |
| X | 0.26 | 0.26 | 0.264 | 0.280 | X | 0.280 | 0.264 | 0.283 | 0.296 |
| Y | 0.205 | 0.265 | 0.267 | 0.248 | Y | 0.248 | 0.267 | 0.305 | 0.276 |
| | b11 | | | | | b12 | | | |
| X | 0.287 | 0.283 | 0.31 | 0.31 | X | 0.31 | 0.31 | 0.330 | 0.330 |
| Y | 0.295 | 0.305 | 0.335 | 0.318 | Y | 0.318 | 0.335 | 0.360 | 0.339 |
| | b21 | | | | | b22 | | | |
| X | 0.296 | 0.287 | 0.31 | 0.31 | X | 0.31 | 0.31 | 0.330 | 0.330 |
| Y | 0.276 | 0.295 | 0.318 | 0.293 | Y | 0.293 | 0.318 | 0.339 | 0.318 |
| | c0 | | | | | | | | |
| X | 0.330 | 0.330 | 0.361 | 0.356 | | | | | |
| Y | 0.318 | 0.360 | 0.385 | 0.351 | | | | | |