



## General Description


The MCP1801 is a family of CMOS low dropout (LDO) voltage regulators that can deliver up to 150 mA of current while consuming only 25  $\mu$ A of quiescent current (typical). The input operating range is specified from 2.0V to 10.0V, making it an ideal choice for two to six primary cell battery-powered applications, 9V alkaline and one or two cell Li-Ion-powered applications.

The MCP1801 is capable of delivering 100 mA with only 200 mV (typical) of input to output voltage differential ( $V_{OUT} = 3.3V$ ). The output voltage tolerance of the MCP1801 at +25°C is typically  $\pm 0.4\%$  with a maximum of  $\pm 2\%$ . Line regulation is  $\pm 0.01\%$  typical at +25°C.

## Features

- **CMOS Low Power Consumption**
- **Dropout Voltage:** **60mV @ 30mA,**  
**200mV @ 100mA**
- **Maximum Output Current:**  
**150mA**
- **Highly Accurate:** **1.2V ~ 1.95V  $\pm 3\%$**   
**2.0V ~ 6.00V  $\pm 2\%$**
- **Output Voltage Range:** **1.5V ~ 6.0V**
- **Low ESR capacitor compatible**
- **Output Voltage Options:** **1.2V, 1.8V, 2.5V  
3.3V, 5.0V**
- **Package:** **SOT23-5**

## Typical Application Circuit

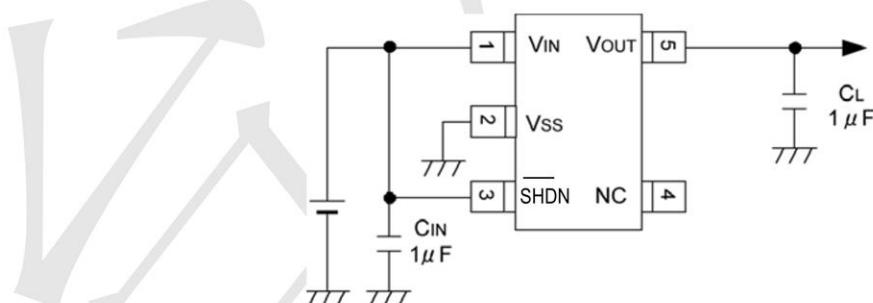

The LDO output is stable with a minimum of 1  $\mu$ F of output capacitance. Ceramic, tantalum, or aluminum electrolytic capacitors can all be used for input and output. Overcurrent limit with current foldback provides short-circuit protection. A shutdown (SHDN) function allows the output to be enabled or disabled. When disabled, the MCP1801 draws only 0.01  $\mu$ A of current (typical).


The MCP1801 is available in a SOT-23-5 package.

## Applications

- Mobile phones
- Cordless phones
- Cameras, video recorders
- Portable games
- Portable AV equipment
- Reference voltage
- Battery-powered equipment



## PIN CONFIGURATION

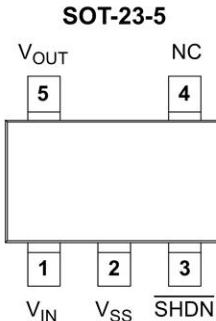

Pin No. SOT-23-5	Name	Function
1	V <sub>IN</sub>	Unregulated Supply Voltage
2	GND	Ground Terminal
3	SHDN	Shutdown Input
4	NC	No Connection
5	V <sub>OUT</sub>	Regulated Voltage Output

## ABSOLUTE MAXIMUM RATINGS (T = 25°C unless otherwise noted)

Parameter	Symbol	Ratings	Units
Input Voltage	V <sub>IN</sub>	12	V
Output Current	I <sub>OUT</sub>	500	mA
Output Voltage	V <sub>OUT</sub>	V <sub>SS</sub> -0.3 ~ V <sub>IN</sub> +0.3	V
Power Dissipation SOT25	P <sub>d</sub>	250	mW
Operation Ambient Temperature	T <sub>opr</sub>	-40 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-55 ~ +85	°C



**TECH PUBLIC**  
台电电子

**MCP1801T Series**

150mA, High PSRR, Low Quiescent Current LDO

[www.sot23.com.tw](http://www.sot23.com.tw)

### Electrical Characteristics ( $T = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Voltage (2%) <sup>(*)5)</sup>	$V_{OUT(E)}^{(*)3)}$	$I_{OUT}=30\text{mA}$	$V_{OUT(T)}^{(*)2} \times 0.98$	$V_{OUT(T)}^{(*)2}$	$V_{OUT(T)}^{(*)2} \times 1.02$	V
Output Voltage (1%) <sup>(*)6)</sup>			$V_{OUT(T)}^{(*)2} \times 0.99$		$V_{OUT(T)}^{(*)2} \times 1.01$	
Maximum Output Current	$I_{OUTMAX}$	-	150	-	-	mA
Load Regulation	$\Delta V_{OUT}$	$1\text{mA} \leq I_{OUT} \leq 100\text{mA}$	-	15	50	mV
Dropout Voltage <sup>(*)4)</sup>	$V_{dif1}$	$I_{OUT}=30\text{mA}$	E-1			mV
	$V_{dif2}$	$I_{OUT}=100\text{mA}$	E-2			mV
Supply Current (Type A)	$I_{DD}$	$V_{CE}=V_{IN}=V_{OUT(T)}+1.0\text{V}$ When $V_{OUT} \leq 0.95\text{V}$ , $V_{IN}=V_{CE}=2.0\text{V}$	-	28	55	$\mu\text{A}$
Supply Current (Type B)			-	25	50	
Stand-by Current	$I_{STB}$	$V_{IN}=V_{OUT(T)}+1.0\text{V}$ , $V_{CE}=V_{SS}$ When $V_{OUT} \leq 0.95\text{V}$ , $V_{IN}=2.0\text{V}$	-	0.01	0.10	$\mu\text{A}$
Line Regulation	$\Delta V_{OUT}/(\Delta V_{IN} \cdot V_{OUT})$	$V_{OUT(T)}+1.0\text{V} \leq V_{IN} \leq 10\text{V}$ When $V_{OUT} \leq 0.95, 2.0\text{V} = V_{IN} \leq 10\text{V}$ $I_{OUT}=30\text{mA}$ When $V_{OUT} \leq 1.75\text{V}$ , $I_{OUT}=10\text{mA}$	-	0.01	0.20	%/V
Input Voltage	$V_{IN}$		2	-	10	V
Output Voltage Temperature Characteristics	$\Delta V_{OUT}/(\Delta T_{opr} \cdot V_{OUT})$	$I_{OUT}=30\text{mA}$ $-40^\circ\text{C} \leq T_{opr} \leq 85^\circ\text{C}$	-	100	-	ppm/ $^\circ\text{C}$
Power Supply Rejection Ratio	PSRR	$V_{IN}=[V_{OUT(T)}+1.0]\text{V}+1.0\text{Vp-pAC}$ When $V_{OUT} \leq 1.5\text{V}$ , $V_{IN}=2.5\text{V}+1.0\text{Vp-pAC}$ $I_{OUT}=50\text{mA}$ , $f=10\text{kHz}$	-	70	-	dB
Current Limit	$I_{lim}$	$V_{IN}=V_{OUT(T)}+1.0\text{V}$ , $V_{CE}=V_{SS}$ When $V_{OUT} \leq 1.75$ , $V_{IN}=V_{OUT(T)}+2.0\text{V}$	-	300	-	mA
Short Current	$I_{SHORT}$	$V_{IN}=V_{OUT(T)}+1.0\text{V}$ , $V_{CE}=V_{SS}$ When $V_{OUT} \leq 1.75$ , $V_{IN}=V_{OUT(T)}+2.0\text{V}$	-	50	-	mA
Logic High Input	$V_{SHDN-HIGH}$	-	1.6	-	$V_{IN}$	V
Logic Low Input	$V_{SHDN-LOW}$	-	-	-	0.25	V




TECH PUBLIC  
台电电子

MCP1801T Series

150mA, High PSRR, Low Quiescent Current LDO

[www.sot23.com.tw](http://www.sot23.com.tw)

## BLOCK DIAGRAM

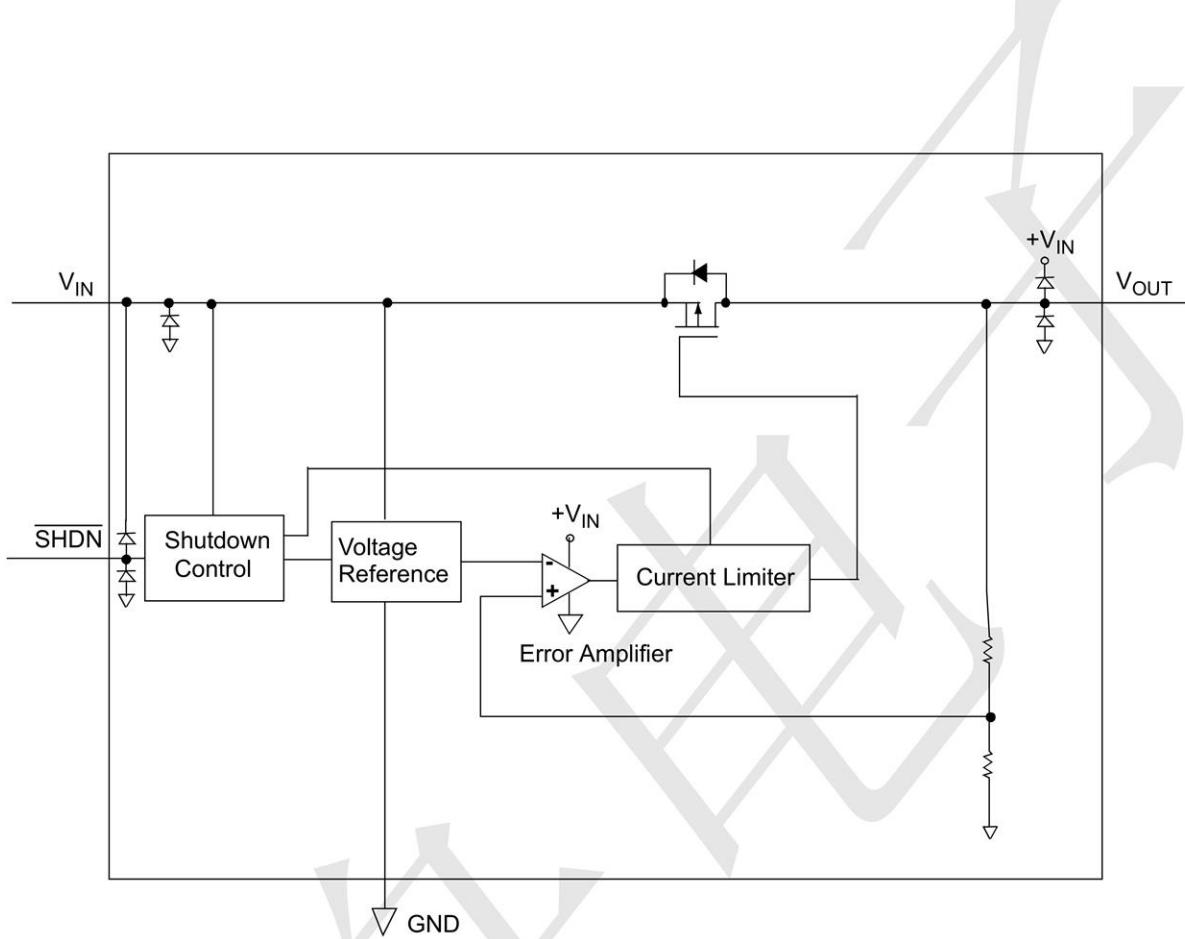




**TECH PUBLIC**  
台电电子

**MCP1801T Series**


**150mA, High PSRR, Low Quiescent Current LDO**

[www.sot23.com.tw](http://www.sot23.com.tw)


**MCP1801T-1502I/OT**

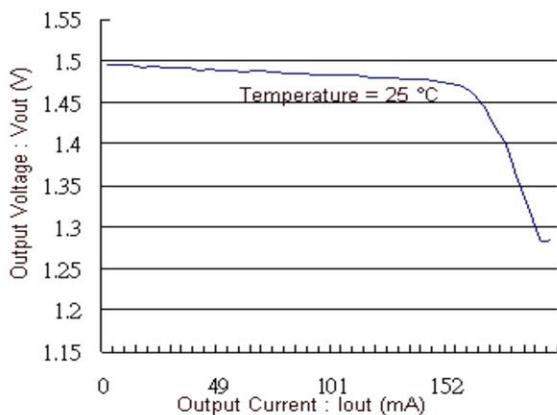

**MCP1801T-3302I/OT**

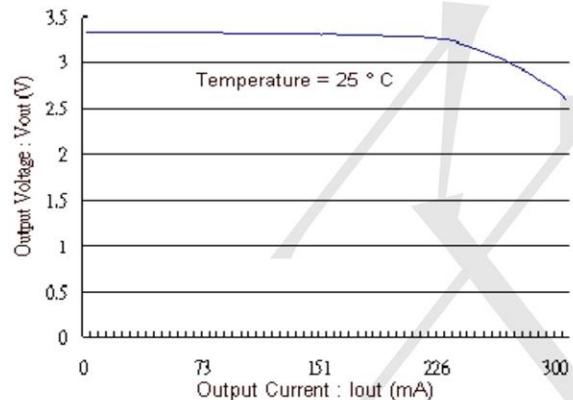


**MCP1801T-5002I/OT**

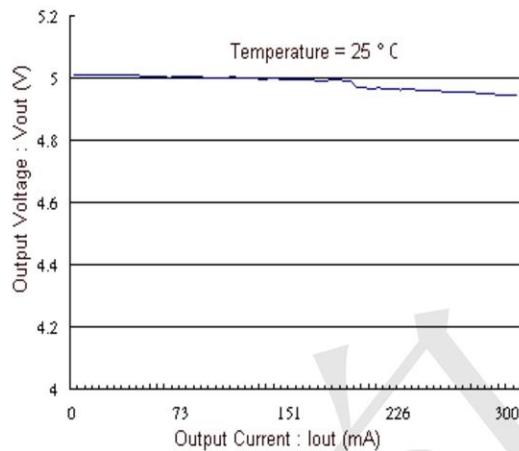

## (2) Output Voltage VS Input Voltage


**MCP1801T-1502I/OT**

Temperature = 25 °C

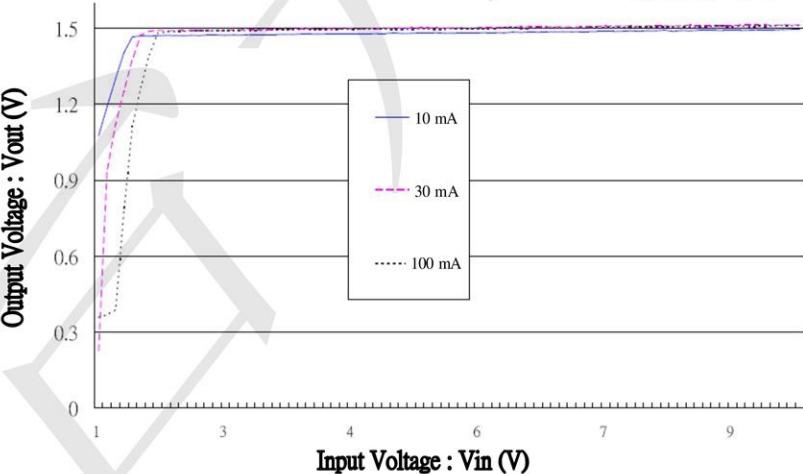




### MCP1801T-3302I/OT



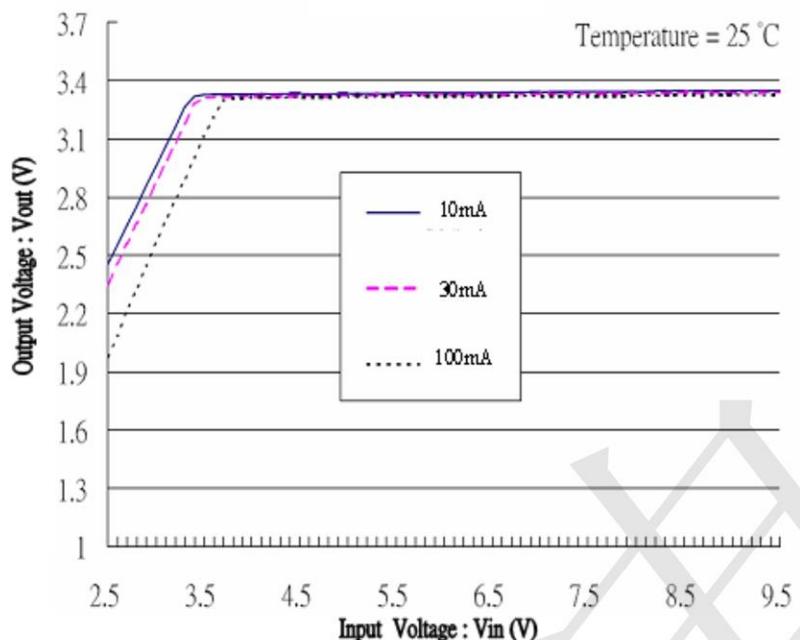


### MCP1801T-5002I/OT

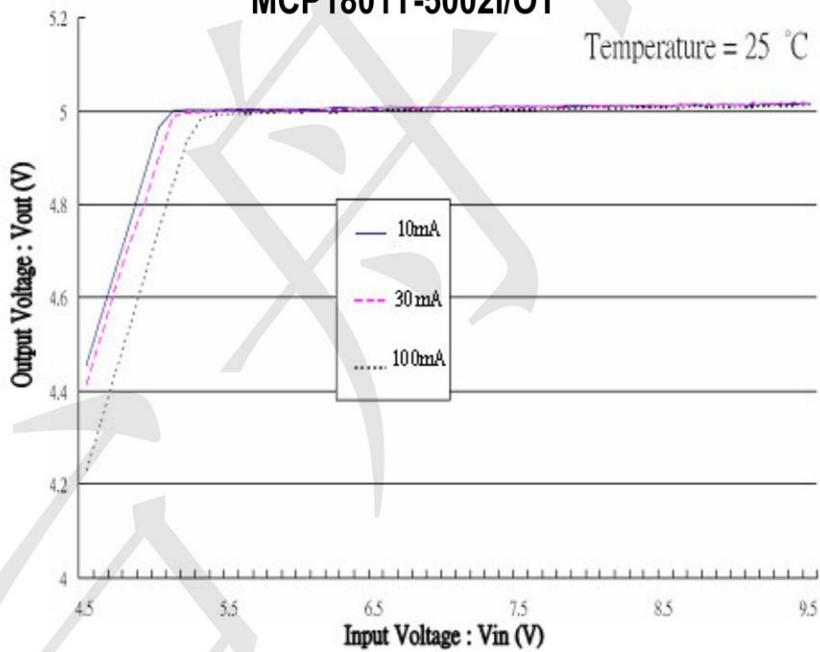



(3) Supply Current VS Input Voltage

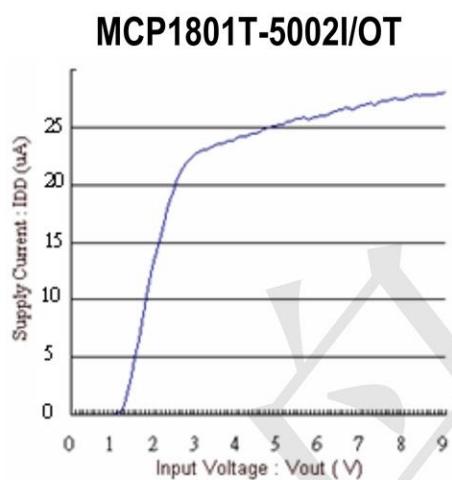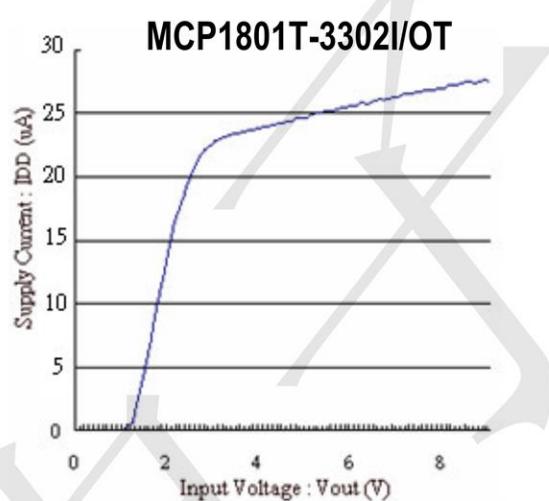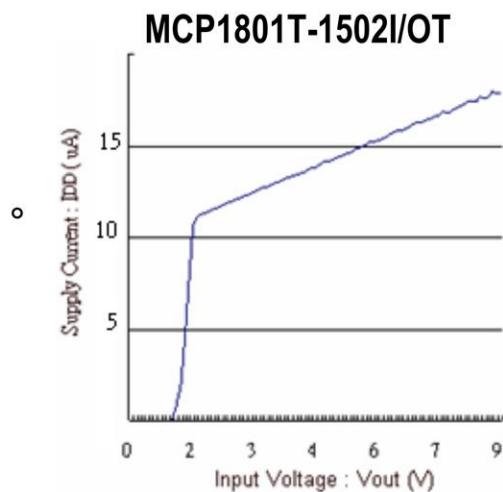




## Package information

[www.sot23.com.tw](http://www.sot23.com.tw)

### 3-pin SOT23-5 Outline Dimensions

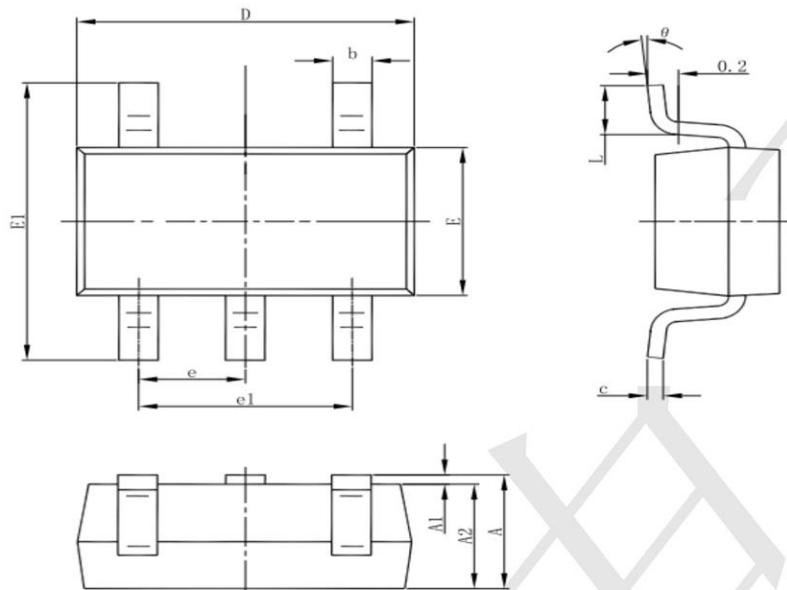

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

## Ordering information

Order code	Package	Baseqty	Delivery mode
TP MCP1801T-3302I/OT	SOT23-5	3000	Tape and reel

Order code	Package	Baseqty	Delivery mode
TP MCP1801T-5002I/OT	SOT23-5	3000	Tape and reel

Order code	Package	Baseqty	Delivery mode
TP MCP1801T-XX02I/OT	SOT23-5	3000	Tape and reel

XX=iout voltage