


**SPECIFICATIONS**

Rated (额定参数): 300V, 15A  
 Dielectric strength (抗电强度): AC2000V/1 Minute  
 Insulation Resistance (绝缘电阻): 1000MΩ Min  
 Contact Resistance (接触电阻): 20mΩ Max  
 Screw Torque (扭矩): 0.4Nm (3.5Lb.in)  
 Wire Range (线径): 12~28AWG  
 Strip length (剥线长度): 7~8mm  
 Temp. range (操作温度): -40℃~+105℃  
 MAX Soldering (瞬时温度): +250℃, 5s

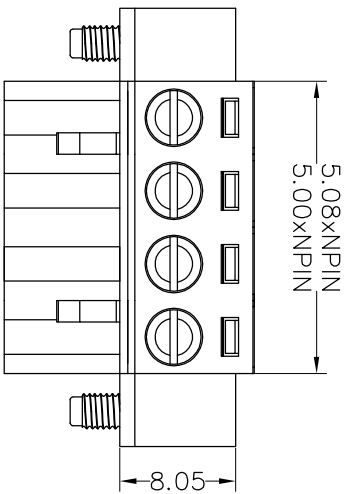



Housing Material (塑件): PA66 (UL94 V-0)  
 Contact (端子): Phosphor Bronze, Tin plating (磷铜镀锡)  
 Clamp (方块): Brass/Steel (铜/铁), Ni plating (镀镍)  
 Screw (螺丝): Steel, Zinc plating (钢, 镀锌)

PITCH RANGE		NOMINAL DIMENSION RANGE	
IN MM	OVER	IN MM	OVER
TO 6	10	30	60
TO 10	24	TO 30	TO 60
TO 15	±0.15	±0.30	±0.50
TO 20	±0.25	±0.50	±0.70
TO 25	±0.30	±0.50	±1.00
TO 30	±0.30	±0.50	±1.00
TO 40	±0.30	±0.50	±1.00
TO 50	±0.30	±0.50	±1.00
TO 60	±0.30	±0.50	±1.00

**Ordering Information**

**JL2EDGKM-XXX XX G X 1**

Pitch  
 500=5.00PH  
 508=5.08PH  
 No. of pins  
 2P~20P  
 Housing Color  
 B=Black  
 G=Green  
 U=Blue  
 R=Red  
 W=White  
 Y=Yellow  
 O=Orange  
 E=Grey  
 Packing  
 0=Pe bog  
 T=Tube  
 A=Troy

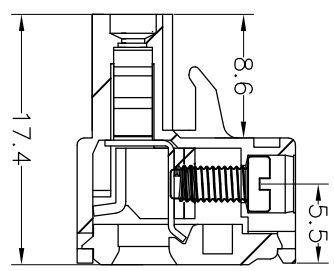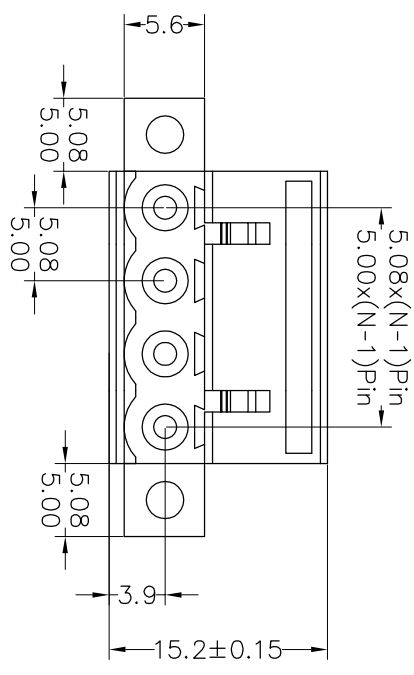

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	SCALE	FIT	PROU.	PART NO.	TITLE:
A0	2017.01.05	NEW DRAWING		Angle	±3°		UNIT	A4		JL2EDGKM-XXXXXXGX1	5.00/5.08 Pitch Female Plugqable Termindl Blocks
1			CHANGE				mm	1/1			

**JILIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992