

1A1A thru 1A7A

General Purpose Plastic Rectifiers
Reverse Voltage 50 to 1000V Forward Current 1.0A

Feature

- * Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- * Construction utilizes void-free molded plastic technique
- * Low reverse leakage
- * High forward surge capability
- * Glass passivated chip
- * High temperature soldering guaranteed:
260°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension

Mechanical Data


Case: JEDEC R-1, molded plastic body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.0063 oz., 0.167 g

Handling precautin:None

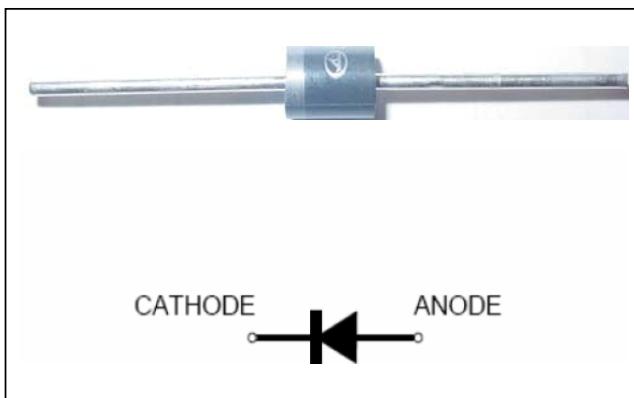

We declare that the material of product compliance with ROHS requirements

1. Electrical Characteristic

Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	1A1A	1A2A	1A3A	1A4A	1A5A	1A6A	1A7A	Unit
device marking code		1A	2A	3A	4A	5A	6A	7A	
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current 0.375" (9.5mm) lead length at T _A = 75°C	IF(AV)								A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}								A
Typical thermal resistance (Note 1)	R _{θJA}								°C/W
Operating junction and storage temperature range	T _J , T _{TSG}								°C

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	1A1A	1A2A	1A3A	1A4A	1A5A	1A6A	1A7A	Unit
Maximum instantaneous forward voltage at 1.0A	V _F				1.10				V
Maximum DC reverse current T _A = 25°C at rated DC blocking voltage T _A = 100°C	I _R				5.0				µA
Typical junction capacitance at 4.0V, 1MHz	C _J				50				PF

NOTES:

1. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

1A1A thru 1A7A

2. Characteristic Curves (TA = 25°C unless otherwise noted)

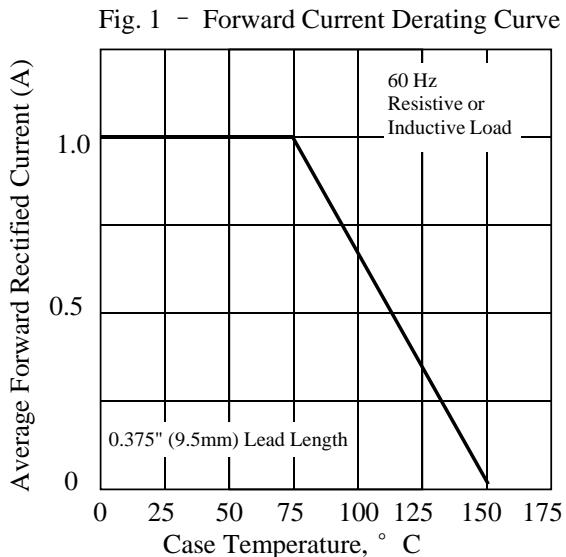


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

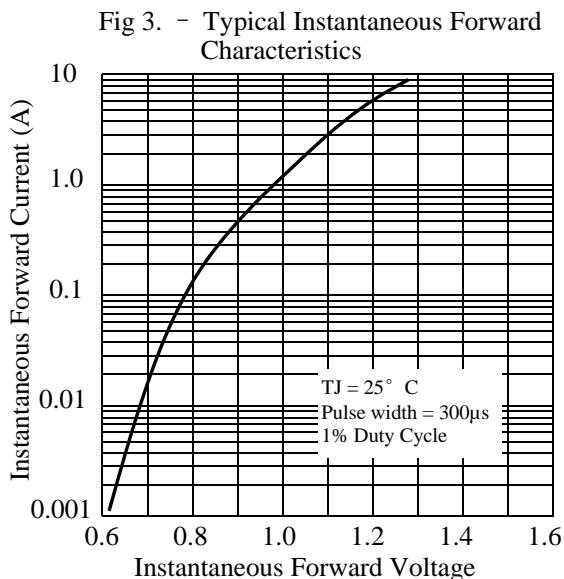
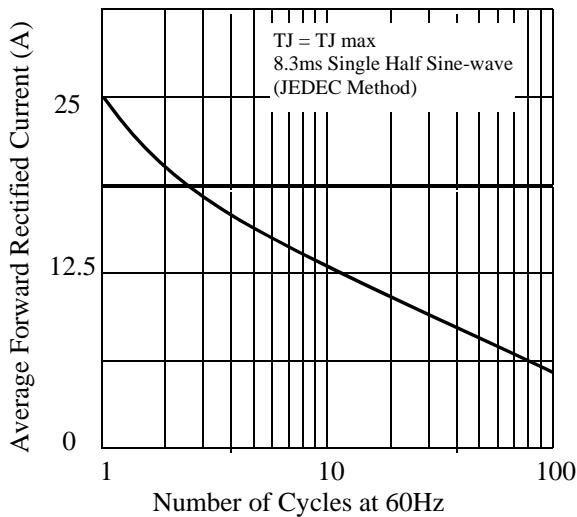


Fig 4. - Typical Reverse Characteristics



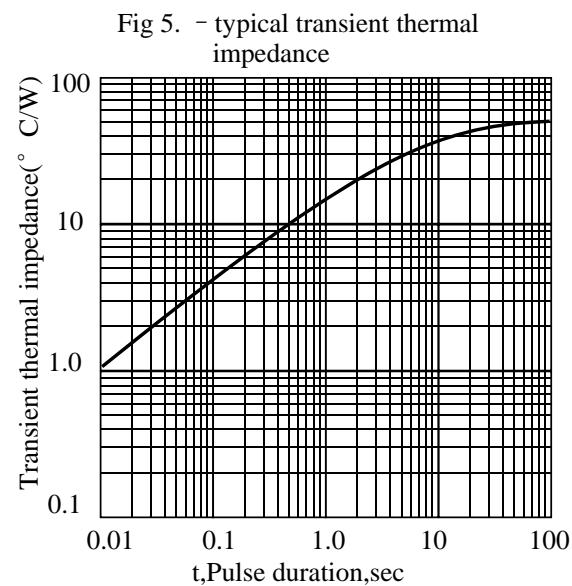



Fig 6. - Typical Junction Capacitance

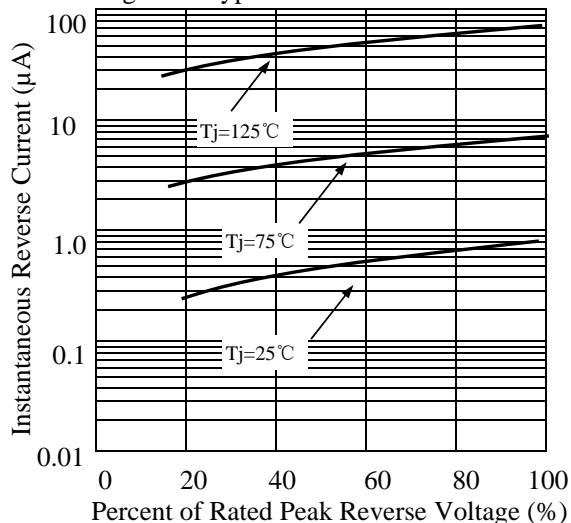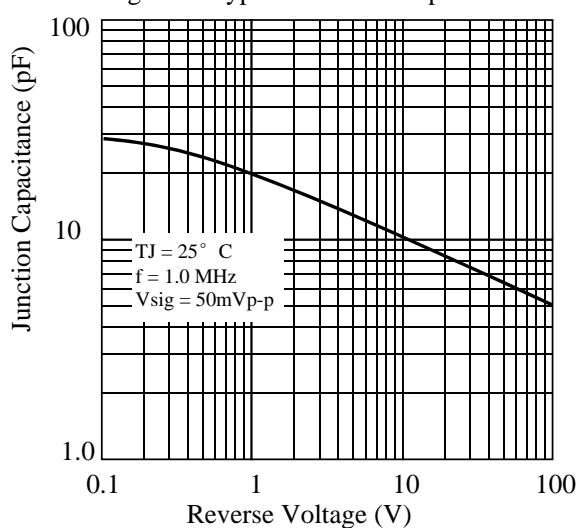

1A1A thru 1A7A

3. dimension:

Package outline

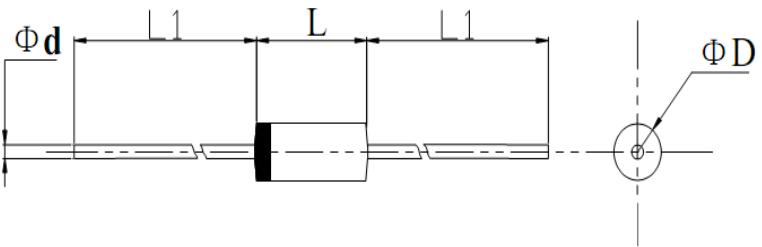

Dimensions				Note: R-1 molded plastic case The marking band indicates the cathode
	inches		mm	
	Min.	Max.	Min.	Max.
L	0.106	0.126	2.7	3.2
L1	0.787	-	20.0	-
ΦD	0.091	0.102	2.3	2.6
Φd	0.021	0.025	0.55	0.65



1A1A thru 1A7A

4、版式次更新记录

版次	更新记录	更新作者	更新日期
1	第一版	谭志伟	2018.02.28