


D20SB10 Thru D20SB100

High Current Glass Passivated Molding Single-Phase Bridge Rectifier

Reverse Voltage 100 to 1000V Forward Current 20 A

FEATURES

- Plastic Package has Underwriters Laboratory Flammability Classification 94V-0
- High current capacity with small package
- Glass passivated chip junctions
- Superior thermal conductivity
- High IFSM

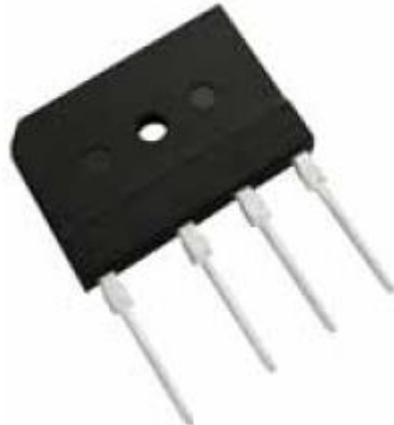

1. Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	Symbol	D20SB10	D20SB20	D20SB40	D20SB60	D20SB80	D20SB100	Unit	
Maximum repetitive voltage	VRRM	100	200	400	600	800	1000	V	
Maximum RMS Voltage	VRMS	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	VDC	100	200	400	600	800	1000	V	
Maximum DC reverse current TA=25 °C	IR	5						μA	
at rated DC blocking voltage TA=125°C		500							
Maximum average forward rectified output current at	With heatsink Tc=100°C ⁽¹⁾ Without heatsink Ta=25°C ⁽²⁾	Io	20						
			3.5						
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	IFSM	300						A	
Rating of fusing (t<8.3ms)	I ² t	373						A ² sec	
Dielectric strength terminals to case, AC 1 minute Current 1mA	Vdia	2.5						KV	
Max instantaneous forward voltage at 10A	VF	1.05						V	
Operating junction temperature	TJ	-55~150						°C	
Maximum thermal on P.C.B. without heat-sink resistance per leg on Al plate heat-sink	R _{θJA}	22						°C/W	
Storage temperature	Tstg	-55~150						°C	
Mounting torque	Tor	Rating Torque : 0.8 (Suggests 0.45~0.65)						N.m	

Notes:

(1) Unit case mounted on aluminum plate heatsink

(2) Units mounted on P.C.B. without heatsink

D20SB10 Thru D20SB100

2. Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 Derating Curve

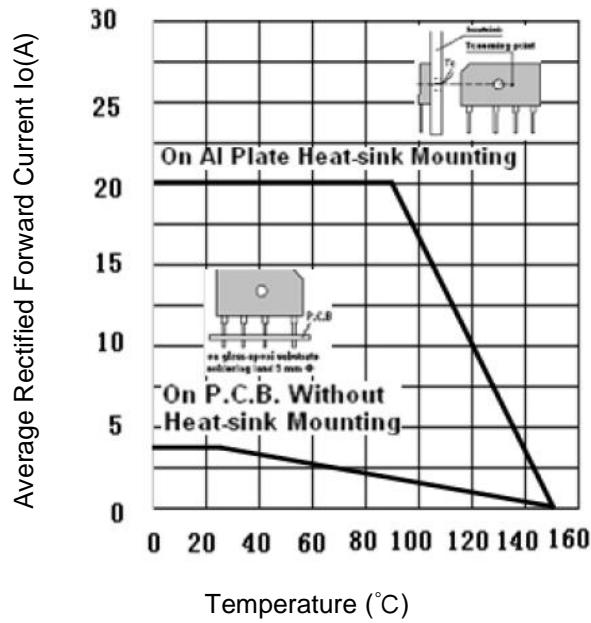


Fig.2 Typical Reverse Characteristics

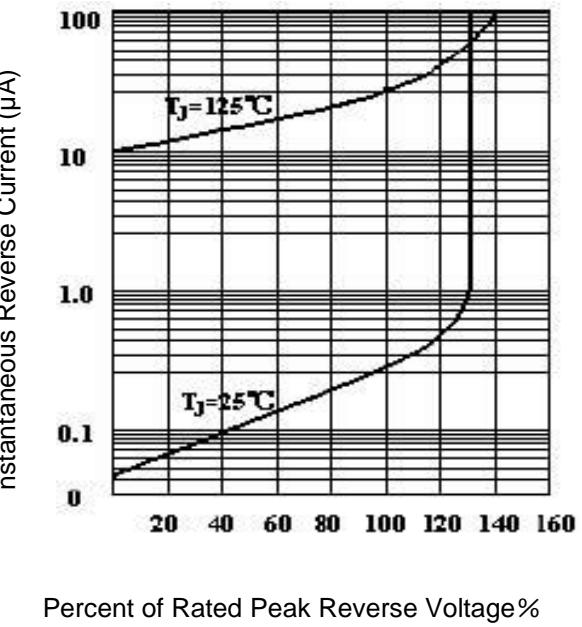


Fig.3 Forward Voltage



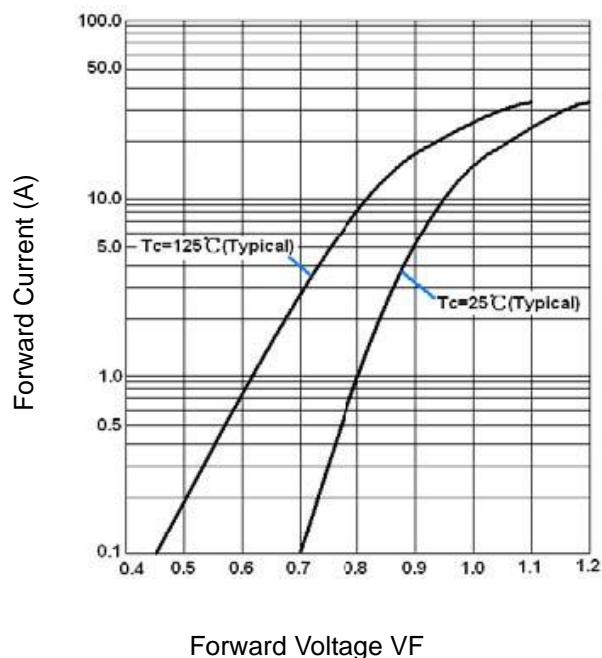


Fig.4 Peak Surge Forward Capability

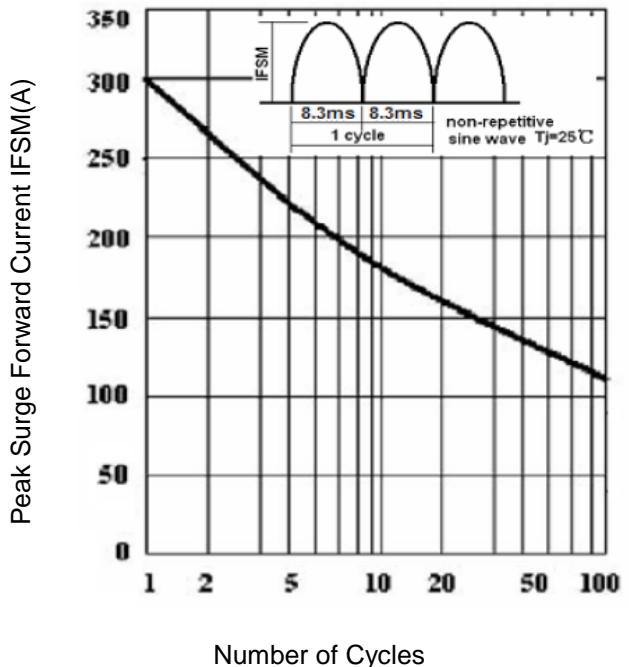

D20SB10 Thru D20SB100

3. Marking Identification

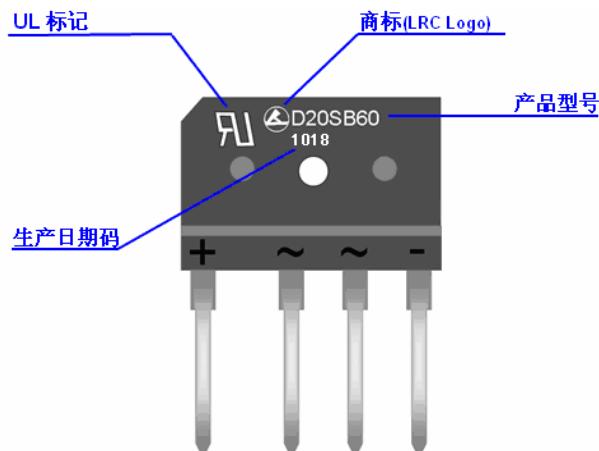

Note:

生产日期码包含4位数字，例如“1010”，前两个数字“10”表示为2010年，另外二个数字“18”是指第18周，即表示该产品为2010年18周生产。

型号： **D** **20** **SB** **80**

bridge reverse voltage=800V
mean: single -in-line bridge
average rectified forward Current=20A
mean: D series bridge

4. Dimension

