


Datasheet of SAW Device

SAW Single Filter for Band41 / Unbalanced / 5pin /1109

Murata PN: SAFFB2G60AA0F0A

Feature

- > Band41 for China
- > 2555-2655MHz



Note: Murata SAW Component is applicable for Cellular /Cordless phone (Terminal) relevant market only.

Please also read caution at the end of this document.



Revision Number	Date	Description
SAFFB2G60AA0F0A_rev. A	Apr-02-2014	■ Initial Release
SAFFB2G60AA0F0A_rev. B	Apr-29-2014	■ Updated for MP
SAFFB2G60AA0F0A_rev. C	Aug-31-2016	■ Updated General Information
SAFFB2G60AA0F0A_rev. D	Mar-15-2017	■ Updated General Information

Operating temperature : -20 to +85 deg.C
 Storage temperature : -40 to +85 deg.C
 Input Power : +10 dBm 8000 h
 D.C. Volatage between the terminals : 3V (25+/-2 deg.C)


Minimum Resistance between the terminals : 10M ohm
 RoHS compliance : Yes
 ESD (ElectroStatic Discharge) sensitive device



Package Dimensions & Recommended Land Pattern

unit: mm

Dimensions

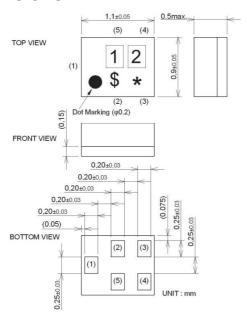

Marking: Laser Printing

*: Month code(Refer to the table A)

\$: Date code(Refer to the table B)

1:2 2:Z

Terminal Number


(1): Unbalanced port

(4): Unbalanced port


Others: GND

Notice) Please refer to Measurement Circuit for Port information in detail.

Land Pattern



Measurement Circuit (Top Thru View)

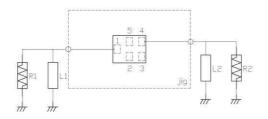

R1 : 50 ohm	L1 :7nH(Ideal inductor)
R2 : 50 ohm	L2 :7nH(Ideal inductor)



Electrical Characteristic < Single Filter >


Rem	Electrical Characteristic > Single Filter >										
Min. Typ.* Max. MHz MHz						Cha	racteri	stics			
Center Frequency		ltem						Unit	Note		
Center Frequency						min.	typ.*	max.			
Section Loss 2555.	Center Frequency								MHz		
2555. to 2655. MHz 2.0 2.3 dB +23 to +27deg.C	Insertion Loss	2555.	to	2655	MHz			2.7			
Ripple Deviation 2555. to 2655. MHz 1.0 2.0 dB 2555. to 2655. MHz 1.0 1.5 dB +23 to +27deg.C 2555. to 2655. MHz 1.5 2.0 2555. to 2655. MHz 1.5 2.0 2555. to 2655. MHz 32 36 dB 2555. to 1225. MHz 32 36 dB 2556. to 1225. MHz 30 33 dB 2560. to 1610. MHz 30 33 dB 2560. to 1610. MHz 30 33 dB 2560. to 1610. MHz 28 32 dB 2570. to 2400. MHz 30 36 dB 2570. to 2473. MHz 35 39 dB 25750. to 2483. MHz 35 39 dB 25750. to 4900. MHz 28 40 dB 25750. to 6000. MHz 28 40 dB 25750. to 6000. MHz 25 35 dB	Intertion Loca			2655	MHz		2.0	2.3	dB	+23 to +27dea C	
VSWR	Rinnle Deviation				MHz					120 to 127 deg.0	
VSWR	Tupple Deviation	2555			MHz					+23 to +27dea C	
2555. to 2655. MHz	VSWR				MHz				45	120 to 127 deg.0	
Absolute Attenuation 10. to 1225. MHz 32 36 dB 1225. to 1560. MHz 30 33 dB 1560. to 1610. MHz 30 33 dB 1610. to 2170. MHz 28 32 dB 2170. to 2400. MHz 30 36 dB 2400. to 2473. MHz 35 39 dB 2456. to 2483. MHz 35 39 dB 2750. to 4900. MHz 28 40 dB 4900. to 6000. MHz 25 35 dB	VOVIIC				MHz						
1225. to 1560. MHz 30 33 dB 1560. to 1610. MHz 30 33 dB 1610. to 2170. MHz 28 32 dB 2170. to 2400. MHz 30 36 dB 2400. to 2473. MHz 35 39 dB 2456. to 2483. MHz 35 39 dB 2750. to 4900. MHz 28 40 dB 4900. to 6000. MHz 25 35 dB	Absolute Attenuation					32		2.0	dВ		
1560. to 1610. MHz 30 33 dB 1610. to 2170. MHz 28 32 dB 2170. to 2400. MHz 30 36 dB 2400. to 2473. MHz 35 39 dB 2456. to 2483. MHz 35 39 dB 2750. to 4900. MHz 28 40 dB 4900. to 6000. MHz 25 35 dB	Absolute Attenuation										
1610. to 2170. MHz 28 32 dB 2170. to 2400. MHz 30 36 dB 2400. to 2473. MHz 35 39 dB 2456. to 2483. MHz 35 39 dB 2750. to 4900. MHz 28 40 dB 4900. to 6000. MHz 25 35 dB		1560		1610	MHz		33				
2170. to 2400. MHz 30 36 dB 2400. to 2473. MHz 35 39 dB 2456. to 2483. MHz 35 39 dB 2750. to 4900. MHz 28 40 dB 4900. to 6000. MHz 25 35 dB				2170	MUZ		32				
2400. to 2473. MHz 35 39 dB 2456. to 2483. MHz 35 39 dB 2750. to 4900. MHz 28 40 dB 4900. to 6000. MHz 25 35 dB		2170		2400	MILIZ		36				
2456. to 2483. MHz 35 39 dB 2750. to 4900. MHz 28 40 dB 4900. to 6000. MHz 25 35 dB					N/ILIZ						
2750. to 4900. MHz 28 40 dB 4900. to 6000. MHz 25 35 dB		2400.		2473.	N/LI-z	35	30				
4900. to 6000. MHz 25 35 dB											
OUUV. (L) OUUV. MIHZ 23 32				0000.	IVIMZ		30				
		0000.	τO	0000.	IVIHZ	∠3	32		uВ		
		-									


^{*} Typical value at 25±2deg.C



Electrical Characteristic

< Single Filter >

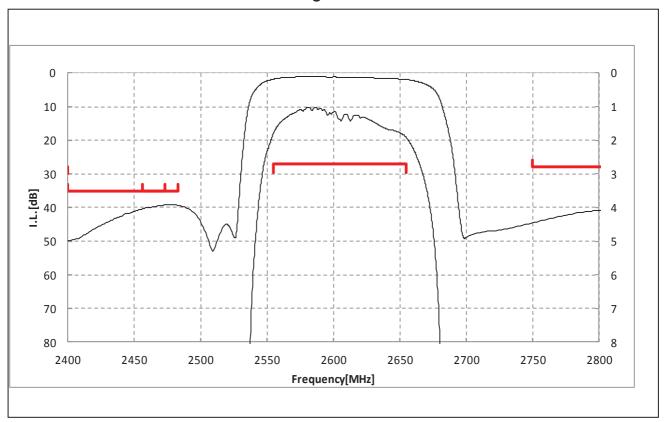


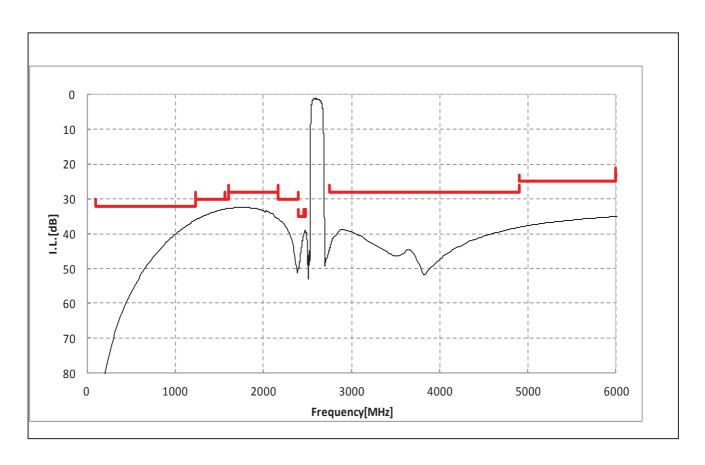




Dimensions of Tape & Reel unit: mm


Carrier Tape

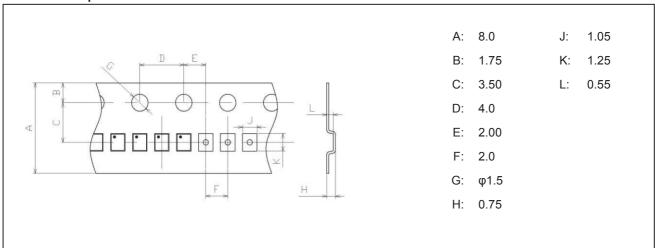

Tape

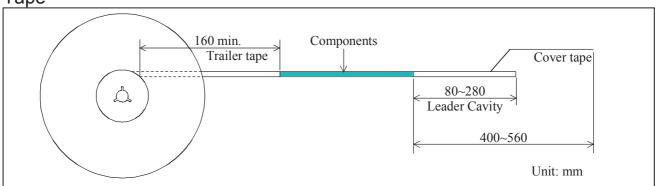

Reel

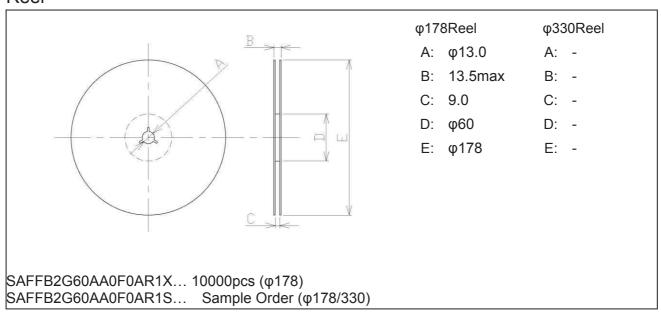



Marking Code

_					4.1	\sim .
	0 h	_	Λ.	N /I 🔿	n+h	(,, \sim \sim
	211	-	Δ	11////	1 1 I I I	1 ()(14
	ab		\neg .	IVIO		Code

2013	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2017 2021	Α	В	С	D	Е	F	G	Н	J	K	L	М
2014	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2018 2022	N	Р	Q	R	S	Т	U	V	W	Х	Υ	Z
2015	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2019 2023	а	b	10	d	е	f	g	h	j	k	Q	m
2016	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2020 2024	n	P	8	r	d	t	u	U	ω	æ	y	8

Table B: Date Code

date	1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th	
code	Α	В	С	D	Е	F	G	Н	J	K	
date	11th	12th	13th	14th	15th	16th	17th	18th	19th	20th	
code	┙	М	Ν	Р	Q	R	S	Т	J	V	
date	21st	22nd	23rd	24th	25th	26th	27th	28th	29th	30th	31st
code	W	Χ	Υ	Z	а	b	Ċ	d	е	f	g

Important Notice (1/2)

PLEASE READ THIS NOTICE BEFORE USING OUR PRODUCTS.

Please make sure that your product has been evaluated and confirmed from the aspect of the fitness for the specifications of our product when our product is mounted to your product. All the items and parameters in this product specification/datasheet/catalog have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment specified in this specification. You are requested not to use our product deviating from the condition and the environment specified in this specification. Please note that the only warranty that we provide regarding the products is its conformance to the specifications provided herein. Accordingly, we shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this specification.

WE HEREBY DISCLAIMS ALL OTHER WARRANTIES REGARDING THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THAT THEY ARE DEFECT-FREE, OR AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS.

The product shall not be used in any application listed below which requires especially high reliability for the prevention of such defect as may directly cause damage to the third party's life, body or property. You acknowledge and agree that, if you use our products in such applications, we will not be responsible for any failure to meet such requirements.

Furthermore, YOU AGREE TO INDEMNIFY AND DEFEND US AND OUR AFFILIATES AGAINST ALL CLAIMS, DAMAGES, COSTS, AND EXPENSES THAT MAY BE INCURRED, INCLUDING WITHOUT LIMITATION, ATTORNEY FEES AND COSTS, DUE TO THE USE OF OUR PRODUCTS IN SUCH APPLICATIONS.



Important Notice (2/2)

- Aircraft equipment.
- Aerospace equipment
- Undersea equipment.
- Power plant control equipment Medical equipment.
- Transportation equipment (vehicles, trains, ships, elevator, etc.).
- Traffic signal equipment.
- Disaster prevention / crime prevention equipment.
- Burning / explosion control equipment
- Application of similar complexity and/ or reliability requirements to the applications listed in the above.

We expressly prohibit you from analyzing, breaking, Reverse-Engineering, remodeling altering, and reproducing our product. Our product cannot be used for the product which is prohibited from being manufactured, used, and sold by the regulations and laws in the world.

Please do not use the product in molding condition.

This product is ESD (ElectroStatic Discharge) sensitive device.

When you install or measure this, you should be careful not to add antistatic electricity or high voltage. Please be advised that you had better check anti serge voltage.

We do not warrant or represent that any license, either express or implied, is granted under any our patent right, copyright, mask work right, or our other intellectual property right relating to any combination, machine, or process in which our products or services are used. Information provided by us regarding third-party products or services does not constitute a license from us to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from us under our patents or other intellectual property.

Please do not use our products, our technical information and other data provided by us for the purpose of developing of mass-destruction weapons and the purpose of military use.

Moreover, you must comply with "foreign exchange and foreign trade law", the "U.S. export administration regulations", etc.

Please note that we may discontinue the manufacture of our products, due to reasons such as end of supply of materials and/or components from our suppliers.

Customer acknowledges that Murata will, if requested by you, conduct a failure analysis for defect or alleged defect of Products only at the level required for consumer grade Products, and thus such analysis may not always be available or be in accordance with your request (for example, in cases where the defect was caused by components in Products supplied to Murata from a third party).

The product shall not be used in any other application/model than that of claimed to Murata.

Customer acknowledges that engineering samples may deviate from specifications and may contain defects due to their development status.

We reject any liability or product warranty for engineering samples.

In particular we disclaim liability for damages caused by

- •the use of the engineering sample other than for evaluation purposes, particularly the installation or integration in the product to be sold by you,
 - ·deviation or lapse in function of engineering sample,
 - ·improper use of engineering samples.

We disclaim any liability for consequential and incidental damages.

If you can't agree the above contents, you should inquire our sales.