



TECH PUBLIC

台舟电子

TPS717 Serirs

450mA 2uA Higt PSRR Voltage Regulator

[www.sot23.com.tw](http://www.sot23.com.tw)

## General Description

The TPS717 is a low-dropout (LDO) voltage regulator with enable function that operates from a 1.2V to 5.5V supply. It provides up to 450mA of output current in miniaturized packaging.

The feature of 2 $\mu$ A low quiescent current and 0.5 $\mu$ A shutdown current are ideal for the battery application with long service life. The other features include current limit function, over temperature protection and output discharge function.

## Features

- 2 $\mu$ A Ground Current at no Load
- $\pm 2\%$  Output Accuracy
- 450mA Output Current
- 10nA Disable Current (by option)
- Wide Operating Input Voltage Range: 1.2V to 5.5V
- Dropout Voltage: 0.18V at 300mA ( $V_{OUT}=3.3V$ )
- Support Fixed Output Voltage 1.2V, 1.5V, 1.6V, 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Stable with Ceramic or Tantalum Capacitor
- Current Limit Protection
- Over-Temperature Protection
- SOT353 Packages Available

## Applications

- Portable, Battery Powered Equipment
- Low Power Microcontrollers
- Laptop, Palmtops and PDAs
- Wireless Communication Equipment
- Audio/Video Equipment

## Ordering Information

**TPS71733DCKR-TP**

TP=TECH PUBLIC

DCKR= SOT353 Package

Output voltage: 12=1.2V

15=1.5V

18=1.8V


30=3.0V

33=3.3V


XX=X.XV



## BLOCK DIAGRAM

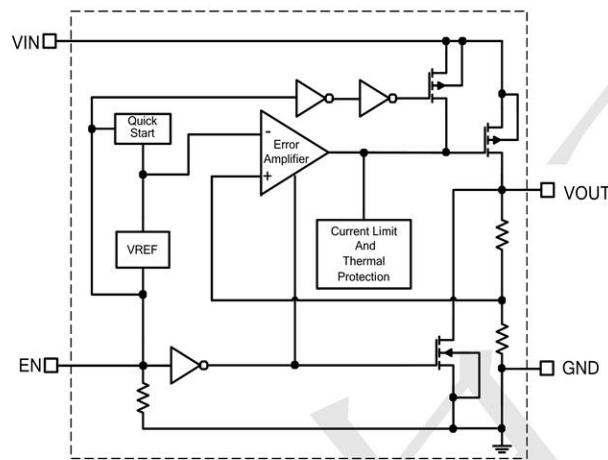

## PIN CONFIGURATION

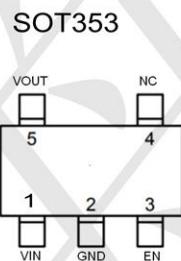

PIN	NAME	FUNCTION
1	VIN	Power Input Voltage.
2	GND	Ground.
3	EN	Enable Control Input.
4	NC	No Connection.
5	VOUT	Output Voltage.



TECH PUBLIC

台舟电子

TPS717 Serirs

450mA 2uA Higt PSRR Voltage Regulator

[www.sot23.com.tw](http://www.sot23.com.tw)

### Absolute Maximum Rating ( $T_A=25^\circ\text{C}$ unless otherwise noted)

VIN Pin to GND Pin Voltage .....	-0.3V to 6.5V
VOUT Pin and EN Pin to GND Pin Voltage .....	-0.3V to 6V
VOUT Pin to VIN Pin Voltage .....	-6V to 0.3V
Storage Temperature Range .....	-60°C~150°C
Lead Temperature (Soldering, 10 sec) .....	260°C
Junction Temperature .....	150°C
Operating Ambient Temperature Range $T_A$ .....	-40°C~85°C
Thermal Resistance Junction to Case, $R_{\theta_{JC}}$ SOT-353 .....	175°C/W
Thermal Resistance Junction to Ambient, $R_{\theta_{JA}}$ .....	
SOT23-5 .....	330°C/W



TECH PUBLIC

台舟电子

TPS717 Serirs

450mA 2uA Higt PSRR Voltage Regulator

www.sot23.com.tw

### Electrical Characteristics ( $T = 25^\circ\text{C}$ unless otherwise noted)

( $V_{IN}=5\text{V}$ ,  $V_{EN}=5\text{V}$ ,  $T_A=25^\circ\text{C}$ , unless otherwise specified) (Note 1)

PARAMETER	TEST CONDITIONS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage		$V_{IN}$	1.2		5.5	V
DC Output Voltage Accuracy	$I_{LOAD}=0.1\text{mA}$		-2		2	%
SNS Input Current	$SNS=V_{OUT}$	$I_{SNS}$		0.5		$\mu\text{A}$
Dropout Voltage (Note 2)	$I_{LOAD}=300\text{mA}, V_{OUT}\geq 3\text{V}$	$V_{DROP\_3\text{V}}$		0.18		V
	$I_{LOAD}=300\text{mA}, V_{OUT}=2.8\text{V}$	$V_{DROP\_2.8\text{V}}$		0.23		
	$I_{LOAD}=300\text{mA}, V_{OUT}=2.5\text{V}$	$V_{DROP\_2.5\text{V}}$		0.23		
	$I_{LOAD}=300\text{mA}, V_{OUT}=1.8\text{V}$	$V_{DROP\_1.8\text{V}}$		0.28		
	$I_{LOAD}=300\text{mA}, V_{OUT}=1.5\text{V}$	$V_{DROP\_1.5\text{V}}$		0.36		
	$I_{LOAD}=300\text{mA}, V_{OUT}=1.2\text{V}$	$V_{DROP\_1.2\text{V}}$		0.45		
GND Current	$I_{LOAD}=0\text{mA}$	$I_Q$		2		$\mu\text{A}$
Shutdown GND Current	$V_{EN}=0\text{V}, V_{OUT}=0\text{V}$	$I_{SD}$		0.1	0.5	$\mu\text{A}$
$V_{OUT}$ Shutdown Leakage Current	$V_{EN}=0\text{V}, V_{OUT}=0\text{V}$	$I_{LEAK}$		0.1	0.5	$\mu\text{A}$
Enable Threshold Voltage	EN Rising	$V_{IH}$	1.0			V
	EN Falling	$V_{IL}$			0.4	
EN Input Current	$V_{EN}=5\text{V}$	$I_{EN}$		10	100	nA
Line Regulation	$I_{LOAD}=30\text{mA}, 1.5\text{V}\leq V_{IN}\leq 5.5\text{V}$ or $(V_{OUT}+0.2\text{V})\leq V_{IN}\leq 5.5\text{V}$	$\Delta_{LINE}$		0.2		%
Load Regulation	$10\text{mA}\leq I_{LOAD}\leq 300\text{mA}$	$\Delta_{LOAD}$		0.2		%
Output Current Limit	$V_{OUT}=0\text{V}$	$I_{LIM}$	450	500		mA
Power Supply Rejection Ratio	$V_{OUT}=1.2\text{V}, I_{LOAD}=5\text{mA}, V_{IN}=2\text{V}, f=100\text{Hz}$	PSRR		80		dB
	$V_{OUT}=1.2\text{V}, I_{LOAD}=5\text{mA}, V_{IN}=2\text{V}, f=1\text{kHz}$			75		
Output Voltage Noise	$V_{IN}=3.5\text{V}, I_{LOAD}=0.1\text{A}, BW=10\text{Hz to } 100\text{kHz}, C_{OUT}=1\mu\text{F}, V_{OUT}=1.2\text{V}$			80		$\mu\text{V}_{\text{RMS}}$
	$V_{IN}=3.5\text{V}, I_{LOAD}=0.1\text{A}, BW=10\text{Hz to } 100\text{kHz}, C_{OUT}=1\mu\text{F}, V_{OUT}=2.8\text{V}$			120		
Thermal Shutdown Temperature	$I_{LOAD}=10\text{mA}$	$T_{SD}$		155		$^\circ\text{C}$
Thermal Shutdown Hysteresis	$I_{LOAD}=10\text{mA}$	$\Delta T_{SD}$		15		$^\circ\text{C}$
Discharge Resistance	$V_{EN}=0\text{V}, V_{OUT}=0.1\text{V}$			100		$\Omega$



## TYPICAL APPLICATION

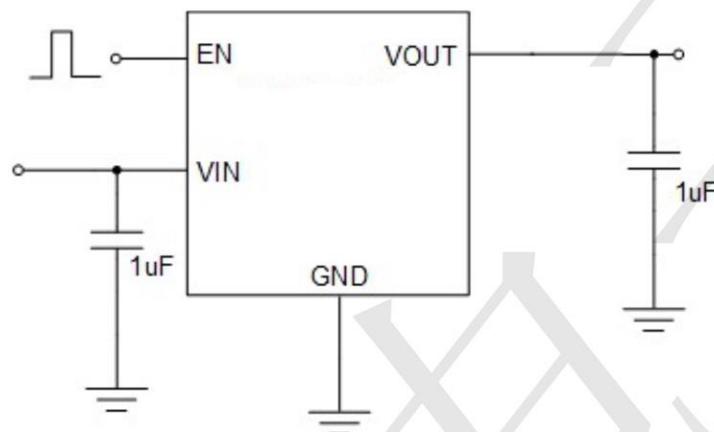


Figure 2: Application circuit of Fixed V<sub>out</sub> LDO with enable function









**TECH PUBLIC**

台舟电子

**TPS717 Serirs**

450mA 2uA Higt PSRR Voltage Regulator

[www.sot23.com.tw](http://www.sot23.com.tw)

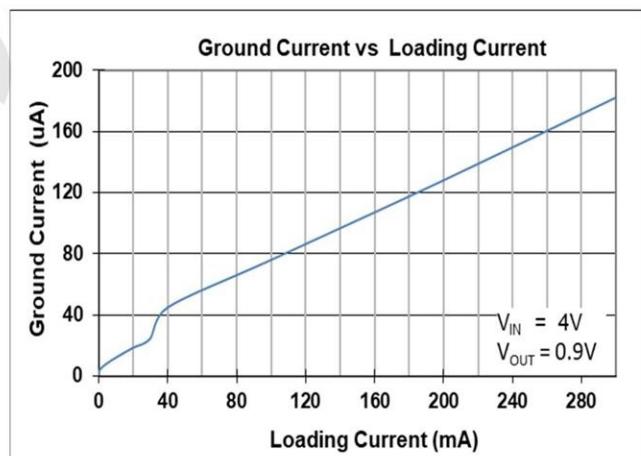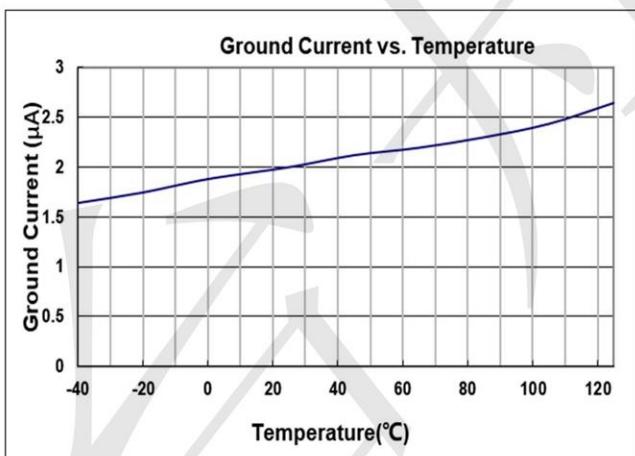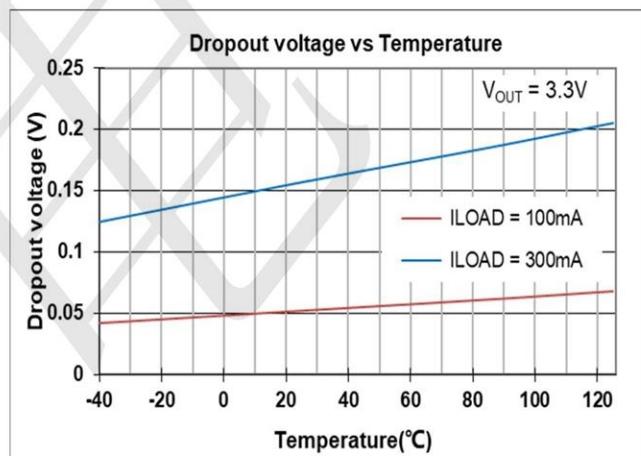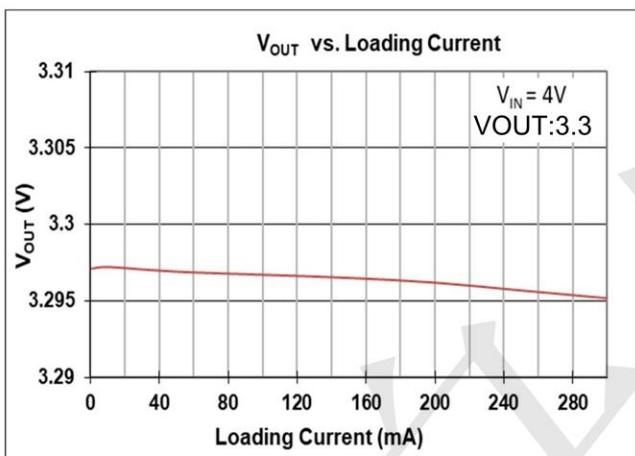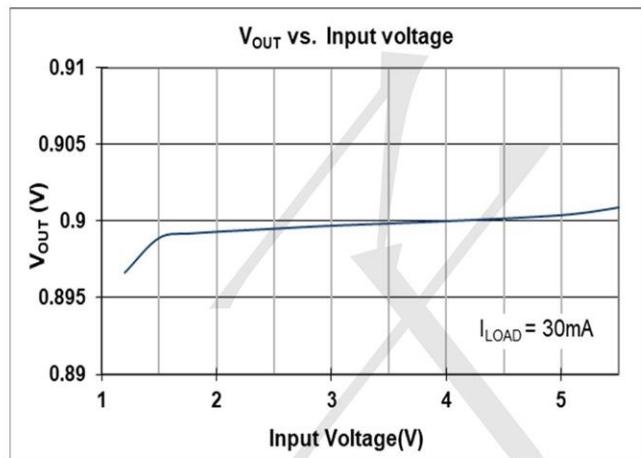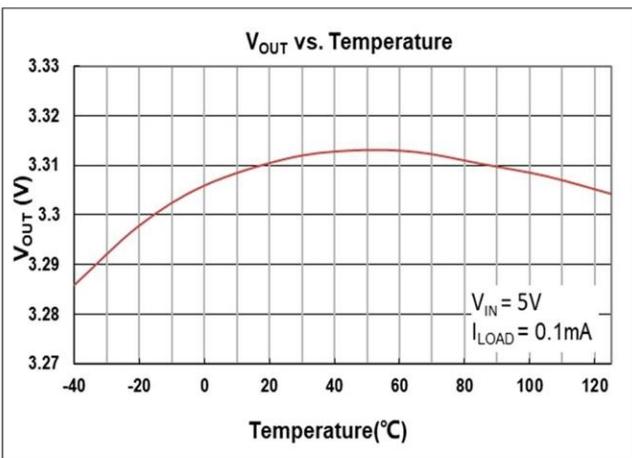







**TECH PUBLIC**

台舟电子


**TPS717 Series**

450mA 2uA Higt PSRR Voltage Regulator


[www.sot23.com.tw](http://www.sot23.com.tw)

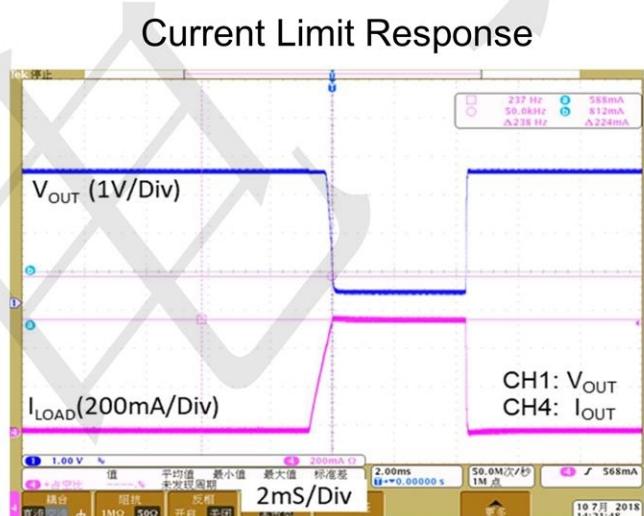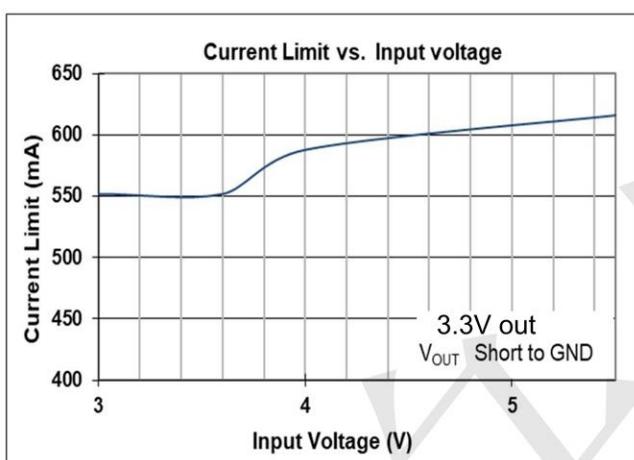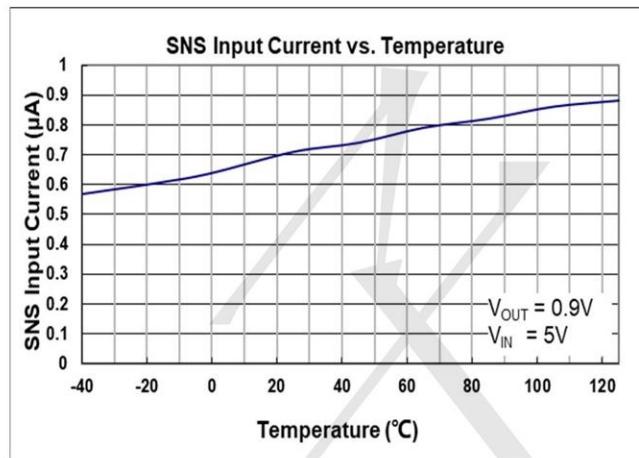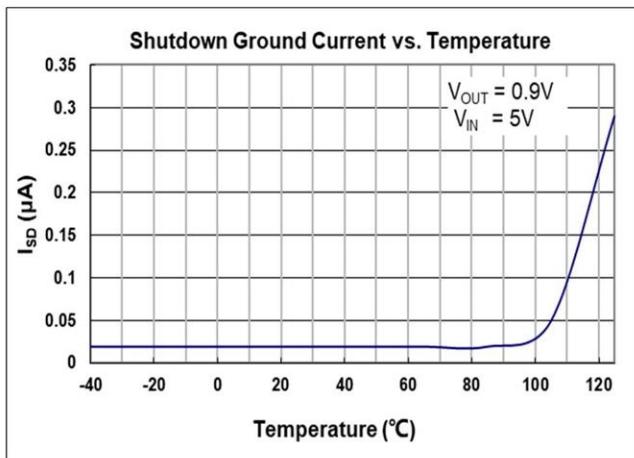

### Load Transient Response I

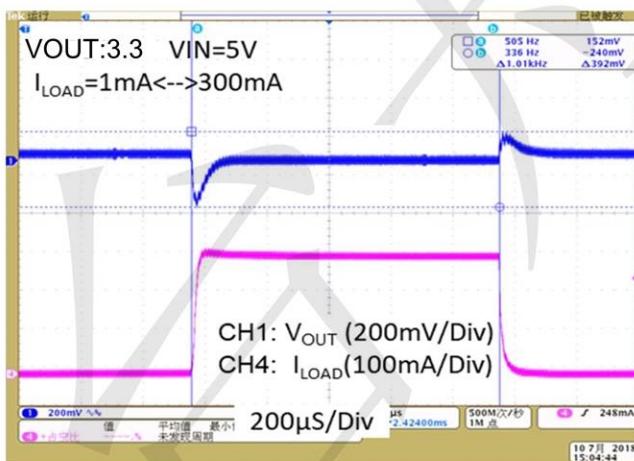

### Load Transient Response II

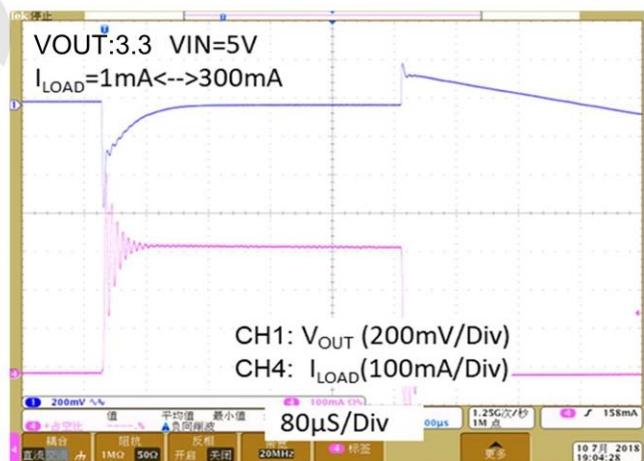



TECH PUBLIC


台舟电子

TPS717 Serirs


450mA 2uA Higt PSRR Voltage Regulator

[www.sot23.com.tw](http://www.sot23.com.tw)

### Line Transient Response

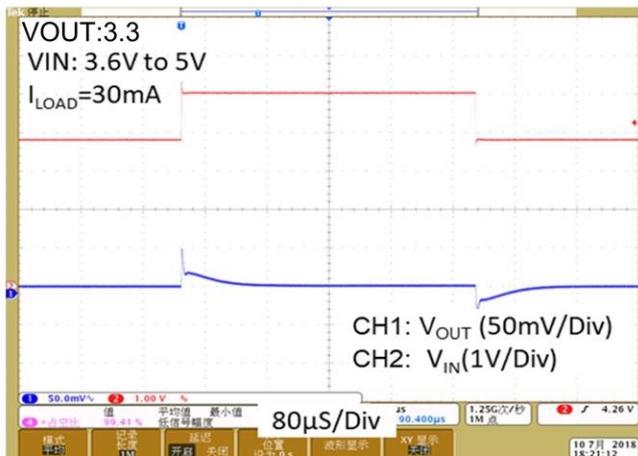

### V<sub>OUT</sub> Turn On/Off by EN

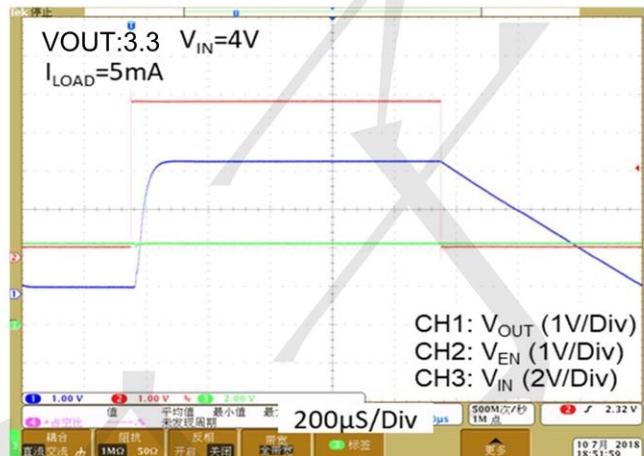




TECH PUBLIC

台舟电子

TPS717 Serirs

450mA 2uA Higt PSRR Voltage Regulator

[www.sot23.com.tw](http://www.sot23.com.tw)

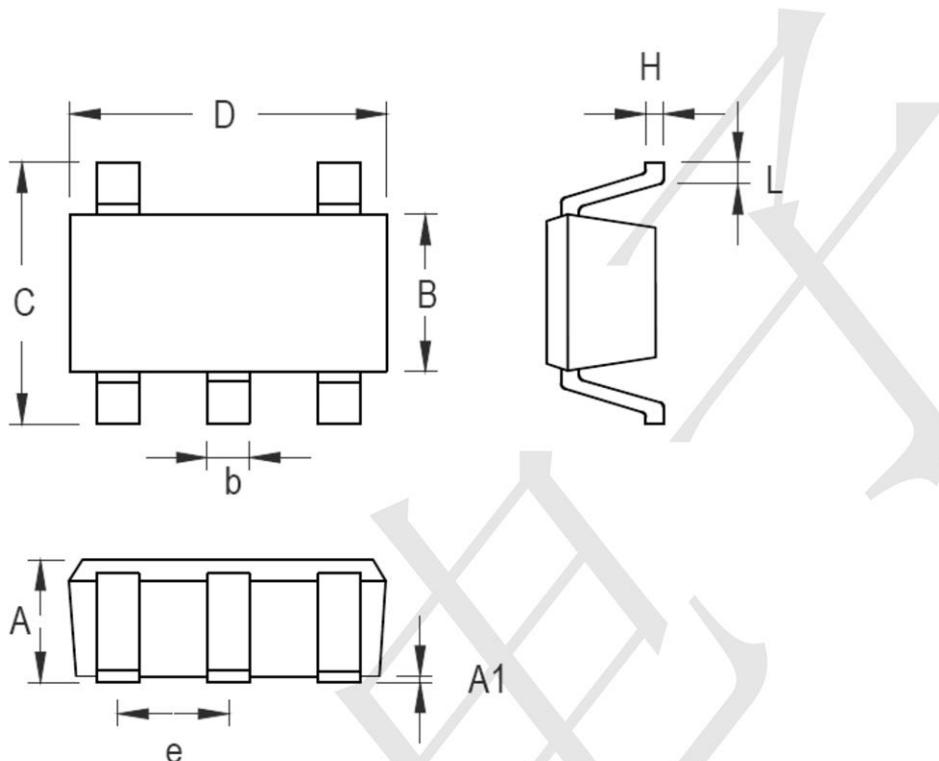

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.800	1.100	0.031	0.044
A1	0.000	0.100	0.000	0.004
B	1.150	1.350	0.045	0.054
b	0.150	0.400	0.006	0.016
C	1.800	2.450	0.071	0.096
D	1.800	2.250	0.071	0.089
e	0.650		0.026	
H	0.080	0.260	0.003	0.010
L	0.210	0.460	0.008	0.018