


**DTC123YCA**





## **TRANSISTOR(NPN)**

### **FEATURES**

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device designs easy

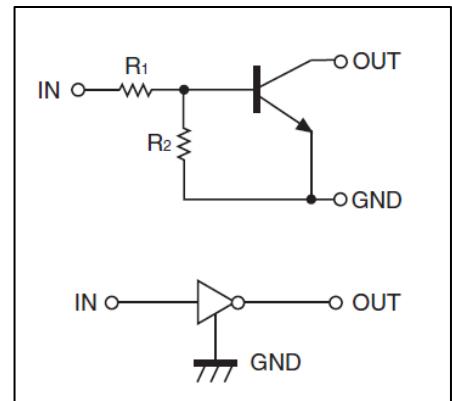

### **PIN CONNECTIONS and MARKING**

<b>DTC123YE</b>		<b>SOT-523</b>	<b>DTC123YUA</b>		<b>SOT-323</b>
<b>DTC123YCA</b>		<b>SOT-23</b>	<b>DTC123YKA</b>		<b>SOT-23-3L</b>

**ORDERING INFORMATION**

<b>Part Number</b>	<b>MARKING<sup>(1)</sup></b>	<b>Package</b>	<b>Packing Method</b>	<b>Pack Quantity</b>
DTC123YE	<b>62</b>	SOT-523	Reel	3000pcs/Reel
DTC123YUA	<b>62</b>	SOT-323	Reel	3000pcs/Reel
DTC123YKA	<b>62</b>	SOT-23-3L	Reel	3000pcs/Reel
DTC123YCA	<b>62</b>	SOT-23	Reel	3000pcs/Reel

Notes: (1). Solid dot = Green molding compound device, if none, the normal device.

(2). XXX=Code







**MAXIMUM RATINGS(Ta=25°C unless otherwise noted)**

<b>Symbol</b>	<b>Parameter</b>	<b>Limits(DTC123Y□)</b>						<b>Unit</b>
		<b>M</b>	<b>E</b>	<b>UA</b>	<b>KA</b>	<b>CA</b>	<b>SA</b>	
<b>V<sub>CC</sub></b>	Supply Voltage			50				V
<b>V<sub>IN</sub></b>	Input Voltage			-5~+12				V
<b>I<sub>O</sub></b>	Output Current			100				mA
<b>P<sub>D</sub></b>	Power Dissipation	100	150	200	200	200	300	mW
<b>T<sub>J</sub>, T<sub>stg</sub></b>	Operation Junction and Storage Temperature Range			-55~+150				°C

**ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)**

<b>Parameter</b>	<b>Symbol</b>	<b>Conditions</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
<b>Input voltage</b>	V <sub>I(off)</sub>	V <sub>CC</sub> =5V, I <sub>O</sub> =100μA	0.3			V
	V <sub>I(on)</sub>	V <sub>O</sub> =0.3V, I <sub>O</sub> =20mA			3	V
<b>Output voltage</b>	V <sub>O(on)</sub>	I <sub>O</sub> /I <sub>I</sub> =10mA/0.5mA		0.1	0.3	V
<b>Input current</b>	I <sub>I</sub>	V <sub>I</sub> =5V			3.8	mA
<b>Output current</b>	I <sub>O(off)</sub>	V <sub>CC</sub> =50V, V <sub>I</sub> =0			0.5	μA
<b>DC current gain</b>	G <sub>I</sub>	V <sub>O</sub> =5V, I <sub>O</sub> =10mA	33			
<b>Input resistance</b>	R <sub>1</sub>		1.54	2.2	2.86	kΩ
<b>Resistance ratio</b>	R <sub>2</sub> /R <sub>1</sub>		3.6	4.5	5.5	
<b>Transition frequency</b>	f <sub>T</sub>	V <sub>O</sub> =10V, I <sub>O</sub> =5mA, f=100MHz		250		MHz

## TYPICAL CHARACTERISTICS

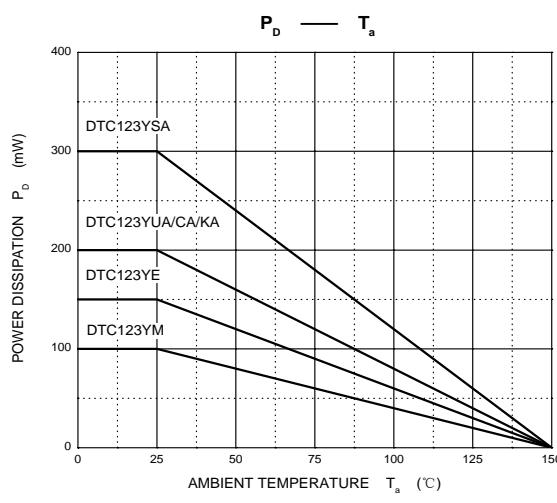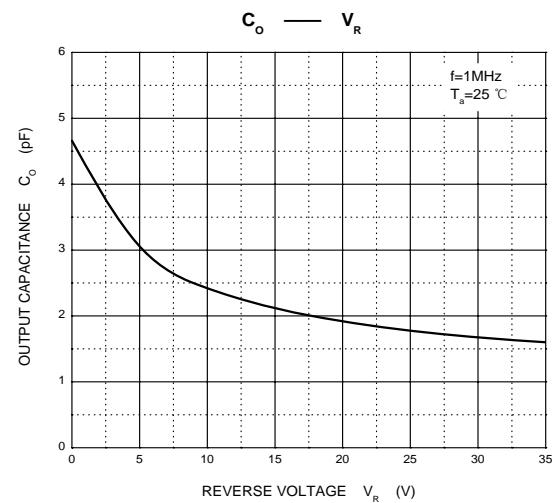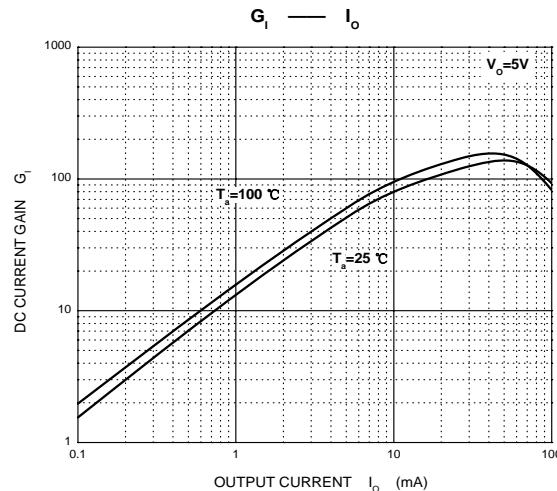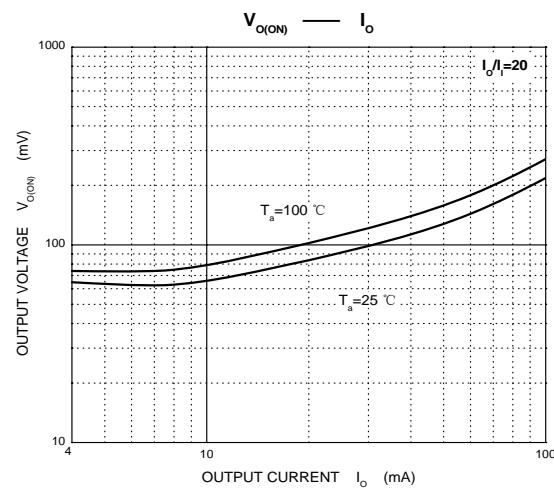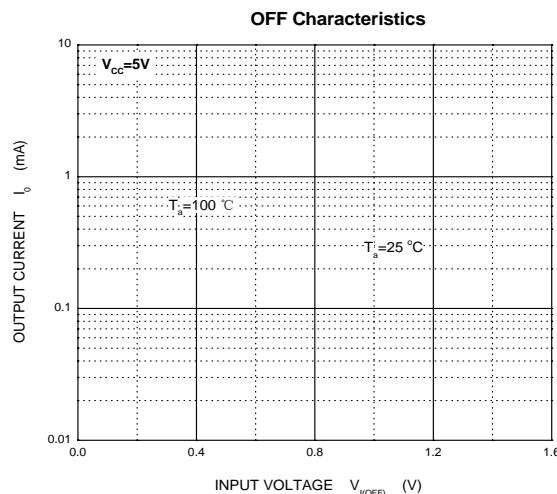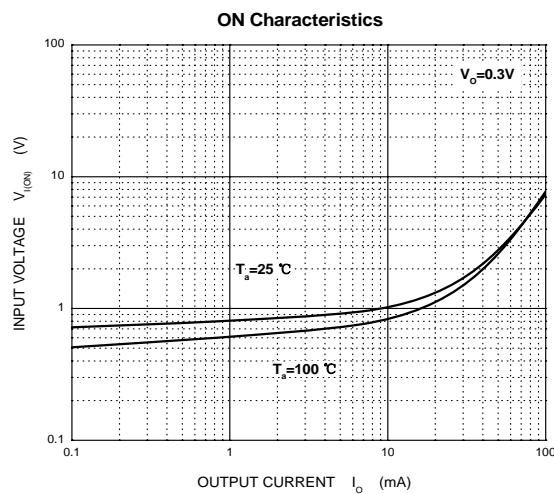

## PACKAGE OUTLINE

**Plastic surface mounted package; 3 leads**

**SOT-23**

