



## Low Power Dual Operational Amplifier

### GENERAL DESCRIPTION

The HT358A consists of two independent, high-gain, internally frequency-compensated operational amplifiers, which were designed specifically to operate from a single power supply over a wide range of voltages. The device operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage. Its application areas include transducer amplifiers, dc gain blocks and all the conventional operational amplifier circuits.


### FEATURES

- Wide range of supply voltages
- Low supply current drain independent of the supply voltage
- Low input biasing current
- Low input offset voltage and offset current
- Input common-mode voltage range including the Ground
- Differential input voltage range equal to the power supply voltage
- DC voltage gain 100 V/mV (typ.)
- Internal frequency compensation


### APPLICATIONS

- Transducer amplifiers
- Dc gain blocks
- Conventional op-amp circuits in single power supply systems


### Package pin connections

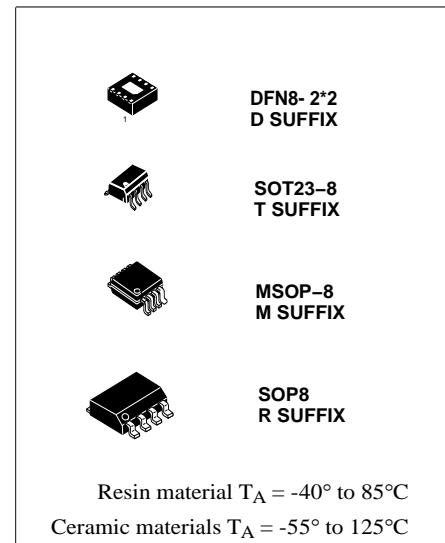

DFN2x2 8L

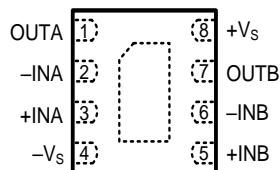

SOP-8L / MSOP-8L/SOT23-8

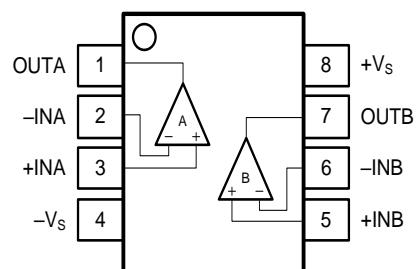



**ABSOLUTE MAXIMUM RATINGS**

Parameter	Symbol	Ratings
Supply voltage	$V_{CC}$	45V
Input voltage	$V_{IN}$	-0.3V to +45V
Input current	$I_{IN}$	50mA at $V_{IN} = -0.3V$
Maximum output current	$I_{OUT}$	100mA
Maximum Operating Junction Temperature	$T_J$	-40°C to 125°C
Storage Temperature Range	$T_{STG}$	-65°C to 150°C
Lead Temperature (soldering, 10 seconds)	-	260°C
ESD protection (HBM)	-	700V

**RECOMMENDED OPERATING CONDITIONS**

Parameter	Symbol	Ratings
Input Voltage	$V_{IN}$	40V
Junction Temperature	$T_J$	-40°C to +85°C

**ELECTRICAL CHARACTERISTICS**

(At specified free-air temperature,  $V_{CC} = 5V$ , unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input Offset Voltage	$V_{IO}$	$V_{CC} = 5V$ to MAX, $V_{IC} = V_{ICR(min)}$ , $V_O = 1.4V$	25°C		3	7
			Full range		9	mV
Average Temperature Coefficient of Input Offset Voltage	$\alpha V_{IO}$		Full range		7	μV/°C
Input Offset Current	$I_{IO}$	$V_O = 1.4V$	25°C		2	50
			Full range		150	nA
Average Temperature Coefficient of Input Offset Current	$\alpha I_{IO}$		Full range		10	pA/°C
Input Bias Current	$I_{IB}$	$V_O = 1.4V$	25°C		-20	-250
			Full range			-500
Common-mode Input Voltage Range	$V_{ICR}$	$V_{CC} = 5V$ to MAX	25°C	0 to $V_{CC}-1.5$		V
			Full range	0 to $V_{CC}-2.0$		
High-level Output Voltage	$V_{OH}$	$V_{CC} = MAX$ , $R_L = 2k\Omega$	Full range	26		V
			Full range	27	28	
Low-level Output Voltage	$V_{OL}$	$R_L \geq 10k\Omega$	Full range		5	20
Large-signal Differential Voltage Amplification	$A_{VD}$	$V_{CC} = 15V$ , $V_{OUT} = 1V$ to $11V$ , $R_L \geq 2k\Omega$	25°C	25	100	
			Full range	15		V/mV
Common-mode Rejection Ratio	CMRR	$V_{CC} = 5V$ to MAX, $V_{IC} = V_{ICR(min)}$	25°C	65	80	dB
Supply Voltage Rejection Ratio ( $\Delta V_{CC}/\Delta V_{IO}$ )	$k_{SVR}$	$V_{CC} = 5V$ to MAX	25°C	65	100	dB
Crosstalk Attenuation	$V_{O1}/V_{O2}$	$f = 1$ kHz to 20 kHz	25°C		120	dB
Output Current	$I_{OUT}$	$V_{CC} = 15V$ , $V_{ID} = 1V$ , $V_O = 0$	25°C	-30	-50	
		Full range	25°C	-20		
		$V_{CC} = 15V$ , $V_{ID} = -1V$ , $V_O = 15V$	25°C	15	35	
		Full range	25°C	7		
		$V_{CC} = 15V$ , $V_{ID} = -1V$ , $V_O = 2V$	25°C	15	28	
Short-circuit Output Current	$I_{OS}$	$V_{ID} = -1V$ , $V_O = 15V$	25°C	12	50	μA
		$V_{ID} = -1V$ , $V_O = 200mV$	25°C		70	mA

Supply Current (two amplifiers)	I <sub>CC</sub>	V <sub>O</sub> = 2.5V, No load V <sub>CC</sub> = MAX, V <sub>O</sub> = 0.5V <sub>CC</sub> , No load	Full range		0.7	1.2	mA
Slew Rate	SR	V <sub>CC</sub> = 15V, V <sub>IN</sub> = 0.5 to 3V, R <sub>L</sub> = 2kΩ, C <sub>L</sub> = 100pF, unity gain	25°C		0.7		
Gain Bandwidth	GBW	V <sub>CC</sub> = 30V, f = 100kHz, V <sub>IN</sub> = 10mV, R <sub>L</sub> = 2kΩ, C <sub>L</sub> = 100pF	25°C		700		kHz
Total Harmonic Distortion	THD	f = 1kHz, A <sub>V</sub> = 20dB, R <sub>L</sub> = 2kΩ, V <sub>O</sub> = 2Vpp, C <sub>L</sub> = 100pF,	25°C		0.04		%

\*All characteristics are measured under the open-loop conditions with zero common-mode input voltage, unless otherwise specified. MAX V<sub>CC</sub> for testing purposes is 36V, V<sub>cc(max)</sub> = 45V. Full range is -40°C to +125°C.




HTCSEMI  
海天芯

HT358A

---

BLOCK DIAGRAM


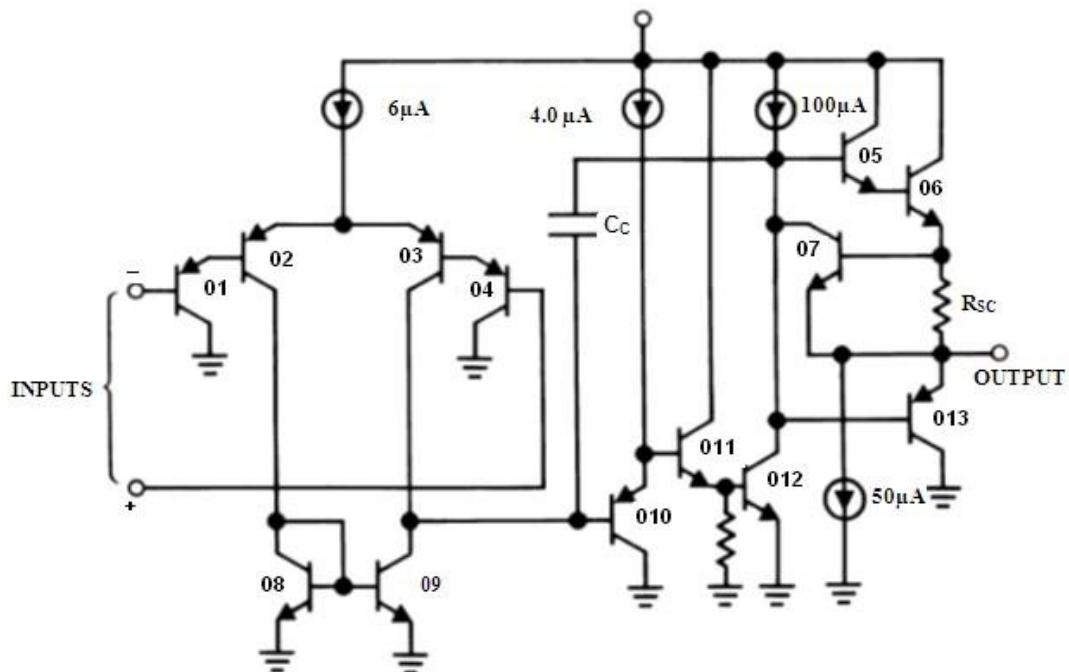




### Typical Single-Supply Applications


( $V^+ = 5.0 \text{ V}_{\text{DC}}$ )

#### Non-Inverting DC Gain (0V Output)

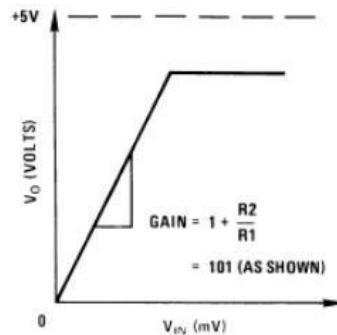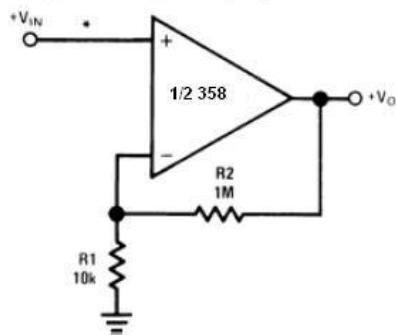


\*R not needed due to temperature independent  $I_{IN}$

#### DC Summing Amplifier ( $V_{IN}$ 's $\geq 0 \text{ V}_{\text{DC}}$ and $V_O \geq 0 \text{ V}_{\text{DC}}$ )

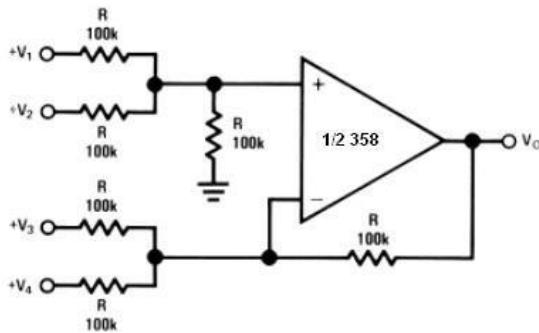

Where:  $V_O = V_1 + V_2 - V_3 - V_4$   
 $(V_1 + V_2) \geq (V_3 + V_4)$  to keep  $V_O > 0 \text{ V}_{\text{DC}}$


#### Power Amplifier

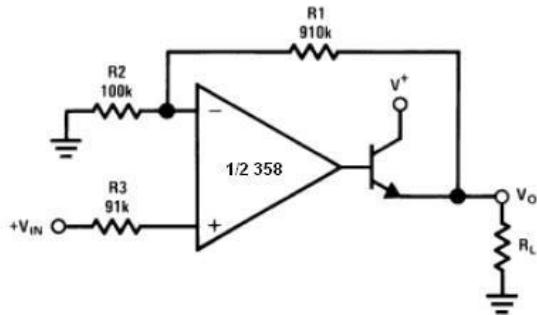

$V_O = 0 \text{ V}_{\text{DC}}$  for  $V_{IN} = 0 \text{ V}_{\text{DC}}$   
 $A_V = 10$




"BI-QUAD" RC Active Bandpass Filter

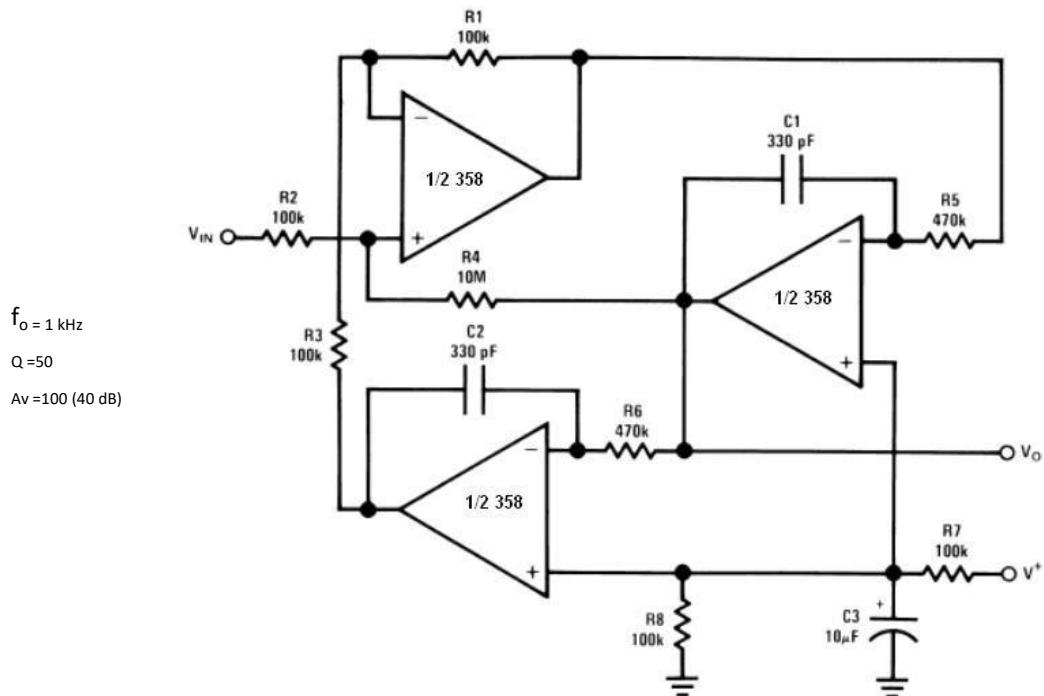





Fixed Current Sources

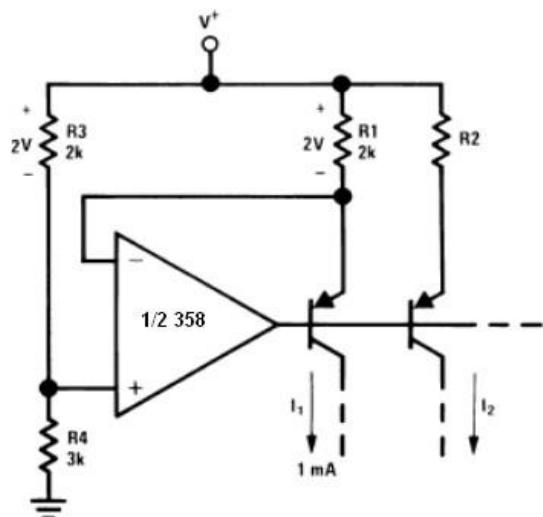


Lamp Driver

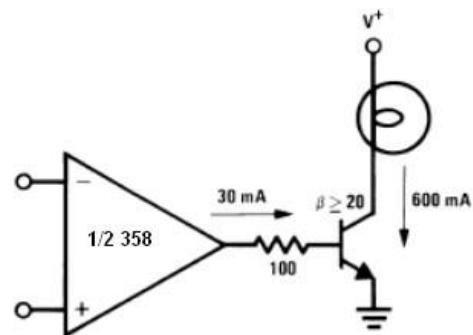

Squarewave Oscillator

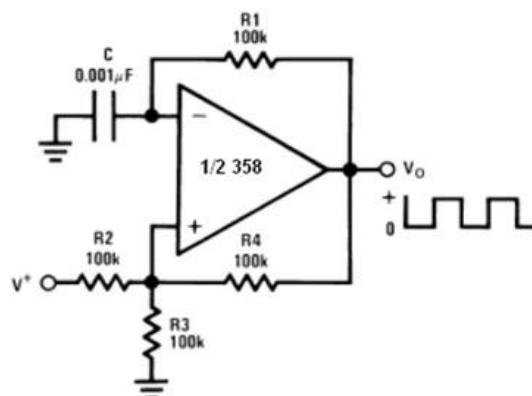


Pulse Generator

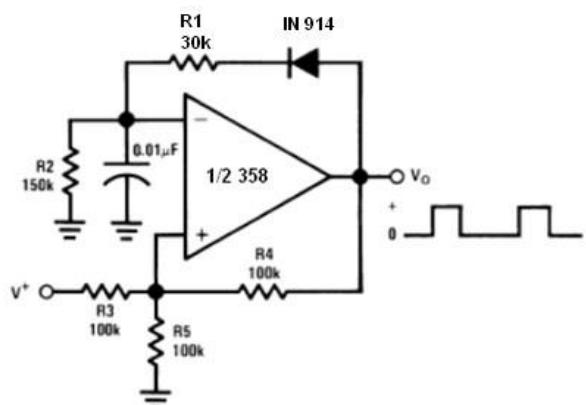



**DFN8 2\*2**

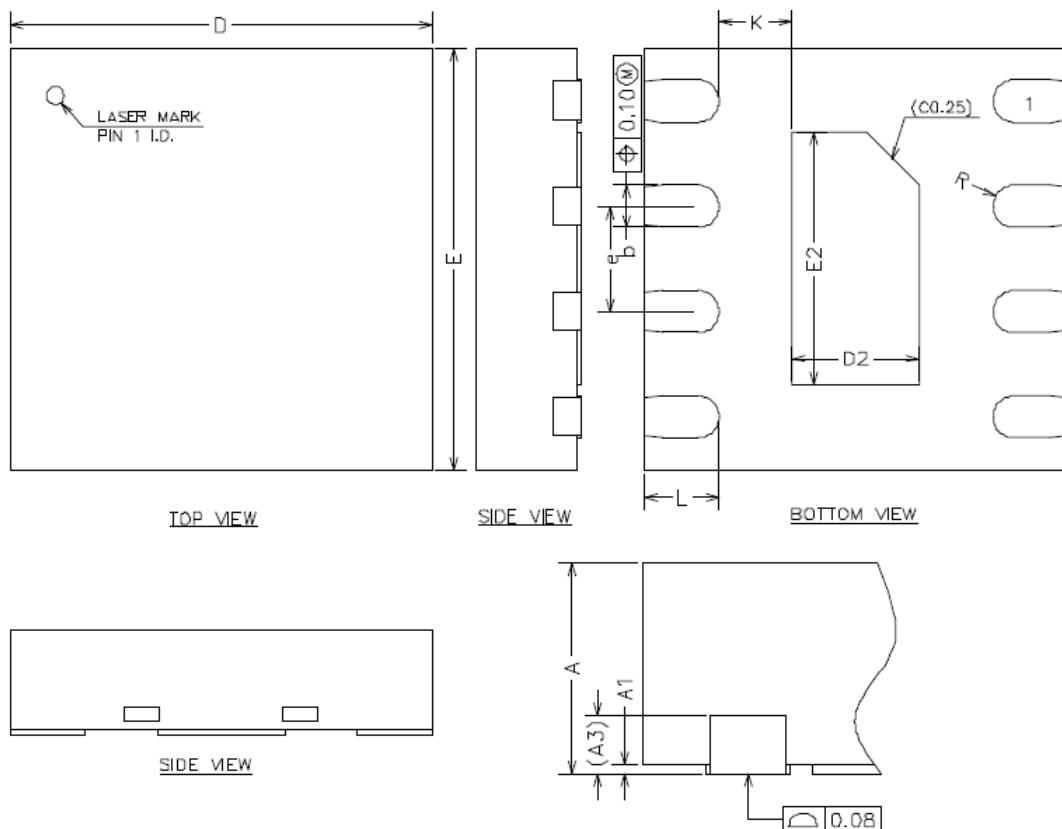


COMMON DIMENSIONS  
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0	0.02	0.05
A3	0.20REF		
b	0.15	0.20	0.25
D	1.90	2.00	2.10
E	1.90	2.00	2.10
D2	0.50	0.60	0.70
E2	1.10	1.20	1.30
e	0.40	0.50	0.60
K	0.20	—	—
L	0.30	0.35	0.40
R	0.09	—	—




SOT23-8L

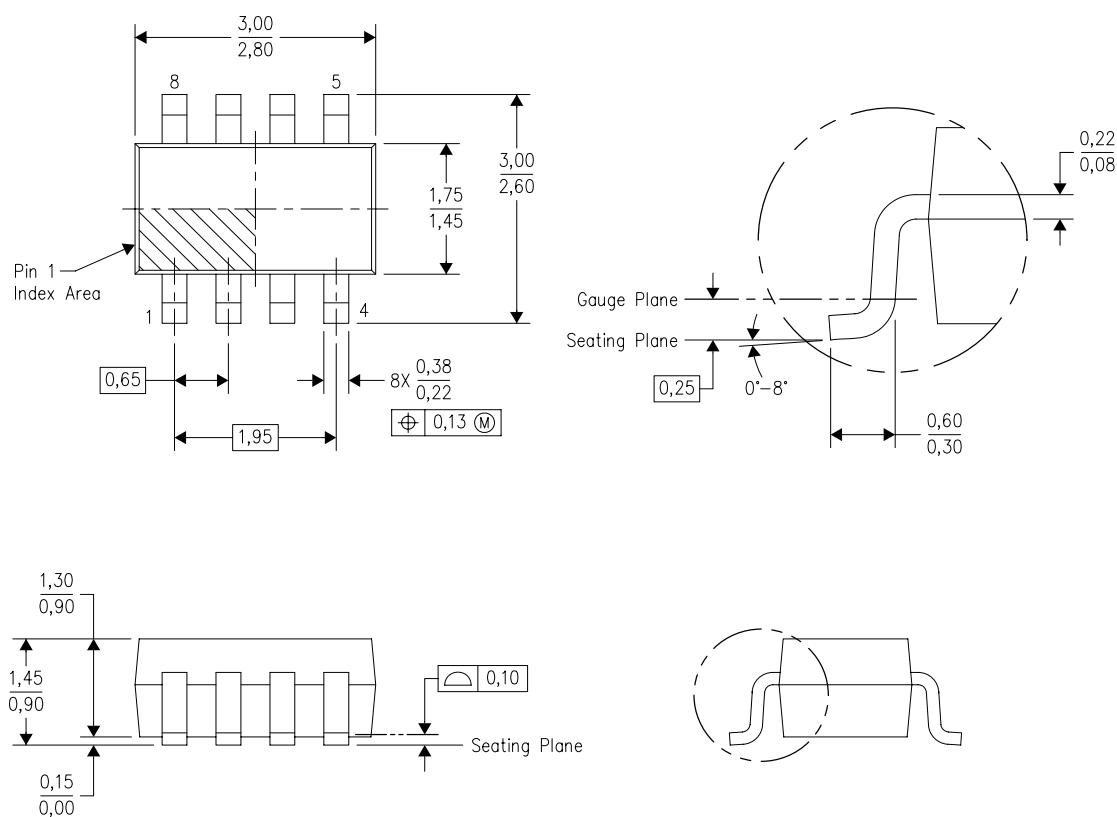




MSOP8

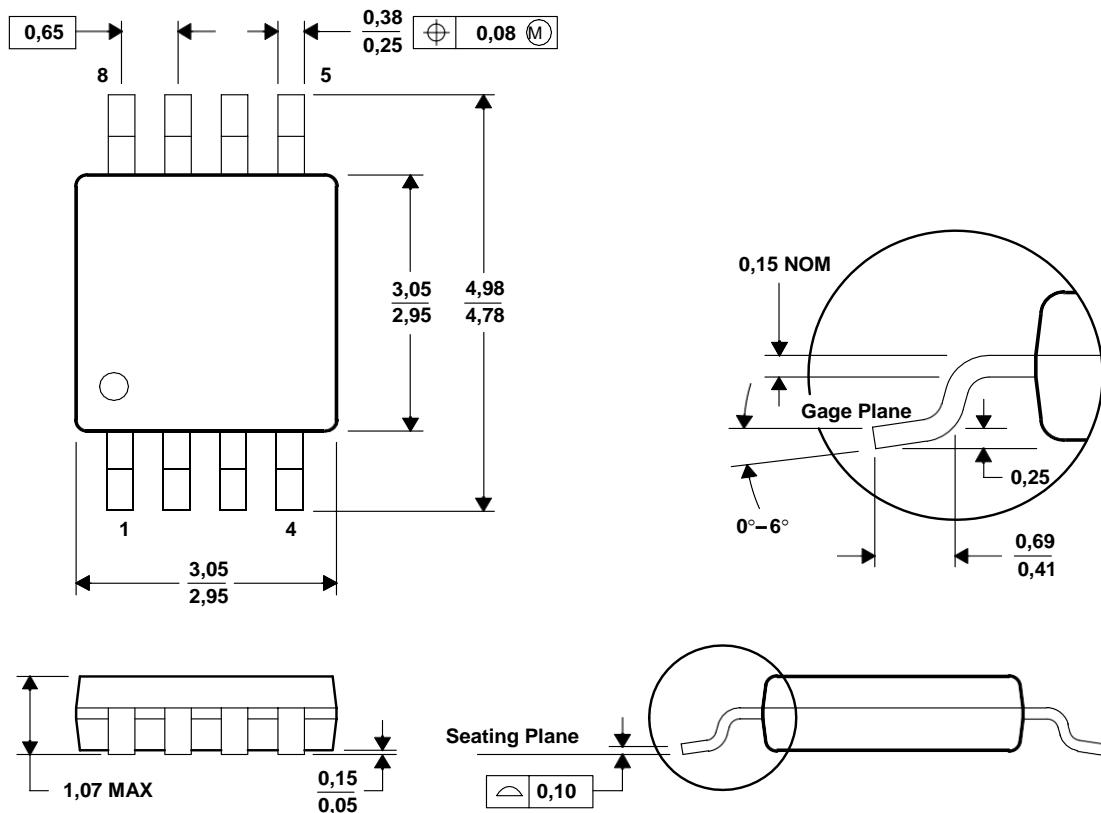



Small Outline SOP-8

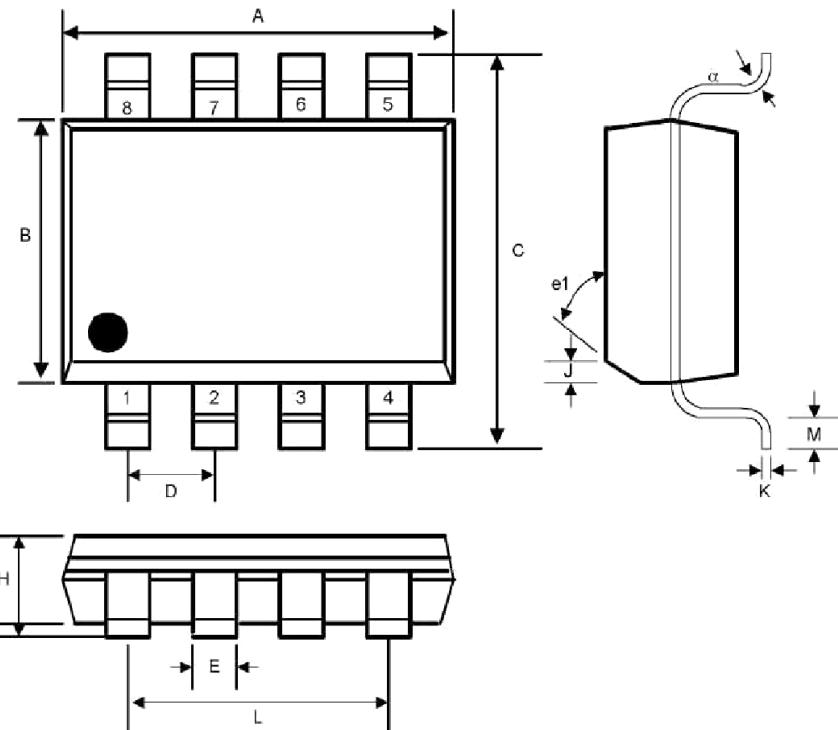

SYMBOL	INCHES		MILLIMETERS		NOTES
	MIN	MAX	MIN	MAX	
A	0.188	0.197	4.80	5.00	-
B	0.149	0.158	3.80	4.00	-
C	0.228	0.244	5.80	6.20	-
D	0.050	BSC	1.27	BSC	-
E	0.013	0.020	0.33	0.51	-
F	0.004	0.010	0.10	0.25	-
H	0.053	0.069	1.35	1.75	-
J	0.011	0.019	0.28	0.48	-
K	0.007	0.010	0.19	0.25	-
M	0.016	0.050	0.40	1.27	
L	0.150	REF	3.81	REF	-
e1	45°		45°		-
α	0°	8°	0°	8°	-

\*All specs and applications shown above subject to change without prior notice.