

# Miniature Quartz Crystal Ceramic SMD

**FW**


2.0 x 1.6mm Ceramic SMD

## Product Features

- Rugged AT-cut crystal construction
- Miniature 2.0 x 1.6mm ceramic package
- Available on tape & reel; 8mm tape, 3000 units per reel
- Pb-free and RoHS/Green compliant

## Product Description

The 4-pad FW Series seam seal devices incorporate a ultra-miniature AT-cut crystal resonator housed in a standard 2.0 x 1.6mm ceramic package. These compact crystals are ideal for surface mounting in densely populated or small form-factor PCB applications.

## Typical Applications

- Smart Phone
- Portable / Hand-held PCs
- PCMCIA Cards
- Notebook PC
- Bluetooth
- Wireless LAN
- SIP
- RF-SIM
- Pen Drive
- SD Module

## Frequency Range:

- 20.000000 MHz to 66.000000 MHz (Fundamental)

## Characteristics at 25°C ±2°C:

- Frequency Calibration Tolerance: ±10ppm to ±50ppm
- Load Capacitance: 8 to 20pF or Series Resonance
- Equivalent Series Resistance (ESR):
  - 120Ω max (20.000000 to 26.000000 MHz)
  - 100Ω max (26.000001 to 32.000000 MHz)
  - 80Ω max (32.000001 to 66.000000 MHz)
- Drive Level: 10μW typ. (100μW max)
- Shunt Capacitance: 3pF Max

## Temperature Range:

- Operating: -20°C to +70°C or -30°C to +85°C
- Storage: -40°C to +85°C

## Frequency Stability (Reference to the Frequency at 25°C):

- -20°C to +70°C: ±10ppm to ±50ppm
- -30°C to +85°C: ±20ppm to ±50ppm

## Aging at 25°C, First Year:

- ±3ppm Max
- ±5ppm Max

## Reflow Temperature:

- 260°C Max, 10 seconds Max


## Mechanical

- Shock: JESD22-B104 Condition B
- Solderability: J-STD-002
- Vibration: JESD22-B103
- Solvent Resistance: JESD22-B107
- Resistance to Soldering Heat: J-STD-020C Table 5-2 Pb-free devices (3 cycles max)

## Environmental



- Gross Test Leak: JESD22-A109, Condition C
- Fine Test Leak: JESD22-A109, Condition A1
- Moisture Resistance: JESD22-A113
- Insulation Resistance: 500 MΩ min (100 VDC)

### Part Ordering Information:

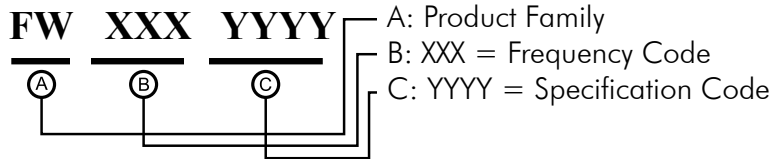

Following the above format, Saronix-eCera part numbers will be assigned upon confirmation of exact customer requirements.

### Mechanical Drawings:

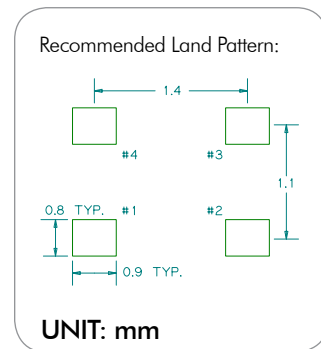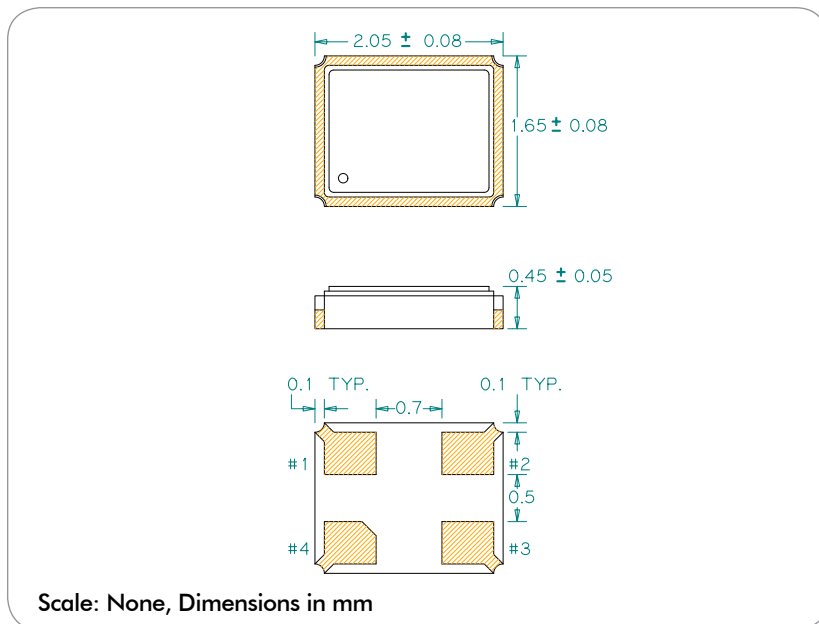

### Pin Functions:

Pin	Function
1	Xtal
2	Case
3	Xtal
4	Case

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Diodes Incorporated:

[FW3840001](#) [FW2500025Z](#) [FW3000010](#) [FW3200011](#) [FW2400007](#) [FW2400014](#) [FW2600004](#) [FW4800013](#)  
[FW4800022](#) [FW5000006](#) [FW3740018Z](#) [FW1600006](#) [FW2400030](#) [FW2400033](#) [FW2600003](#) [FW5310001](#)  
[FW3000016](#) [FW2500021](#) [FW2600019](#) [FW3740013](#) [FW4800006](#) [FW3000005](#) [FW3200034](#) [FW3840024Z](#)  
[FW5200002Z](#) [FW2710005](#) [FW4000018](#) [FW2000011](#) [FW1600015](#) [FW2500003](#) [FW4800002](#) [FW4800008](#)  
[FW5000003](#) [FW2600046Z](#) [FW2700012](#) [FW3200018](#) [FW4000028Z](#) [FW2600029](#) [FW3200021](#) [FW2500027](#)  
[FW2400011](#) [FW2500016](#) [FW2500019](#) [FW2500020](#) [FW2600040](#) [FW2500037Z](#) [FW3000011](#) [FW3200008](#)  
[FW4000015Z](#) [FW1600001](#) [FW2400031](#) [FW3000006](#) [FW3200009](#) [FW3200032](#) [FW3840022Z](#) [FW3840026Z](#)  
[FW4000029Z](#) [FW3000012](#) [FW6000003](#) [FW2500001](#) [FW4800016](#) [FW4800012](#) [FW3740016Z](#) [FW2450002](#)  
[FW2600047Z](#) [FW2400023](#) [FW2400015](#) [FW4000025](#) [FW3200024](#) [FW4000027Z](#) [FW4000021](#) [FW2500026](#)  
[FW2500018](#) [FW2400016](#) [FW2500012](#) [FW1600009](#) [FW2860003](#) [FW2400022](#) [FW3740017Z](#) [FW3200010](#)  
[FW2000012](#)