

- 2.4 GHz Frequency Hopping Spread Spectrum Transceivers
- Direct Peer-to-peer Low Latency Communication
- Transmitter RF Power Configurable - 6.3 or 63 mW
- Transmitter EIRP 15.8 mW or 100 mW with 2 dBi Antenna
- 250 kbps RF Data Rate
- Serial Port Data Rate up to 250 kbps, SPI Port Data Rate up to 500 kbps
- 128-Bit AES Encryption
- Separate Serial Port for Diagnostics
- Analog and Digital I/O for Sensor Applications
- FCC, Canadian IC and ETSI Certified for Unlicensed Operation

The DNT24MC and DNT24MP FHSS transceiver modules provide a low-cost, versatile solution for wireless data communications in the 2.4 GHz ISM band. Direct peer-to-peer communication provides very low transmission latency between all modules in a network. The DNT24MC/MP RF output power can be set at 6.3 or 63 mW. The DNT24MC and DNT24MP modules include analog, digital and serial I/O, providing the flexibility to serve applications ranging from cable replacements to sensor networks. The DNT24MC and DNT24MP transceiver modules are easy to integrate and provides reliable wireless communications up to 5 miles in line-of-sight installations.

DNT24MC/MP Absolute Maximum Ratings

| Rating | Value | Units |
|--------------------------|--------------|-------|
| Power Supply Input | -0.5 to +6.5 | V |
| All Input/Output Pins | -0.5 to +3.3 | V |
| Input Power to RFIO Port | 0 | dBm |

DNT24MC DNT24MP

Low Cost 2.4 GHz FHSS Transceiver Modules with I/O



DNT24MC/MP Electrical Characteristics

| Characteristic | Sym | Notes | Minimum | Typical | Maximum | Units |
|---|-----|-------|------------------------|---------|---------|-------|
| RF Communication Topology | | | Direct Peer-to-Peer | | | |
| Spread Spectrum Mode | | | Frequency Hopping | | | |
| Operating Frequency Range | | | 2406 | | 2475 | MHz |
| Number of RF Channels | | 1 | 15 | | | |
| Number of Hopping Patterns | | | 64 | | | |
| Hop Duration | | 1 | 8 | | 100 | ms |
| Modulation | | | FSK | | | |
| RF Data Transmission Rate | | | 250 | | | kbps |
| Packet Transmission Time Including FHSS Synchronization and Acknowledgement | | | | 16 | | ms |
| Receiver Sensitivity @ 10 ⁻⁵ BER | | | | -100 | | dBm |
| Transmitter RF Output Power | | 1 | 6.3 or 63 mW | | | mW |
| Antenna Impedance | | | | 50 | | Ω |
| RF Connection | | | U.FL Coaxial Connector | | | |

DNT24MC/MP Electrical Characteristics

| Characteristic | Sym | Notes | Minimum | Typical | Maximum | Units |
|---|-----------------|-------|---|---------|---------|-------------------|
| ADC Input Range | | | 0 | | 2.7 | V |
| ADC Input Resolution | | | | | 12 | bits |
| ADC Sample Rate | | | | 100 | | Hz |
| Signal Source Impedance for ADC Reading | | | | | 10 | K Ω |
| ADC External Reference Voltage Range | | | 1.0 | | 2.7 | V |
| DAC Output Range | | | 0 | | 3.3 | V |
| DAC Output Resolution | | | | | 12 | bits |
| Primary and Diagnostic Serial Port Baud Rates | | | 1.2, 2.4, 4.8, 9.6, 14.4, 19.2, 28.8, 38.4, 57.6, 115.2, 230.4, 250.0 | | | kbps |
| Master Serial Peripheral Interface Data Rate | | | 125 | 250 | 500 | kbps |
| Slave Serial Peripheral Interface Data Rate | | | | | 4000 | kbps |
| Digital I/O: | | | | | | |
| Logic Low Input Level | | | -0.5 | | 0.8 | V |
| Logic High Input Level | | | 2.45 | | 3.3 | V |
| Logic Input Internal Pull-up Resistor | | | | 20 | | K Ω |
| Power Supply Voltage Range | V _{CC} | | +3.3 | | +5.5 | Vdc |
| Power Supply Voltage Ripple | | | | | 10 | mV _{P-P} |
| Peak Transmit Mode Current, 63 mW Output | | | | | 140 | mA |
| Operating Receive Current | | | | 40 | | mA |
| Sleep Current | | 2 | | 3 | 6 | μ A |
| DNT24MC Mounting | | | Reflow Soldering | | | |
| DNT24MP Mounting | | | Socket | | | |
| Operating Temperature Range | | | -40 | | 85 | $^{\circ}$ C |
| Operating Relative Humidity Range, Non-condensing | | | 10 | | 90 | % |

Notes:

1. The DNT24MC/MP achieves regulatory certification under FHSS rules.
2. Maximum sleep current occurs at +85 $^{\circ}$ C.



CAUTION: Electrostatic Sensitive Device. Observe precautions when handling.

DNT24MC/DNT24MP Block Diagram

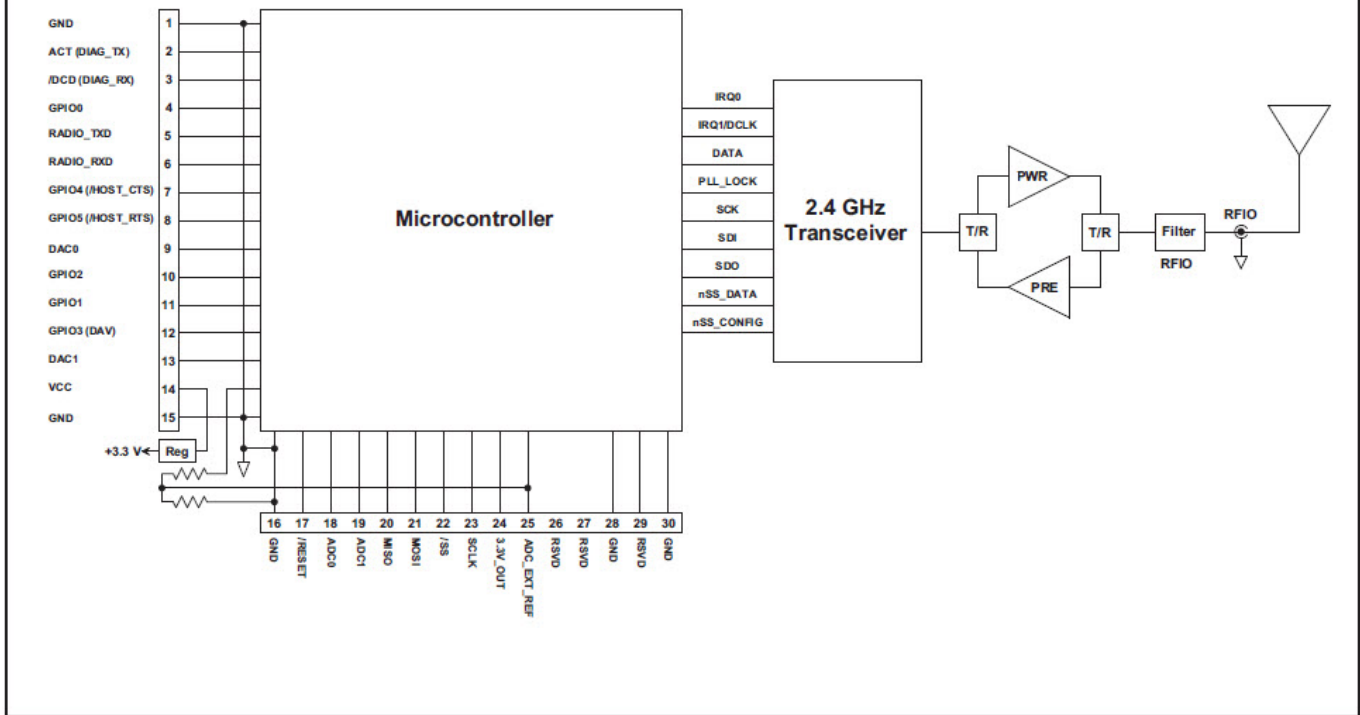


Figure 1

DNT24MC/MP Hardware

The major components of the DNT24MC/MP include a 2.4 GHz FHSS transceiver and a low current 8-bit microcontroller. The DNT24MC/MP hops across 15 frequency channels in the 2.4 GHz ISM band on one of 64 selectable hopping patterns. The DNT24MC/MP has two selectable RF output power levels: 6.3 mW and 63 mW.

The DNT24MC/MP provides a variety of hardware interfaces. There are two serial ports plus one SPI port. Either the primary serial port or the SPI port can be selected for data communications. The second serial port is dedicated to diagnostics. The primary and diagnostic serial ports support most standard baud rates up to 250.0 kbps. The SPI port supports data rates up to 500 kbps. The DNT24MC/MP also includes three ADC inputs, two DAC outputs, and six general-purpose digital I/O ports. Four of the digital I/O ports support an optional interrupt-from-sleep mode when configured as inputs. The radio is available in two mounting configurations. The DNT24MC is designed for solder reflow mounting. The DNT24MP is designed for plug-in connector mounting.

DNT24MC/MP Firmware

DNT24MC/MP firmware implements *direct peer-to-peer* data transmissions that provide very low transmission latency between all DNT24MC/MP radios in a network. In addition, efficient point-to-point and point-to-multipoint networks are readily configured using direct peer-to-peer transmissions.

DNT24MC/MP firmware provides the user with a rich set of configuration options including a choice of hopping patterns, serial and/or SPI data port operation, serial and SPI data rate selection, RF output power selection, plus configurable analog and digital I/O lines.

Data integrity is protected by 24-bit error detection, with optional ACK and automatic transmission retries or redundant transmissions. 128-bit AES encryption provides a high level of data security for sensitive applications. Sensor networks can take advantage of timer or event-based data reporting and remote node sleep cycling for extended battery life.

DNT24MC/MP I/O Descriptions

| Pin | Name | I/O | Description |
|-----|----------------------|------------|--|
| 1 | GND | - | Power supply and signal ground. Connect to the host circuit board ground. |
| 2 | ACT (DIAG_TX) | O (O) | This pin's default configuration is transmitter activity (ACT) output. The ACT signal is asserted whenever any data packet other than just an ACK is transmitted. The alternate function for this pin is the diagnostic serial port output. |
| 3 | /DCD (DIAG_RX) | O (I) | The /DCD signal is asserted when a DNT24M receives a valid packet. If a radio is transmitting data and receiving ACKs, both the ACT and /DCD signals will be asserted. If a radio is receiving packets only, the /DCD signal will be asserted. The alternate function for this pin is the diagnostic serial port input. |
| 4 | GPIO0 | I/O | Configurable digital I/O port 0. When configured as an input, an internal pull-up resistor can be selected and direct interrupt from sleep can be invoked. When configured as an output, the power-on state is configurable. In sleep mode the pin direction, input pull-up selection or output state are also separately configurable. |
| 5 | RADIO_TXD | O | Serial data output from the radio. |
| 6 | RADIO_RXD | I | Serial data input to the radio. |
| 7 | GPOI4 (/HOST_CTS) | I/O (O) | Default pin function is GPIO4 with the same configuration options as GPIO0. Alternate pin function is UART/SPI flow control output. The module sets this line low when it is ready to accept data from the host on the RADIO_RXD or MOSI input. When the line goes high, the host must stop sending data. |
| 8 | GPOI5 (/HOST_RTS) | I/O (I) | Default pin function is GPIO5 with the same configuration options as GPIO0. Alternate pin function is UART/SPI flow control input. The host sets this line low to allow data to flow from the module on the RADIO_TXD pin. When the host sets this line high, the module will stop sending data to the host. |
| 9 | DAC0 | O | 12-bit DAC 0 output. Full scale output can be referenced to the voltage at pin 25 or the 3.3 V regulated module bus voltage. |
| 10 | GPIO2 | I/O | Configurable digital I/O port 2. Same configuration options as GPIO0. |
| 11 | GPIO1 | I/O | Configurable digital I/O port 1. Same configuration options as GPIO0. |
| 12 | GPIO3 (DAV) | I/O (O) | Default pin function is GPIO3 with the same configuration options as GPIO0. When SPI slave mode operation is enabled, a logic high on this pin indicates when data is available to be clocked out by the SPI master. |
| 13 | DAC1 | O | 12-bit DAC 1 output. Same specifications and configuration options as DAC0. |
| 14 | VCC | I | Power supply input, +3.3 to +5.5 Vdc. |
| 15 | GND | - | Power supply and signal ground. Connect to the host circuit board ground. |
| 16 | GND | - | Power supply and signal ground. Connect to the host circuit board ground. |
| 17 | /RESET | I | Active low module hardware reset. |
| 18 | ADC0 | I | ADC input 0. This pin is a direct ADC input when the ADC is operating in single-ended mode, or the differential negative input for positive inputs applied to ADC1 or ADC2 when the ADC is operating in differential mode. Full-scale reading can be referenced to Pin 25 for ratiometric measurements. For absolute measurements, the ADC can use either the regulated supply voltage divided by 1.6 (about 2.06 V), or an external voltage applied to Pin 25. In single-ended mode, ADC measurements are 11-bit unsigned values with full scale nominally 2.7 V when referenced to a 2.7 V input on Pin 27. In differential mode, ADC measurements are 12-bit signed values. |
| 19 | ADC1 | I | ADC input 1. Direct input when the ADC is operating in single-ended mode, positive differential input relative to ADC0 when the ADC is operating in differential mode. |
| 20 | MISO | I/O | This pin is the SPI master mode input or slave mode output. |
| 21 | MOSI | I/O | This pin is the SPI master mode output or slave mode input. |
| 22 | /SS | I/O | SPI active low slave select. This pin is an output when the module is operating as a master, and an input when it is operating as a slave. |
| 23 | SCLK | I/O | SPI clock signal. This pin is an output when operating as a master, and an input when operating as a slave. |

| Pin | Name | I/O | Description |
|-----|-------------|-----|---|
| 24 | ADC2 | I | ADC input 2. Direct input when the ADC is operating in single-ended mode, positive differential input relative to ADC0 when the ADC is operating in differential mode. |
| 25 | ADC_EXT_REF | I/O | ADC external reference voltage pin. The voltage at this pin can be used by the ADCs as a reference for ratiometric measurements. With no external voltage or load applied, this pin presents a nominal 2.7 V output through a 2.126 K source resistance. A low impedance external reference voltage in the range of 1 to 2.7 V may be applied to this pin as an option. |
| 26 | RSVD | - | Reserved pin. Leave unconnected. |
| 27 | RSVD | - | Reserved pin. Leave unconnected. |
| 28 | GND | - | Connect to the host circuit board ground plane. |
| 29 | RSVD | - | Reserved pin. Leave unconnected. |
| 30 | GND | - | Connect to the host circuit board ground plane. |

DNT24MC/MP Antenna Connector

A U.FL miniature coaxial connector is provided on both DNT24MC and DNT24MP configurations for connection to the RFIO port. A short U.FL coaxial cable can be used to connect the RFIO port directly to an antenna. In this case the antenna should be mounted firmly to avoid stressing the U.FL coaxial cable due to antenna mounting flexure. Alternately, a U.FL coaxial jumper cable can be used to connect the DNT24MC/MP module to a U.FL connector on the host circuit board. The connection between the host circuit board U.FL connector and the antenna or antenna connector on the host circuit board should be implemented as a 50 ohm stripline. Referring to Figure 2, the width of this stripline depends on the thickness of the circuit board between the stripline and the groundplane. For FR-4 type circuit board materials (dielectric constant of 4.7), the width of the stripline is equal to 1.75 times the thickness of the circuit board. Note that other circuit board traces should be spaced away from the stripline to prevent signal coupling, as shown in Figure 3. The stripline trace should be kept short to minimize its insertion loss.

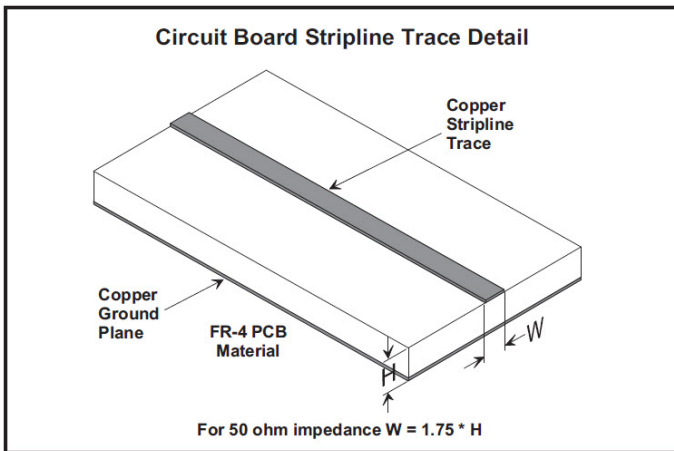


Figure 2

| Trace Separation from 50 ohm Microstrip | Length of Trace Run Parallel to Microstrip |
|---|--|
| 100 mil | 125 mil |
| 150 mil | 200 mil |
| 200 mil | 290 mil |
| 250 mil | 450 mil |
| 300 mil | 650 mil |

Figure 3

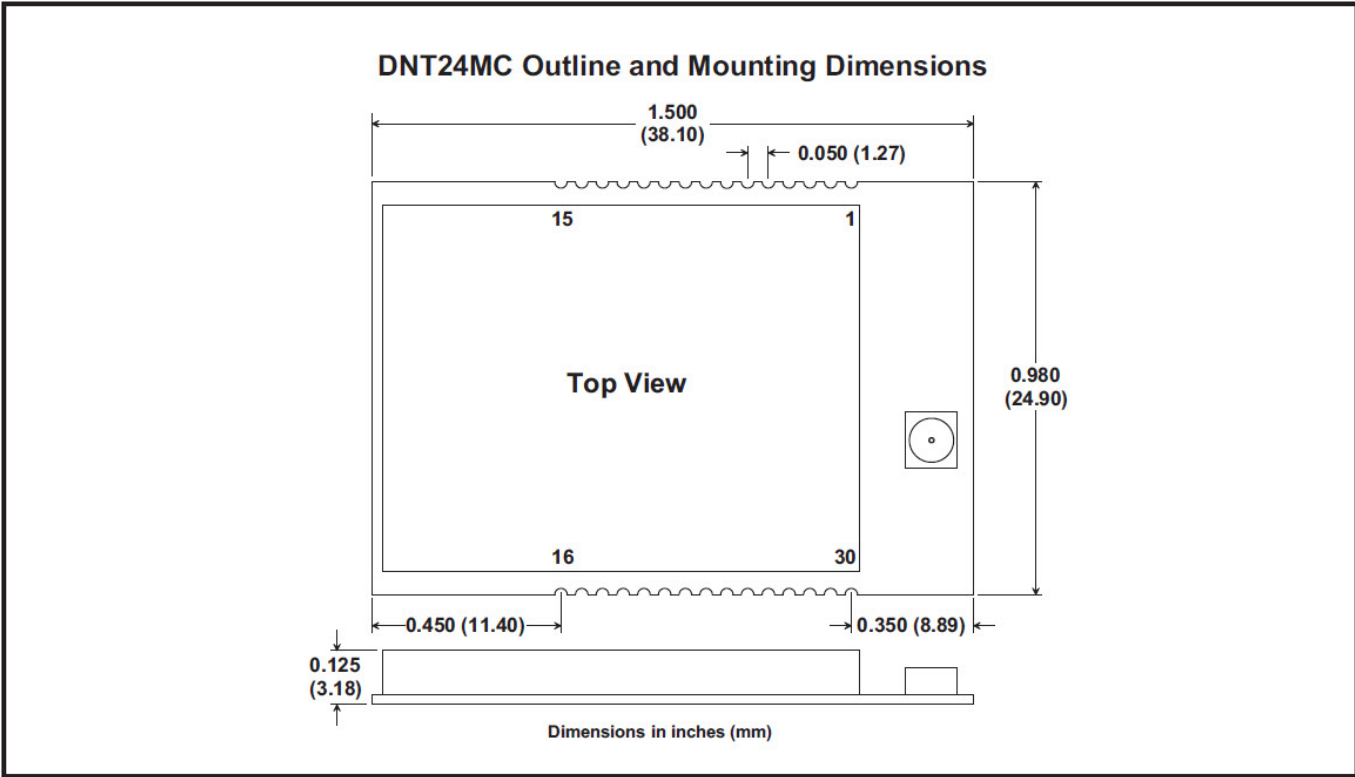


Figure 4

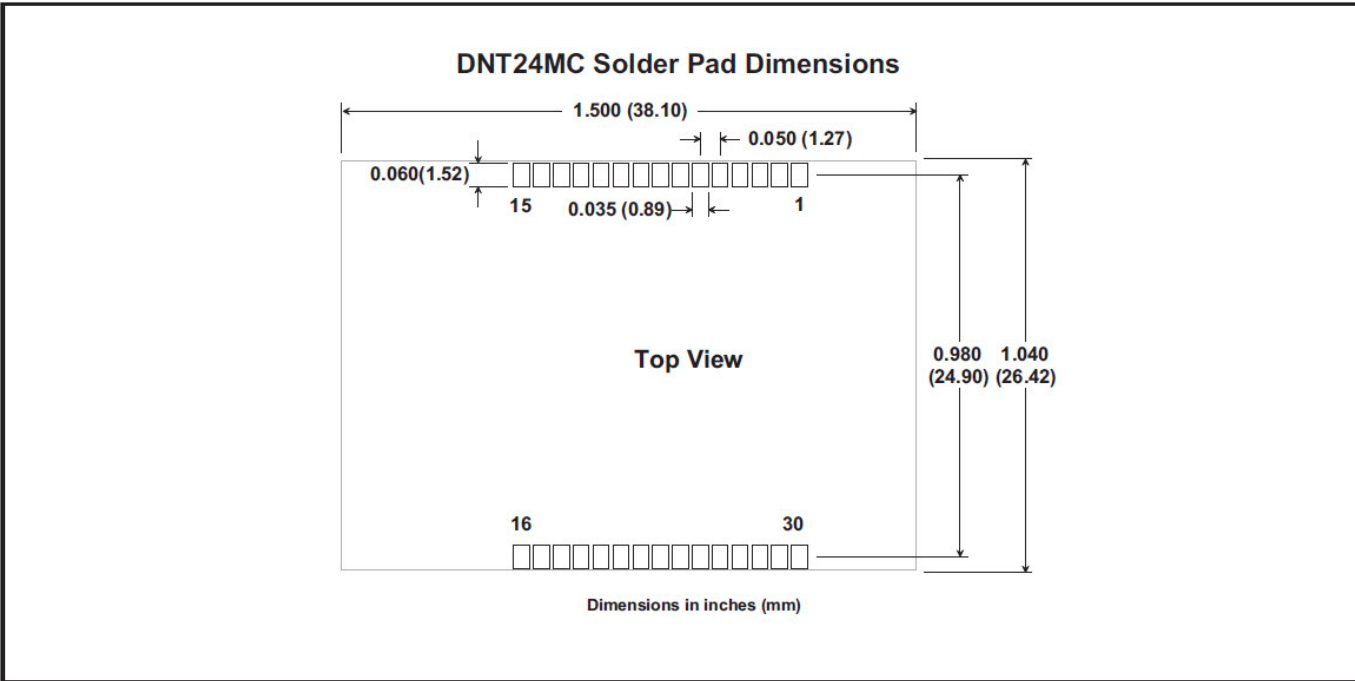


Figure 5

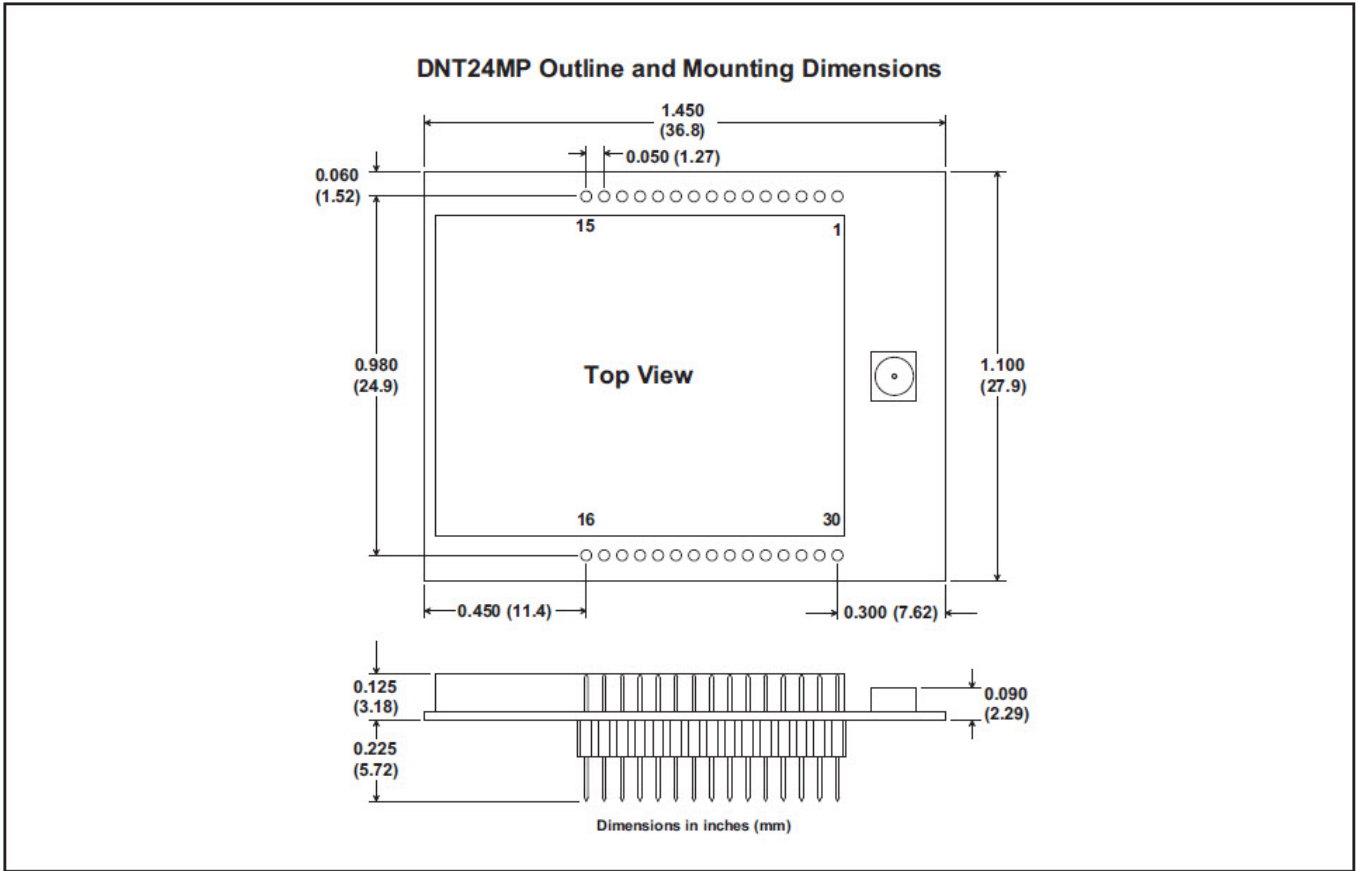


Figure 6

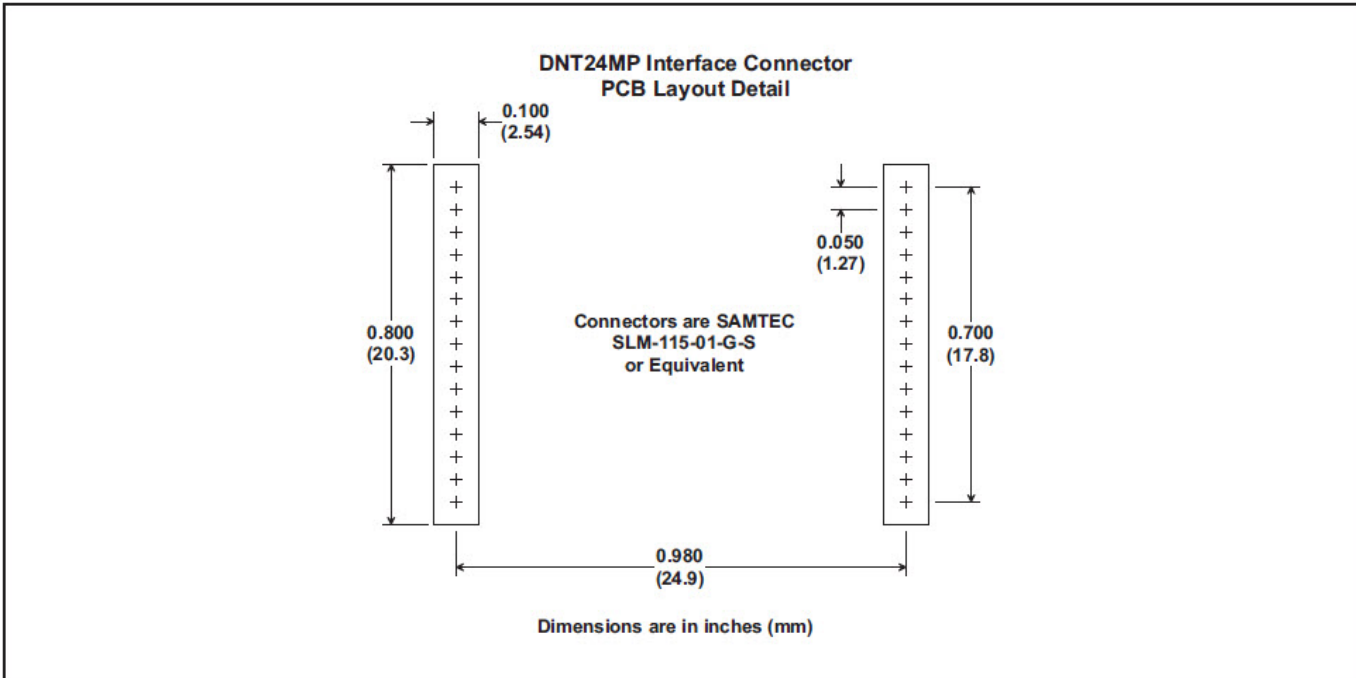


Figure 7

DNT24MC/MP Antenna Options:

For fixed or portable operation (> 20 cm from body):

Murata OMNI249 Omnidirectional Dipole Antenna, 9 dBi, 50 ohms

Murata PA2400 Patch Antenna, 6 dBi, 50 ohms

Antenna types not included in the above list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

For mobile operation (< 20 cm from body):

Limited to the use of antennas of gain 3.47 dBi or less.

Antennas having a gain greater than the maximum gain indicated are strictly prohibited for use with this device.

Note: Specifications subject to change without notice.