

DM74LS138, DM74LS139

Decoder/Demultiplexer

These Schottky-clamped circuits are designed to be used in high-performance memory-decoding or data-routing applications, requiring very short propagation delay times. In high-performance memory systems these decoders can be used to minimize the effects of system decoding. When used with high-speed memories, the delay times of these decoders are usually less than the typical access time of the memory. This means that the effective system delay introduced by the decoder is negligible.

The DM74LS138 decodes one-of-eight lines, based upon the conditions at the three binary select inputs and the three enable inputs. Two active-low and one active-high enable inputs reduce the need for external gates or inverters when expanding. A 24-line decoder can be implemented with no external inverters, and a 32-line decoder requires only one inverter. An enable input can be used as a data input for demultiplexing applications.

Rochester Electronics Manufactured Components

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All re-creations are done with the approval of the Original Component Manufacturer (OCM).

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceeds the OCM data sheet.

Quality Overview

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-35835
 - Class Q Military
 - Class V Space Level
- Qualified Suppliers List of Distributors (QSLD)
 - Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OCM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.

FOR REFERENCE ONLY

DM74LS138 • DM74LS139 Decoder/Demultiplexer

General Description

These Schottky-clamped circuits are designed to be used in high-performance memory-decoding or data-routing applications, requiring very short propagation delay times. In high-performance memory systems these decoders can be used to minimize the effects of system decoding. When used with high-speed memories, the delay times of these decoders are usually less than the typical access time of the memory. This means that the effective system delay introduced by the decoder is negligible.

The DM74LS138 decodes one-of-eight lines, based upon the conditions at the three binary select inputs and the three enable inputs. Two active-low and one active-high enable inputs reduce the need for external gates or inverters when expanding. A 24-line decoder can be implemented with no external inverters, and a 32-line decoder requires only one inverter. An enable input can be used as a data input for demultiplexing applications.

The DM74LS139 comprises two separate two-line-to-four-line decoders in a single package. The active-low enable input can be used as a data line in demultiplexing applications.

All of these decoders/demultiplexers feature fully buffered inputs, presenting only one normalized load to its driving circuit. All inputs are clamped with high-performance Schottky diodes to suppress line-ringing and simplify system design.

Features



- Designed specifically for high speed:
 - Memory decoders
 - Data transmission systems
- DM74LS138 3-to-8-line decoders incorporates 3 enable inputs to simplify cascading and/or data reception
- DM74LS139 contains two fully independent 2-to-4-line decoders/demultiplexers
- Schottky clamped for high performance
- Typical propagation delay (3 levels of logic)
 - DM74LS138 21 ns
 - DM74LS139 21 ns
- Typical power dissipation
 - DM74LS138 32 mW
 - DM74LS139 34 mW

Ordering Code:

| Order Number | Package Number | Package Description |
|--------------|----------------|---|
| DM74LS138M | M16A | 16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150 Narrow |
| DM74LS138SJ | M16D | 16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide |
| DM74LS138N | N16E | 16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide |
| DM74LS139M | M16A | 16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150 Narrow |
| DM74LS139SJ | M16D | 16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide |
| DM74LS139N | N16E | 16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide |

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

Connection Diagrams

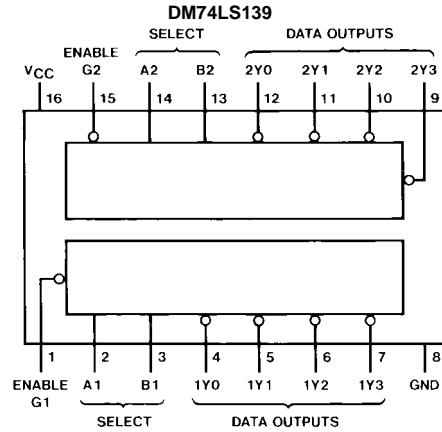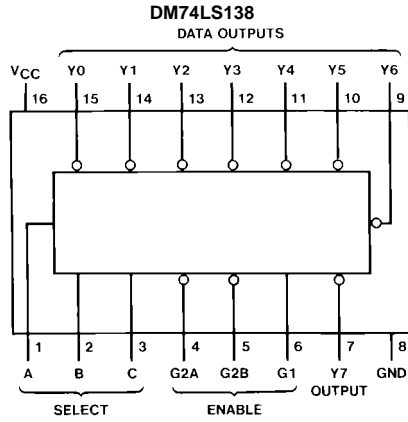

Function Tables

DM74LS138

| Inputs | | | Outputs | | | | | | | | | |
|--------|-------------|--------|---------|---|----|----|----|----|----|----|----|----|
| Enable | | Select | | | | | | | | | | |
| G1 | G2 (Note 1) | C | B | A | Y0 | Y1 | Y2 | Y3 | Y4 | Y5 | Y6 | Y7 |
| X | H | X | X | X | H | H | H | H | H | H | H | H |
| L | X | X | X | X | H | H | H | H | H | H | H | H |
| H | L | L | L | L | L | H | H | H | H | H | H | H |
| H | L | L | L | H | H | L | H | H | H | H | H | H |
| H | L | L | H | L | H | H | L | H | H | H | H | H |
| H | L | L | H | H | H | H | H | L | H | H | H | H |
| H | L | L | L | L | H | H | H | H | L | H | H | H |
| H | L | H | L | H | H | H | H | H | H | L | H | H |
| H | L | H | H | L | H | H | H | H | H | H | L | H |
| H | L | H | H | H | H | H | H | H | H | H | H | L |



DM74LS139

| Inputs | | | Outputs | | | |
|--------|--------|---|---------|----|----|----|
| Enable | Select | | | | | |
| G | B | A | Y0 | Y1 | Y2 | Y3 |
| H | X | X | H | H | H | H |
| L | L | L | L | H | H | H |
| L | L | H | H | L | H | H |
| L | H | L | H | H | L | H |
| L | H | H | H | H | H | L |

H = HIGH Level
L = LOW Level
X = Don't Care

Note 1: G2 = G2A + G2B

Logic Diagrams

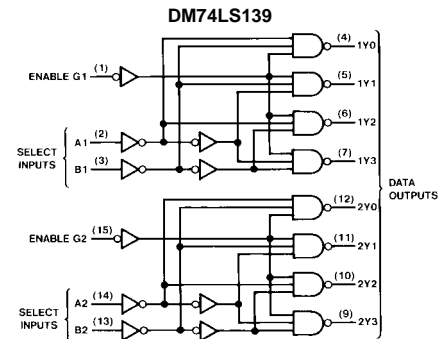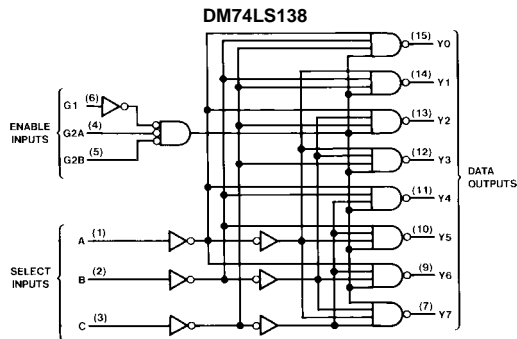

Absolute Maximum Ratings(Note 2)

| | |
|--------------------------------------|-----------------|
| Supply Voltage | 7V |
| Input Voltage | 7V |
| Operating Free Air Temperature Range | 0°C to +70°C |
| Storage Temperature Range | -65°C to +150°C |

Note 2: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

DM74LS138 Recommended Operating Conditions

| Symbol | Parameter | Min | Nom | Max | Units |
|----------|--------------------------------|------|-----|------|-------|
| V_{CC} | Supply Voltage | 4.75 | 5 | 5.25 | V |
| V_{IH} | HIGH Level Input Voltage | 2 | | | V |
| V_{IL} | LOW Level Input Voltage | | | 0.8 | V |
| I_{OH} | HIGH Level Output Current | | | -0.4 | mA |
| I_{OL} | LOW Level Output Current | | | 8 | mA |
| T_A | Free Air Operating Temperature | 0 | | 70 | °C |

DM74LS138 Electrical Characteristics

over recommended operating free air temperature range (unless otherwise noted)

| Symbol | Parameter | Conditions | Min | Typ (Note 3) | Max | Units |
|----------|-----------------------------------|--|-----|-----------------|-------|---------------|
| V_I | Input Clamp Voltage | $V_{CC} = \text{Min}, I_I = -18 \text{ mA}$ | | | -1.5 | V |
| V_{OH} | HIGH Level Output Voltage | $V_{CC} = \text{Min}, I_{OH} = \text{Max}, V_{IL} = \text{Max}, V_{IH} = \text{Min}$ | 2.7 | 3.4 | | V |
| V_{OL} | LOW Level Output Voltage | $V_{CC} = \text{Min}, I_{OL} = \text{Max}, V_{IL} = \text{Max}, V_{IH} = \text{Min}$ | | 0.35 | 0.5 | V |
| | | $I_{OL} = 4 \text{ mA}, V_{CC} = \text{Min}$ | | 0.25 | 0.4 | |
| I_I | Input Current @ Max Input Voltage | $V_{CC} = \text{Max}, V_I = 7V$ | | | 0.1 | mA |
| I_{IH} | HIGH Level Input Current | $V_{CC} = \text{Max}, V_I = 2.7V$ | | | 20 | μA |
| I_{IL} | LOW Level Input Current | $V_{CC} = \text{Max}, V_I = 0.4V$ | | | -0.36 | mA |
| I_{OS} | Short Circuit Output Current | $V_{CC} = \text{Max}$ (Note 4) | -20 | | -100 | mA |
| I_{CC} | Supply Current | $V_{CC} = \text{Max}$ (Note 5) | | 6.3 | 10 | mA |

Note 3: All typicals are at $V_{CC} = 5V, T_A = 25^\circ\text{C}$.

Note 4: Not more than one output should be shorted at a time, and the duration should not exceed one second.

Note 5: I_{CC} is measured with all outputs enabled and OPEN.

DM74LS138 Switching Characteristics

at $V_{CC} = 5V$ and $T_A = 25^\circ\text{C}$

| Symbol | Parameter | From (Input) To (Output) | Levels of Delay | $R_L = 2 \text{ k}\Omega$ | | | | Units |
|-----------|--|-----------------------------|--------------------|---------------------------|-----|-----------------------|-----|-------|
| | | | | $C_L = 15 \text{ pF}$ | | $C_L = 50 \text{ pF}$ | | |
| | | | | Min | Max | Min | Max | |
| t_{PLH} | Propagation Delay Time LOW-to-HIGH Level Output | Select to Output | 2 | | 18 | | 27 | ns |
| t_{PHL} | Propagation Delay Time HIGH-to-LOW Level Output | Select to Output | 2 | | 27 | | 40 | ns |
| t_{PLH} | Propagation Delay Time LOW-to-HIGH Level Output | Select to Output | 3 | | 18 | | 27 | ns |
| t_{PHL} | Propagation Delay Time HIGH-to-LOW Level Output | Select to Output | 3 | | 27 | | 40 | ns |
| t_{PLH} | Propagation Delay Time LOW-to-HIGH Level Output | Enable to Output | 2 | | 18 | | 27 | ns |
| t_{PHL} | Propagation Delay Time HIGH-to-LOW Level Output | Enable to Output | 2 | | 24 | | 40 | ns |
| t_{PLH} | Propagation Delay Time LOW-to-HIGH Level Output | Enable to Output | 3 | | 18 | | 27 | ns |
| t_{PHL} | Propagation Delay Time HIGH-to-LOW Level Output | Enable to Output | 3 | | 28 | | 40 | ns |

DM74LS139 Recommended Operating Conditions

| Symbol | Parameter | Min | Nom | Max | Units |
|----------|--------------------------------|------|-----|------|-------|
| V_{CC} | Supply Voltage | 4.75 | 5 | 5.25 | V |
| V_{IH} | HIGH Level Input Voltage | 2 | | | V |
| V_{IL} | LOW Level Input Voltage | | | 0.8 | V |
| I_{OH} | HIGH Level Output Current | | | -0.4 | mA |
| I_{OL} | LOW Level Output Current | | | 8 | mA |
| T_A | Free Air Operating Temperature | 0 | | 70 | °C |

DM74LS139 Electrical Characteristics

over recommended operating free air temperature range (unless otherwise noted)

| Symbol | Parameter | Conditions | Min | Typ (Note 6) | Max | Units |
|----------|-----------------------------------|--|-----|--------------|-------|---------------|
| V_I | Input Clamp Voltage | $V_{CC} = \text{Min}, I_I = -18 \text{ mA}$ | | | -1.5 | V |
| V_{OH} | HIGH Level Output Voltage | $V_{CC} = \text{Min}, I_{OH} = \text{Max}, V_{IL} = \text{Max}, V_{IH} = \text{Min}$ | 2.7 | 3.4 | | V |
| V_{OL} | LOW Level Output Voltage | $V_{CC} = \text{Min}, I_{OL} = \text{Max}, V_{IL} = \text{Max}, V_{IH} = \text{Min}$ | | 0.35 | 0.5 | V |
| | | $I_{OL} = 4 \text{ mA}, V_{CC} = \text{Min}$ | | 0.25 | 0.4 | |
| I_I | Input Current @ Max Input Voltage | $V_{CC} = \text{Max}, V_I = 7\text{V}$ | | | 0.1 | mA |
| I_{IH} | HIGH Level Input Current | $V_{CC} = \text{Max}, V_I = 2.7\text{V}$ | | | 20 | μA |
| I_{IL} | LOW Level Input Current | $V_{CC} = \text{Max}, V_I = 0.4\text{V}$ | | | -0.36 | mA |
| I_{OS} | Short Circuit Output Current | $V_{CC} = \text{Max}$ (Note 7) | -20 | | -100 | mA |
| I_{CC} | Supply Current | $V_{CC} = \text{Max}$ (Note 8) | | 6.8 | 11 | mA |

Note 6: All typicals are at $V_{CC} = 5\text{V}, T_A = 25^\circ\text{C}$.

Note 7: Not more than one output should be shorted at a time, and the duration should not exceed one second.


Note 8: I_{CC} is measured with all outputs enabled and OPEN.

DM74LS139 Switching Characteristics

at $V_{CC} = 5\text{V}$ and $T_A = 25^\circ\text{C}$




| Symbol | Parameter | From (Input) To (Output) | $R_L = 2 \text{ k}\Omega$ | | | | Units |
|-----------|--|-----------------------------|---------------------------|-----|-----------------------|-----|-------|
| | | | $C_L = 15 \text{ pF}$ | | $C_L = 50 \text{ pF}$ | | |
| | | | Min | Max | Min | Max | |
| t_{PLH} | Propagation Delay Time LOW-to-HIGH Level Output | Select to Output | | 18 | | 27 | ns |
| t_{PHL} | Propagation Delay Time HIGH-to-LOW Level Output | Select to Output | | 27 | | 40 | ns |
| t_{PLH} | Propagation Delay Time LOW-to-HIGH Level Output | Enable to Output | | 18 | | 27 | ns |
| t_{PHL} | Propagation Delay Time HIGH-to-LOW Level Output | Enable to Output | | 24 | | 40 | ns |

Physical Dimensions inches (millimeters) unless otherwise noted

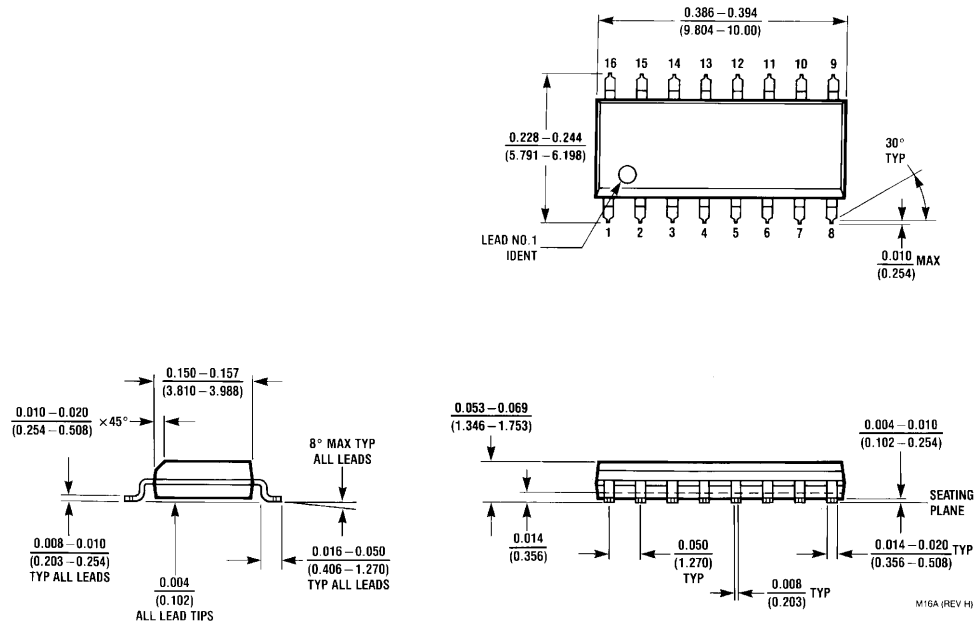

16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150 Narrow Package Number M16A


Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

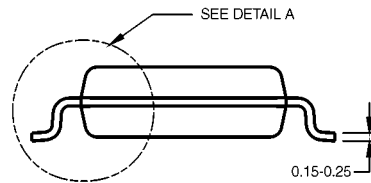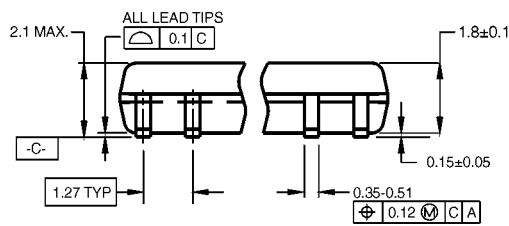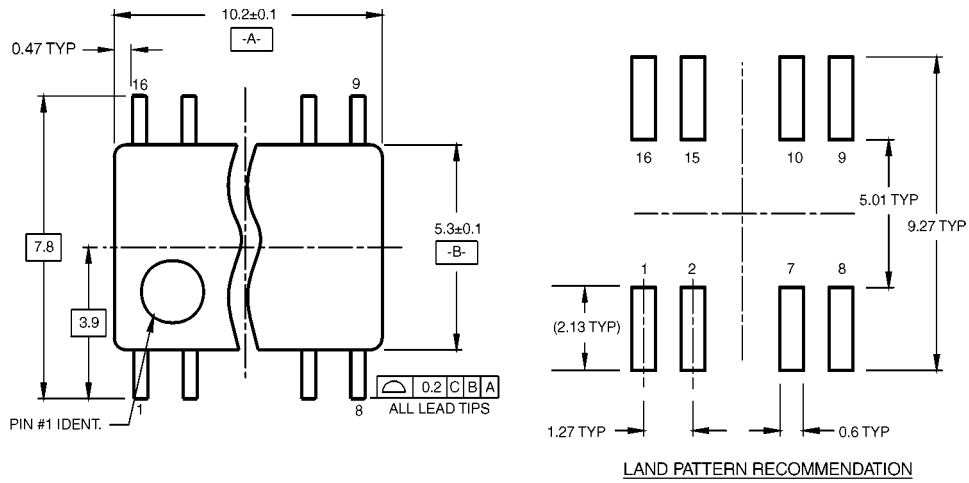

DIMENSIONS ARE IN MILLIMETERS


- NOTES:
 A. CONFORMS TO EIAJ EDR-7320 REGISTRATION, ESTABLISHED IN DECEMBER, 1998.
 B. DIMENSIONS ARE IN MILLIMETERS.
 C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.

M16DRevB1

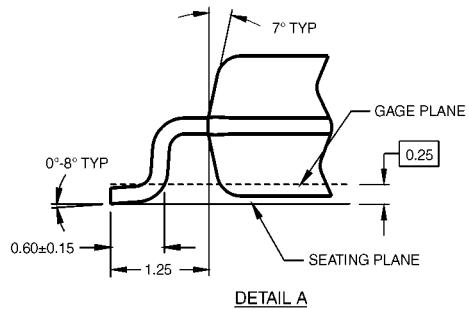

16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide Package Number M16D

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

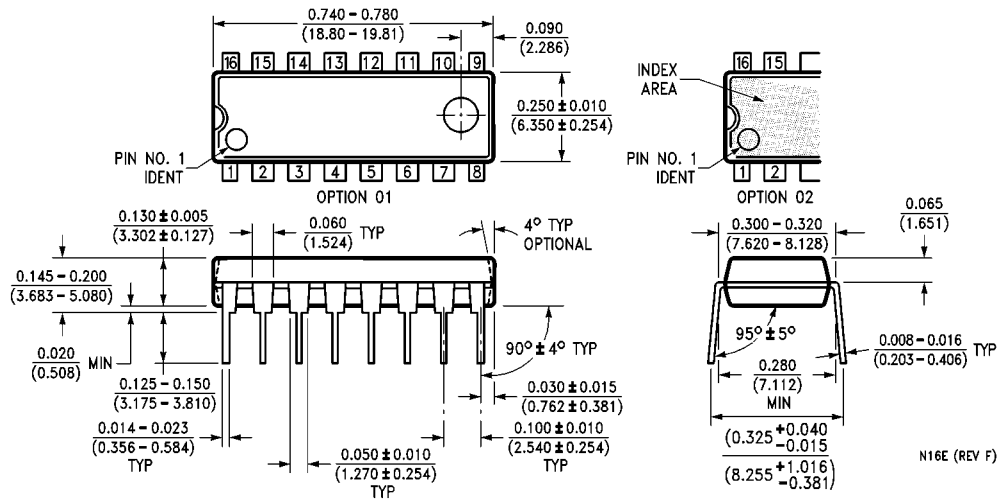

16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide Package Number N16E

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com



[Home](#) >>> [Products](#) >>> [DM74LS138](#)

[Information as of 1-Aug-2000]

DM74LS138

3-to-8 Line Decoder/Demultiplexer

Generic P/N 74LS138

Contents

[General Description](#)

[Features](#)

[Datasheet](#)

[Availability, Models, Samples & Pricing](#)

General Description

These Schottky-clamped circuits are designed to be used in high-performance memory-decoding or data-routing applications, requiring very short propagation delay times. In high-performance memory systems these decoders can be used to minimize the effects of system decoding. When used with high-speed memories, the delay times of these decoders are usually less than the typical access time of the memory, which means that the effective system delay introduced by the decoder is negligible.

The DM74LS138 decodes one-of-eight lines, based upon the conditions at the three binary select inputs. Two active-low and one active-high enable inputs reduce the need for external inverters when expanding. A 24-line decoder can be implemented with no external inverters, and the decoder requires only one inverter. An enable input can be used as a data input for demultiplexing applications.

The DM74LS139 comprises two separate two-line-to-four-line decoders in a single package. The active-low enable input can be used as a data line in demultiplexing applications.

All of these decoders/demultiplexers feature fully buffered inputs, presenting only one normalized loading circuit. All inputs are clamped with high-performance Schottky diodes to suppress line-ringing and simplify system design.

Features

- Designed specifically for high speed:

Memory decoders

Data transmission systems

- DM74LS138 3-to-8-line decoders incorporates 3 enable inputs to simplify cascading and/or d reception
- DM74LS139 contains two fully independent 2-to-4-line decoders/demultiplexers
- Schottky clamped for high performance
- Typical propagation delay (3 levels of logic)

DM74LS138 21 ns



DM74LS139 21 ns

- Typical power dissipation

DM74LS138 32 mW

DM74LS139 34 mW

Datasheet

Receive datasheet via E-mail  or download now ; use [Adobe Acrobat](#) to view...



[DM74LS138/DM74LS139 Decoder/Demultiplexer](#) (81 Kbytes; 29-JUL-00)

Availability, Models, Samples & Pricing

| Part Number | Grade | Package | | Status | Models | | Budgetary Pricing | | Std Pack Size | Packaging Marking |
|--------------|-------|----------------------|--------|-----------------|--------|------|---------------------------|----------------------------------|---------------|-------------------|
| | | Type | # pins | | SPICE | IBIS | Quantity | \$US ea | | |
| DM74LS138M | Comm | SOIC | 16 | Full Production | N/A | N/A | 1-24 25-99 100-1000 | \$0.5560 \$0.4170 \$0.3330 | N/A | \$Y&Z DM74 |
| DM74LS138MX | Comm | SOIC | 16 | Full Production | N/A | N/A | 1-24 25-99 100-1000 | \$0.5780 \$0.4330 \$0.3470 | N/A | \$Y&Z DM74 |
| DM74LS138SJX | Comm | SOIC | 16 | Full Production | N/A | N/A | | N/A | N/A | \$Y&Z LS |
| DM74LS138SJ | Comm | SOIC | 16 | Full Production | N/A | N/A | | N/A | N/A | \$Y&Z LS |
| DM74LS138N | Comm | MDIP | 16 | Full Production | N/A | N/A | 1-24 25-99 100-1000 | \$0.4220 \$0.3170 \$0.2530 | N/A | \$Y&Z DM74 |
| DM74LS138CW | Comm | wafer | | Preliminary | N/A | N/A | | N/A | N/A | |

Quick Search

[Company](#)
[What's New](#)
[Products](#)
[Search Tools](#)
[Contact Fairchild](#)
[Home](#)

Copyright