

National Semiconductor is now part of
Texas Instruments.

Search <http://www.ti.com/> for the latest technical
information and details on our current products and services.

DS36276 FAILSAFE Multipoint Transceiver

General Description

The DS36276 FAILSAFE Multipoint Transceiver is designed for use on bi-directional differential busses. It is compatible with existing TIA/EIA-485 transceivers, however, it offers an additional feature not supported by standard transceivers.


The FAILSAFE feature guarantees the receiver output to a known state when the Interface is in the following conditions: Floating Line, Idle Line (no active drivers), and Line Fault conditions (open or short). The receiver output is in a HIGH state for the following conditions: OPEN Inputs, Terminated Inputs (50Ω), and SHORTED Inputs.

FAILSAFE is a highly desirable feature when the transceivers are used with Asynchronous Controllers such as UARTs.

Features

- FAILSAFE receiver, RO = HIGH for:
 - OPEN inputs
 - Terminated inputs
 - SHORTED inputs
- Compatible with popular interface standards:
 - TIA/EIA-485 (RS-485)
 - TIA/EIA-422-A (RS-422-A)
 - CCITT Recommendation V.11
- Bi-Directional Transceiver
 - Designed for multipoint transmission
- Separate driver input, driver enable, receiver enable, and receiver output for maximum flexibility
- Wide bus common mode range
 - ($-7V$ to $+12V$)
- Pin compatible with: DS75176B, DS96176, DS3695 and SN75176A and B
- Available in SOIC package

Connection and Logic Diagram



Order Number DS36276M
See NS Package Number M08A

Truth Tables

Driver

| Inputs | | | Outputs | |
|-----------------|----|----|---------|-------------------------------|
| \overline{RE} | DE | DI | DO/RI | $\overline{DO}/\overline{RI}$ |
| X | H | H | H | L |
| X | H | L | L | H |
| X | L | X | Z | Z |

Receiver

| Inputs | | | Output |
|-----------------|----|-----------------------|--------|
| \overline{RE} | DE | $RI-\overline{RI}$ | RO |
| L | L | $\geq 0V$ | H |
| L | L | $\leq -500\text{ mV}$ | L |
| H | X | X | Z |

Receiver FAILSAFE

| Inputs | | | Output |
|-----------------|----|--------------------|--------|
| \overline{RE} | DE | $RI-\overline{RI}$ | RO |
| L | L | SHORTED | H |
| L | L | OPEN | H |
| H | X | X | Z |

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|--|-----------------|
| Supply Voltage (V_{CC}) | 7V |
| Input Voltage (DE, \overline{RE} , and DI) | 5.5V |
| Driver Output Voltage/Receiver Input Voltage | -10V to +15V |
| Receiver Output Voltage (RO) | 5.5V |
| Maximum Package Power Dissipation @ +25°C | |
| M Package (derate 5.8 mW/°C above +25°C) | 726 mW |
| Storage Temperature Range | -65°C to +150°C |

| | |
|-------------------------------------|----------|
| Lead Temperature (Soldering 4 sec.) | 260°C |
| Max Junction Temperature | 150°C |
| ESD Rating (HBM, 1.5 kΩ, 100 pF) | ≥ 6.0 kV |

Recommended Operating Conditions

| | Min | Max | Units |
|---|------|------|-------|
| Supply Voltage, V_{CC} | 4.75 | 5.25 | V |
| Bus Voltage | -7 | +12 | V |
| Operating Temperature (T_A) DS36276 | 0 | +70 | °C |

Electrical Characteristics (Notes 2, 4)

Over recommended Supply Voltage and Operating Temperature ranges, unless otherwise specified.

| Symbol | Parameter | Conditions | Min | Typ | Max | Units | |
|---------------------------------|---|---|-----------------------------|------------|------------|------------|----|
| DRIVER CHARACTERISTICS | | | | | | | |
| V_{OD} | Differential Output Voltage | $I_O = 0$ mA (No Load) | 1.5 | 4.8 | 6.0 | V | |
| V_{ODO} | Output Voltage | $I_O = 0$ mA (Output to GND) | 0 | | 6.0 | V | |
| $V_{\overline{ODO}}$ | Output Voltage | | 0 | | 6.0 | V | |
| V_{T1} | Differential Output Voltage (Termination Load) | $R_L = 54\Omega$ (485) $R_L = 100\Omega$ (422) | (Figure 1) | 1.5 2.0 | 2.0 2.3 | 5.0 5.0 | V |
| ΔV_{T1} | Balance of V_{T1} $ V_{T1} - \overline{V_{T1}} $ | $R_L = 54\Omega$ $R_L = 100\Omega$ | (Note 3) | -0.2 | 0.07 | +0.2 | V |
| V_{OS} | Driver Common Mode Output Voltage | $R_L = 54\Omega$ $R_L = 100\Omega$ | (Figure 1) | 0 | 2.5 | 3.0 | V |
| ΔV_{OS} | Balance of V_{OS} $ V_{OS} - \overline{V_{OS}} $ | $R_L = 54\Omega$ $R_L = 100\Omega$ | (Note 3) | -0.2 | 0.08 | +0.2 | V |
| I_{OSD} | Driver Short-Circuit Output Current | $V_O = +12V$ $V_O = V_{CC}$ $V_O = 0V$ $V_O = -7V$ | (Figure 3) | | 134 | 290 | mA |
| | | | | | 140 | | mA |
| | | | | | -140 | | mA |
| | | | | | -180 | -290 | mA |
| RECEIVER CHARACTERISTICS | | | | | | | |
| V_{TH} | Differential Input High Threshold Voltage (Note 5) | $V_O = V_{OH}$, $I_O = -0.4$ mA $-7V \leq V_{CM} \leq +12V$ | | -0.18 | 0 | | V |
| V_{TL} | Differential Input Low Threshold Voltage (Note 5) | $V_O = V_{OL}$, $I_O = 8.0$ mA $-7V \leq V_{CM} \leq +12V$ | -0.5 | -0.23 | | | V |
| V_{HST} | Hysteresis (Note 6) | $V_{CM} = 0V$ | | 50 | | | mV |
| I_{IN} | Line Input Current ($V_{CC} = 4.75V, 5.25V, 0V$) | Other Input = 0V DE = V_{IH} (Note 7) | $V_I = +12V$ $V_I = -7V$ | | 0.7 | 1.0 | mA |
| | | | | | -0.5 | -0.8 | mA |
| I_{OSR} | Short Circuit Current | $V_O = 0V$ | RO | -5.0 | -30 | -85 | mA |
| I_{OZ} | TRI-STATE® Leakage Current | $V_O = 0.4$ to 2.4V | | -20 | | +20 | μA |
| V_{OH} | Output High Voltage (Figure 12) | $V_{ID} = 0V$, $I_{OH} = -0.4$ mA $V_{ID} = OPEN$, $I_{OH} = -0.4$ mA | | 2.5 | 3.5 | | V |
| | | | | 2.5 | 3.5 | | V |
| V_{OL} | Output Low Voltage (Figure 12) | $V_{ID} = -0.5V$, $I_{OL} = +8$ mA $V_{ID} = -0.5V$, $I_{OL} = +16$ mA | | | 0.25 | 0.6 | V |
| | | | | | 0.35 | 0.7 | V |
| R_{IN} | Input Resistance | | | 12 | 19 | | kΩ |

Electrical Characteristics (Notes 2, 4) (Continued)

Over recommended Supply Voltage and Operating Temperature ranges, unless otherwise specified.

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|-------------------------------|--------------------------|---------------------------|---------------|-------|------|------------|
| DEVICE CHARACTERISTICS | | | | | | |
| V_{IH} | High Level Input Voltage | | DE, RE, or DI | 2.0 | | V_{CC} V |
| V_{IL} | Low Level Input Voltage | | | GND | | 0.8 V |
| I_{IH} | High Level Input Current | $V_{IH} = 2.4V$ | | | 20 | μA |
| I_{IL} | Low Level Input Current | $V_{IL} = 0.4V$ | | | -100 | μA |
| V_{CL} | Input Clamp Voltage | $I_{CL} = -18 mA$ | | -0.75 | -1.5 | V |
| I_{CC} | Output Low Voltage | DE = 3V, RE = 0V, DI = 0V | | 42 | 60 | mA |
| I_{CCR} | Supply Current (No Load) | DE = 0V, RE = 0V, DI = 0V | | 28 | 45 | mA |
| I_{CCD} | | DE = 3V, RE = 3V, DI = 0V | | 43 | 60 | mA |
| I_{CCX} | | DE = 0V, RE = 3V, DI = 0V | | 31 | 50 | mA |

Switching Characteristics (Note 4)

Over recommended Supply Voltage and Operating Temperature ranges, unless otherwise specified.

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|---------------------------------|--|--|-----|-----|-----|-------|
| DRIVER CHARACTERISTICS | | | | | | |
| t_{PLHD} | Diff. Prop. Delay Low to High | $R_L = 54\Omega$ $C_L = 50 pF$ $C_D = 50 pF$ (Figures 4, 5) | 7 | 21 | 60 | ns |
| t_{PHLD} | Diff. Prop. Delay High to Low | | 7 | 19 | 60 | ns |
| t_{SKD} | Diff. Skew ($ t_{PLHD} - t_{PHLD} $) | | | 2 | 10 | ns |
| t_r | Diff. Rise Time | | | 12 | 50 | ns |
| t_f | Diff. Fall Time | | | 12 | 50 | ns |
| t_{PLH} | Prop. Delay Low to High | $R_L = 27\Omega$, $C_L = 15 pF$ (Figures 6, 7) | | 22 | 45 | ns |
| t_{PHL} | Prop. Delay High to Low | | | 22 | 45 | ns |
| t_{PZH} | Enable Time Z to High | $R_L = 110\Omega$ $C_L = 50 pF$ (Figure 8 - Figure 11) | | 32 | 55 | ns |
| t_{PZL} | Enable Time Z to Low | | | 32 | 65 | ns |
| t_{PHZ} | Disable Time High to Z | | | 22 | 55 | ns |
| t_{PLZ} | Disable Time Low to Z | | | 16 | 55 | ns |
| RECEIVER CHARACTERISTICS | | | | | | |
| t_{PLH} | Prop. Delay Low to High | $V_{ID} = -1.5V$ to $+1.5V$ $C_L = 15 pF$ (Figures 13, 14) | 15 | 40 | 70 | ns |
| t_{PHL} | Prop. Delay High to Low | | 15 | 42 | 70 | ns |
| t_{SK} | Skew ($ t_{PLH} - t_{PHL} $) | | | 2 | 15 | ns |
| t_{PZH} | Enable Time Z to High | $C_L = 15 pF$ (Figures 15, 16) | | 15 | 50 | ns |
| t_{PZL} | Enable Time Z to Low | | | 17 | 50 | ns |
| t_{PHZ} | Disable Time High to Z | | | 24 | 50 | ns |
| t_{PLZ} | Disable Time Low to Z | | | 19 | 50 | ns |

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The tables of "Electrical Characteristics" specify conditions for device operation.

Note 2: Current into device pins is defined as positive. Current out of device pins is defined as negative. All voltages are referenced to ground unless otherwise specified.

Note 3: $\Delta |V_{T1}|$ and $\Delta |V_{OS}|$ are changes in magnitude of V_{T1} and V_{OS} , respectively, that occur when the input changes state.

Note 4: All typicals are given for $V_{CC} = 5.0V$ and $T_A = +25^\circ C$.

Note 5: Threshold parameter limits specified as an algebraic value rather than by magnitude.

Note 6: Hysteresis defined as $V_{HST} = V_{TH} - V_{TL}$.

Note 7: I_{IN} includes the receiver input current and driver TRI-STATE leakage current.

Parameter Measurement Information

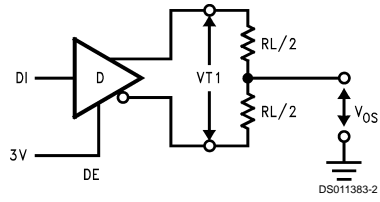


FIGURE 1. Driver V_{T1} and V_{OS} Test Circuit

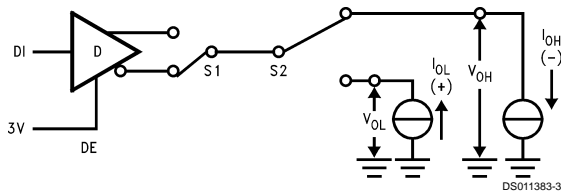


FIGURE 2. Driver V_{OH} and V_{OL} Test Circuit

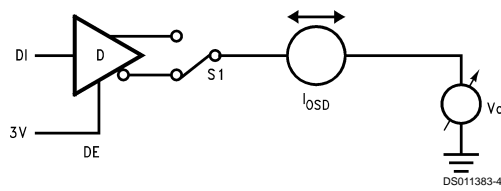


FIGURE 3. Driver Short Circuit Test Circuit

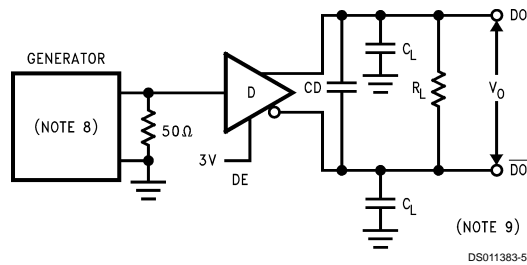


FIGURE 4. Driver Differential Propagation Delay and Transition Time Test Circuit

Parameter Measurement Information (Continued)

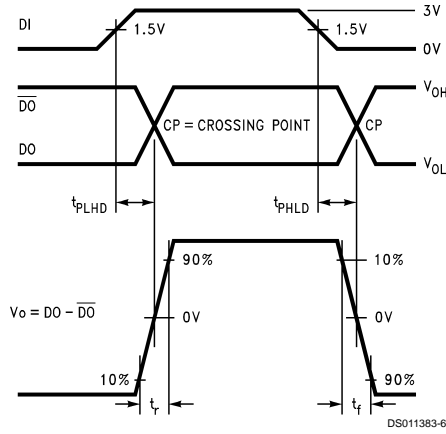


FIGURE 5. Driver Differential Propagation Delays and Transition Times

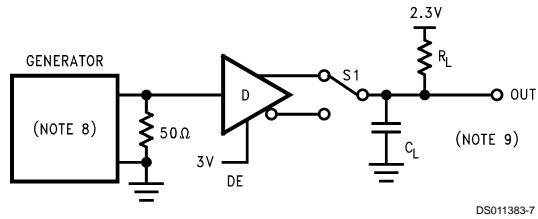


FIGURE 6. Driver Propagation Delay Test Circuit


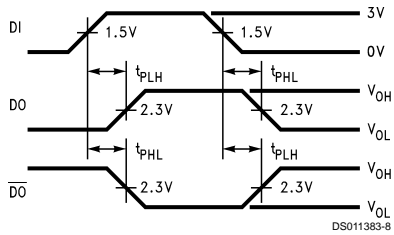


FIGURE 7. Driver Propagation Delays

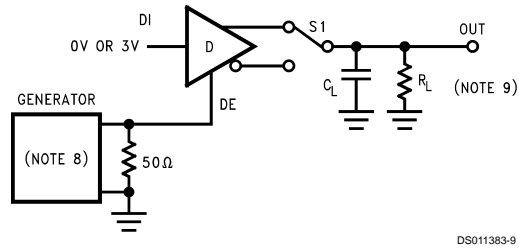

S1 to DO for DI = 3V
S1 to \overline{DO} for DI = 0V

FIGURE 8. Driver TRI-STATE Test Circuit (t_{PZH} , t_{PHZ})

Parameter Measurement Information (Continued)


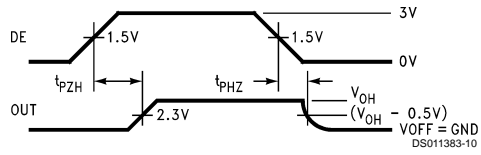


FIGURE 9. Driver TRI-STATE Delays (t_{PZH} , t_{PHZ})

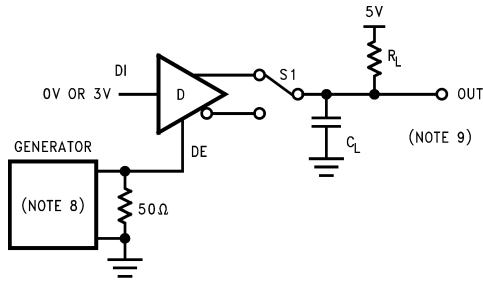

DS011383-11

S1 to \overline{DO} for DI = 0V
S1 to \overline{DO} for DI = 3V

FIGURE 10. Driver TRI-STATE Test Circuit (t_{PZL} , t_{PLZ})



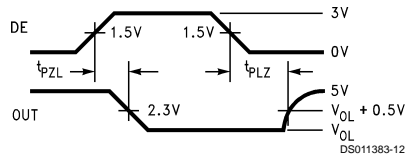


FIGURE 11. Driver TRI-STATE Delays (t_{PZL} , t_{PLZ})

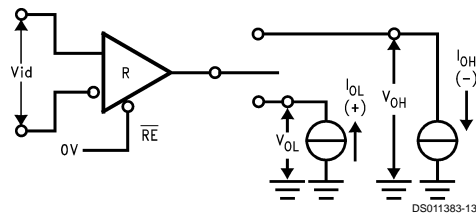

DS011383-13

FIGURE 12. Receiver V_{OH} and V_{OL}

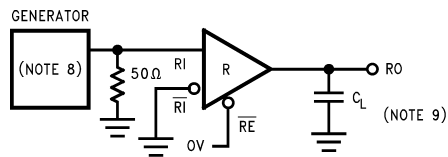

DS011383-14

FIGURE 13. Receiver Propagation Delay Test Circuit

Parameter Measurement Information (Continued)

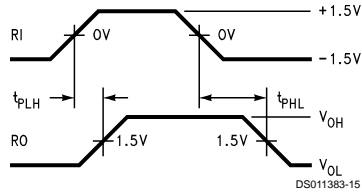


FIGURE 14. Receiver Propagation Delays


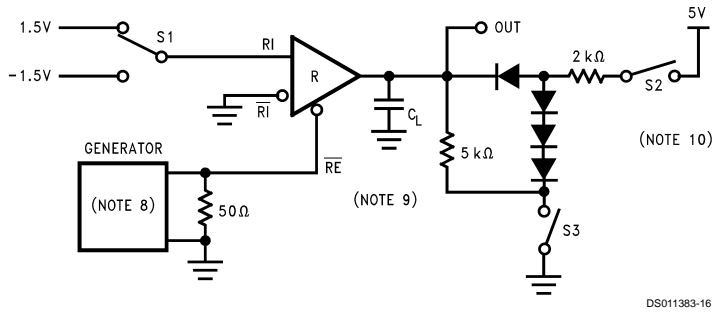


FIGURE 15. Receiver TRI-STATE Delay Test Circuit

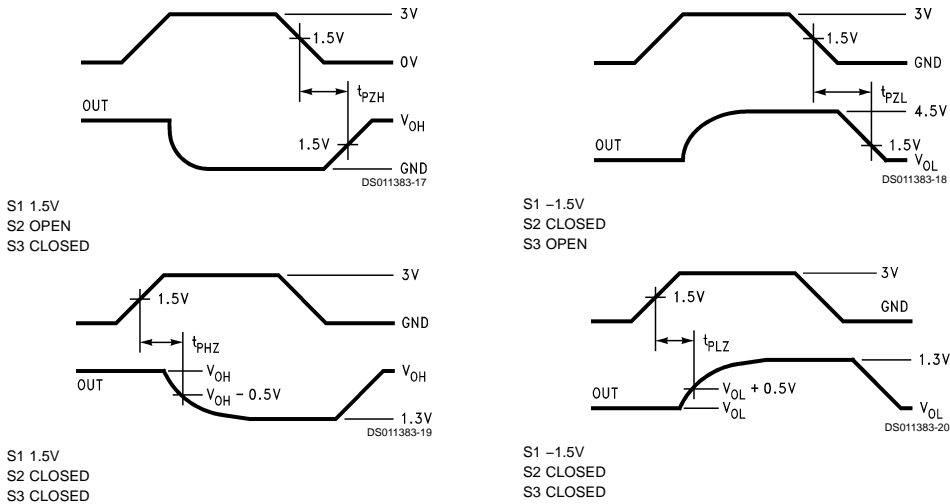

Note 8: The input pulse is supplied by a generator having the following characteristics: $f = 1.0$ MHz, 50% duty cycle, t_r and $t_f < 6.0$ ns, $Z_0 = 50\Omega$.


Note 9: C_L includes probe and stray capacitance.

Note 10: Diodes are 1N916 or equivalent.

FIGURE 16. Receiver Enable and Disable Timing


Typical Performance Characteristics

Differential Output Voltage vs Output Current

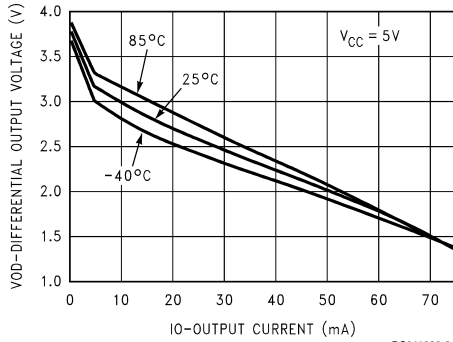


DS011383-21

Differential Output Voltage vs Output Current

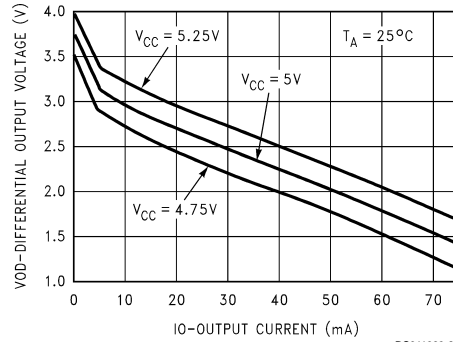


DS011383-22

Driver V_{OH} vs I_{OH} vs V_{CC}

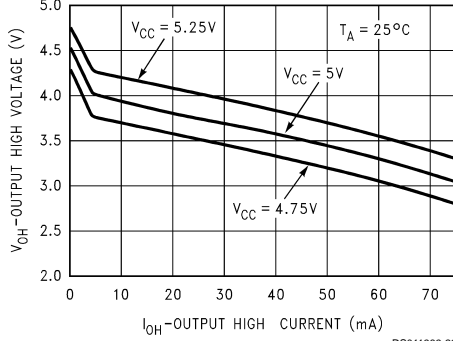


DS011383-23

Driver V_{OH} vs I_{OH} vs Temperature

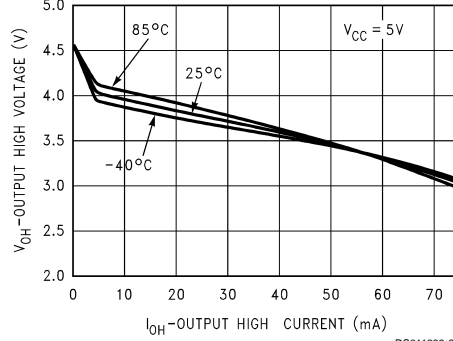


DS011383-24

Driver V_{OL} vs I_{OL} vs V_{CC}

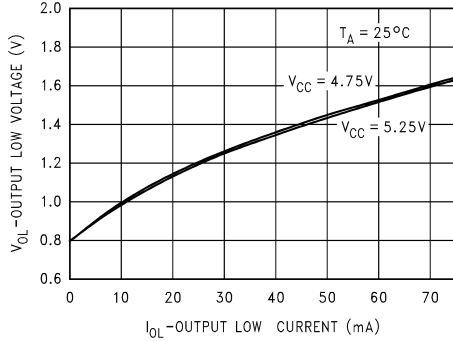

DS011383-25


Driver V_{OL} vs I_{OL} vs Temperature

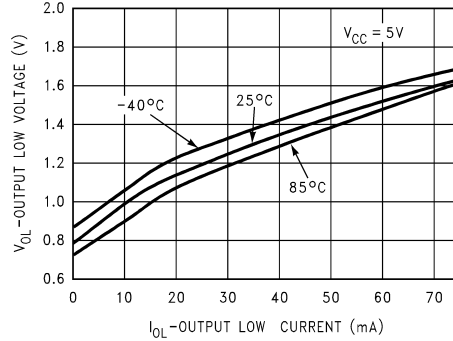


DS011383-26

Typical Performance Characteristics (Continued)


Receiver V_{OH} vs I_{OH} vs V_{CC}

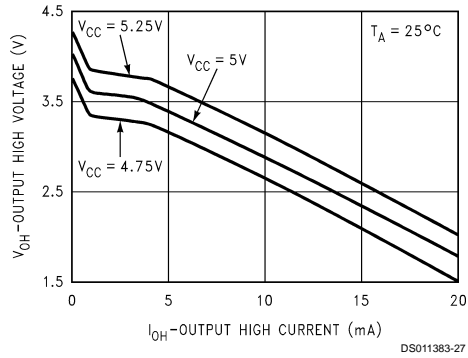


Receiver V_{OH} vs I_{OH} vs Temperature

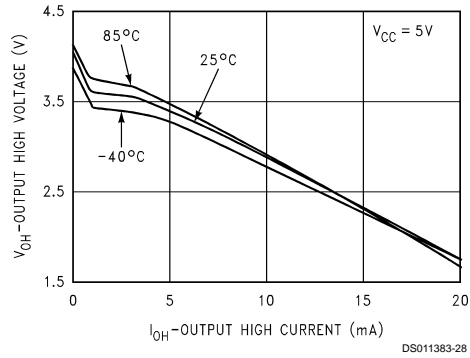


Receiver V_{OL} vs I_{OL} vs V_{CC}

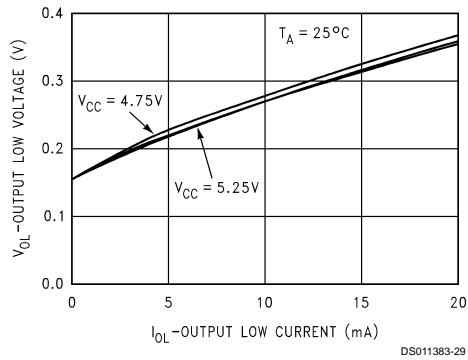


Receiver V_{OL} vs I_{OL} vs Temperature

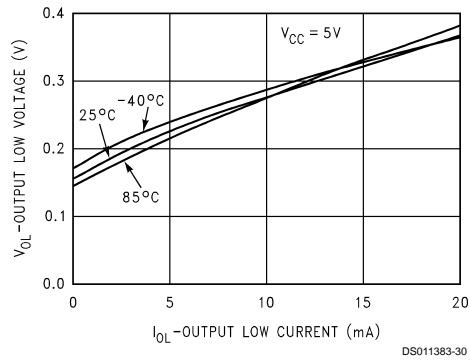

Supply Current vs Supply Voltage

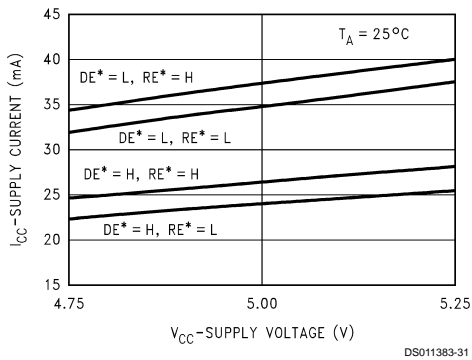


Supply Current vs Temperature

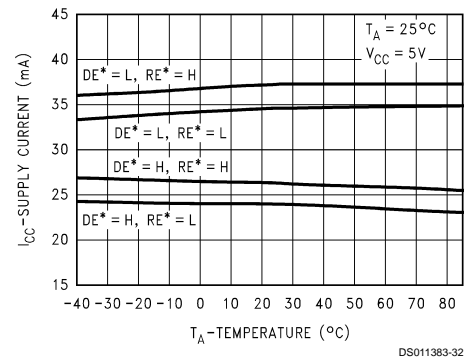


Typical Performance Characteristics (Continued)

Voltage Output vs Voltage Input
(Hysteresis)

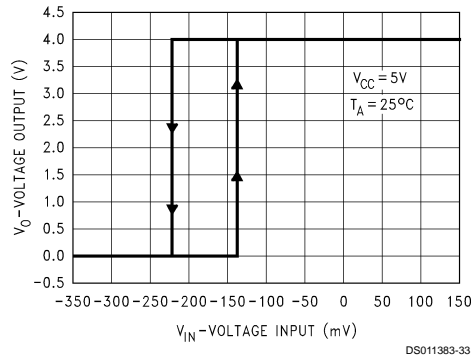



Physical Dimensions inches (millimeters) unless otherwise noted

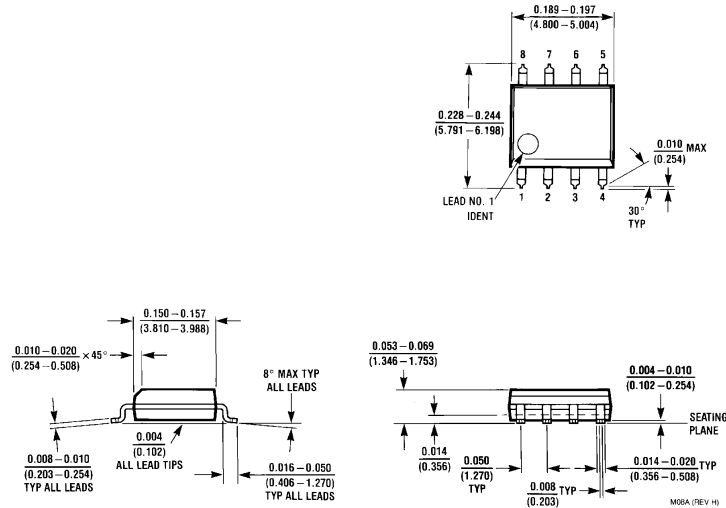

Order Number DS36276M
NS Package Number M08A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

| | | | |
|--|---|--|---|
|  <p>National Semiconductor Corporation Americas Tel: 1-800-272-9959 Fax: 1-800-737-7018 Email: support@nsc.com</p> <p>www.national.com</p> | <p>National Semiconductor Europe Fax: +49 (0) 1 80-530 85 86 Email: europe.support@nsc.com Deutsch Tel: +49 (0) 1 80-530 85 85 English Tel: +49 (0) 1 80-532 78 32 Français Tel: +49 (0) 1 80-532 93 58 Italiano Tel: +49 (0) 1 80-534 16 80</p> | <p>National Semiconductor Asia Pacific Customer Response Group Tel: 65-2544466 Fax: 65-2504466 Email: sea.support@nsc.com</p> | <p>National Semiconductor Japan Ltd. Tel: 81-3-5639-7560 Fax: 81-3-5639-7507</p> |
|--|---|--|---|

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.



[Products](#) > [Analog - Interface](#) > [Data Transmission Circuits](#) > [RS-485](#) > DS36276

Product Folder

DS36276 FailSafe Multipoint Transceiver

Contents

- [General Description](#)
- [Features](#)
- [Datasheet](#)
- [Package Availability, Models, Samples & Pricing](#)
- [Application Notes](#)

| Parametric Table | |
|---------------------|---------|
| Number of Drivers | 1 |
| Number of Receivers | 1 |
| Supply Voltage | 5 V |
| Process | Bipolar |

General Description

The DS36276 FAILSAFE Multipoint Transceiver is designed for use on bi-directional differential busses. It is compatible with existing TIA/EIA-485 transceivers, however, it offers an additional feature not supported by standard transceivers.

The FAILSAFE feature guarantees the receiver output to a known state when the Interface is in the following conditions: Floating Line, Idle Line (no active drivers), and Line Fault conditions (open or short). The receiver output is in a HIGH state for the following conditions: OPEN Inputs, Terminated Inputs (50 Ohm), and SHORTED Inputs.

FAILSAFE is a highly desirable feature when the transceivers are used with Asynchronous Controllers such as UARTs.

Features

- FAILSAFE receiver, RO = HIGH for:
 - OPEN inputs
 - Terminated inputs
 - SHORTED inputs
- Compatible with popular interface standards:
 - TIA/EIA-485 (RS-485)
 - TIA/EIA-422-A (RS-422-A)
 - CCITT Recommendation V.11
- Bi-Directional Transceiver
 - Designed for multipoint transmission

- Separate driver input, driver enable, receiver enable, and receiver output for maximum flexibility
- Wide bus common mode range
 - (-7V to +12V)
- Pin compatible with: DS75176B, DS96176, DS3695 and SN75176A and B
- Available in SOIC package

Datasheet

| Title | Size (in Kbytes) | Date | <input type="checkbox"/> View Online | <input type="checkbox"/> Download | <input type="checkbox"/> Receive via Email |
|--|------------------|----------|--------------------------------------|-----------------------------------|--|
| DS36276 FAILSAFE Multipoint Transceiver | 236 Kbytes | 4-Mar-99 | View Online | Download | Receive via Email |
| DS36276 FAILSAFE Multipoint Transceiver (JAPANESE) | 431 Kbytes | | <input type="checkbox"/> View Online | <input type="checkbox"/> Download | <input type="checkbox"/> Receive via Email |

Please use [Adobe Acrobat](#) to view PDF file(s).

If you have trouble printing, see [Printing Problems](#).

Package Availability, Models, Samples & Pricing

| Part Number | Package | | Status | Models | | Samples & Electronic Orders | Budgetary Pricing | | Std Pack Size | Package Marking |
|-------------|-----------------------------|--------|-----------------|--------|------|--|-------------------|-----------|---------------|---------------------------------|
| | Type | # pins | | SPICE | IBIS | | Quantity | \$US each | | |
| DS36276M | SOIC NARROW | 8 | Full production | N/A | N/A | <input type="checkbox"/> 24 Hour Samples <input type="checkbox"/> Buy Now | 1K+ | \$1.3400 | tube of 95 | [logo]¢2¢T DS36 276M |
| DS36276MX | SOIC NARROW | 8 | Full production | N/A | N/A | | 1K+ | \$1.3400 | reel of 2500 | [logo]¢2¢T DS36 276M |
| DS36276 MDC | Die | | Full production | N/A | N/A | | | | tray of N/A | - |

Application Notes

| Title | Size (in Kbytes) | Date | <input type="checkbox"/> View Online | <input type="checkbox"/> Download | <input type="checkbox"/> Receive via Email |
|---|------------------|----------|--------------------------------------|-----------------------------------|--|
| AN-1057: Application Note 1057 Ten Ways to Bulletproof RS-485 Interfaces | 155 Kbytes | 5-Oct-98 | View Online | Download | Receive via Email |
| AN-1031: Application Note 1031 TIA/EIA-422-B Overview | 101 Kbytes | 3-Feb-00 | View Online | Download | Receive via Email |

Please use [Adobe Acrobat](#) to view PDF file(s).

If you have trouble printing, see [Printing Problems](#).

[Information as of 3-Oct-2001]

Quick Search

[Parametric
Search](#)

[System
Diagrams](#)

[Product
Tree](#)

[Home](#)

[About Languages](#) . [Website Guide](#) . [About "Cookies"](#) . National is [QS 9000 Certified](#)
[Site Terms & Conditions of Use](#) . Copyright 2001 © National Semiconductor Corporation
[Privacy/Security Statement](#) . [Preferences](#) . [Feedback](#)