



Multilayer High Pass Filter

For 5150-5850MHz

DEA165150HT-8025C2

1.6x0.8mm [EIA 0603]*

* Dimensions Code JIS[EIA]




Multilayer High Pass Filter


For 5150-5850MHz

Conformity to RoHS Directive

DEA165150HT-8025C2


SHAPES AND DIMENSIONS





Terminal functions	
1 Input Port	Ī
2 GND	
3 Output Port	
4 GND	
imensions in mm	

■ RECOMMENDED LAND PATTERN



Dimensions in mm

OROHS Directive Compliant Product: See the following for more details.https://product.tdk.com/info/en/environment/rohs/index.html

[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.



DEA165150HT-8025C2

ELECTRICAL CHARACTERISTICS

Item	Frequency Range (MHz)	Min.	Тур.	Max.
Incomtion Loop (dD)	5150 to 5850	_	0.18	0.40
Insertion Loss (dB)	5150 to 5850	_	_	0.50 (-40 to +85°C)
Return Loss (dB)	5150 to 5850	15	23	_
	699 to 1800	25	31	_
Attenuation (dB)	1800 to 2000	30	45	_
	2000 to 2690	25	33	_
Characteristic Impedance (Ω)			50 (Nominal)	

[·] Ta: +25±5°C

■TEMPERATURE RANGE

Operating temperature	Storage temperature	
(°C)	(°C)	
-40 to +85	-40 to +85	


All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.




DEA165150HT-8025C2

■ FREQUENCY CHARACTERISTICS


□INSERTION LOSS



ATTENUATION



□RETURN LOSS

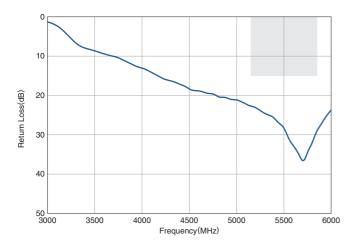


[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.



DEA165150HT-8025C2

■ RECOMMENDED REFLOW PROFILE

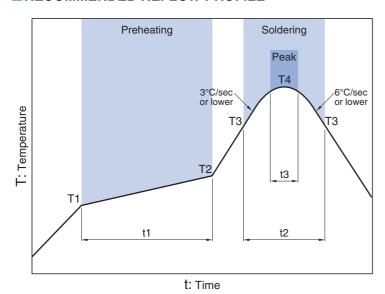

Preheating	eating			Soldering Critical zone (T3 to T4) Peak		
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3*
150°C	200°C	60 to 120sec	217°C	60 to 120sec	240 to 260°C	30sec max.

^{*}t3: Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.



REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

⚠ REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.

All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.