## **─ ASB160 Series**



## 160W BASEPLATE

The ASB160 series is a range of complete low profile, full brick, baseplate cooled AC-DC power supplies which requires no external components.

The series includes a complete built in EMC filter and AC fuse as well as bulk storage capacitor providing a complete AC-DC power solution ready for installation into end applications.

The ASB160 offers high efficiency to minimise waste heat and heat sinking requirements and operates from  $-40^{\circ}$ C to  $+90^{\circ}$ C on the module baseplate.

### **Features**

- Complete AC-DC power supply
- No extra components required
- Baseplate cooled full brick package
- Low profile
- Input range 90 to 264VAC
- Single outputs from 12 to 54VDC
- Output voltage trim ±5%
- High efficiency up to 93%
- Over current, over voltage and over temperature protection
- Optional heatsink available
- -40 to +90°C baseplate operating temperature
- 3 year warranty

#### **AC-DC POWER SUPPLIES**



### **Applications**







AC-DC Converters

Industrial Electronics

Instrumentation







Railwa

Security

Dimensions

2.40 x 4.60 x 0.78" (61.0 x 116.8 x 19.7 mm)

### **Models & Ratings**

Model number <sup>(1)</sup>	Output Power	Output Voltage	Output Current	Ripple & Noise	Efficiency <sup>(2)</sup>
ASB160PS12	160W	12.0V	13.30A	120mV	92.0%
ASB160PS15		15.0V	10.66A	150mV	93.0%
ASB160PS24		24.0V	6.66A	240mV	92.0%
ASB160PS36		36.0V	4.44A	360mV	93.0%
ASB160PS48		48.0V	3.33A	480mV	93.0%
ASB160PS54		54.0V	2.96A	540mV	91.0%

#### Notes:

- 1. Add suffix '-HK' to receive with optional heat-sink fitted.
- 3. Optional heatsink can be ordered as a separate item using part number IFH HEATSINK
- 2. Typical efficiency with 230VAC input and full load.

# **← ASB160 Series**

### Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage	90		264	VAC	
Input Frequency	47		63	Hz	
Input Current		1.7/0.82		А	115VAC/230VAC
Inrush Current			100	А	230VAC, cold start at 25°C
Earth Leakage Current			750	μΑ	264VAC, 60Hz
Power Factor	0.9				Full load
No Load Input Power			0.5/0.7	W	12V-48V/54V
Input Protection	Internal T3.15A/25	OVAC fitted in line			

### General

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency		92		%	See models and ratings table
Isolation: Input to Output			3000	VAC	
Input to Ground			1500	VAC	
Output to Ground			500	VAC	
Outtobing Forman	180		250	kHz	Main converter, variable, load dependant
Switching Frequency	100		150		PFC
Power Density		18.5		W/in³	
Mean Time Between Failure	160			khrs	MIL-HDBK-217F at 25°C GB and 115VAC
Weight		0.62 (280)		lb(g)	

### Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions	
Output Voltage	12		54	VDC	See Models and Ratings table	
Initial Set Accuracy		1		%	At 60% load	
Output Voltage Trim	95		105	%	Of nominal output voltage. See application note	
Minimum Load					No minimum load required	
Start Up Delay			1.3	S		
Start Up Rise Time			10	ms		
Hold Up Time	8	10		ms	Full load and 115VAC	
Line Regulation			±0.5	%		
Load Regulation			±0.5	%		
Transient Response			2	%	Maximum deviation, recovering to less than 1% withi 300µs for 25% step load	
Ripple and Noise			1	% pk-pk	20MHz bandwidth, measured with 20MHz Bandwidth and 10μF electrolytic in parallel with 0.1μF ceramic capacitor	
Overload Protection	110		140	%		
Overvoltage Protection	110		150	%	Auto recovery except 54V version recycle AC to reset	
Short Circuit Protection	Trip and restart (h	niccup), auto reset	ting			
Thermal Protection	Measured interna	ally at the basepla	te, auto resetting			
Temperature Coefficient		0.02		%/°C	After 20 minute warm up	
Remote Sense			5	%	Maximum compensation	

# **← ASB160 Series**

### **Environmental**

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions			
Operating Temperature	-40		+90	°C	Baseplate Temperature, see derating curve			
Cooling	Conduction coole	Conduction cooled via baseplate						
Operating Humidity	5		90	%RH	Non-condensing			
Storage Temperature	-40		+90	°C				
Operating Altitude		5000 m						
Shock	IEC68-2-27, 30g	IEC68-2-27, 30g, 11ms half sine, 3 times in each of 6 axes						
Vibration	IEC68-2-6, 10-5	IEC68-2-6, 10-500Hz, 2g 10 mins/sweep, 60 mins for each of 3 axes						

### **EMC: Emissions**

Phenomenon	Standard	Test Level	Notes & Conditions
Conducted	ENEEGOO	Lavel B	
ESD	EN55032	Level B	
Harmonic Currents	EN61000-3-2	Class A	
Voltage Flicker	EN61000-3-3		

### **EMC: Immunity**


Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
Radiated	EN61000-4-2	3/2	Α	±8kV air/±4kV contact
Radiated Immunity	EN61000-4-3	3V/m	Α	
EFT/Burst	EN61000-4-4	2	Α	
Surge	EN61000-4-5	Installation Class 3	Α	
Conducted	EN61000-4-6	3V	Α	
		Dip: 100% 10ms	A/B	High Line/Low Line
Dips and Interruptions	EN61000-4-11	Dip: 30% 500ms	A/B	High Line/Low Line
		Int: 100% 5000ms	В	

### Safety Approvals

Safety Agency	Standard	Notes & Conditions
UL	UL62368-1	
TUV	EN62368-1	
СВ	IEC62368-1	
CE	Meets all applicable directives	
UKCA	Meets all applicable legislation	

## **─ ASB160 Series**

### **Mechanical Details**

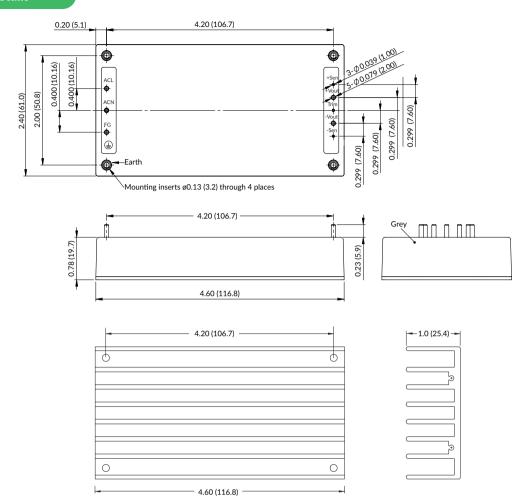


#### Notes:


**Heatsink Option** 

- 1. Dimensions shown in inches (mm).
- 2. Weight: 0.62lb (280g)
- 3. Pin diameter: 0.08 ±0.002 (2.0 ±0.05)

- 4. Pin pitch tolerance: ±0.014 (±0.35)
- 5. Case tolerance: ±0.02 (±0.5)
- 6. Baseplate is connected to FG Pin

### **Derating Curve**

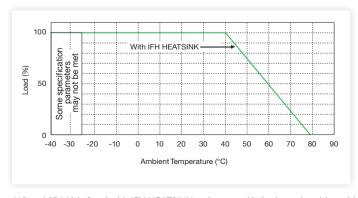

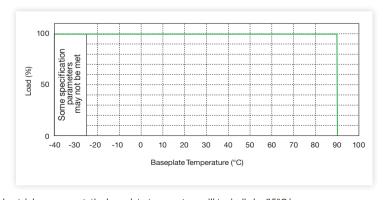


When ASB160 is fitted with IFH HEATSINK and mounted in horizontal position with heatsink upper most, the baseplate temperature will typically be 85°C in an ambient of 40°C.


## **─ ASB160 Series**

### **Efficiency Curves**

### ASB160PS12

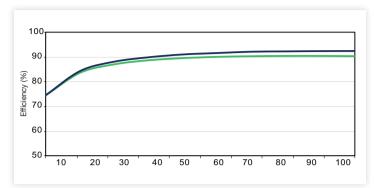


### ASB160PS24

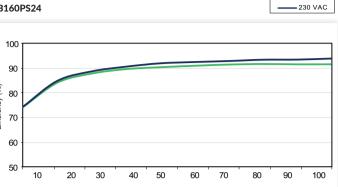

-115 VAC

### **Output Voltage Adjustment**

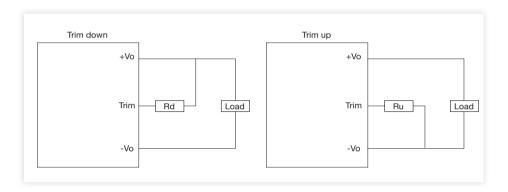

#### To Trim Down

Connecting an external resistor (Rd) between the Trim pin and the +Vo pin decreases the output voltage. The following table can be used to determine the required external resistor value to obtain a percentage output voltage change of 5%.

Trim Down (%)	12V 15V 24V 36V 48V 54V							
		Rd (k $\Omega$ )						
5	288.7	398.5	738	1215	1776	2005		

#### To Trim Up

Connecting an external resistor (Ru) between the Trim pin and the -Vo pin increases the output voltage. The following table can be used to determine the required external resistor value to obtain a percentage output voltage change of 5%.

Trim Up (%)	12V	15 <b>V</b>	24V	36V	48V	54 <b>V</b>	
	Ru (kΩ)						
5	79	84	90.8	92.8	89.4	90.8	