

## **Data sheet for SINAMICS G120X**

Article No.: 6SL3230-1YH52-0CF0

Client order no. : Order no. : Offer no. : Remarks :

Rated data				
Input				
	Number of phases	3 AC		
	Line voltage	500 690 V +10 %	-20 %	
	Line frequency	47 63 Hz		
	Rated voltage	690V IEC	600V NEC	
	Rated current (LO)	205.00 A	205.00 A	
	Rated current (HO)	185.10 A	185.10 A	
Output				
	Number of phases	3 AC		
	Rated voltage	690V IEC	600V NEC 1)	
	Rated power (LO)	200.00 kW	200.00 hp	
	Rated power (HO)	160.00 kW	150.00 hp	
	Rated current (LO)	208.00 A	208.00 A	
	Rated current (HO)	171.00 A	171.00 A	
	Rated current (IN)	213.00 A		
	Max. output current	281.00 A		
Pulse frequency		2 kHz		
Οι	tput frequency for vector control	0 200 Hz		
Οι	tput frequency for V/f control	0 550 Hz		
Overload capability				
Law Overland (LO)				

Low Overload (LO)

110% base load current IL for 60 s in a 300 s cycle time

High Overload (HO)

 $150\%\,x$  base load current IH for 60 s within a 600 s cycle time

General tech. specifications			
Power factor $\lambda$	0.90 0.95		
Offset factor $\cos\phi$	0.99		
Efficiency η	0.98		
Sound pressure level (1m)	74 dB		
Power loss 3)	3.700 kW		
Filter class (integrated)	RFI suppression filter for Category C3		
EMC category (with accessories)	Category C3		
Safety function "Safe Torque Off"	without SIRIUS device (e.g. via S7- 1500F)		

Communication

Communication PROFINET, EtherNet/IP



Item no. : Consignment no. : Project :

Inputs / outputs				
Standard digital inputs				
Number	6			
Switching level: $0 \rightarrow 1$	11 V			
Switching level: $1 \rightarrow 0$	5 V			
Max. inrush current	15 mA			
Fail-safe digital inputs				
Number	1			
Digital outputs				
Number as relay changeover contact	2			
Output (resistive load)	DC 30 V, 5.0 A			
Number as transistor	0			
Analog / digital inputs				
Number	2 (Differential input)			
Resolution	10 bit			
Switching threshold as digital input				
0 → 1	4 V			
1 → 0	1.6 V			
Analog outputs				
Number	1 (Non-isolated output)			

## PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy  $\pm 5~^\circ\text{C}$ 

Closed-loop control techniques		
V/f linear / square-law / parameterizable	Yes	
V/f with flux current control (FCC)	Yes	
V/f ECO linear / square-law	Yes	
Sensorless vector control	Yes	
Vector control, with sensor	No	
Encoderless torque control	No	
Torque control, with encoder	No	



## **Data sheet for SINAMICS G120X**

Article No.: 6SL3230-1YH52-0CF0


Ambient conditions				
Standard board coating type	Class 3C3, according to IEC 60721-3-3: 2002			
Cooling	Air cooling using an integrated fan			
Cooling air requirement	0.210 m <sup>3</sup> /s (7.416 ft <sup>3</sup> /s)			
Installation altitude	1,000 m (3,280.84 ft)			
Ambient temperature				
Operation	-20 45 °C (-4 113 °F)			
Transport	-40 70 °C (-40 158 °F)			
Storage	-25 55 °C (-13 131 °F)			
Relative humidity				
Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible			
Connections				
Signal cable				
Conductor cross-section	0.15 1.50 mm <sup>2</sup> (AWG 24 AWG 16)			
Line side				
Version	M10 screw			
Conductor cross-section	35.00 2 x 185.00 mm <sup>2</sup> (AWG 1 MCM 2 x 350)			
Motor end				
Version	M10 screw			
Conductor cross-section	35.00 2 x 185.00 mm <sup>2</sup> (AWG 1 MCM 2 x 350)			
DC link (for braking resistor)				
DC link (for braking resistor)				
DC link (for braking resistor)  PE connection	M10 screw			
	M10 screw			

Mechanical data				
Degree of protection	IP20 / UL open type			
Frame size	FSG			
Net weight	113 kg (249.12 lb)			
Dimensions				
Width	305 mm (12.01 in)			
Height	999 mm (39.33 in)			
Depth	369 mm (14.53 in)			
Standards				
Compliance with standards	UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH			
CE marking	EMC Directive 2004/108/EC, Low- Voltage Directive 2006/95/EC			

Converter losses to IEC61800-9-2\*

IE2

36.6 %

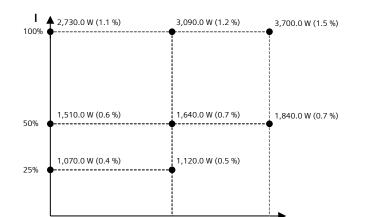

The percentage values show the losses in relation to the rated apparent power of the converter.

50%

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*converted values

Efficiency class

Comparison with the reference

converter (90% / 100%)

 $<sup>^{1)}\</sup>mbox{The output current}$  and HP ratings are valid for the voltage range 550V-600V

<sup>&</sup>lt;sup>3)</sup>Typical value. More information can be found in the element group "Converter losses to IEC 61800-9-2" in this datasheet.