## 3RA2110-4AD18-1AP0

**Data sheet** 



Load feeder fuseless, Direct-on-line starting 400 V AC, Size S00 10...16 A 230 V AC screw terminal for 60 mm busbar systems Type of coordination 1, Iq = 150 kA 1 NO (contactor)

product brand name	SIRIUS
product designation	Direct (on-line) starter
design of the product	for 60 mm busbars
product type designation	3RA21
manufacturer's article number	
<ul> <li>of the supplied contactor</li> </ul>	3RT2018-1AP01
<ul> <li>of the supplied circuit-breakers</li> </ul>	3RV2011-4AA10
<ul> <li>of the supplied busbar adapter</li> </ul>	<u>8US1251-5DS10</u>
<ul> <li>of the supplied link module</li> </ul>	3RA1921-1DA00
General technical data	
size of the circuit-breaker	S00
size of load feeder	S00
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
degree of protection NEMA rating	other
shock resistance according to IEC 60068-2-27	6g / 11 ms
mechanical service life (switching cycles) of contactor typical	30 000 000
type of assignment	1
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
ambient temperature	
<ul><li>during operation</li></ul>	-20 +60 °C
<ul> <li>during storage</li> </ul>	-50 +80 °C
during transport	-50 +80 °C
temperature compensation	-20 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current-dependent overload release	10 16 A
operating voltage	
rated value	690 V
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V

	_
operating frequency rated value	50 60 Hz
operational current at AC-3 at 400 V rated value	15.5 A
operating power at AC-3	
at 400 V rated value	7 500 W
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
<ul> <li>at 50 Hz rated value</li> </ul>	230 V
<ul> <li>at 50 Hz rated value</li> </ul>	230 230 V
<ul> <li>at 60 Hz rated value</li> </ul>	230 V
<ul> <li>at 60 Hz rated value</li> </ul>	230 230 V
apparent holding power of magnet coil at AC	5.7 VA
Auxiliary circuit	
product extension auxiliary switch	Yes
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release	thermal (bimetallic)
UL/CSA ratings	and (onlocally)
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value	14 A
yielded mechanical performance [hp]	14 A
<ul><li>for 3-phase AC motor</li><li>— at 220/230 V rated value</li></ul>	5 ha
	5 hp
— at 460/480 V rated value	10 hp
— at 575/600 V rated value	10 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
conditional short-circuit current (Iq)	
at 400 V according to IEC 60947-4-1 rated value	150 000 A
Installation/ mounting/ dimensions	
mounting position	vertical
fastening method	for snapping onto 60 mm busbar systems
height	200 mm
width	45 mm
depth	155 mm
required spacing	
<ul> <li>for grounded parts</li> </ul>	
— forwards	20 mm
— backwards	0 mm
<ul><li>backwards</li><li>upwards</li></ul>	0 mm 50 mm
<ul><li>backwards</li><li>upwards</li><li>at the side</li></ul>	0 mm 50 mm 20 mm
<ul><li>backwards</li><li>upwards</li><li>at the side</li><li>downwards</li></ul>	0 mm 50 mm
<ul> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> </ul>	0 mm 50 mm 20 mm 10 mm
<ul> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> </ul>	0 mm 50 mm 20 mm 10 mm
<ul> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> </ul>	0 mm 50 mm 20 mm 10 mm 0 mm
<ul> <li>— backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> <li>• for live parts</li> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> </ul>	0 mm 50 mm 20 mm 10 mm 0 mm 50 mm
<ul> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> </ul>	0 mm 50 mm 20 mm 10 mm  20 mm 0 mm 50 mm 10 mm
<ul> <li>— backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> <li>• for live parts</li> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul>	0 mm 50 mm 20 mm 10 mm 0 mm 50 mm
<ul> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> </ul>	0 mm 50 mm 20 mm 10 mm  20 mm 0 mm 50 mm 10 mm
<ul> <li>— backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> <li>• for live parts</li> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul>	0 mm 50 mm 20 mm 10 mm  20 mm 0 mm 50 mm 10 mm
<ul> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> Connections/ Terminals	0 mm 50 mm 20 mm 10 mm  20 mm 0 mm 50 mm 10 mm
<ul> <li>— backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> <li>• for live parts</li> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> Connections/ Terminals type of electrical connection	0 mm 50 mm 10 mm 20 mm 0 mm 0 mm 50 mm 10 mm 20 mm
— backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — upwards — at the side  Connections/ Terminals  type of electrical connection • for main current circuit	0 mm 50 mm 20 mm 10 mm 20 mm 0 mm 50 mm 10 mm 20 mm somm
- backwards - upwards - at the side - downwards  • for live parts - forwards - backwards - upwards - downwards - at the side  Connections/ Terminals  type of electrical connection • for main current circuit • for auxiliary and control circuit	0 mm 50 mm 20 mm 10 mm 20 mm 0 mm 50 mm 10 mm 20 mm somm
— backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — downwards — at the side  Connections/ Terminals  type of electrical connection • for main current circuit • for auxiliary and control circuit  Safety related data	0 mm 50 mm 20 mm 10 mm 20 mm 0 mm 50 mm 10 mm 20 mm screw-type terminals screw-type terminals
<ul> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> Connections/ Terminals type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> </ul> Safety related data B10 value with high demand rate according to SN 31920	0 mm 50 mm 20 mm 10 mm 20 mm 0 mm 50 mm 10 mm 50 mm sorew-type terminals screw-type terminals
- backwards - upwards - at the side - downwards  • for live parts - forwards - backwards - upwards - downwards - at the side  Connections/ Terminals  type of electrical connection • for main current circuit • for auxiliary and control circuit  Safety related data  B10 value with high demand rate according to SN 31920  proportion of dangerous failures	0 mm 50 mm 20 mm 10 mm 20 mm 0 mm 50 mm 10 mm 20 mm screw-type terminals screw-type terminals
<ul> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> Connections/ Terminals type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> </ul> Safety related data B10 value with high demand rate according to SN 31920 proportion of dangerous failures <ul> <li>with high demand rate according to SN 31920</li> </ul>	0 mm 50 mm 20 mm 10 mm 20 mm 0 mm 50 mm 10 mm 20 mm screw-type terminals screw-type terminals

## protocol is supported • PROFINET IO protocol • PROFIsafe protocol • PROFIsafe protocol No protocol is supported AS-Interface protocol No

## Certificates/ approvals

**General Product Approval** 

For use in hazardous locations **Declaration of Conformity** 



Confirmation



EAC





Declaration of Conformity

**Test Certificates** 

Marine / Shipping



Type Test Certificates/Test Report

Special Test Certificate







Marine / Shipping

other











nfirmation Vibration and Shock

Railway

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2110-4AD18-1AP0

Cax online generator

 $\underline{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RA2110-4AD18-1AP0}$ 

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2110-4AD18-1AP0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA2110-4AD18-1AP0&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RA2110-4AD18-1AP0/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2110-4AD18-1AP0&objecttype=14&gridview=view1

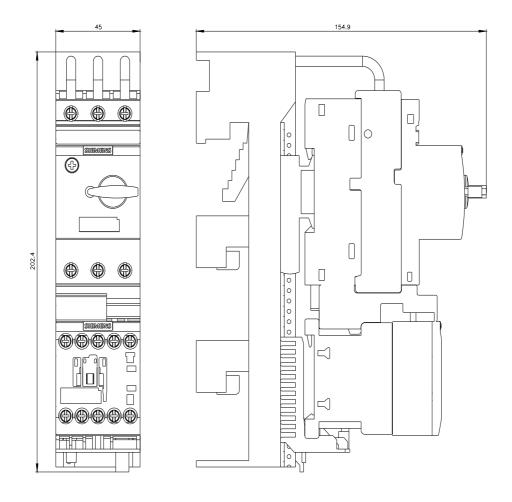

last modified: 2/16/2022 🖸