SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

SS52LB THRU SS510LB	VOLTAGE RANGE	20 to 100Volts
SSSTR LUKO SSSTOLD	CURRENT	5.0 Ampere

Features

- Low profile surface mount package
- Built-in strain relief
- High switching speed, low V_{F}
- Low voltage drop, high efficiency
- For use in low voltage high frequency inverters, Free willing, and polarity protection applications
- Guarding for over voltage protection

Mechanical Data

- Case: Transfer molded plastic
- Epoxy :UL 94V-0 rate flame retardant
- Lead: Solder plated, solderable per MIL-STD-750 method 2026
- Polarity: Color band denotes cathode end
- Weight: 0.003ounce, 0.093 gram

Maximum Ratings and Electrical Characteristics

- Ratings at 25°C ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

SYMB SS SS SS SS SS SS SS TYPE NUMBER UNIT 58LB 510LB OLS 52LB 53LB 54LB 55LB 56LB 20 80 Maximum Repetitive Peak Reverse Voltage V_{RRM} 30 40 50 60 100 Volts 21 Maximum RMS Voltage V_{RMS} 14 28 35 42 56 70 Volts Maximum DC Blocking Voltage V_{DC} 20 30 40 50 60 80 100 Volts Maximum Average Forward Rectified Current at T_LSee 5.0 Amps I (AV) figuor.1 T_i =105°C Peak Forward Surge Current 8.3mS single half sine-wave 120 Amps FSM superimposed on rated load (JEDEC method) Maximum Instantaneous Forward Voltage @ 5.0A (Note 1) 0.45 V 0.55 0.65 Volts 10 T_A=25°C Maximum DC Reverse Current at rated DC mΑ $|_{R}$ Blocking voltage per element T₄=125°C 100 55 R_{01A} Typical Thermal Resistance (Note 2) °C/W $R_{\theta JL}$ 12 **Operating Junction Temperature** Τ, -65 to +150 °C °C Storage Temperature Rang T_{STG} -65 to +150

Notes:

Pulse test:300µs pulse width,1% duty cycle 1.

2. Thermal resistance from Junction to ambient and from junction to lead mounted on PCB. with 0.3×0.3" (8.0 × 8.0mm) copper pad areas



DO-214AA (SMB J-Bend)



SS52LB THRU SS510LB


SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE 20 to 100Volts CURRENT 5.0 Ampere

40

60 80100

120 140

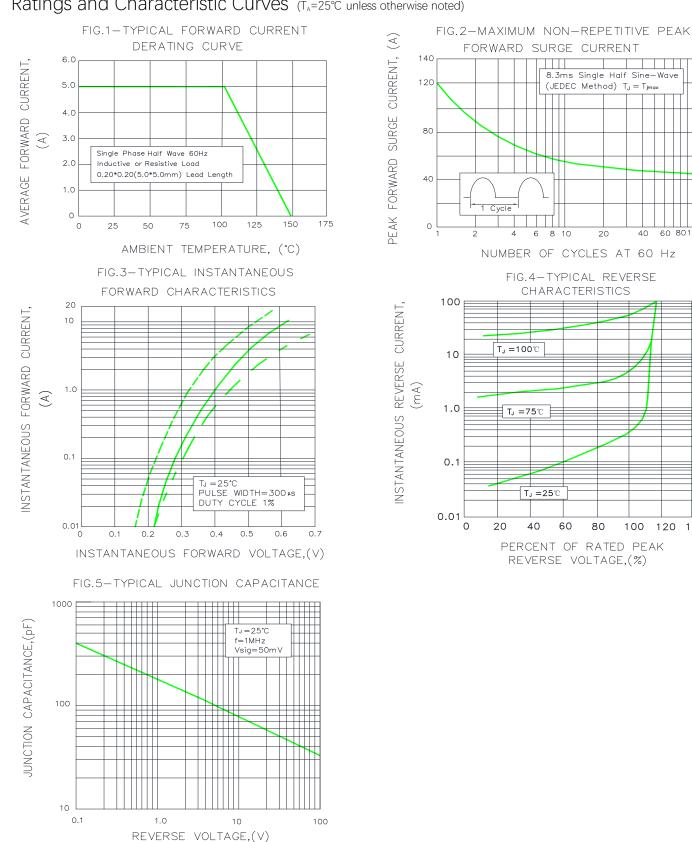

Ratings and Characteristic Curves (T_=25°C unless otherwise noted)




SS52LB THRU SS510LB

VOLTAGE RANGE


CURRENT

20 to 100Volts 5.0 Ampere

Package Outline Dimensions in inches (millimeters)

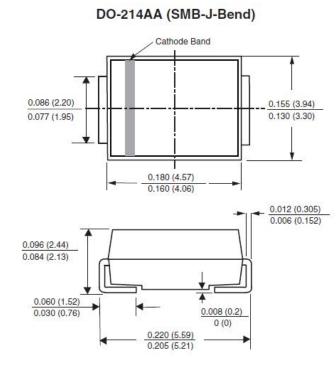

Mounting Pad Layout

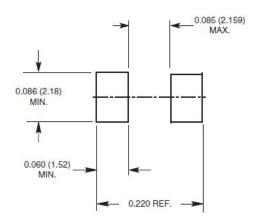




SS52LB THRU SS510LB

VOLTAGE RANGE	20 to 100Volts
CURRENT	5.0 Ampere

Package Reel Information

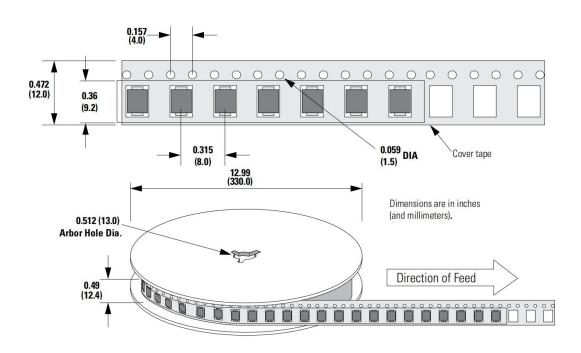


Таре		13"Reel		07"Reel				
DEVICE TYPE		Q'TY/REEL(pcs	BOX/CARTOO	Q'TY/CARTON	Q'TY/REEL(pcs	REEL/BOX	BOX/CARTOO	Q'TY/CARTON
)	Ν	(pcs))	KEED DOX	N	(pcs)
SMB	12mm	3000	8	48000	NA	NA	NA	NA




SS52LB THRU SS510LB

VOLTAGE RANGE	20 to 100Volts
CURRENT	5.0 Ampere

Reflow Profile

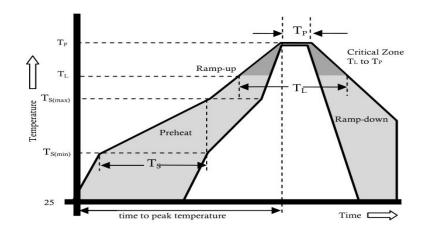

Reflow Condition		Pb-Free Assembly	
	Temperature Min.	+150°C	
Pre Heat	Temperature Max.	+200°C	
	Time(Min to Max)	60-180 secs.	
Average ram	np up rate(Liquidus Temp(T_L) to peak)	3°C/sec. Max.	
$T_s(max)$ to T_L - Ramp-up Rate		3°C/sec. Max.	
Deflesss	Temperature (T_L) (Liquidus)	+217°C	
Reflow	Temperature (T _L)	60-150 secs.	
Peak Temp (T _P)		+(260+0/-5)°C	
Time within 5°C of actual Peak Temp (T_P)		25 secs.	
Ramp-down Rate		6°C/sec. Max.	
Time 25°C to peak Temp (T₂)		8 min. Max.	
	Do not exceed	+260°C	

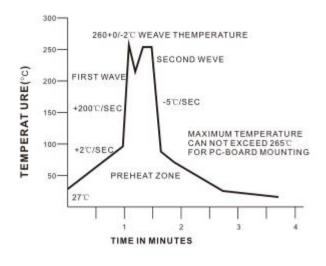



5552LD THRU 55510LD CURRENT 5.0 Ampere	VOLTAGE RANGE	20 to 100Volts
	CURRENT	5.0 Ampere

Disclaimer

The information presented in this document is for reference only. Chongqing changjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Changjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// www.czlangjie.com , or consult your nearest Langjie's sales office for further assistance.