

30V/1.5A High Brightness Step-Down LED Driver


Description

The NDP3315SG is a high-efficiency step-down LED driver controller with a wide input voltage range of 6V to 30V.

The NDP3315SG employs a continuous conduction mode architecture that accurately regulates LED current with a feedback coming from an external current-sense resistor. This control scheme optimizes circuit stabilization and fast response time without loop compensation. Its low 100mV/200mV average feedback voltage reduces power loss and improves the converter's efficiency.

The NDP3315SG implements PWM and analog dimming together through the DIM pin.

The NDP3315SG also includes thermal regulation protection in case of output overload.




Features

- VIN Range : 6V to 30V
- Able to Drive <1.5A LED Load
- Output Current Accuracy : $\pm 3\%$
- Up to 1MHz Switching Frequency
- High Efficiency
- Feedback Voltage: 100mV/200mV
- Analog and PWM Dimming
- Open LED Protection
- No Need Compensation
- Thermal Regulation
- RoHS and Halogen Free Compliance.
- Available in SOT89-5 Package

Applications

- Low Voltage Halogen Replacement
- DC/DC or AC/DC LED Driver Application
- Automotive/Decorative LED Lighting
- Emergency Lighting
- LED Backlighting


Typical Application

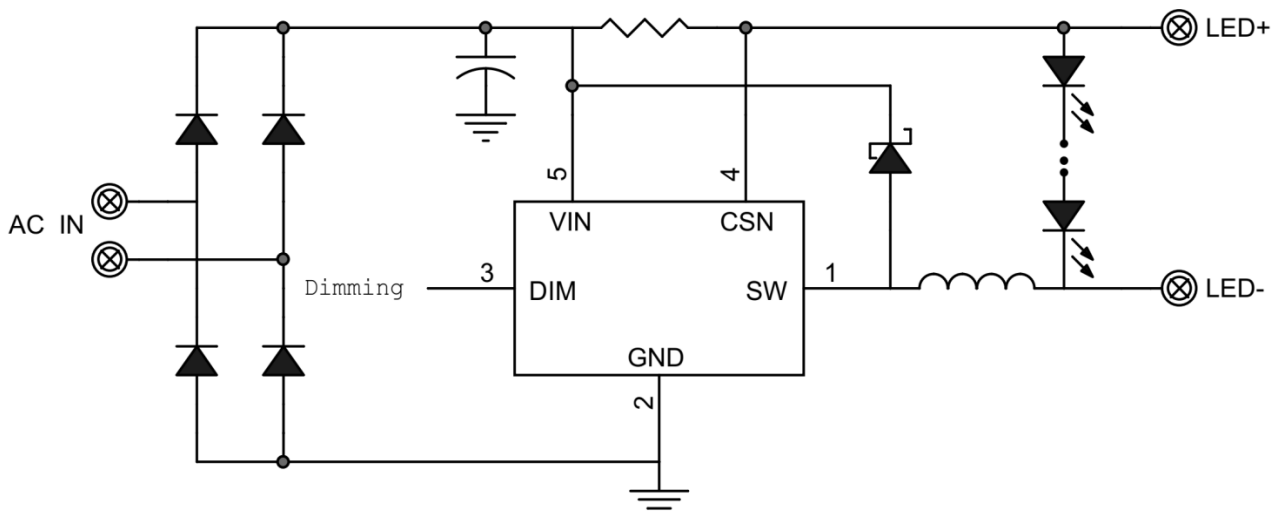

Order Information

Orderable Device	Feedback Voltage Version	Package Type	Packing Qty/reel	MSL- Peak Temp -Floor Life	Eco Std	Marking Information
NDP3315SG	100mV	SOT89-5	1000	MSL3-260°C-168hrs	RoHS & Green	1-FYYWWX
NDP3315SG	200mV	SOT89-5	1000	MSL3-260°C-168hrs	RoHS & Green	2-FYYWWX

Product Naming

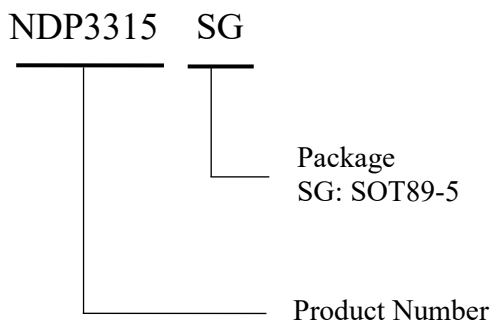

Top Side Marking



K: FB Voltage ID Code(1=100mV,2=200mV)
 F: Internal ID Code
 YY: Year (23=2023,24=2024,...)
 WW: Weekly (01-53)
 X : Internal ID Code


Notes:

- RoHS:** Quoted from **RoHS Directive (EU) 2015/863**, Deep-Pool defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. Deep-Pool may reference these types of products as "**Pb-Free**".
- RoHS Exempt:** Deep-Pool defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.
- Green:** Deep-Pool defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JEDEC (**JS709C**) low halogen requirements of ≤ 1000 ppm threshold.
- MSL, Peak Temp. -** The Moisture Sensitivity Level rating according to the JEDEC (**J-STD-020F**) industry standard classifications, as well as the peak solder temperature of SMT and the floor life after unpacking, which customers should pay attention and strictly comply with the standard to use.
- There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

The information provided on this page represents **Deep-Pool's** knowledge and belief as of the date that it is provided. **Deep-Pool** bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. **Deep-Pool** has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. **Deep-Pool** and **Deep-Pool** suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

Pin Function and Definition

PIN	Name	Description
1	SW	Drain of the Internal NMOS
2	GND	Ground
3	DIM	PWM/Analog Diming Input. Internal Weak Pull Up. Drive DIM Low to Turn Off the Output
4	CSN	Connect Sensor Input Reference to VIN for Measure Output Current.
5	VIN	Power Input

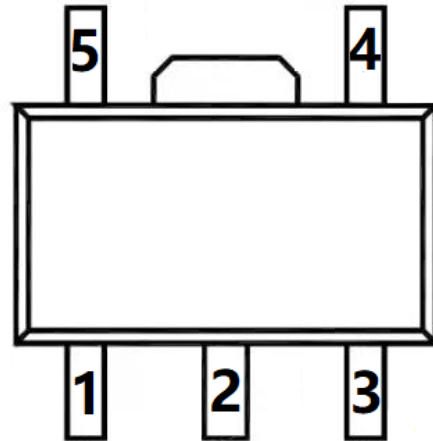

Absolute Maximum Ratings (at T_A= 25°C)

Characteristics	Symbol	Rating	Unit
VIN,CSN to GND		-0.3 to 36	V
SW to GND		-0.3 to VIN+0.3	V
DIM to GND		-0.3 to +6.5	V
Operating Junction Temperature	T _A	-40 to 150	°C
Storage Junction Temperature	T _{stg}	-65 to 150	°C

Notes:

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.


RECOMMENDED OPERATING RANGE				
ELECTRICAL PARAMETER	MINIMUM	TYPICAL	MAXIMUM	UNIT
Input Voltage (V _{IN})	8		24	V
Output Voltage (V _{OUT})	3		18	V
Output Current (I _{OUT})			1.5	A
Thermal Resistance from Junction to ambient (θ _{JA})		45		°C/W

Electrical Characteristics

$T_J = 25^{\circ}\text{C}$, $V_{IN} = 12\text{V}$, unless otherwise noted.


Characteristics	Symbol	Conditions	Min	Typ	Max	Units
Input Voltage	V_{IN}		6		30	V
VCC UVLO Threshold	V_{UVLOTH}	VCC Rising		5.6		V
VCC UVLO Hysteresis	$V_{UVLOHYS}$			0.4		V
Quiescent Supply Current	I_Q	No Switching		270		μA
Current Sense Voltage	V_{CS}	$V_{IN-CSN(1-FYYWWX)}$		100		mV
		$V_{IN-CSN(2-FYYWWX)}$		200		mV
Current Sense Threshold	V_{CS_HY}			15		%
CSN Input Current	I_{CSN}			3		μA
DIM Floating Voltage	V_{DIM_F}			3.8		V
DIM Input Leakage Current	I_{DIM_PU}	IDIM=5V		27		μA
DIM Pull Up Current	I_{DIM_PU}	IDIM=0V		-25		μA
DIM Input High	V_{DIM_H}		2.5			V
DIM Input Low	V_{DIM_L}				0.3	V
DIM Voltage Range	V_{DIM}	VDIM Rising	0.5		2.5	V
Min Recommended Pwm dimming Frequency	F_{PWMmin}			0.1		kHz
Max Recommended Pwm Dimming Frequency	F_{PWMmax}			20		kHz
Maxmum Switch Frequency	F_{MAX}			1		MHz
MOSFET ON Resistance	R_{DSON}			240		$\text{m}\Omega$
Thermal Regulate	T_{REG}	Temp Rising		105		$^{\circ}\text{C}$
Thermal Shutdown	T_{SH}		-	160	-	$^{\circ}\text{C}$

Block Diagram

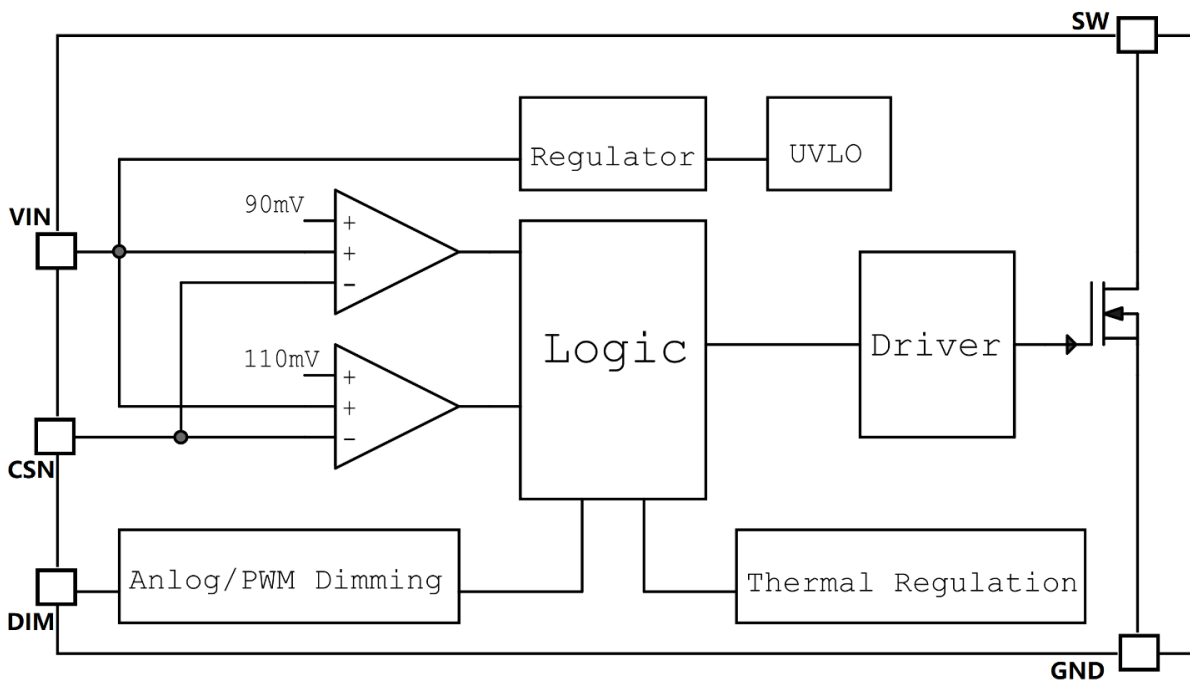


Typical Performance Characteristics


$T_J = 25^\circ\text{C}$, $V_{IN} = 12\text{V}$, unless otherwise noted.

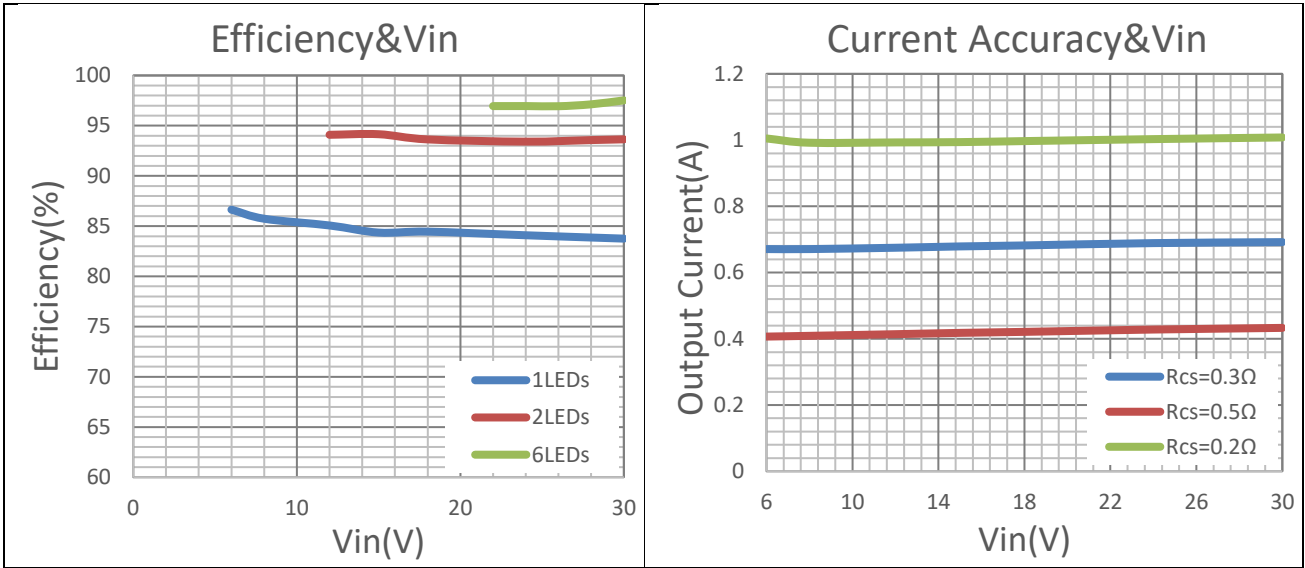


CH1= V_{IN} , CH2= V_{SW} , CH3= V_{OUT} , CH4= I_{SW} , unless otherwise noted.

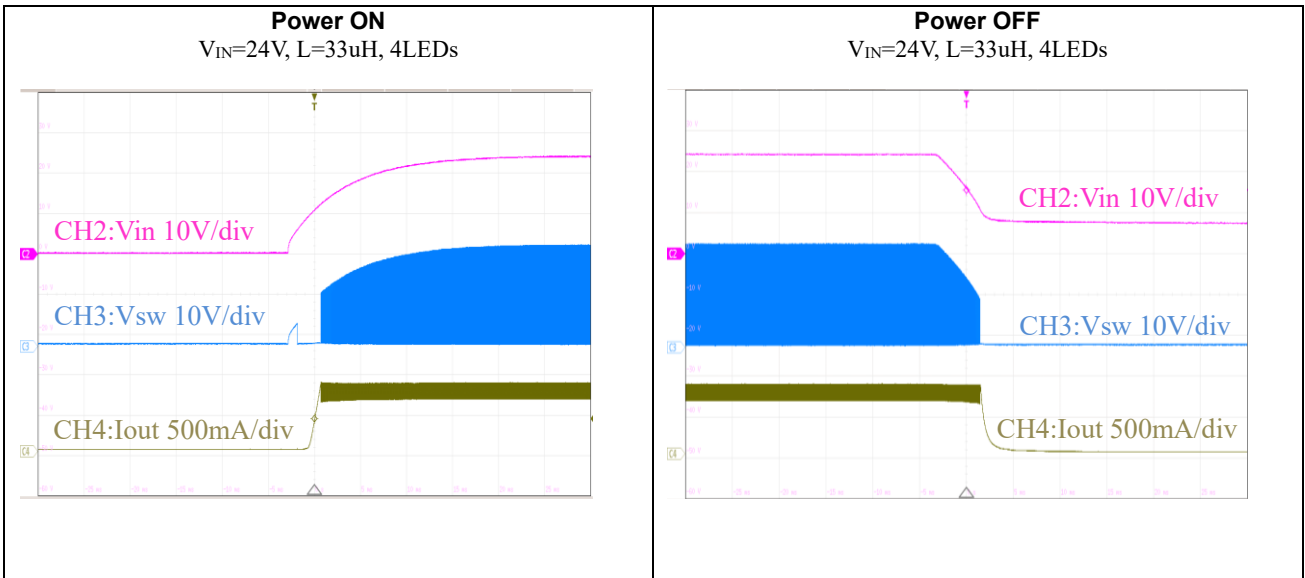


Operation waveform
 $V_{in}=12V, L=33\mu H, 4LEDs$

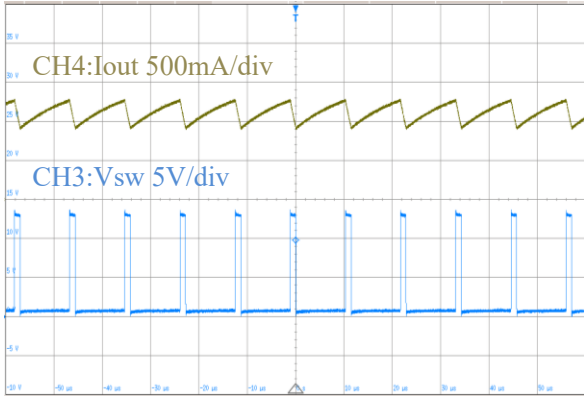


Operation waveform
 $V_{in}=24V, L=33\mu H, 4LEDs$

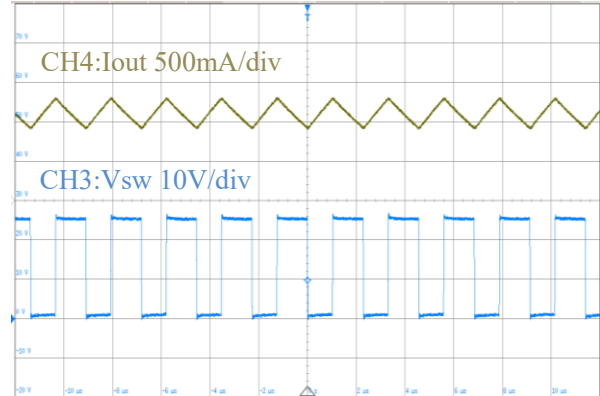


PWM Dimming
 $V_{in}=24V, L=33\mu H, I_{out}=1A, 4LEDs$

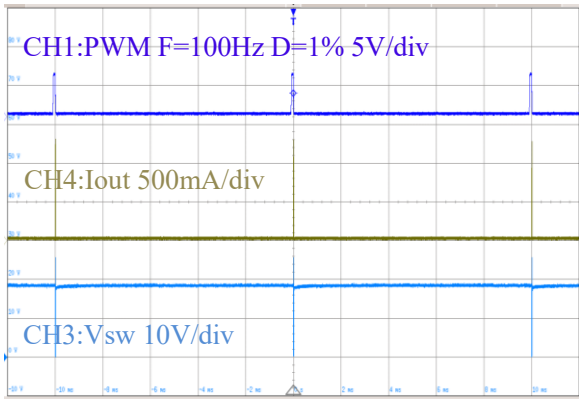


PWM Dimming
 $V_{in}=24V, L=33\mu H, I_{out}=1A, 4LEDs$

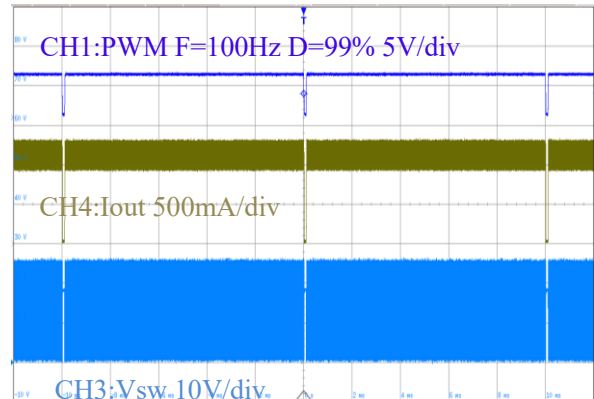

PWM Dimming
 $V_{in}=24V, L=33\mu H, I_{out}=1A, 4LEDs$

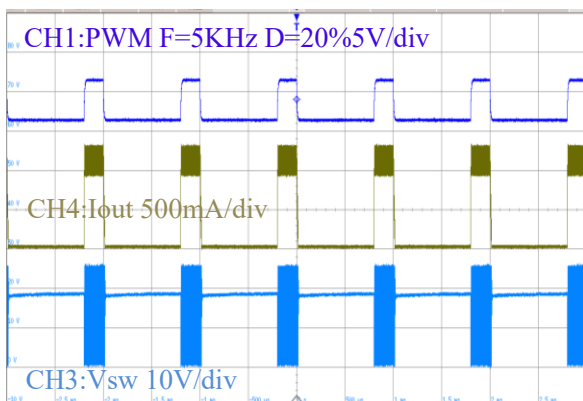

PWM Dimming
 $V_{in}=24V, L=33\mu H, I_{out}=1A, 4LEDs$

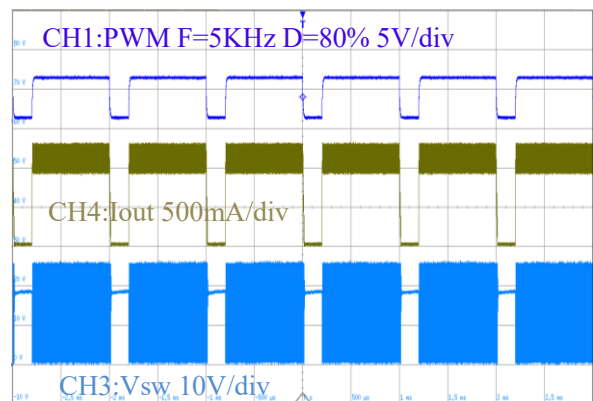

Operational Description

Steady State

The NDP3315SG is a step-down LED-current convertor that is easily configured for a wide input that ranges from 6V to 30V input. The NDP3315SG uses a High-side current-sense resistor to detect and regulate LED current. The average voltage across the current- sense resistor is measured and regulated in the 100mV/200mV range.

Dimming Control

The NDP3315SG allows the DIM pin to control both Analog and PWM dimming. Whenever the voltage on DIM is less than 0.3V, the chip turns off. For analog dimming the LED current will change from 0% to 100% of the maximum LED current according to the DIM voltage of 0.5V to 2.5V. If the voltage on DIM pin is higher than 2.5V, output LED current will equal the maximum LED current. For PWM dimming, the signal amplitude must exceed 2.5V. Choose a PWM frequency in range of 100Hz to 20kHz for good dimming linearity.

Applications Information

Setting the LED Current

The LED current is identical and set by the current sense resistor CS and GND.

$$R_{SENSE} = 100\text{mV}/I_{LED}$$

$$R_{SENSE} = 200\text{mV}/I_{LED}$$

For $R_{SENSE} = 0.2\Omega$, the LED current is set to 1A. Selecting the Inductor Lower value of inductance can result in a higher switching frequency, which causes a larger switching loss. Choose a switch frequency between 100kHz to 500kHz for most application. According to switching frequency, inductor value can be estimated as:

$$L = \frac{\left(1 - \frac{V_{OUT}}{V_{IN}}\right) \times V_{OUT}}{0.3 \times I_{LED} \times f_{SW}}$$

For higher efficiency, choose an inductor with a DC resistance as small as possible.


Selecting the Input Capacitor

The input capacitor reduces the surge current drawn from the input supply and the switching noise from the device. Choose a capacitor value of 100μF for most applications. The voltage rating should be greater than the input voltage. Use a low ESR capacitor for input decoupling.


Layout Consideration

Pay careful attention to the PCB layout and component placement. R1 should be placed close to the VIN pin and CSN pin in order to minimize current sense error. The input loop—including input capacitor, Schottky diode, and MOSFET—should be as short as possible.

Typical Applications

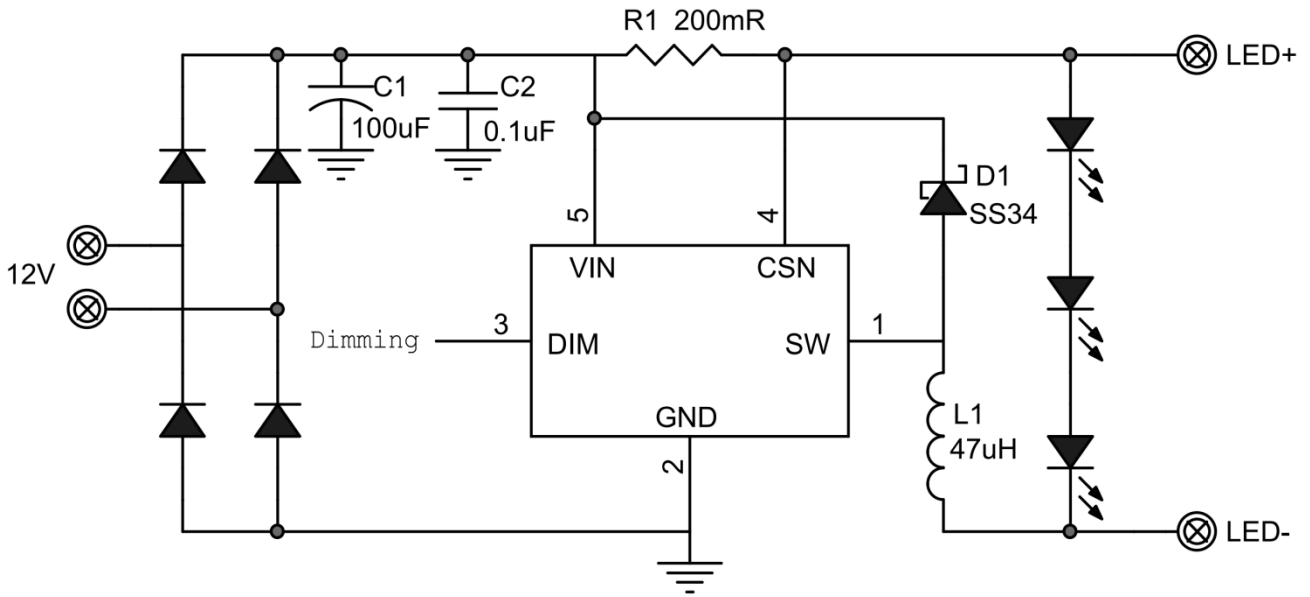

Package Outline Drawing

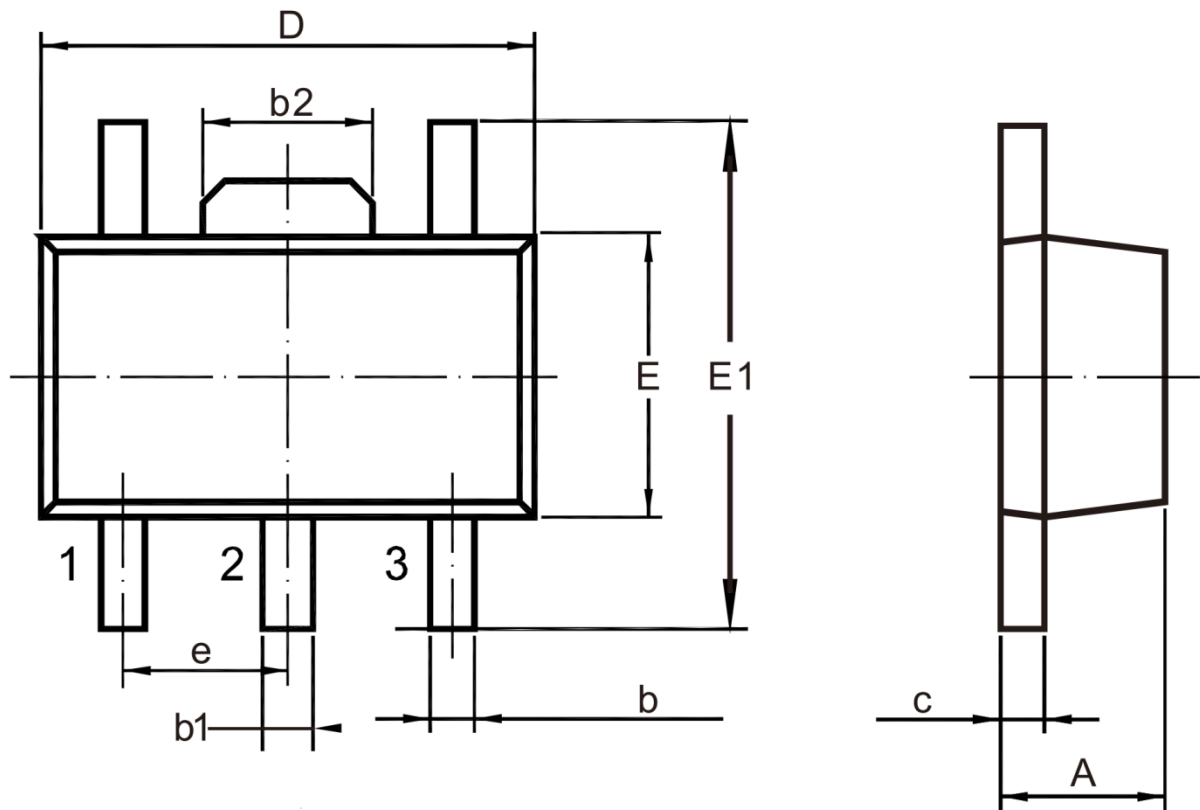

Symbol	Dimensions In Millimeters	
	Min.	Max.
A	1.4	1.6
b	0.35	0.45
b1	0.47	0.53
b2	1.5	1.6
c	0.3	0.5
D	4.4	4.6
E	2.4	2.6
E1	4.3	4.7
e	1.5 (BSC)	

Notes

1. Use millimeters as the primary measurement
2. Dimensioning and tolerances conform to ASME Y14.5M. – 1994
3. These dimensions do not include mold flash or protrusions.
4. Mold flash or protrusions shall not exceed 0.15mm

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Jiangsu Deep-Pool Microelectronics Co., Ltd, and its affiliates, agents, employees, as well as all persons acting on its or their behalf (collectively, “**Deep-Pool**”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Deep-Pool makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Deep-Pool disclaims (a) any and all liability arising out of the application or use of any product, (b) any and all liability, including without limitation special, consequential or incidental damages, and (c) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding on the suitability of products for certain types of applications are based on Deep-Pool's knowledge of typical requirements that are often placed on Deep-Pool products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications should not be expanded or otherwise modify Deep-Pool's terms and conditions of purchase, including but not limited to the warranty announced therein.

Unless expressly stated in writing, Deep-Pool products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of product could result in personal injury or death. Customers who use or sell Deep-Pool products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Deep-Pool personnel to obtain written terms and conditions regarding products designed for such applications.