





RIGHT ANGLE PUSH PULL PLUG SOLDER TYPE FOR CABLE .141

PAGE 1/3 ISSUE 17-01-17B SERIES 4.3/10 PART NUMBER R183197007

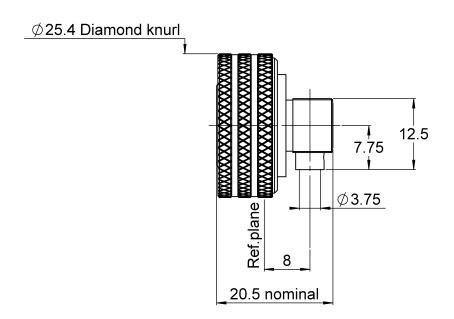





All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
Body	BRASS	BBR
Center contact	BRASS	SILVER
Outer contact	210100	0.27.2.1
Insulator	PTFE	
Gasket	EPDM	
Others parts	BRASS	BBR
-	-	-
-	-	-



# **Technical Data Sheet**

RIGHT ANGLE PUSH PULL PLUG SOLDER TYPE FOR CABLE .141

ISSUE 17-01-17B PAGE **2/3 SERIES 4.3/10** PART NUMBER R183197007

### **PACKAGING**

Standard	Unit	Other
50	Contact us	Contact us

# **ELECTRICAL CHARACTERISTICS**

50 Impedance Frequency GHz 0-6 **VSWR** 1.02 0.030 x F(GHz) Maxi Insertion loss 0.05 √F(GHz) dB Maxi RF leakage NA - F(GHz)) dB Maxi - ( Voltage rating Veff Maxi 850 Dielectric withstanding voltage 1500 Veff mini Insulation resistance 5000  $M\Omega$  mini

# **MECHANICAL CHARACTERISTICS**

Center contact retention

Axial force - Mating End 30 N mini Axial force - Opposite end 30 N mini Torque NA N.cm mini

Recommended torque

Mating NA N.cm Panel nut NA N.cm Clamp nut NA N.cm A/F clamp nut 0.000 mm

Mating life 100 Cycles mini Weight 29.953 g

# **ENVIRONMENTAL**

Operating temperature -55/+90 °C Hermetic seal NA Atm.cm3/s Panel leakage NA

### **SPECIFICATION**

# **CABLE ASSEMBLY**

Stripping	а	b	С	d	е	f
mm	1.8	4	10	0	0	0

Assembly instruction: NA

Recommended cable(s)

**RG 402** KS<sub>2</sub> **BELDEN 1673A** HC80000-3 **SUCOFORM 141** 

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the

# Cable retention

200 - pull off N mini - torque NA N.cm

# **TOOLING**

Part Number	Description	Hexagon
R282740030	SOLDERING MOUNTING	

# **OTHER CHARACTERISTICS**

IP67 mated condition








PAGE 3/3 ISSUE 17-01-17B SERIES 4.3/10 PART NUMBER R183197007


# COMPONENTS

# STRIPPING DIMENSIONS




We recommend a cable thermal preconditioning before assembly

5




Put three rings of solder around the cable.
Solder the body onto the cable.




Present the cutting element in front of the cutting element. Push and turn both elements, back part opposite to the front part.

Once they reach the stop, pull without revolving.



After cooling, remove the assembly from the jig. Remove the positioner. Solder the inner conductor.



Insert the cable into the body.
Secure the positioner into the assembly jig.
Place the sub-assembly into the assembly jig.
Tighten.

Blace the can into the body

