

Description

The SUD45P03-09-GE3 uses advanced trench technology

to provide excellent R DS(ON), low gate charge and

operation with gate voltages as low as 4.5V. This

device is suitable for use as a

Battery protection or in other Switching application.




TO-252-2L

General Features

 $V_{DS} = -30V I_{D} = -70A$

 $R_{DS(ON)}$ < 11m Ω @ V_{GS} =-10V



Application

Battery protection

Load switch

Uninterruptible power supply

P-Channel MOSFET

Package Marking and Ordering Information

Product ID	Pack	Brand	Qty(PCS)
SUD45P03-09-GE3	TO-252-2L	HXY MOSFET	2500

Absolute Maximum Ratings (TC=25°C unless otherwise specified)

Symbol	Parameter	Rating	Units	
VDS	Drain-Source Voltage	-30	V	
Vgs	Gate-Source Voltage	±20		
I _D @T _C =25°C	Continuous Drain Current, V _{GS} @ -10V ^{1,6}	-70	Α	
$I_D@T_C=100^{\circ}C$	Continuous Drain Current, V _{GS} @ -10V ^{1,6}	Continuous Drain Current, V _{GS} @ -10V ^{1,6} -50		
Ідм	Pulsed Drain Current ² -200		Α	
EAS	Single Pulse Avalanche Energy ³ 80		mJ	
las	Avalanche Current	-40	Α	
$P_D@T_C=25^{\circ}C$	Total Power Dissipation ⁴	90	W	
Тѕтс	Storage Temperature Range	-55 to 175	°C	
TJ	Operating Junction Temperature Range	-55 to 175	°C	
	Thermal Resistance Junction-ambient ¹(t≦10S)	20	°C/W	
$R_{\theta JA}$	Thermal Resistance Junction-ambient ¹ (Steady State)	50	°C/W	
Rejc	Thermal Resistance Junction-case ¹	1.6	°C/W	



Electrical Characteristics (T_J=25 °C, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =-250uA	-30			V
		V _{GS} =-10V , I _D =-20A		8	11	mΩ
Rds(on)	Static Drain-Source On-Resistance ²	V _{GS} =-4.5V , I _D =-15A		12	19	mΩ
V _{GS(th)}	Gate Threshold Voltage	V _{GS} =V _{DS} , I _D =-250uA	-1.2		-2.5	V
	Drain-Source Leakage Current	V _{DS} =-24V , V _{GS} =0V , T _J =25℃			-1	
IDSS		V _{DS} =-24V , V _{GS} =0V , T _J =55°C			-5	uA
Igss	Gate-Source Leakage Current	V _{GS} =±20V , V _{DS} =0V			±100	nA
Rg	Gate Resistance	V _{DS} =0V , V _{GS} =0V , f=1MHz		1.2		Ω
Qg	Total Gate Charge (-10V)			60		nC
Qgs	Gate-Source Charge	V _{DS} =-15V , V _{GS} =-10V		9		
Qgd	Gate-Drain Charge	I _D =-18A		15		
Td(on)	Turn-On Delay Time			17		
Tr	Rise Time	V _{DD} =-15V V _{GS} =-10V		40		ns
Td(off)	Turn-Off Delay Time	R _G =3.3 Ω,		55		
T _f	Fall Time	I _D =-20A		13		
Ciss	Input Capacitance			3110		
Coss	Output Capacitance	V _{DS} =-25V , V _{GS} =0V , f=1MHz		255		pF
Crss	Reverse Transfer Capacitance			140		
ls	Continuous Source Current ^{1,5}	V _G =V _D =0V , Force Current			-70	Α
VsD	Diode Forward Voltage ²	V _{GS} =0V , I _S =-1A , T _J =25℃			-1.2	V
trr	Reverse Recovery Time	IF=-20A , di/dt=100A/µs ,		22		nS
Q _{rr}	Reverse Recovery Charge	–_TJ=25℃		72		nC

Note:

^{1.}The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.

^{2.} The data tested by pulsed , pulse width ≤ 300 us , duty cycle $\leq 2\%$

^{3.} The EAS data shows Max. rating . The test condition is V_{DD} =-50V, V_{GS} =-10V, L=0.1mH, I_{AS} =-40A

^{4.}The power dissipation is limited by 150°C junction temperature

^{5.} The data is theoretically the same as I_D and I_{DM} , in real applications, should be limited by total power dissipation

^{6.} The maximum current rating is package limited.



Typical Characteristics




Fig.1 Typical Output Characteristics




Fig.3 Forward Characteristics of Reverse




Fig.5 Normalized -V_{GS(th)} vs. T_J




Fig.2 On-Resistance vs. Gate-Source Voltage




Fig.4 Gate-Charge Characteristics





Fig.6 Normalized R_{DSON} vs. T_J






Fig.7 Capacitance

Fig.8 Safe Operating Area

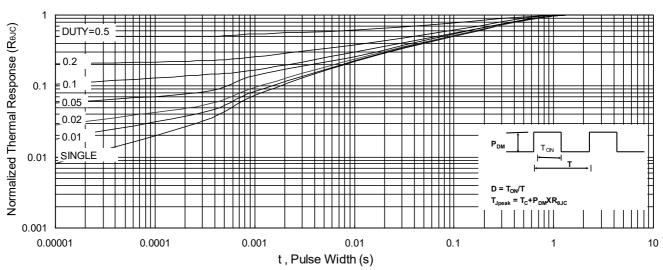


Fig.9 Normalized Maximum Transient Thermal Impedance




Fig.10 Switching Time Waveform





Fig.11 Unclamped Inductive Switching Waveform



TO-252-2L Package Information

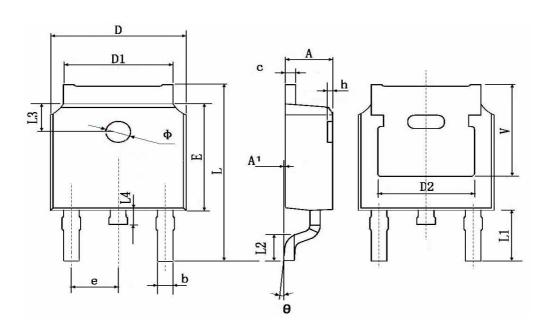

Symbol	Dimensions In Millimeters		Dimensions In Inches		
	Min.	Max.	Min.	Max.	
Α	2.200	2.400	0.087	0.094	
A1	0.000	0.127	0.000	0.005	
b	0.660	0.860	0.026	0.034	
С	0.460	0.580	0.018	0.023	
D	6.500	6.700	0.256	0.264	
D1	5.100	5.460	0.201	0.215	
D2	4.830 TYP.		0.190 TYP.		
E	6.000	6.200	0.236	0.244	
е	2.186	2.386	0.086	0.094	
L	9.800	10.400	0.386	0.409	
L1	2.900 TYP.		0.114 TYP.		
L2	1.400	1.700	0.055	0.067	
L3	1.600 TYP.		0.063 TYP.		
L4	0.600	1.000	0.024	0.039	
Ф	1.100	1.300	0.043	0.051	
θ	0°	8°	0°	8°	
h	0.000	0.300	0.000	0.012	
V	5.350	TYP.	0.211 TYP.		

P-Channel Enhancement Mode MOSFET

Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.

 HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.