Technical Data Sheet



SP6T Ramses SMA2.9 40GHz Latching Self-cut-off Auto-reset 12Vdc TTL Diodes Pins Terminals

PAGE 1/2 ISSUE 22-03-22 SERIE : SPnT PART NUMBER : R573882620

RF CHARACTERISTICS

Number of ways : 6

Frequency range : 0 - 40 GHz Impedance : 50 Ohms

Frequency (GHz)	DC - 6	6 - 12.4	12.4 - 18	18 - 26.5	26.5 - 40
VSWR max	1.30	1.40	1.50	1.70	2.20
Insertion loss max	0.20 dB	0.40 dB	0.50 dB	0.70 dB	1.10 dB
Isolation min	70 dB	60 dB	60 dB	55 dB	50 dB
Average power (*)	40 W	30 W	25 W	15 W	5 W

ELECTRICAL CHARACTERISTICS

Actuator : LATCHING
Nominal current ** : 960 mA

Actuator voltage (Vcc) : 12V (10.2 to 13V)

Terminals : solder pins (250°C max. / 30 sec.)

Self cut-off time : 40 ms < CT < 120 ms

TTL inputs (E) - High level : 2.2 to 5.5 V / 800μA at 5.5 V

- Low level : 0 to 0.8 V / 20 μ A at 0.8 V

MECHANICAL CHARACTERISTICS

Connectors : SMA 2.9 female per MIL-C 39012
Life : 2 million cycles per position

Switching Time*** : < 40 ms Construction : Splashproof Weight : < 220 g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C Storage temperature range : -55°C to +85°C

(* Average power at 25°C per RF Path)

(** At 25° C ±10%)

(*** Nominal voltage; 25° C)









SP6T Ramses SMA2.9 40GHz Latching Self-cut-off Auto-reset 12Vdc TTL Diodes Pins Terminals

PAGE **2/2** ISSUE **22-03-22** SERIE: SPnT PART NUMBER: **R573882620**

DRAWING




TTL input	RF Continuity		
E1 = 1	IN ↔ 1		
E2 = 1	$IN \leftrightarrow 2$		
E3 = 1	$IN \leftrightarrow 3$		
E4 = 1	$IN \leftrightarrow 4$		
E5 = 1	IN ↔ 5		
E6 = 1	IN ↔ 6		




General tolerances : ±0,5 mm [0,02 in]







SCHEMATIC DIAGRAM

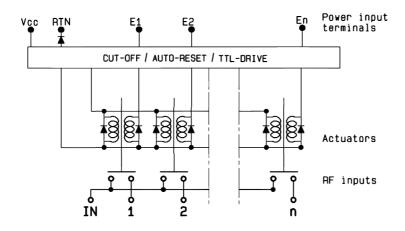

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.