



# TAOGLAS®



# Datasheet

## GPS/Galileo Patch Antenna for 1575MHz

**Part No:**  
GP.1575.12.4.A.02

### Description

12mm GPS/Galileo Patch Antenna

### Features:

Passive GPS/Galileo Patch Antenna  
Centre Frequency: 1575MHz  
Mounted with pin and adhesive tape  
Dimensions: 12mm\*12mm\*4mm  
RoHS & REACH Compliant

<b>1.</b>	<b>Introduction</b>	<b>3</b>
<b>2.</b>	<b>Specification</b>	<b>4</b>
<b>3.</b>	<b>Antenna Characteristics</b>	<b>6</b>
<b>4.</b>	<b>Radiation Patterns</b>	<b>10</b>
<b>5.</b>	<b>Mechanical Drawing</b>	<b>12</b>
<b>6.</b>	<b>Antenna Integration Guide</b>	<b>13</b>
<b>7.</b>	<b>Solder Reflow Profile</b>	<b>19</b>
<b>8.</b>	<b>Packaging</b>	<b>20</b>
<hr/>		
	Changelog	21

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



# 1. Introduction



This miniaturized ceramic GPS/GALILEO patch antenna is based on smart XtremeGain™ technology. It is mounted via pin and double-sided adhesive and has been selected as optimal solution for the customer device environment.

The GP.1575.12.4.A.02 provides gain and radiation pattern performance supporting solutions with high location accuracy, rapid satellite signal reception and lock, and quick time to first fix.


The compact size of the GP.1575.12.4.A.02 allows it to be used in areas where larger patch antennas won't fit.

Typical applications include:

- Asset Trackers
- Transportation and OBDs

## 2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	□	□		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	□	□	□		
Galileo	E1 1575.42 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	□	□	□	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	□	□	□	□
L-Band	L-Band 1542 MHz				
	□				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	□	□	□	
IRNSS (Regional)	L5 1176.45 MHz				
	□				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	□	□	□	□

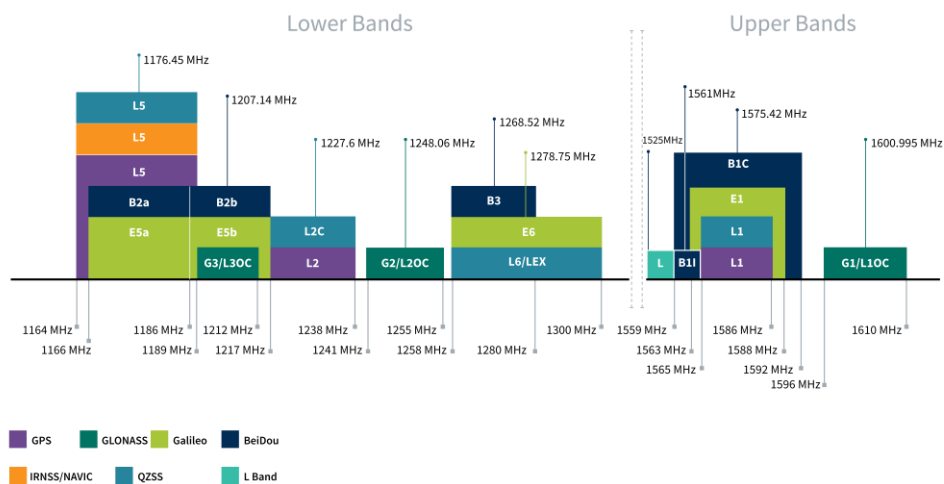

GNSS Bands and Constellations

### GNSS Electrical

Frequency (MHz)	1575.42
Passive Antenna Efficiency (%) (Without cable loss)	65.72
Passive Antenna Gain at Zenith (dBic) (Without cable loss)	3.21
Polarization	RHCP
Impedance	50 Ω

### Mechanical

Dimensions	(12x12x4) mm
Operating Temperatures	-40°C to +85°C


### 3. Antenna Characteristics

#### 3.1 Test Setup


AUT




Vector Network Analyzer

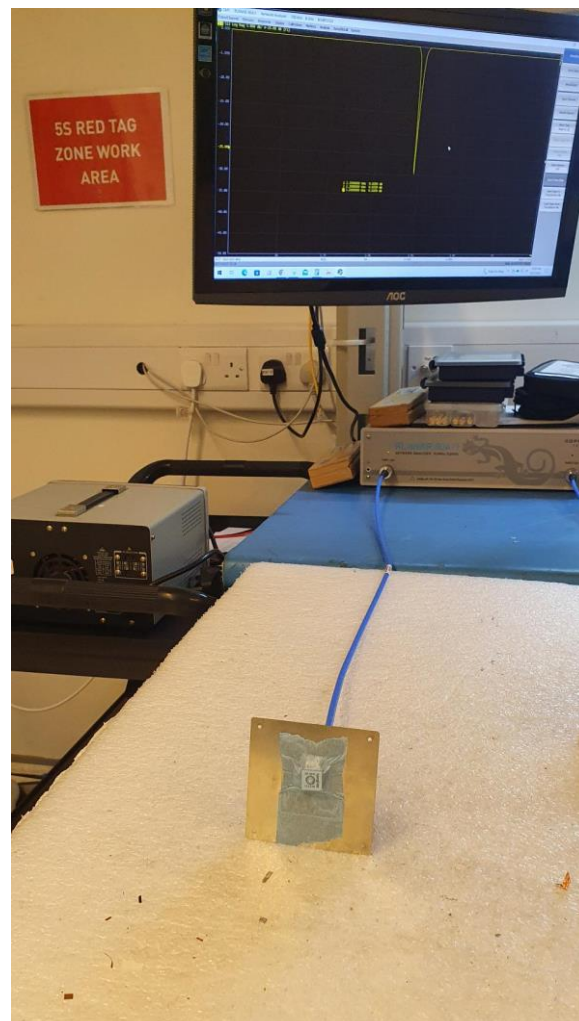


### 3.2 Return Loss

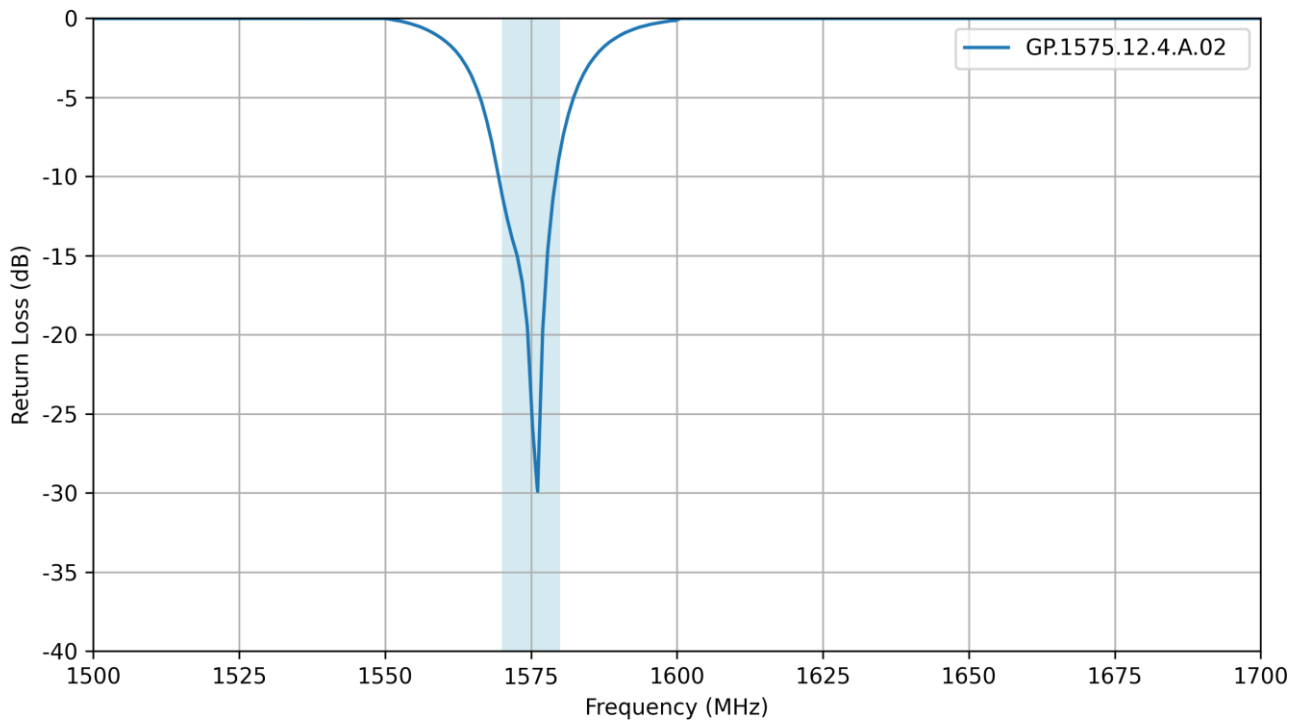


### 3.3 VSWR

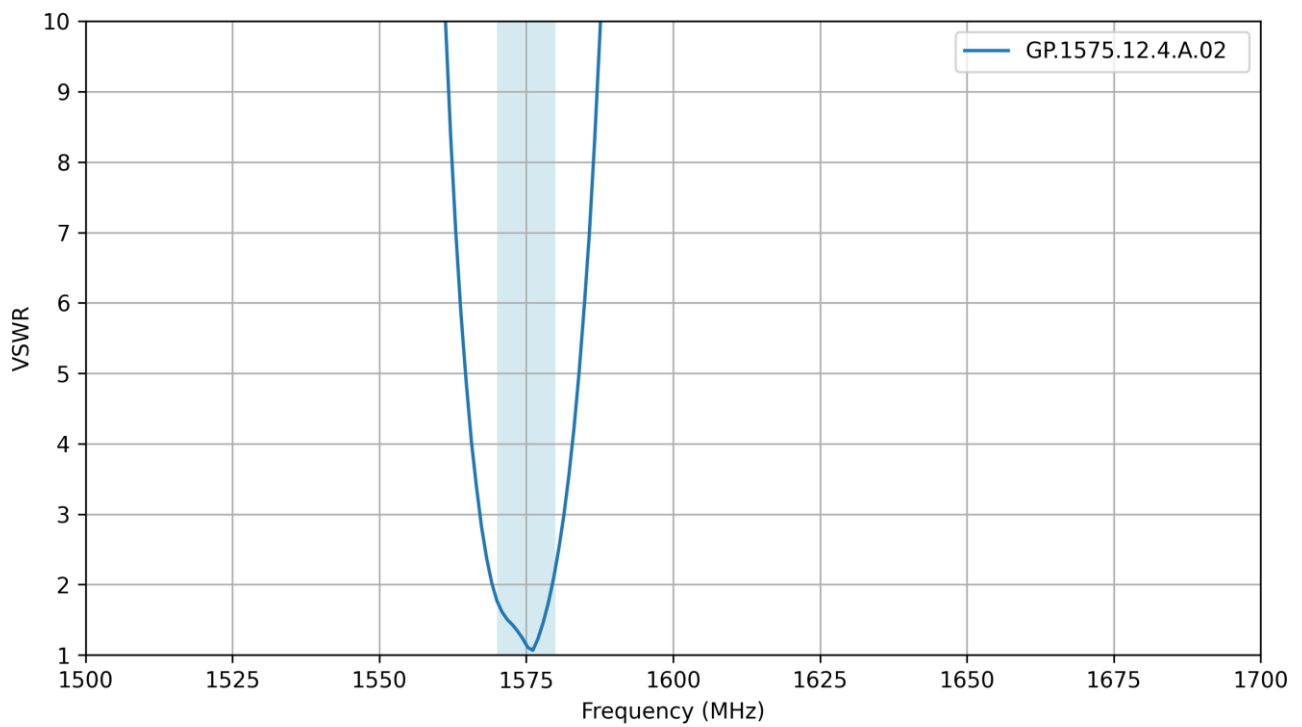

### 3.4 Efficiency

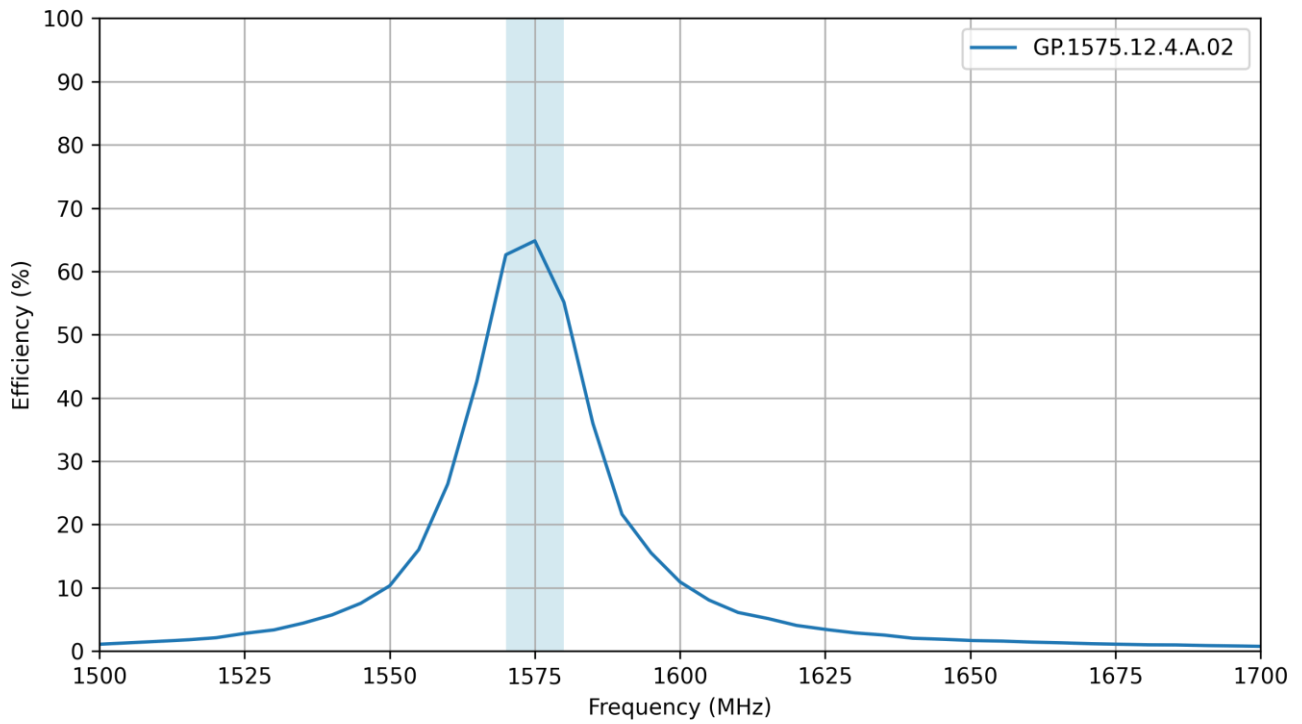


### 3.5 Average Gain

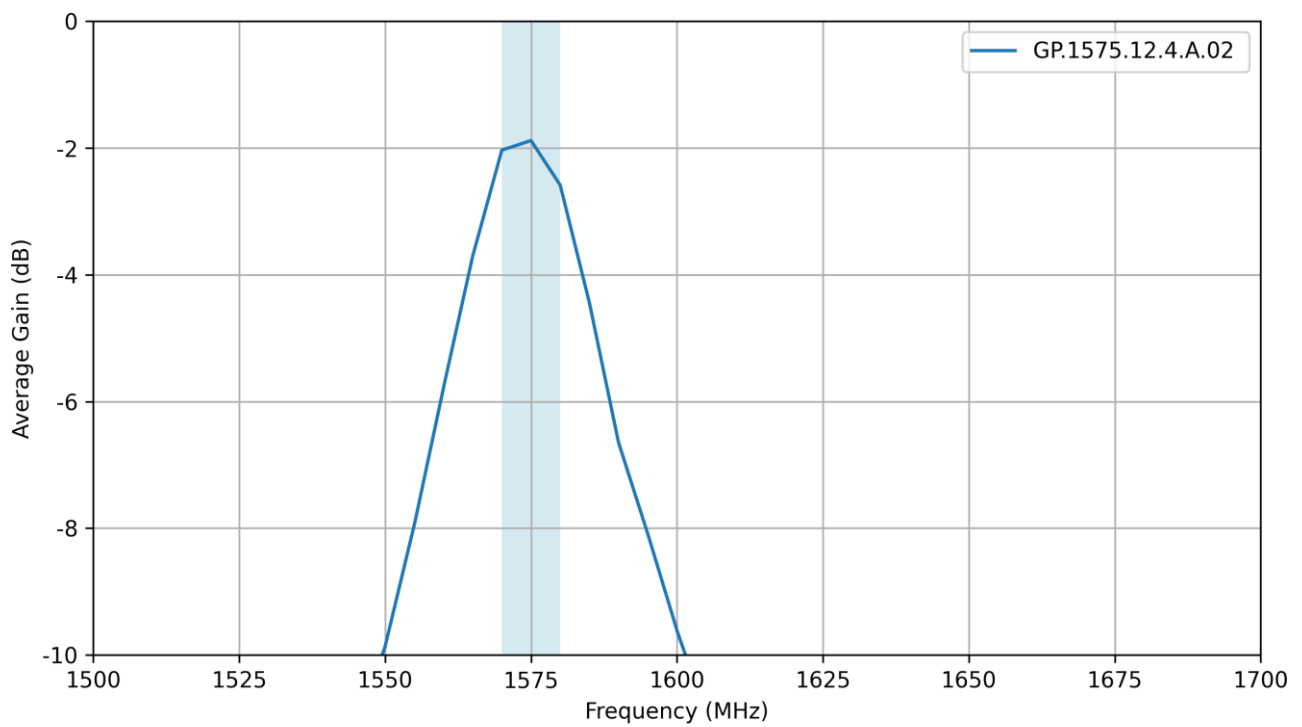





3.6 Peak Gain


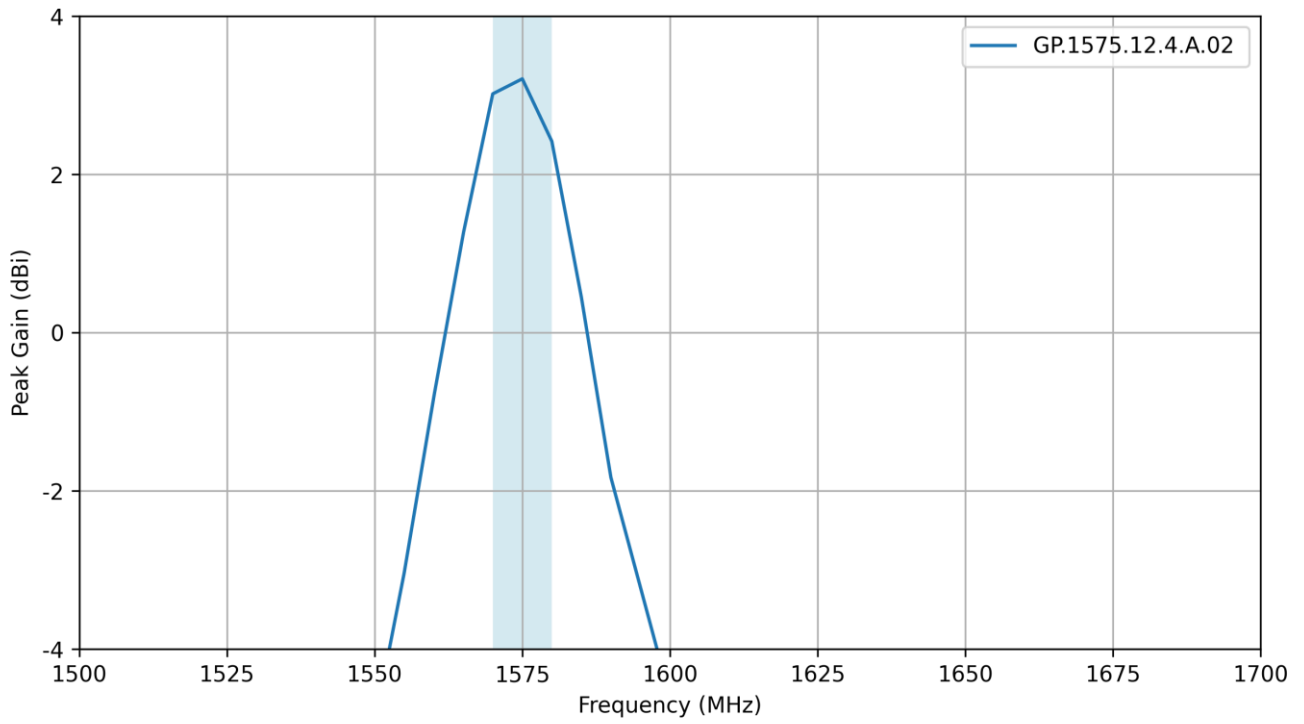


## 4. Radiation Patterns

### 4.1 Test Setup

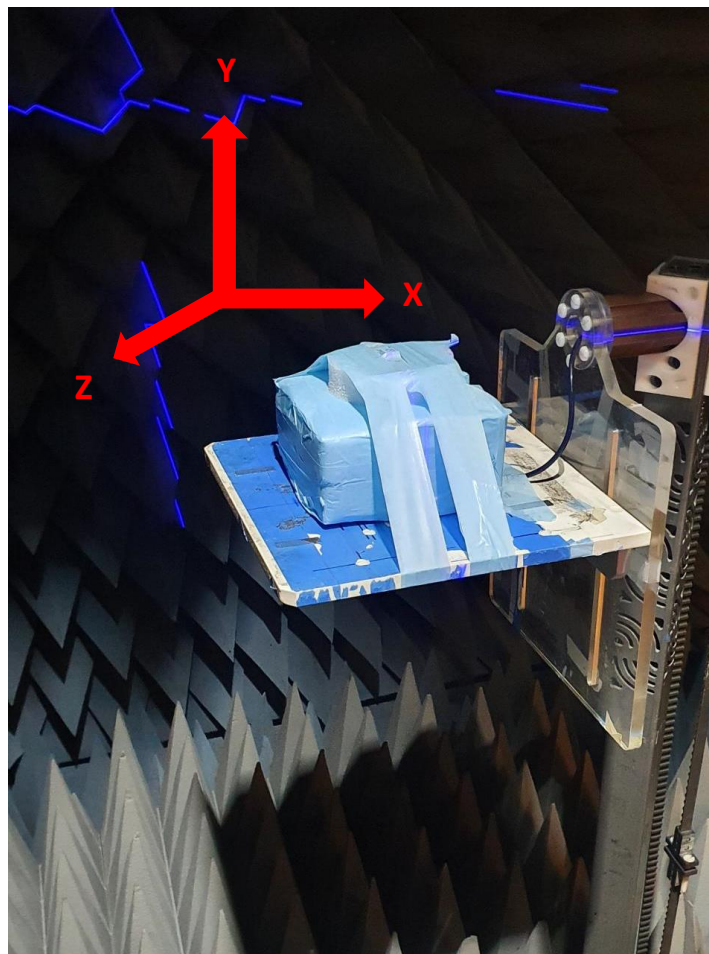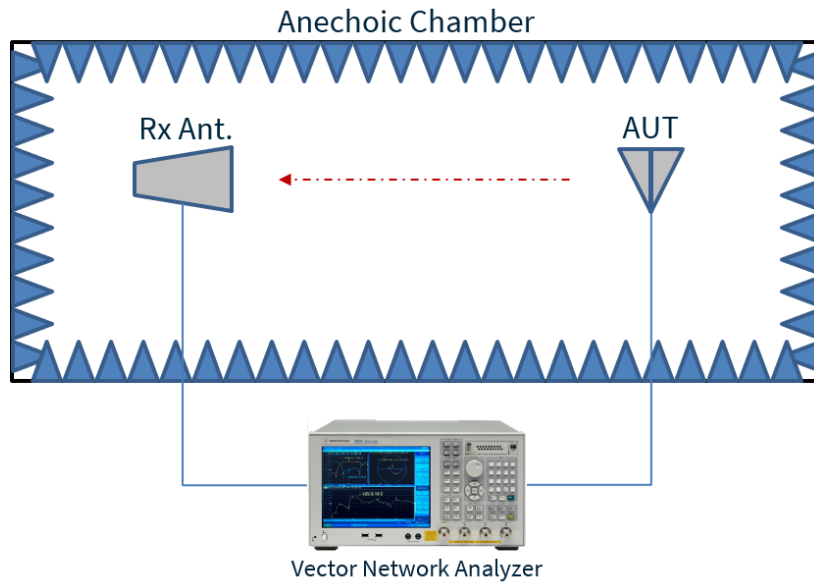

4.2 Patterns at 1575 MHz

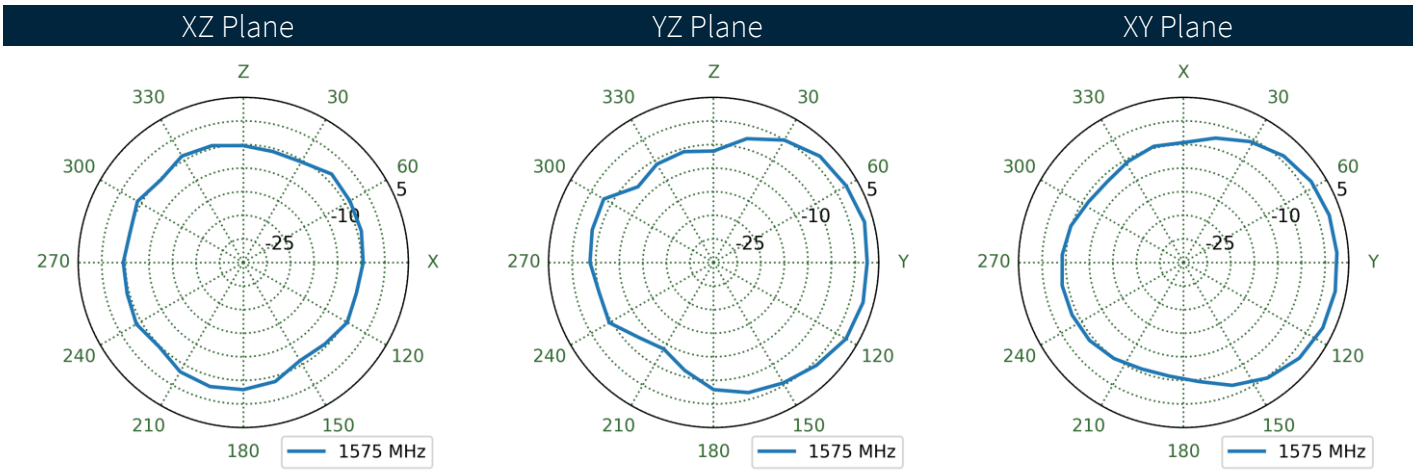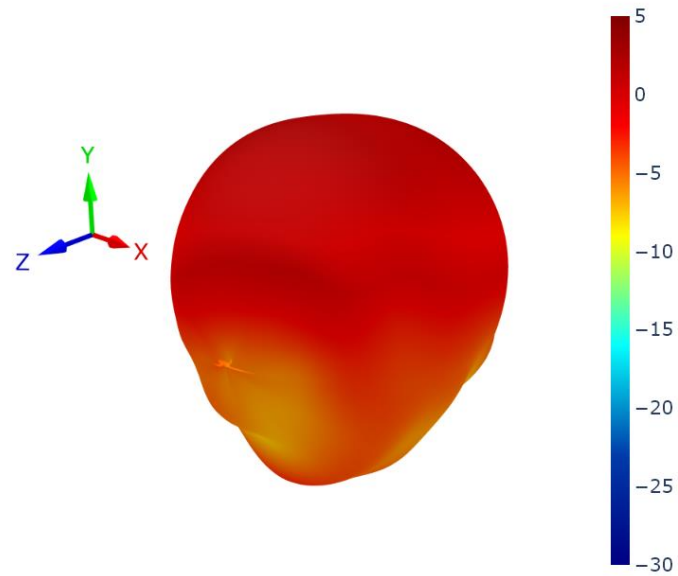

# 5. Mechanical Drawing


ISO NO.: EDW-12-8-0026

STATE: Release


NOTES: 1. Double sided adhesive area.

REV.	DESCRIPTION	ENG.	APPROVED	DATE
A	EC-21-08-010	Mickey	Buluto	2021/03/02


Top View

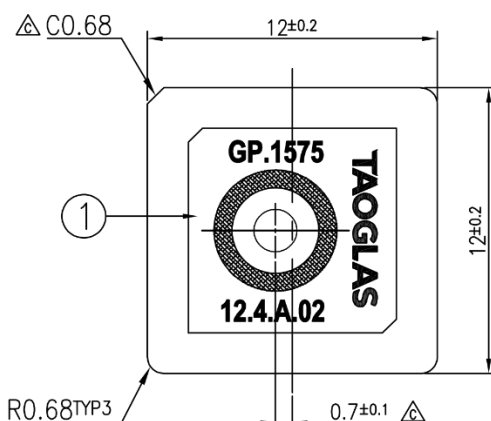

Side View

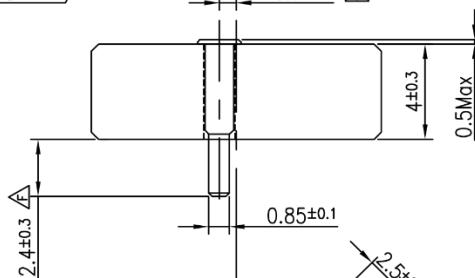

Bottom View

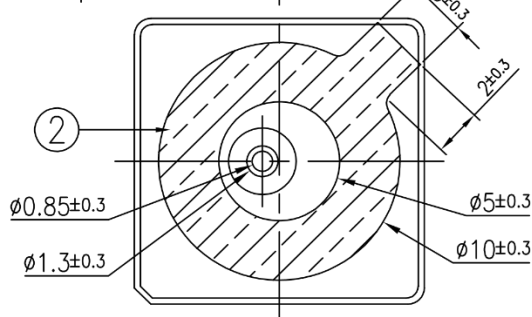

	Name	P/N	Material	Finish	QTY
1	GP.1575 Patch	001517F050000A	Ceramic	Brown	1
2	Double sided Adhesive	001517F050000A	Tesa 4872	White Liner	1

APPROVED BY: Joanna	TW Design Centre This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.
CHECK BY: Joanna	
DRAWN BY: Sandy	
DATE: 2012/01/31	
UNLESS OTHERWISE SPECIFIED TOLERANCES ON:	TITLE : GPS Patch Antenna 1575MHz Ceramic Patch PART NO. : GP.1575.12.4.A.02
THIRD ANGLE PROJECTION	UNIT: mm SCALE: 4:1 PAGES: 1/1 REV. F

## 6. Antenna Integration Guide

The following is an example on how to integrate the GP.1575.12.4.A.02 into a design. This antenna has one which is used for the RF Feed. Taoglas recommends using a minimum of 50x50mm ground plane (PCB) to ensure optimal performance.



Top view of PCB.

Please find the Integration files in Altium, 2D formats and the 3D model for the GP.1575.12.4.A.02 here:  
<https://www.taoglas.com/product/gp-1575-12-4-a-02-2/>

**6.1** Schematic and Symbol Definition



Above is the 3D model of the GP.1575.12.4.A.02 on the PCB.

The circuit symbol for the GP.1575.12.4.A.02 is shown below. The antenna has 1 pin as indicated below.

Pin	Description
1	RF Feed


TAOGLAS\_GP.1575.12.4.A.02

ANT1




Above is a schematic symbol of GP.1575.12.4.A.02 and a table of the pin definitions.

## 6.2 Antenna Footprint

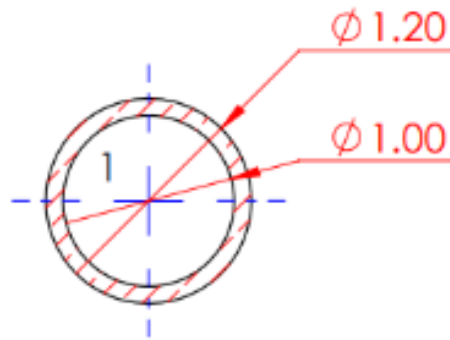

Top Side

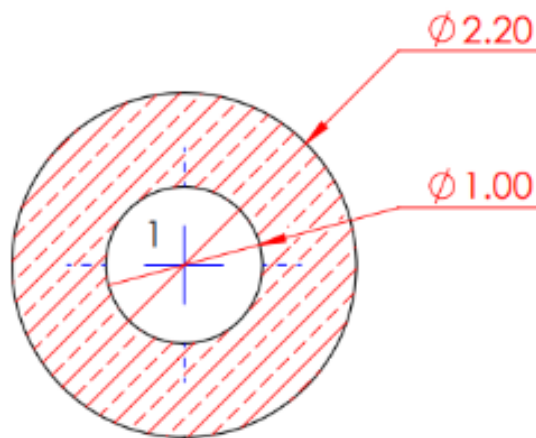


Bottom Side

Pin	Description
1	RF Feed


### 6.3 Copper Clearance for GP.1575.12.4.A.02

The footprint and clearance on the PCB must comply with the antenna's specification. The PCB layout shown in the diagrams below demonstrates the GP.1575.12.4.A.02 clearance area for Pin 1 (RF Feed Pad). The bottom copper keep out area only applies to the bottom layer and the top copper keep out area applies to all other layers.

There should be a  $\varnothing 3\text{mm}$  copper clearance around the antenna pins on the top side of the PCB with a  $\varnothing 3.5\text{mm}$  copper clearance around the antenna pins on the bottom side.

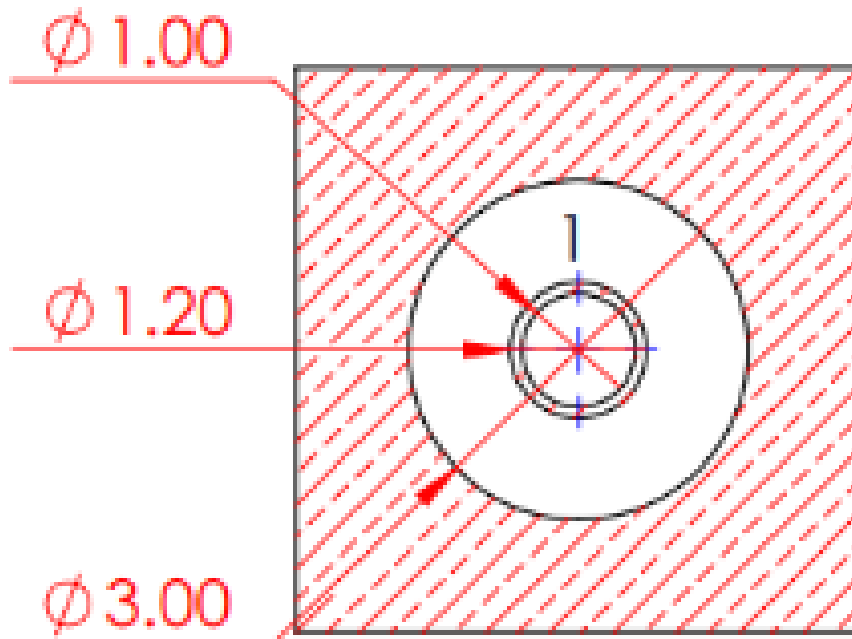

Top Side

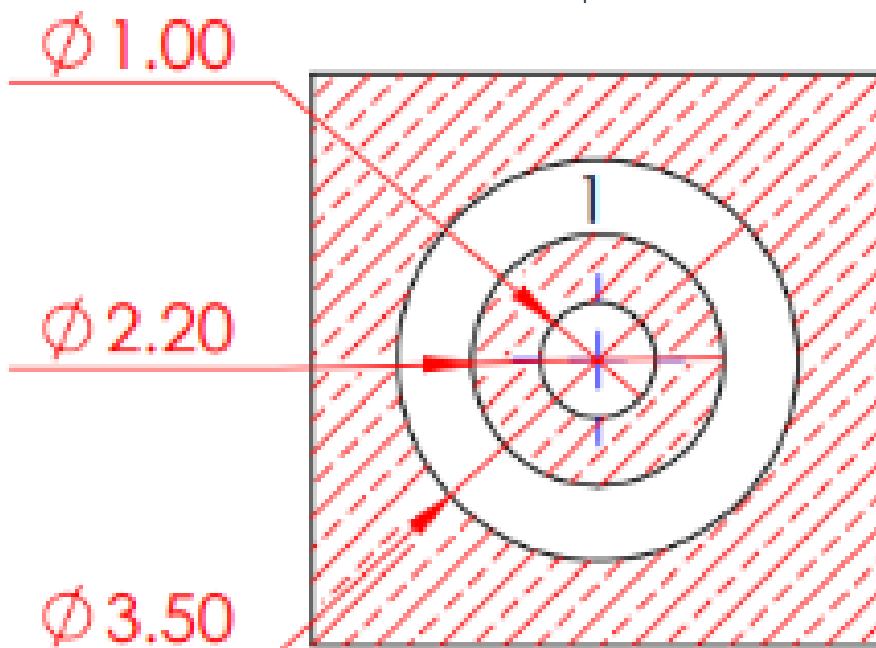

Bottom Side



## 6.4 Antenna Integration


The GP.1575.12.4.A.02 should be placed in the centre of the PCB to take advantage of the ground plane. The RF trace must maintain a 50 Ohm transmission line. Ground vias should be placed around the copper clearance area.





Bottom view of the PCB, showing transmission lines and integration notes.

## 6.5 Final Integration

The bottom side image shown below highlights the antenna transmission line. Taoglas recommends using a minimum of 50x50mm ground plane (PCB) to ensure optimal performance.

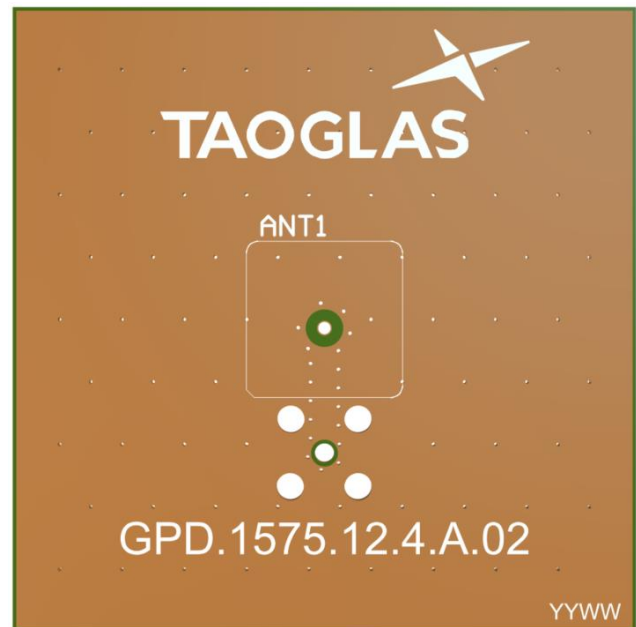


Top Side (GP.1575.12.4.A.02 placement on 50x50mm PCB)

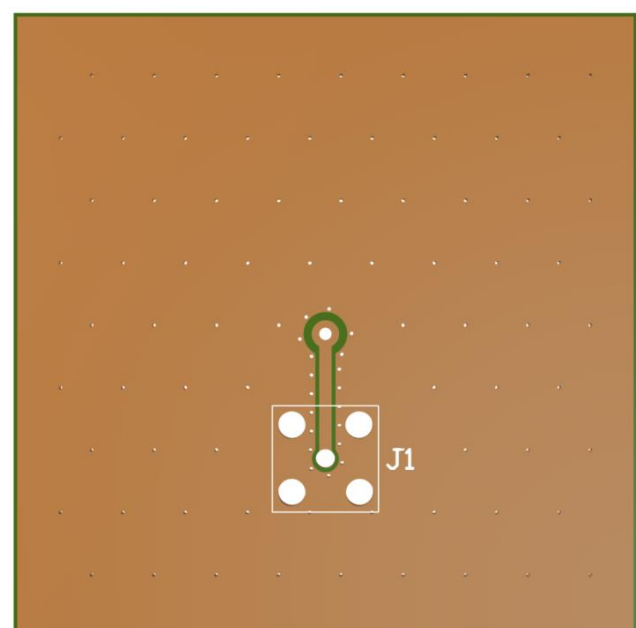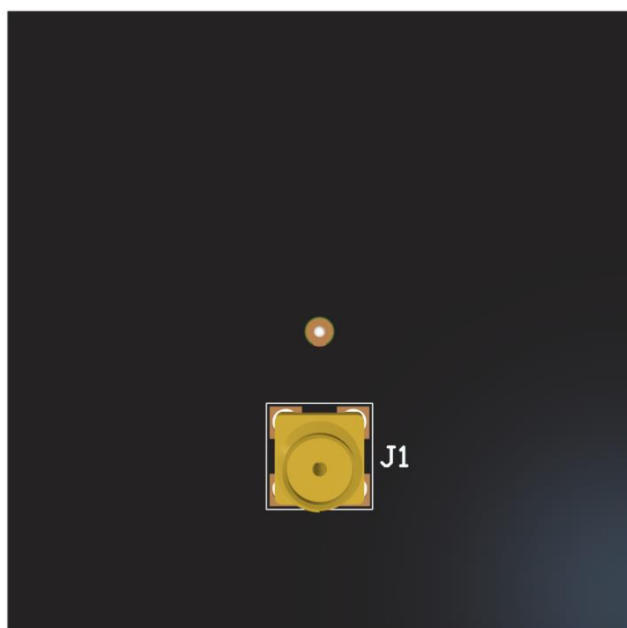

Bottom Side

## 7. Solder Reflow Profile

The GP.1575.12.4.A.02 can be assembled by following the recommended soldering temperatures are as follows:

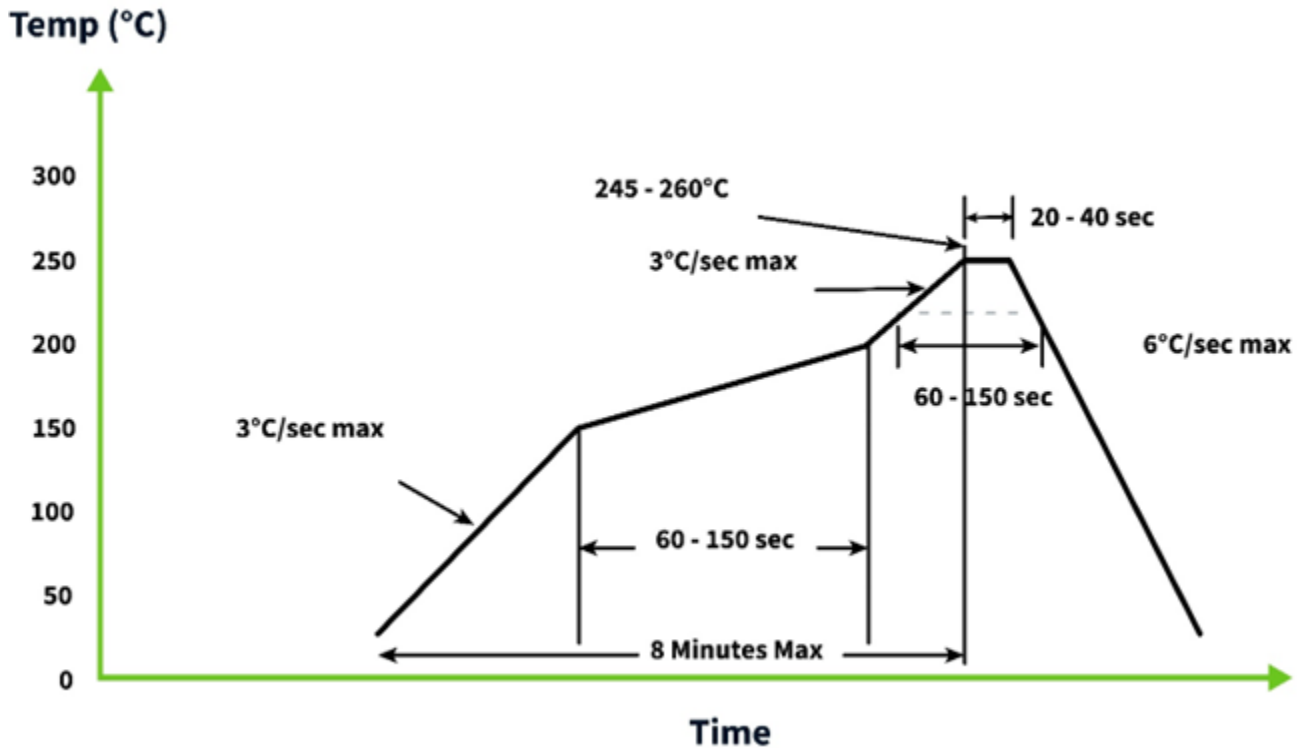


\*Temperatures listed within a tolerance of +/- 10° C


Smaller components are typically mounted on the first pass, however, we do advise mounting the GP.1575.12.4.A.02 when placing larger components on the board during subsequent reflows.

## 8. Packaging


90pcs GP.1575.12.4.A.02 per Tray  
 Dimensions: 350\*200\*15mm  
 Weight: 720g

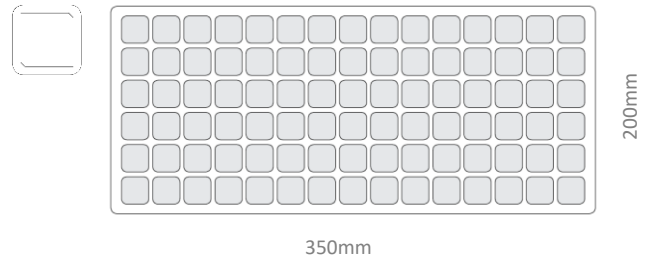

900pcs GP.1575.12.4.A.02 per Inner Carton  
 Dimensions: 355\*205\*125mm  
 Weight: 7.2Kg

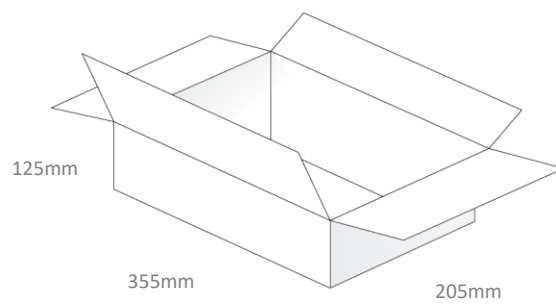

1800pcs GP.1575.12.4.A.02 per Carton  
 Dimensions: 425\*365\*145mm  
 Weight: 14.4Kg

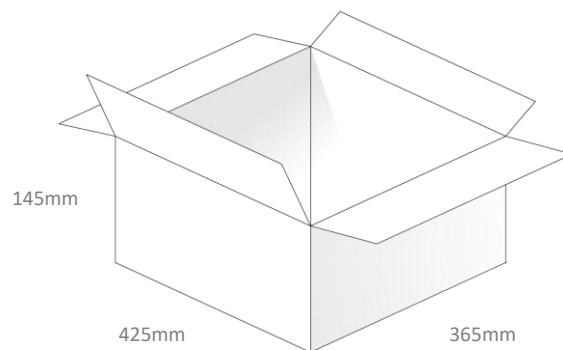

Changelog for the datasheet

**SPE-12-8-093 – GP.1575.12.4.A.02**

**Revision: D (Current Version)**

Date:	2022-09-27
Changes:	Full Data Sheet Update
Changes Made by:	Evan Murphy

**Previous Revisions**

**Revision: C**

Date:	2017-05-15
Changes:	
Changes Made by:	Technical Writer

**Revision: B**

Date:	2012-07-19
Changes:	
Changes Made by:	Technical Writer

**Revision: A (Original First Release)**

Date:	2009-08-10
Notes:	
Author:	Technical Writer

