



TAOGLAS®



Datasheet

Part No:
WPC.25.A.07.0150C

Description

2.4GHz Ceramic Patch Antenna on integral ground with cable and connector

Features:

2.4~2.5GHz Ceramic Patch Antenna
Peak Gain: 5dBi
Efficiency: Greater than 60%
Dimensions: 25mm * 25mm * 4mm
Cable: 150mm 1.37 Micro Coaxial
Connector: I-PEX MHE® I (U.FL comp)
Custom Cables and Connectors Available
RoHS & Reach Compliant

1.	Introduction	2
2.	Specification	3
3.	Antenna Characteristics	4
4.	Radiation Patterns	8
5.	Mechanical Drawing	12
6.	Packaging	13
<hr/>		
	Changelog	14

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The WPC.25A 2.4GHz Ceramic Patch Antenna with cable works on Wi-Fi, Zigbee, Bluetooth and ISM band at 2.4GHz. This antenna comprises of a 2.4GHz 25*25*4mm embedded patch with mini-coax cable and connector for connectivity and a PCB carrier to mount the antenna. The antenna has its own ground PCB carrier and is therefore ground independent.

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

For example, a module manufacturer may state that the antenna must have less than 2dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2dBi in free-space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.

2. Specification

Electrical								
Band	Frequency (MHz)	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
Wi-Fi - 2GHz	2400-2500	76.9	-1.14	5.15	50 Ω	Linear	Omni	2W
Mechanical								
Dimensions			25 x 25 x 5.5mm					
Cable			1.37 mini coaxial cable					
Cable length			150mm					
Connector			IPEX MHF1					
Environmental								
Temperature Range			-40°C to 85°C					
Humidity			Non-condensing 65°C 95% RH					

3. Antenna Characteristics

3.1 Test Setup


AUT




Vector Network Analyzer




3.2 Return Loss

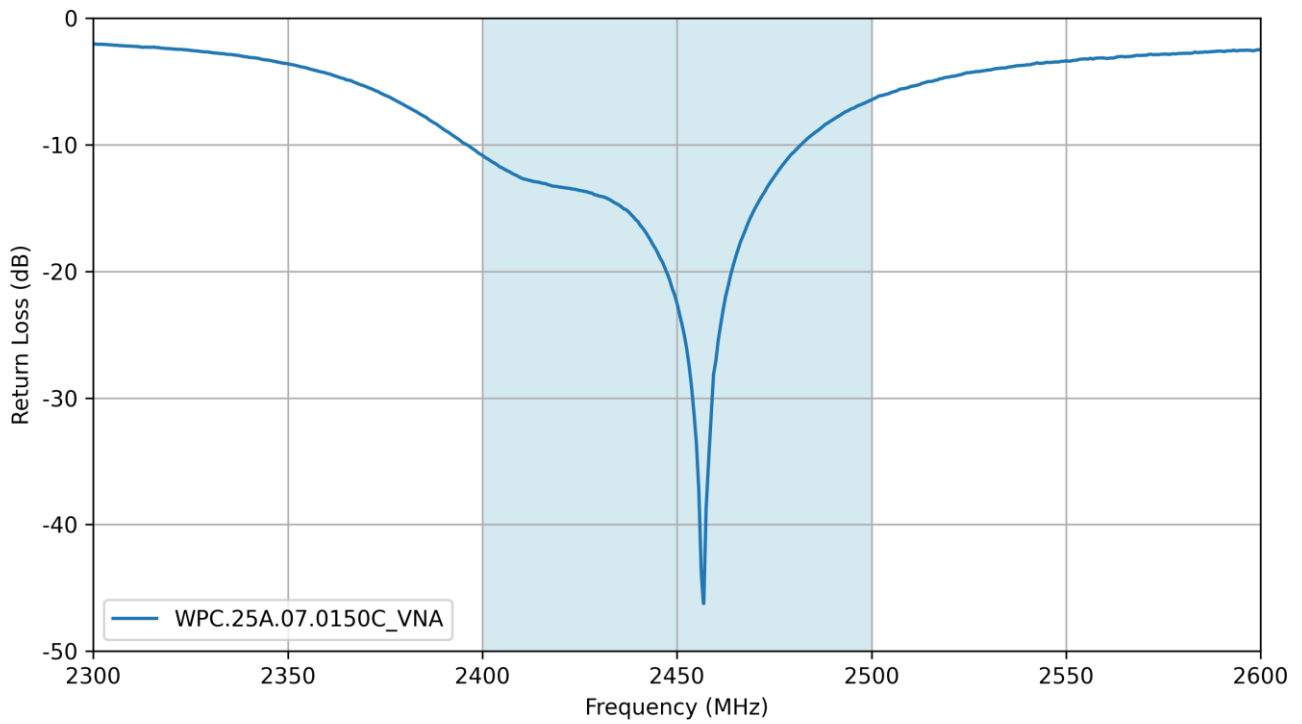


3.3 VSWR

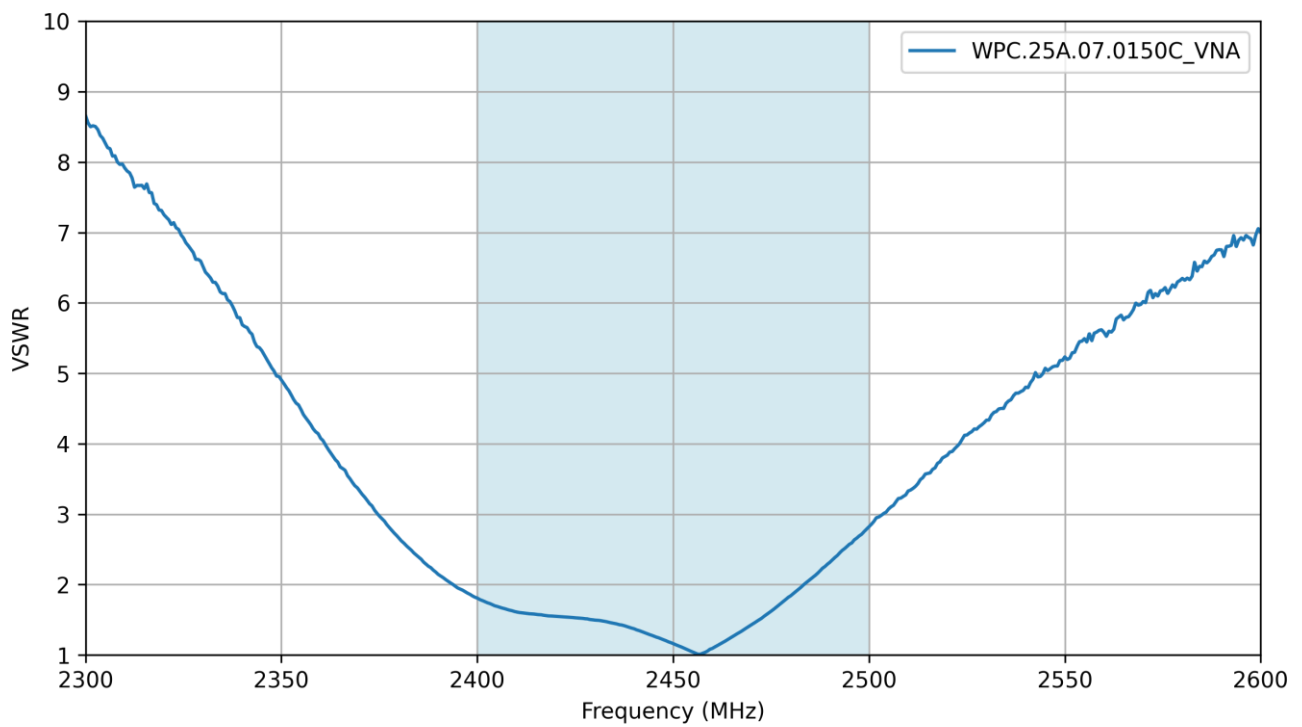


3.4 Efficiency

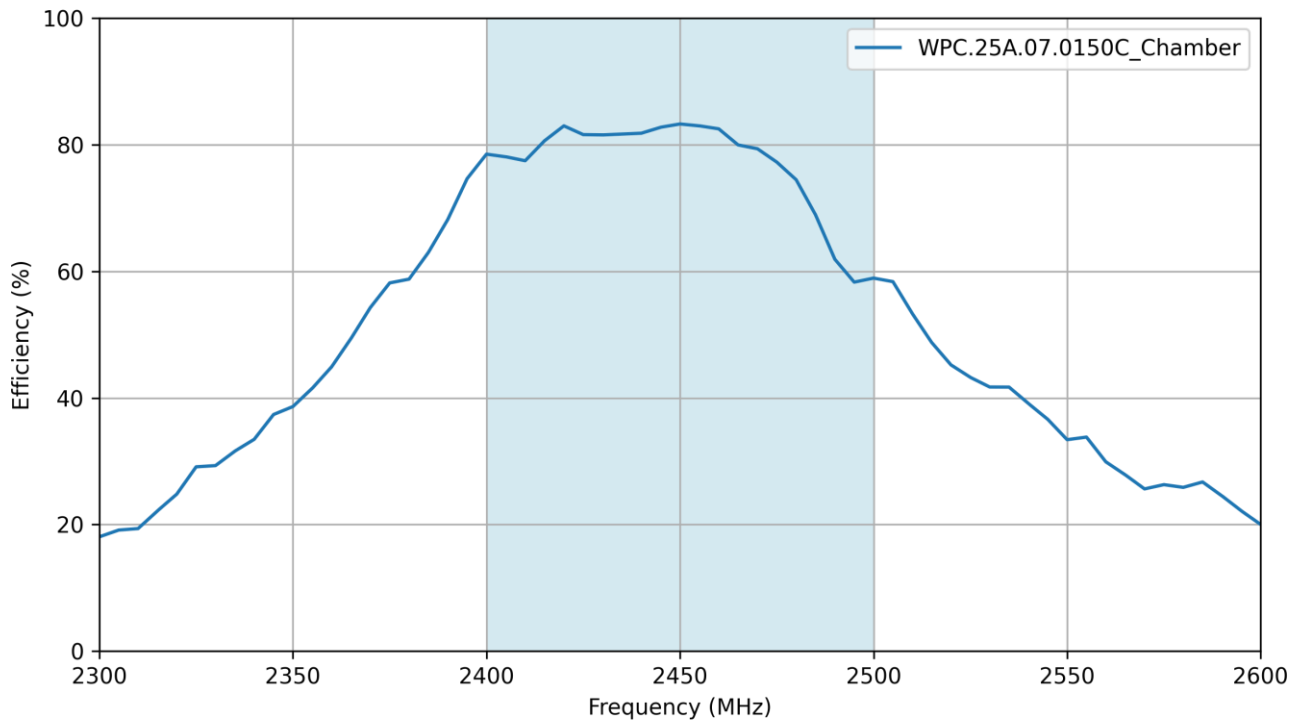

3.5 Average Gain


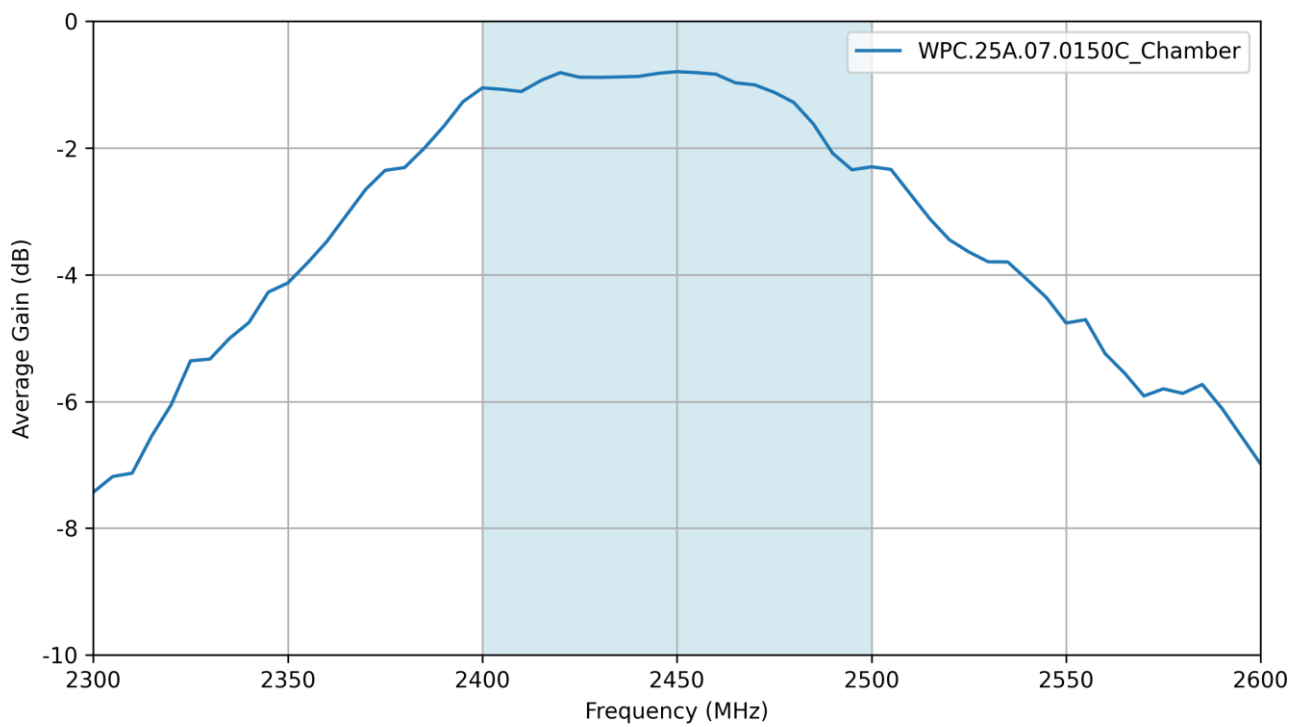


3.6 Peak Gain


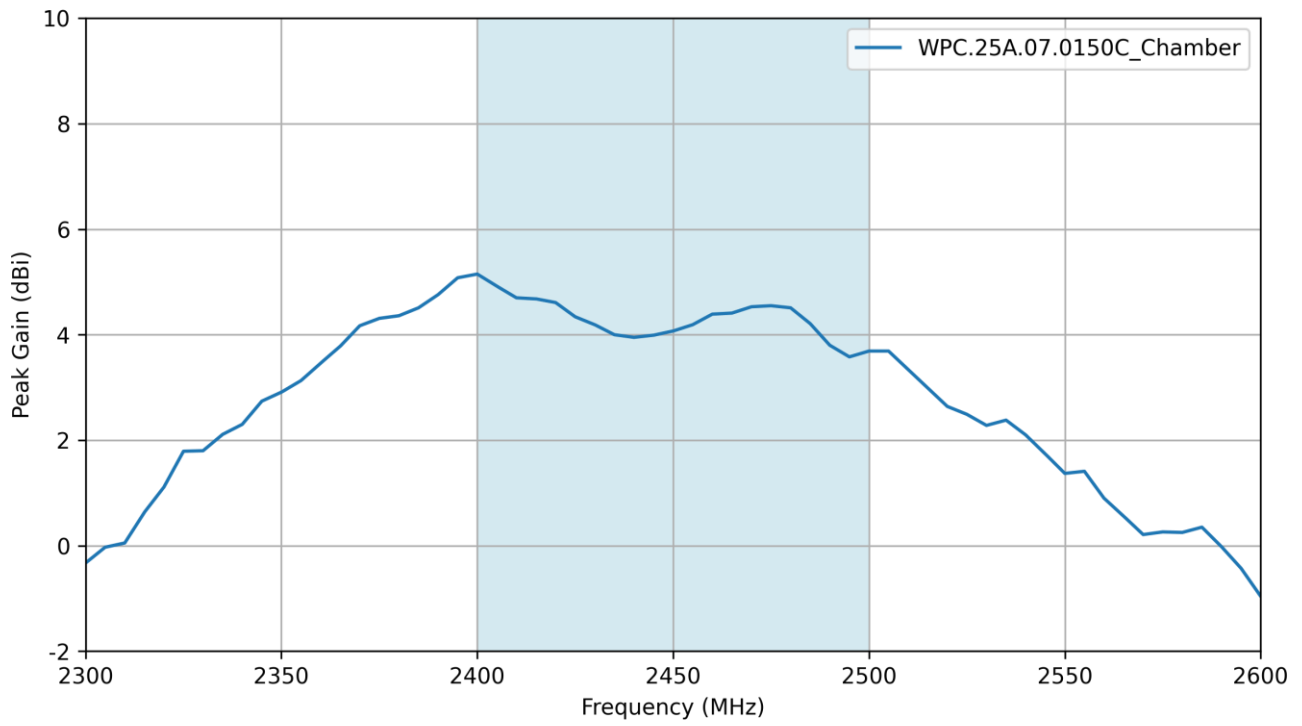


4. Radiation Patterns



4.1 Test Setup

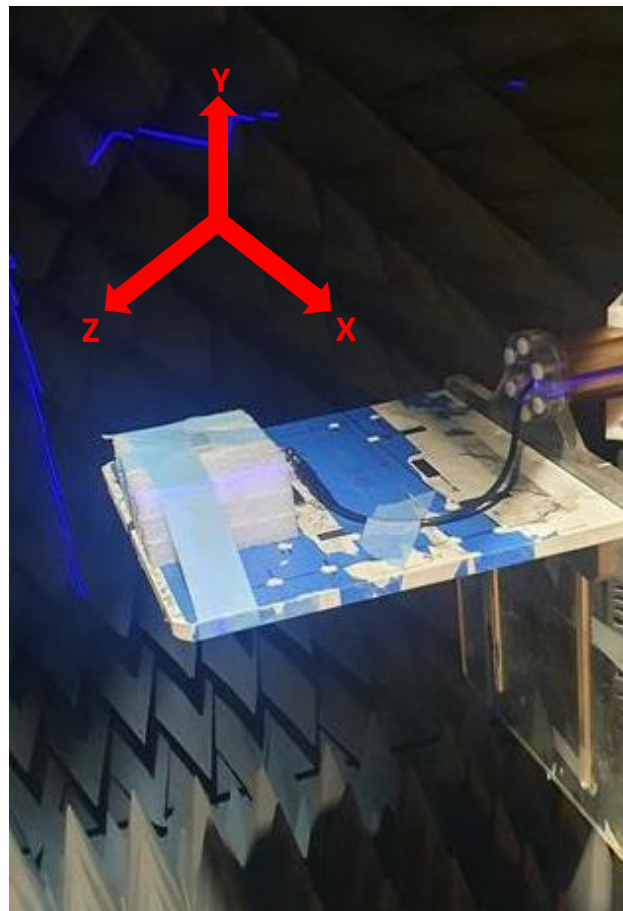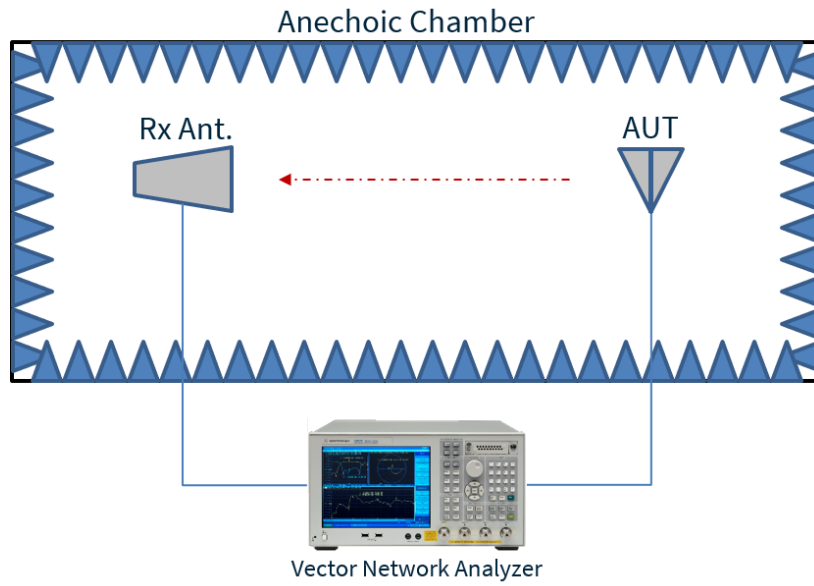



4.2 WPC.25A.07.0150C_Chamber Patterns at 2400 MHz

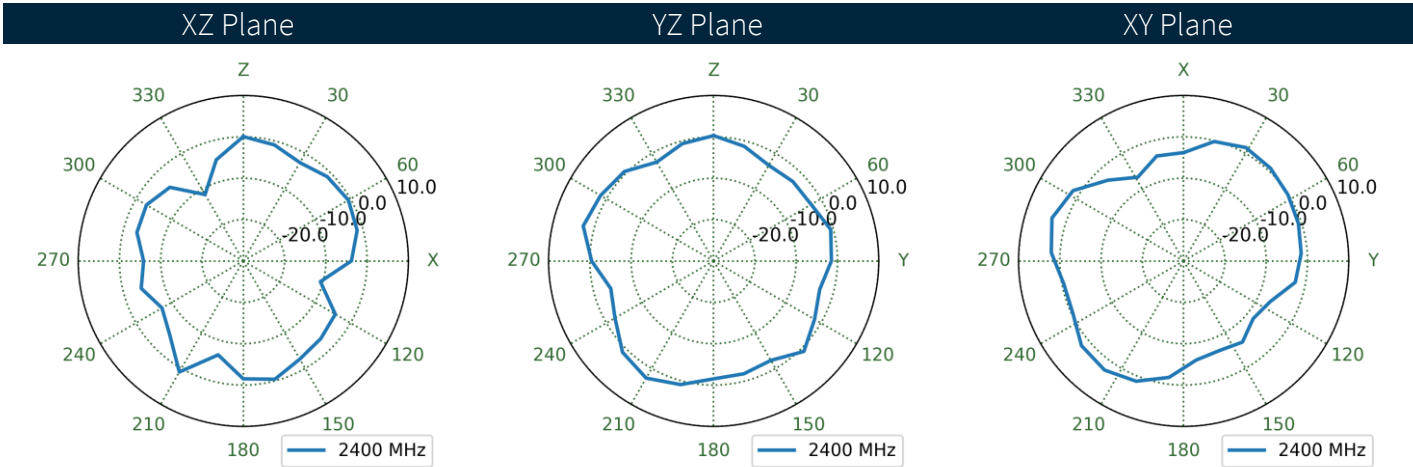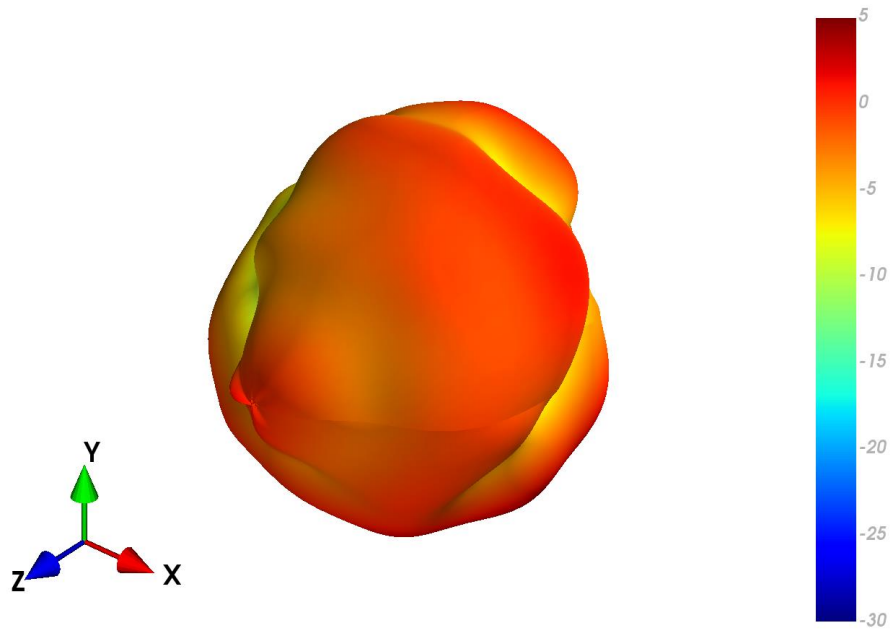


4.3 WPC.25A.07.0150C_Chamber Patterns at 2450 MHz

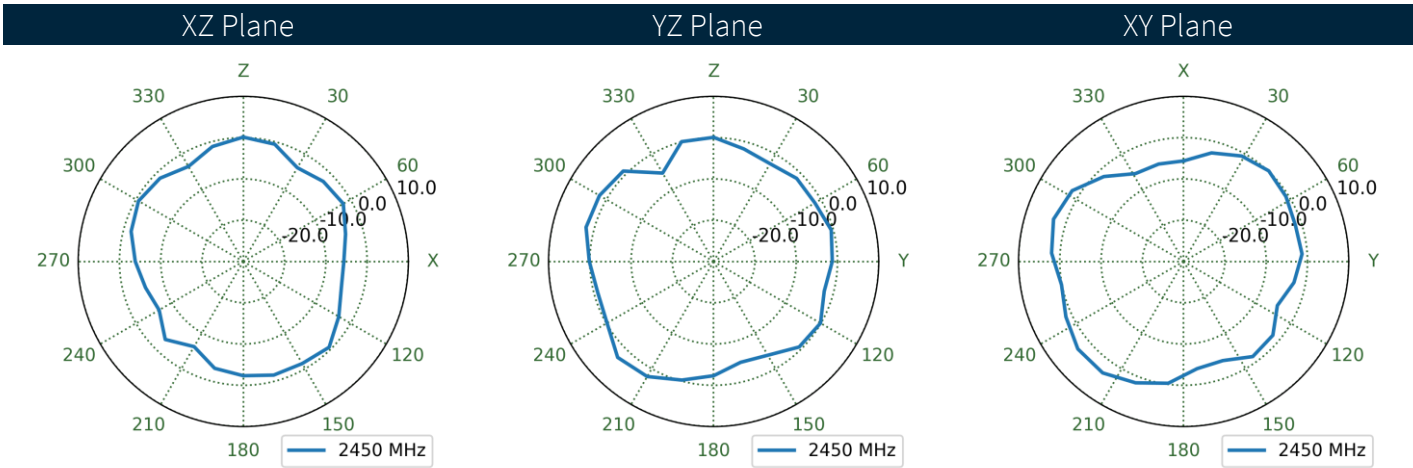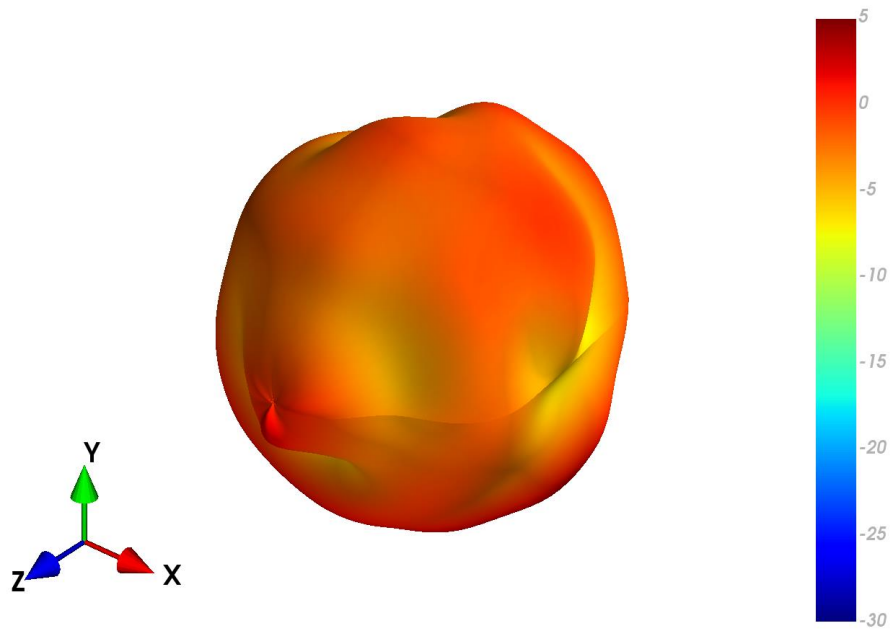

4.4 WPC.25A.07.0150C_Chamber Patterns at 2500 MHz

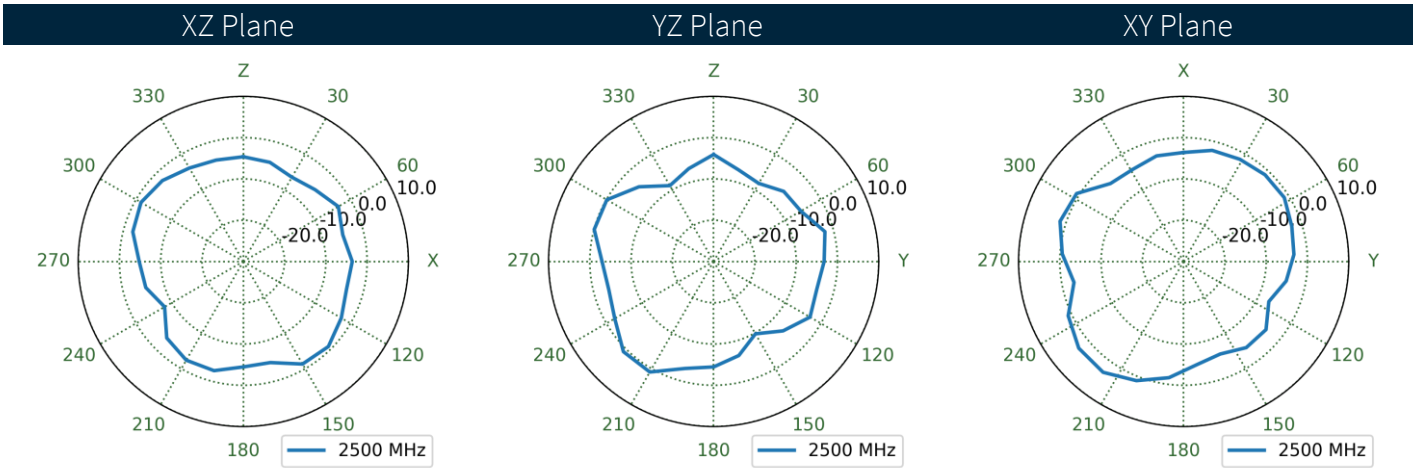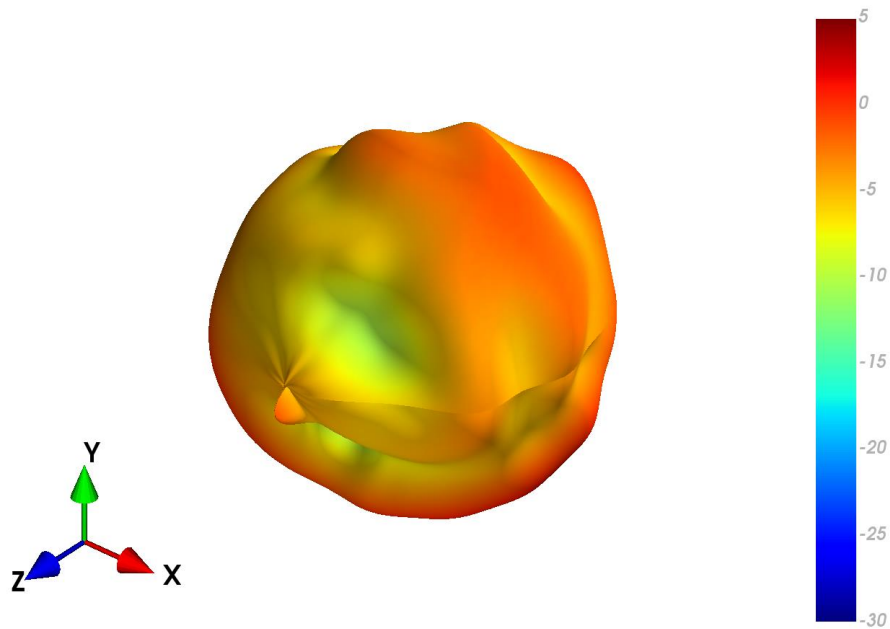



5. Mechanical Drawing

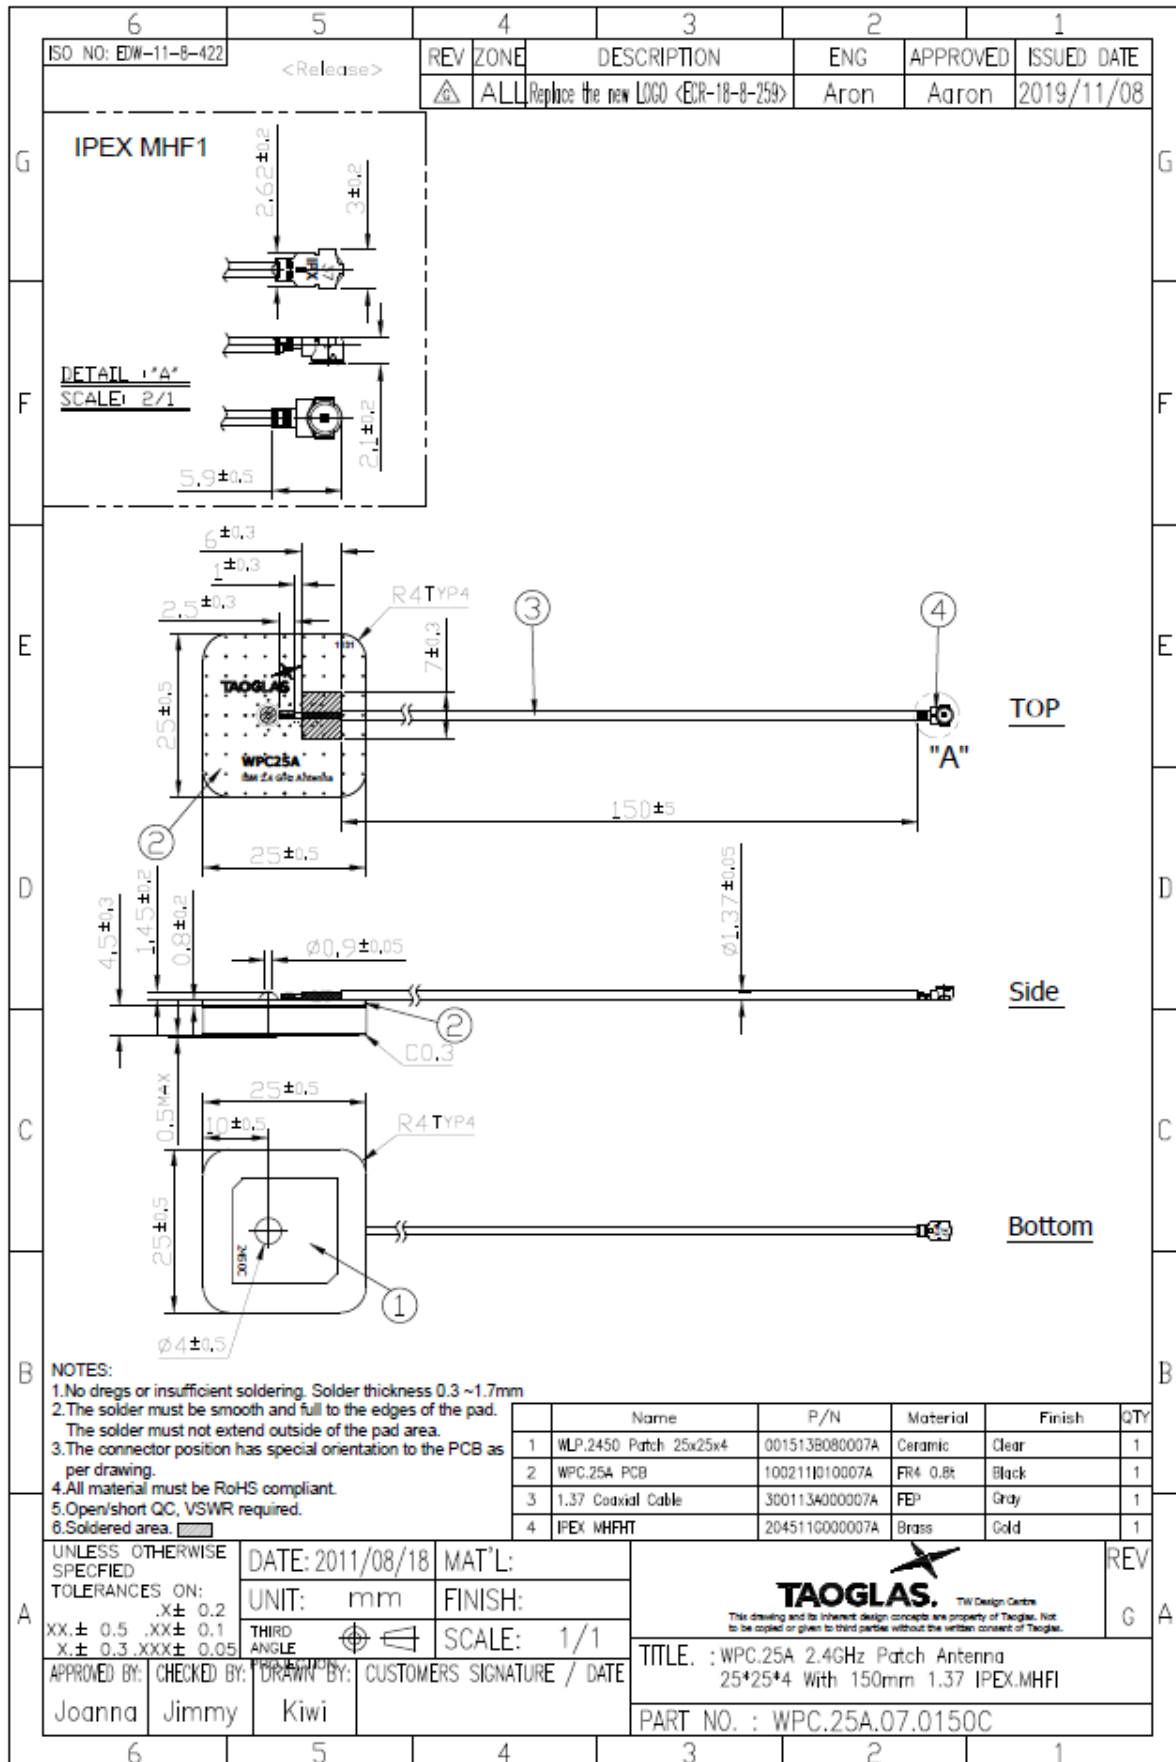


6. Packaging




30 pcs WPC.25A.07.0150C per tray
 Tray Dimensions - 365*300mm
 Total Weight - 482g

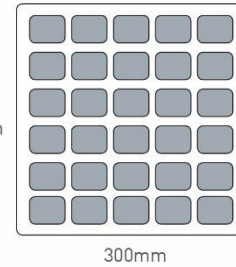


5 trays / 180 pcs WPC.25A.07.0150C per vacumm bag
 Vacumm bag Dimensions - 366*300*50
 Weight - 2.9Kg

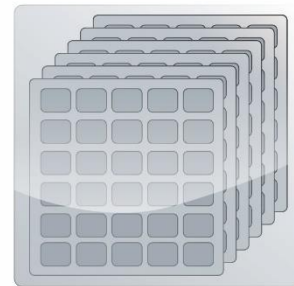

15 trays / 3 vacumm bags / 540 pcs PCSG.01.A per carton
 Carton Dimensions - 390*320*290
 Weight - 9Kg

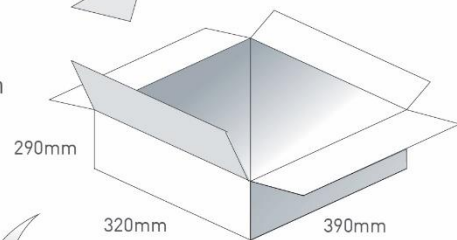

Pallet Dimensions 1170mm*960mm*1370mm
 36 Cartons per pallet
 3 Cartons per layer
 12 Layers

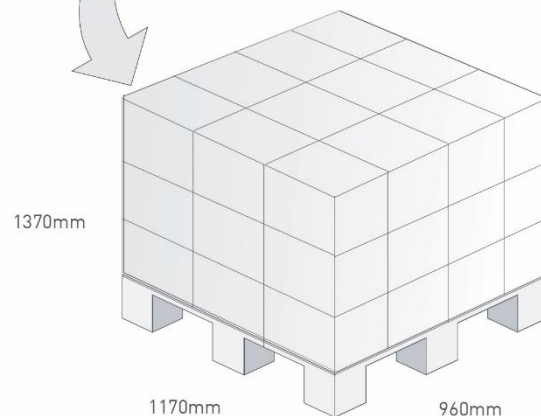

Changelog for the datasheet

SPE-11-8-130-H - WPC.25.A.07.0150C

Revision: H (Current Version)

Date:	2022-02-10
Changes:	Full Datasheet update
Changes Made by:	Evan Murphy

Previous Revisions

Revision: G

Date:	2019-06-06
Changes:	
Changes Made by:	Technical Writer

Revision: B

Date:	2012-02-06
Changes:	
Changes Made by:	Technical Writer

Revision: F

Date:	2015-12-08
Changes:	changed Polarization to "Broadly Linear".
Changes Made by:	Aine Doyle

Revision: A (Original First Release)

Date:	2011-02-06
Notes:	
Author:	Technical Writer

Revision: E

Date:	2015-03-02
Changes:	
Changes Made by:	Technical Writer

Revision: D

Date:	2012-03-02
Changes:	
Changes Made by:	Technical Writer

Revision: C

Date:	2012-02-24
Changes:	
Changes Made by:	Technical Writer



www.taoglas.com

