

Schottky Barrier Rectifiers

Using the Schottky Barrier principle with a Molybdenum barrier metal. These state-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes.

Features

- *Low Forward Voltage.
- *Low Switching noise.
- *High Current Capacity
- *Guarantee Reverse Avalanche.
- *Guard-Ring for Stress Protection.
- *Low Power Loss & High efficiency.
- *150°C Operating Junction Temperature
- *Low Stored Charge Majority Carrier Conduction.
- * Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O
- *Moisture Sensitivity Level: MSL-1



* In compliance with EU RoHs 2002/95/EC directives
The marking is indicated by part no. with. "M". ex:SR107M~SR1100M

MAXIMUM RATINGS


| Characteristic | Symbol | SR107 | SR108 | SR109 | SR1100 | Unit |
|--|--|-------------|-------|-------|------------|------|
| Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage | V _{RRM} V _{RWM} V _R | 70 | 80 | 90 | 100 | V |
| RMS Reverse Voltage | V _{R(RMS)} | 49 | 56 | 63 | 70 | V |
| Average Rectifier Forward Current | Io | 1.0 | | | | Α |
| Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfware, single phase, 60Hz) | I _{FSM} | 25 | | | | А |
| Operating and Storage Junction Temperature Range | T _J , T _{STG} | -65 to +150 | | | $^{\circ}$ | |


ELECTRIAL CHARACTERISTICS

| Characteristic | Symbol | SR107 | SR108 | SR109 | SR1100 | Unit |
|--|----------------|-----------|-------|-------|--------|------|
| Maximum Instantaneous Forward Voltage (I _F =1 Amp) | V_{F} | 0.75 0.85 | | 85 | V | |
| Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C = 25^{\circ}C$) (Rated DC Voltage, $T_C = 125^{\circ}C$) | I _R | 0.5 20 | | | mA | |
| Maxmum Thermal Resistance Junction to case | R_{thjC} | 60 | | | °C/W | |
| Typical Junction Capacitance (Reverse Voltage of 4 volts & f=1 MHz) | C_P | 7 | 0 | 6 | 60 | ₽F |

SCHOTTKY BARRIER RECTIFIERS

1.0 AMPERES 70-100 VOLTS








| DIM | MILLIMETERS | | | |
|-------|-------------|------|--|--|
| ווועו | MIN | MAX | | |
| Α | 2.00 | 2.70 | | |
| В | 25.40 | | | |
| С | 4.10 | 5.20 | | |
| D | 0.70 | 0.90 | | |

CASE---Transfer molded plastic

POLARITY---Cathode indicated polarity band

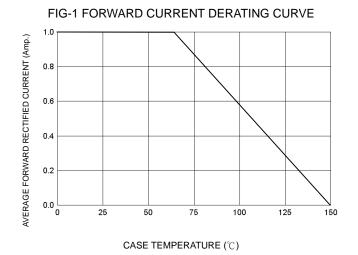




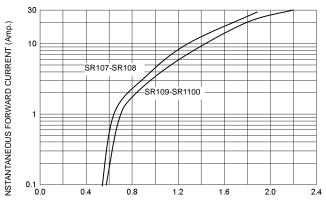


FORWARD VOLTAGE (Volts)



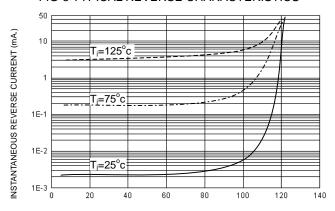


PERCENT OF RATED REVERSE VOLTAGE (%)

FIG-4 TYPICAL JUNCTION CAPACITANCE

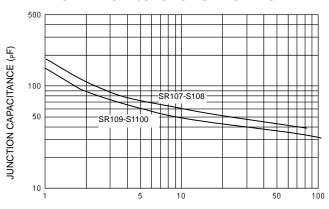

REVERSE VOLTAGE (Volts)

FIG-5 PEAK FORWARD SURGE CURRENT

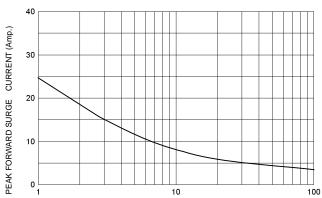

NUMBER OF CYCLES AT 60 Hz