

### 1 Description

The iW350 is a PWM signal generator that works with three different types of dimming inputs, 0-10V PWM dimming, 0-10V linear dimming or simple dimming using a single resistor to ground from the DIM pin. The iW350 auto detects the dimmer type connected. A PWM dimming type is directly used, while the 0-10V linear dimming and resistor dimming signals are converted into a 0%-100% PWM duty cycle that can then be used to provide a dimming signal to a primary-side LED driver such as the iW3636, removing the need for transformers or other driver circuitry. The output of the iW350 is optimized in such a way as to remove the impact of the non-linear delay typical of optocouplers.

The iW350 offers a high level of flexibility by offering programmability for the maximum dimming voltage, minimum output duty cycle and the turn-off threshold voltage through external resistors. The output PWM frequency is also programmable from 100Hz to 5kHz through a single capacitor to ground. The input to the iW350 integrates the necessary current source to interface with both active and passive 0-10V dimmers without additional circuitry, while the output can drive an optocoupler to provide isolated dimming control from the secondary to the primary.

#### 2 Features

- 15V to 60V operating voltage
- 3-in-1 dimmer interface
  - » 0-10V PWM dimming
  - » 0-10V linear dimming
  - » Single resistor dimming
- Dimmer type auto detect
  - » PWM or DC input dimming signal
- 0% to 100% PWM output
  - » 1% PWM duty cycle tolerance
  - » Selectable frequency range via external capacitor
  - » Unique duty cycle drive to account for non-linear optocoupler delay

- SOIC-8 package
- External resistor configuration
  - » Programmable max dimming voltage: 8.5V, 9V, 9.5V and 10V
  - Programmable minimum duty cycle: 1%, 3%, 5% and 10%
  - » Programmable turn-off threshold: 0.5V, 0.6V, 0.7V and 0.8V
- Programmable PWM output frequency range: 100Hz-5kHz
- Integrated current source for driving 0-10V dimmer
- Low power shutdown mode
- Integrated optocoupler driver for isolated applications

#### 3 Applications

- 0-10V LED dimming application
- 3-in-1 LED driver interface chip (0-10V linear, 0-10V PWM and R dimming) dimming LED driver application



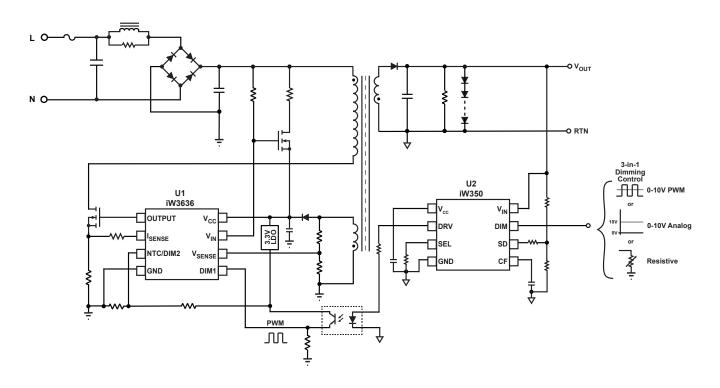


Figure 3.1: iW350 Typical Application Circuit



### **4 Pinout Description**




Figure 4.1: 8-Lead SOIC Package

| Pin Number | Pin Name        | Туре                | Pin Description   |
|------------|-----------------|---------------------|---|
| 1          | V <sub>IN</sub> | Power               | Power supply up to 60V.   |
| 2          | GND             | Ground              | Ground.   |
| 3          | V <sub>CC</sub> | Power               | 5V power supply for internal circuit, connect a 4.7uF capacitor to GND.                                   |
| 4          | DRV             | Digital Output      | PWM driver.   |
| 5          | DIM             | Analog Input/Output | Dimming interface connection.   |
| 6          | SEL             | Analog Input/Output | Connect an external resistor to set max dimming voltage and turn-off threshold voltage.                   |
| 7          | CF              | Analog Input/Output | Sets the PWM output frequency: 100Hz to 5kHz.   |
| 8          | SD              | Analog Input/Output | Shuts down the IC if voltage is over 0.5V, and programs the minimum duty cycle with a resistor to ground. |



### **5 Absolute Maximum Ratings**

Absolute maximum ratings are the parameter values or ranges which can cause permanent damage if exceeded.

| Parameter   | Symbol            | Value       | Units |
|---|-------------------|-------------|-------|
| V <sub>IN</sub> to GND                            | V <sub>IN</sub>   | -0.3 to 65  | V     |
| V <sub>CC</sub> to GND (IC internal power supply) | V <sub>cc</sub>   | -0.3 to 6.5 | V     |
| DIM to GND  | V <sub>DIM</sub>  | -0.3 to 65  | V     |
| CF, SD and SEL to GND                             |                   | -0.3 to 6.5 | V     |
| DRV to GND  | $V_{DRV}$         | -0.3 to 6.5 | V     |
| Operating temperature                             | T <sub>J</sub>    | 85          | °C    |
| Storage temperature range                         | T <sub>STRG</sub> | 150         | °C    |
| ESD rating (HBM)                                  |                   | ±2000       | V     |



### **6 Physical Dimensions**

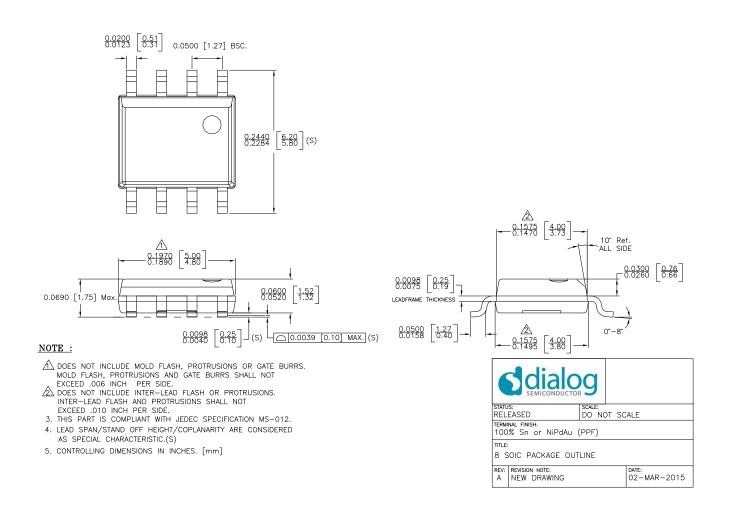


Figure 6.1: Physical Dimensions of 8-Pin SOIC Package

#### 7 Ordering Information

| Part Number | Options   | Package | Description              |
|-------------|---|---------|--------------------------|
| iW350-00    | Standard PWM Output; Dimming Curve Figure 9.1; Turn-off Function Disabled | SOIC-8  | Tape & Reel <sup>1</sup> |
| iW350-02    | Standard PWM Output; Dimming Curve Figure 9.2; Turn-off Function Disabled | SOIC-8  | Tape & Reel <sup>1</sup> |
| iW350-30    | Standard PWM Output; Dimming Curve Figure 9.3; Turn-off Function Enabled  | SOIC-8  | Tape & Reel <sup>1</sup> |
| iW350-32    | Standard PWM Output; Dimming Curve Figure 9.4; Turn-off Function Enabled  | SOIC-8  | Tape & Reel <sup>1</sup> |

Note 1. Tape and reel packing quantity is 2,500/reel. Minimum packing quantity is 2,500.

Product Summary Rev. 0.2 Preliminary 07-Mar-2019



#### **Disclaimer**

Information in this document is believed to be accurate and reliable. However, Dialog Semiconductor does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information. Dialog Semiconductor furthermore takes no responsibility whatsoever for the content in this document if provided by any information source outside of Dialog Semiconductor.

Dialog Semiconductor reserves the right to change without notice the information published in this document, including without limitation the specification and the design of the related semiconductor products, software and applications.

Applications, software, and semiconductor products described in this document are for illustrative purposes only. Dialog Semiconductor makes no representation or warranty that such applications, software and semiconductor products will be suitable for the specified use without further testing or modification. Unless otherwise agreed in writing, such testing or modification is the sole responsibility of the customer and Dialog Semiconductor excludes all liability in this respect.

Customer notes that nothing in this document may be construed as a license for customer to use the Dialog Semiconductor products, software and applications referred to in this document. Such license must be separately sought by customer with Dialog Semiconductor.

All use of Dialog Semiconductor products, software and applications referred to in this document are subject to Dialog Semiconductor's Standard Terms and Conditions of Sale, available on the company website (www.dialog-semiconductor.com) unless otherwise stated.

Dialog and the Dialog logo are trademarks of Dialog Semiconductor plc or its subsidiaries. All other product or service names are the property of their respective owners.

© 2019 Dialog Semiconductor. All rights reserved.

#### **RoHS Compliance**

Dialog Semiconductor's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

### **Contacting Dialog Semiconductor**

United Kingdom (Headquarters)

Dialog Semiconductor (UK) LTD Phone: +44 1793 757700

Germany

Dialog Semiconductor GmbH Phone: +49 7021 805-0

The Netherlands

Dialog Semiconductor B.V. Phone: +31 73 640 8822

Email

info\_pcbg@diasemi.com

North America

Dialog Semiconductor Inc. Phone: +1 408 845 8500

Japan

Dialog Semiconductor K. K. Phone: +81 3 5769 5100

Taiwan

Dialog Semiconductor Taiwan Phone: +886 281 786 222

Web site

www.dialog-semiconductor.com

Hong Kong

Dialog Semiconductor Hong Kong Phone: +852 2607 4271

Korea

Dialog Semiconductor Korea Phone: +82 2 3469 8200 China (Shenzhen)

Dialog Semiconductor China Phone: +86 755 2981 3669

China (Shanghai)

Dialog Semiconductor China Phone: +86 21 5424 9058

**Product Summary** 

Rev. 0.2 Preliminary

07-Mar-2019

© 2019 Dialog Semiconductor