

ITEM :

CRYSTAL OSCILLATOR

TYPE :

DSA321SDN

NOMINAL FREQUENCY :

12.000MHz

SPEC No. :

1XTV12000MAA

Please acknowledge receipt of this specification by signing and returning a copy to us.

	RECEIPT
DATE	
RECEIVED	(signature) (name)

General Manufacturer of Quartz Devices



675–0194 Japan Phone (81)79–425–3141 Fax (81)79–425–1134 http://www.kds.info/index_en.htm

A. Hishikawa C.ENG.

ENG.

Takase

- 1. Device Name VC-TCXO
- 2. Model Name DSA321SDN
- 3. Nominal Frequency 12.000 MHz
- 4. Mass 0.03g max.

5. Absolute Maximum Ratings

	Item	Symbol		Rating		unit
1	Supply Voltage	V _{CC}		-0.3~+4.6		V
2	Storage Temperature Range	T_ _{STG}	_stg -40~+85			°C
6. Recommended Operating Conditions						
	Item	Symbol	min.	typ.	max.	unit
1	Supply Voltage	V _{CC}	+2.85	+3.0	+3.15	V
2	Load Impedance (resistance part)	$L_{OAD}R$	9	10	11	kΩ
	(parallel capacitance)	L _{OAD} _C	9	10	11	pF
3	Control Voltage Range	V _{CONT}	+0.5	+1.5	+2.5	V
4	Operating Temperature Range	T _{OPR}	-30	-	+85	°C

7. Electrical Characteristics

 $(T_A=-30 \sim +85^{\circ}C, L_{OAD}R//C=10k\Omega//10pF, V_{CC}=+3.0V, V_{CONT}=+1.5V, unless otherwise noted)$

	14	Quaditions		Limits			Natas
	Item	Conditions	min.	typ	max.	unit	Notes
1	Current Consumption		-	-	+1.5	mA	
2	Output Level		0.8	-	-	V_{P-P}	1
3	Symmetry	GND level (DC cut)	40/60	-	60/40	%	
4	Harmonics		-	-	-5	dBc	
5	Frequency Stability						
	1.Tolerance	After 2 times reflow Ref. to nominal frequency	-	-	±1.5	ppm	2,3
	2.vs Temperature	T _A =-30~+85°C Ref. to frequency (T _A =+25°C)	-	-	±0.5	ppm	
	3.vs Supply Voltage	V _{CC} =+3.0V±5%	-	-	±0.2	ppm	
	4.vs Load Variation	L _{OAD} _R//C=(10kΩ//10pF)±10%	-	-	±0.2	ppm	
	5.vs Aging	T _A =Room ambient	-	-	±1.0	ppm/year	
6	Start Up Time	@90% of final Vout level	-	-	2.0	ms	
7	Frequency Control 1.Control Range	V _{CONT} =+1.5V±1.0V	±8	-	±15	ppm	4
	2.Input Resistance		500	-	-	kΩ	
8	SSB Phase Noise	Relative to f0 level offset 1kHz	-	-	-130	dBc/Hz	

Notes


1. Clipped sine wave (DC-coupled)

2. T_A=+25°C

3. Please leave after reflow in 2h or more at room ambient.

4. Positive slope (Frequency becomes high in proportion to frequency control voltage.)

TITLE	Remark		
DSA321SDN TYPE SPECIFICATION			
Date		Rev.	Page
2017/06/05		-	1/13

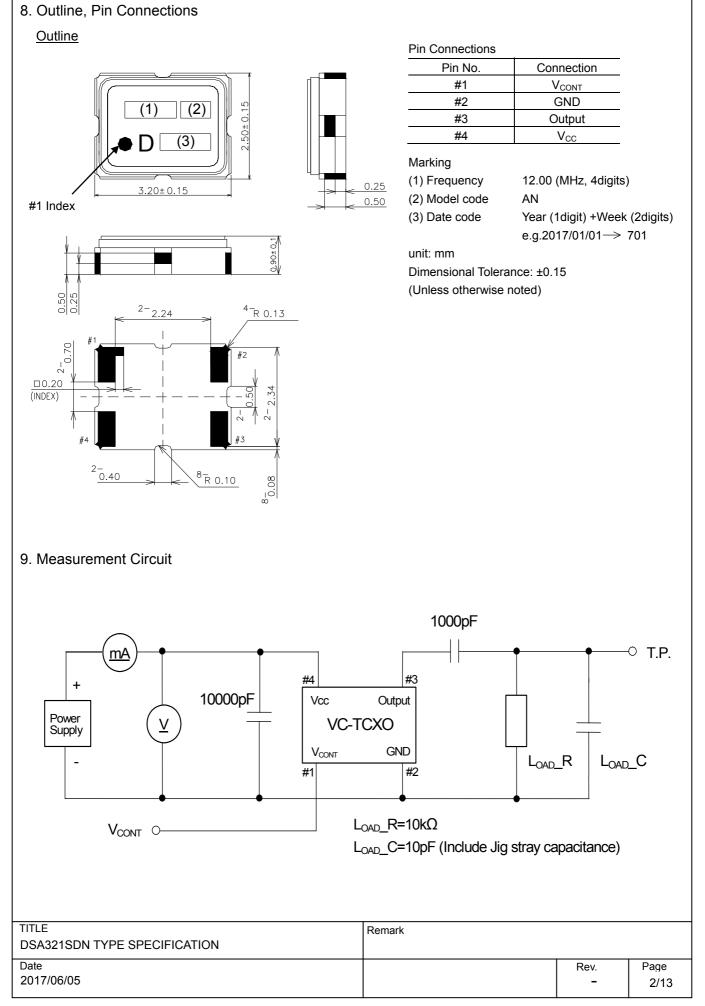


	Itom	I test is performed after 3times reflow (Clause.13)					
1	Item	Description	Rec	quirements			
I	Drop	Natural drop (On concrete)					
		Mounting on the set or test fixture.(Total weight	100g)				
		Height : 150cm	df/f=<±1.0pp	om			
		Direction : X,Y,Z, 6directions					
		Test cycle : 3cycles					
		Reference specification : EIAJ-ED-4702A Metho	d5				
2	Vibration	Sweep range : 10~500Hz					
		Sweep speed : 11min/cycle					
		Amplitude : 1.5mm (10~55Hz)					
		Acceleration : 200m/s ² (55~500Hz)	df/f=<±0.5pr	om			
		Direction : X,Y,Z, 3directions					
		Test cycle : 10cycles					
		Reference specification : IEC 60068-2-6					
3	Shock	Acceleration : 1000m/s ²					
5	SHOCK	Direction : X,Y,Z, 6directions					
		Duration : 6ms	df/f-<10 En				
			df/f=<±0.5pp	וווכ			
		Test cycle : 3cycles/each directions					
		Reference specification : IEC 60068-2-27					
4	PCB bend	PWB : t=1.6mm					
	strength	Pressure speed : 1.0mm/s	df/f=<±0.5pp				
		Bend width : 1→2→3mm	No visible da	No visible damage.			
		Duration : 10±1s	No leak dan	nage.			
		Reference specification : IEC 60068-2-21 Ue1					
5	Adherence nature	PWB : t=1.6mm					
		Direction : X,Y, 2directions	df/f=<±0.5pp	om			
	Pressure : 10N		No visible damage.				
		Duration : 10±1s		No leak damage.			
		Reference specification : IEC 60068-2-21 Ue3					
6	Package strength	Pressure : 10N	df/f=<+0.5pr	df/f=<±0.5ppm			
0	i ackage strength	Duration : 10±1s					
				No mechanical damage. No leak damage.			
-	Over a la sla	Reference specification : IEC 60068-2-77	No leak damage.				
7	Gross leak	It is immersed for 3min into +125±5°C		No continuous air bubbles.			
		Chlorofluorocarbon (CFCs) liquid.	No continuo	us air bubbles.			
		Reference specification : IEC 60068-2-17					
8	Fine leak	It shall be measured by the helium leak detector					
		after pressurization for 60min by the pressure	Loss than 1	$0 \times 10^{-9} D_{2} m^{3} / c$			
		of $(3.92\pm0.49) \times 10^5$ Pa in a helium gas atmosph	ere.	Less than 1.0x10 ⁻⁹ Pa m ³ /s.			
		Reference specification : IEC 60068-2-17					
9	Solderability	Solder bath temperature : +245±5°C	A new unifo	rm coating of sold			
	,	Duration : 3±0.3s		shall cover a minimum of 95%			
		Reference specification : IEC 60068-2-58		ce being immersed			
10	Resistance to	1) Solder iron method					
10	soldering heat	Bit size : $B(\varphi 3)$ Bit temperature : +350±10°C	df/f-<10 En				
	soluering near	Duration : $3+1/-0s$ /each terminal		df/f=<±0.5ppm dV _{OUT} =<±0.2V _{P-P}			
		It shall be measured after 2h at room temperatu		amage.			
		humidity. Reference specification : IEC 60068-2-	20				
		2) Reflow					
		In refer to temperature profile shown in clause13					
		Test cycle : 3cycles	dV _{OUT} =<±0.2	2V _{P-P}			
		It shall be measured after 2h at room temperatu	e, No visible da	amage.			
		humidity. Reference specification : IEC 60068-2-	58				
_							
ITLE		Remark					
SA3	321SDN TYPE SPECIF	ICATION					
				Rev. P			
ate	/06/05						

11. Environmental Characteristics

criptionRequirementsdf/f=< ± 1.0 ppm $dV_{OUT}= \pm 0.2V_{P.P}$ th at room temperature, cation : IEC 60068-2-1 AbThe electrical characteristics are satisfied.df/f=< ± 1.0 ppm $dV_{OUT}= \pm 0.2V_{P.P}$ The electrical characteristics are satisfied.th at room temperature, cation : IEC 60068-2-2 Bbdf/f=< ± 1.0 ppm $dV_{OUT}= \pm 0.2V_{P.P}$ th at room temperature, cation : IEC 60068-2-3df/f=< ± 1.0 ppm $dV_{OUT}= \pm 0.2V_{P.P}$ th at room temperature, cation : IEC 60068-2-3df/f=< ± 1.0 ppm $dV_{OUT}= \pm 0.2V_{P.P}$ voltage th at room temperature, cation : IEC 60068-2-2 Bbdf/f=< ± 1.0 ppm $dV_{OUT}= \pm 0.2V_{P.P}$ voltage th at room temperature, cation : IEC 60068-2-3df/f=< ± 1.0 ppm $dV_{OUT}= \pm 0.2V_{P.P}$ voltage th at room temperature, cation : IEC 60068-2-3df/f=< ± 1.0 ppm $dV_{OUT}= \pm 0.2V_{P.P}$ voltage th at room temperature, cation : IEC 60068-2-3df/f=< ± 1.0 ppm $dV_{OUT}= \pm 0.2V_{P.P}$ voltage th at room temperature, cation : IEC pub.68-2-14.Nadf/f=< ± 1.0 ppm $dV_{OUT}= \pm 0.2V_{P.P}$ th at room temperature, cation : IEC pub.68-2-14.Nadf/f=< ± 1.0 ppm $dV_{OUT}= \pm 0.2V_{P.P}$ mon terminal.mon terminal.M) OQ)df/f=< ± 1.0 ppm $dV_{OUT}= \pm 0.2V_{P.P}$ No DQ)df/f=< $\pm $
th at room temperature, cation : IEC 60068-2-1 Ab $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.th at room temperature, cation : IEC 60068-2-2 Bb $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.th at room temperature, cation : IEC 60068-2-3 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3 Bb $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.woltage th at room temperature, cation : IEC pub.68-2-14.Na $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.M) DQ) hon terminal. $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.M) DQ) $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.M) DQ) $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.M) DQ) $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.M)
th at room temperature, cation : IEC 60068-2-1 AbThe electrical characteristics are satisfied.th at room temperature, cation : IEC 60068-2-2 Bbdf/f=<±1.0ppm
cation : IEC 60068-2-1 Abare satisfied.df/f=<±1.0ppm dV_{OUT}=<±0.2V_{P-P}
df/f=< $\pm 1.0ppm$ dV_{OUT}=< $\pm 0.2V_{P-P}$ th at room temperature, cation : IEC 60068-2-2 Bbdf/f=< $\pm 1.0ppm$ dV_OUT=< $\pm 0.2V_{P-P}$ th at room temperature, cation : IEC 60068-2-3df/f=< $\pm 1.0ppm$ dV_OUT=< $\pm 0.2V_{P-P}$ th at room temperature, cation : IEC 60068-2-3df/f=< $\pm 1.0ppm$ dV_OUT=< $\pm 0.2V_{P-P}$ voltage th at room temperature, cation : IEC 60068-2-2 Bbdf/f=< $\pm 1.0ppm$ dV_OUT=< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-2 Bbdf/f=< $\pm 1.0ppm$ dV_OUT=< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3df/f=< $\pm 1.0ppm$ dV_OUT=< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC pub.68-2-14.Nadf/f=< $\pm 1.0ppm$ dV_OUT=< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.M) DQ) non terminal.df/f=< $\pm 1.0ppm$ dV_OUT=< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.IA/JESD22-A114df/f=< $\pm 1.0ppm$ dV_OUT=< $\pm 0.2V_{P-P}$
th at room temperature, cation : IEC 60068-2-2 Bb The electrical characteristics are satisfied. df/f=<±1.0ppm dV _{OUT} =<±0.2V _{P-P} The electrical characteristics are satisfied.
th at room temperature, cation : IEC 60068-2-2 BbThe electrical characteristics are satisfied.th at room temperature, cation : IEC 60068-2-3 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-2 Bb $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.woltage th at room temperature, cation : IEC pub.68-2-14.Na $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.M) OQ) non terminal. $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.
cation : IEC 60068-2-2 Bbare satisfied.df/f=<±1.0ppm dV_{OUT}=<±0.2V_{P,P}
df/f=< ± 1.0 ppm dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3df/f=< ± 1.0 ppm dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-2 Bbdf/f=< ± 1.0 ppm dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3df/f=< ± 1.0 ppm dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3df/f=< ± 1.0 ppm dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.th at room temperature, cation : IEC pub.68-2-14.Nadf/f=< ± 1.0 ppm dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.M) DQ) non terminal.df/f=< ± 1.0 ppm dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.Mi DQ) NAf/f=< ± 1.0 ppm dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.Mi DQ) NAf/f=< ± 1.0 ppm dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.Mi N DQ)Af/f=< ± 1.0 ppm dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.IA/JESD22-A114Af/f=< ± 1.0 ppm dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.
th at room temperature, cation : IEC 60068-2-3 $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-2 Bb $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-2 Bb $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC pub.68-2-14.Na $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.M) DQ) mon terminal. $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.M/ LO2 LO2 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.M) DQ1 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.M) LO2 LO3 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.
th at room temperature, cation : IEC 60068-2-3 $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-2 Bb $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-2 Bb $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC pub.68-2-14.Na $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.M) DQ) mon terminal. $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.M/ LO2 LO2 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.M) DQ1 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.M) LO2 LO3 $df/f=<\pm 1.0ppm$ $dV_{OUT}=<\pm 0.2V_{P,P}$ The electrical characteristics are satisfied.
th at room temperature, cation : IEC 60068-2-3The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-2 Bbdf/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-2 Bbdf/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3df/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC pub.68-2-14.Nadf/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.M) DQ) mon terminal.df/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.
th at room temperature, cation : IEC 60068-2-3are satisfied.voltage th at room temperature, cation : IEC 60068-2-2 Bbdf/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-2 Bbdf/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3df/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC pub.68-2-14.Nadf/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.M) DQ) mon terminal.df/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.
cation : IEC 60068-2-3df/f=< \pm 1.0ppm dV_{OUT}=< \pm 0.2V _{P-P} The electrical characteristics are satisfied.woltage th at room temperature, cation : IEC 60068-2-2 Bbdf/f=< \pm 1.0ppm dV_{OUT}=< \pm 0.2V _{P-P} The electrical characteristics are satisfied.woltage th at room temperature, cation : IEC 60068-2-3df/f=< \pm 1.0ppm dV_{OUT}=< \pm 0.2V _{P-P} The electrical characteristics are satisfied.woltage th at room temperature, cation : IEC 60068-2-3df/f=< \pm 1.0ppm dV_{OUT}=< \pm 0.2V _{P-P} The electrical characteristics are satisfied.th at room temperature, cation : IEC pub.68-2-14.Nadf/f=< \pm 1.0ppm dV_{OUT}=< \pm 0.2V _{P-P} The electrical characteristics are satisfied.M) DQ)df/f=< \pm 1.0ppm dV_OUT=< \pm 0.2V _{P-P} The electrical characteristics are satisfied.
voltage th at room temperature, cation : IEC 60068-2-2 Bb $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3 $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3 $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.th at room temperature, cation : IEC pub.68-2-14.Na $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.M) OQ) $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.M) OQ) $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.M) DQ) $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.M) DQ) $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.IA/JESD22-A114 $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$
voltage th at room temperature, cation : IEC 60068-2-2 Bb $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3 $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3 $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.th at room temperature, cation : IEC pub.68-2-14.Na $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.M) OQ) $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.M) OQ) $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.M) DQ) $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.M) DQ) $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$ The electrical characteristics are satisfied.IA/JESD22-A114 $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P,P}$
voltage th at room temperature, cation : IEC 60068-2-2 BbThe electrical characteristics are satisfied.voltage voltage th at room temperature, cation : IEC 60068-2-3df/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.voltage th at room temperature, cation : IEC 60068-2-3df/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.th at room temperature, cation : IEC pub.68-2-14.Nadf/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.M) DQ)df/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.M) DQ)df/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.M) DQ)df/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.IA/JESD22-A114H
that room temperature, cation : IEC 60068-2-2 Bbare satisfied.voltagedf/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} voltageThe electrical characteristics are satisfied.that room temperature, cation : IEC 60068-2-3df/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} that room temperature, cation : IEC pub.68-2-14.Nadf/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} that room temperature, cation : IEC pub.68-2-14.Nadf/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} that room temperature, cation : IEC pub.68-2-14.Nadf/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.are satisfied.M) DQ)df/f=< ± 1.0 ppm dV _{OUT} =< ± 0.2 V _{P-P} The electrical characteristics are satisfied.IA/JESD22-A114
cation : IEC 60068-2-2 Bbvoltagedf/f=< \pm 1.0ppm dV _{OUT} =< \pm 0.2V _{P-P} The electrical characteristics are satisfied.voltageThe electrical characteristics are satisfied.th at room temperature, cation : IEC 60068-2-3df/f=< \pm 1.0ppm dV _{OUT} =< \pm 0.2V _{P-P} The electrical characteristics are satisfied.th at room temperature, cation : IEC pub.68-2-14.Nadf/f=< \pm 1.0ppm dV _{OUT} =< \pm 0.2V _{P-P} The electrical characteristics are satisfied.M) DQ)df/f=< \pm 1.0ppm dV _{OUT} =< \pm 0.2V _{P-P} The electrical characteristics are satisfied.M) DQ)df/f=< \pm 1.0ppm dV _{OUT} =< \pm 0.2V _{P-P} The electrical characteristics are satisfied.IA/JESD22-A114Image: test test test test test test test te
voltage $dV_{OUT}=<\pm0.2V_{P-P}$ The electrical characteristics are satisfied.The electrical characteristics are satisfied.0.5h \Leftrightarrow +85±2°C : 0.5h $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P-P}$ The electrical characteristics are satisfied.eh at room temperature, cation : IEC pub.68-2-14.Na $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P-P}$ The electrical characteristics are satisfied.M) DQ) $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P-P}$ The electrical characteristics are satisfied.M) DQ) $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P-P}$ The electrical characteristics are satisfied.IA/JESD22-A114 $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P-P}$ The electrical characteristics are satisfied.
voltage $dV_{OUT}=<\pm0.2V_{P-P}$ The electrical characteristics are satisfied.The electrical characteristics are satisfied.0.5h \Leftrightarrow +85±2°C : 0.5h $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P-P}$ The electrical characteristics are satisfied.eh at room temperature, cation : IEC pub.68-2-14.Na $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P-P}$ The electrical characteristics are satisfied.M) DQ) $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P-P}$ The electrical characteristics are satisfied.M) DQ) $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P-P}$ The electrical characteristics are satisfied.IA/JESD22-A114 $df/f=<\pm1.0ppm$ $dV_{OUT}=<\pm0.2V_{P-P}$ The electrical characteristics are satisfied.
voltageThe electrical characteristics are satisfied.th at room temperature, cation : IEC 60068-2-3are satisfied. $0.5h \Leftrightarrow +85\pm2^{\circ}C : 0.5h$ df/f=< $\pm 1.0ppm$ dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.th at room temperature, cation : IEC pub.68-2-14.Nadf/f=< $\pm 1.0ppm$ dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.M) DQ)df/f=< $\pm 1.0ppm$ dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.M) DQ)df/f=< $\pm 1.0ppm$ dV _{OUT} =< $\pm 0.2V_{P-P}$ The electrical characteristics are satisfied.IA/JESD22-A114Helectrical characteristics are satisfied.
that room temperature, cation : IEC 60068-2-3are satisfied. $0.5h \Leftrightarrow +85\pm 2^{\circ}C : 0.5h$ df/f=<±1.0ppm dV_{OUT}=<±0.2V_{P-P} The electrical characteristics are satisfied.th at room temperature, cation : IEC pub.68-2-14.Nadf/f=<±1.0ppm dV_{OUT}=<±0.2V_{P-P} The electrical characteristics are satisfied.M) 0Ω)df/f=<±1.0ppm dV_{OUT}=<±0.2V_{P-P} The electrical characteristics are satisfied.M) 0Ω)df/f=<±1.0ppm dV_{OUT}=<±0.2V_{P-P} The electrical characteristics are satisfied.IA/JESD22-A114df/f=<±1.0ppm dV_OUT=<±0.2V_{P-P}
cation : IEC 60068-2-3 $0.5h \Leftrightarrow +85\pm 2^{\circ}C : 0.5h$ df/f=<±1.0ppm
$\begin{array}{llllllllllllllllllllllllllllllllllll$
$\begin{array}{c} df/f=<\pm1.0ppm\\ dV_{OUT}=<\pm0.2V_{P-P}\\ The electrical characteristics\\ are satisfied.\\ \end{array}$
$\begin{array}{c} dV_{OUT} = < \pm 0.2 V_{P-P} \\ \text{The electrical characteristics} \\ \text{are satisfied.} \\ \end{array}$
The electrical characteristics are satisfied.M) $\Omega\Omega)$ df/f=<±1.0ppm $dV_{OUT}=<±0.2V_{P-P}$ The electrical characteristics are satisfied.IA/JESD22-A114Image: the satisfied structure the satisfied structure
that room temperature, cation : IEC pub.68-2-14.Naare satisfied.M) $\Omega\Omega)$ df/f=< ± 1.0 ppm $dV_{OUT}=<\pm 0.2V_{P-P}non terminal.The electrical characteristicsare satisfied.IA/JESD22-A114IA/JESD22-A114$
cation : IEC pub.68-2-14.Naare satisfied.M) $\Omega\Omega)$ df/f=< ± 1.0 ppm $dV_{OUT}=<\pm 0.2V_{P-P}non terminal.The electrical characteristicsare satisfied.IA/JESD22-A114IA/JESD22-A114$
$\begin{array}{ll} df/f=<\pm 1.0 ppm \\ dV_{OUT}=<\pm 0.2 V_{P-P} \\ \mbox{The electrical characteristics} \\ are satisfied. \\ \mbox{IA/JESD22-A114} \end{array}$
non terminal. IA/JESD22-A114
non terminal. The electrical characteristics are satisfied.
IA/JESD22-A114 are satisfied.
IA/JESD22-A114
el (HBM)
=1500Ω) df/f=<±1.0ppm
$dV_{OUT} = \le 0.2V_{P-P}$
non terminal. The electrical characteristics
are satisfied.
IA/JESD22-A115

12. Flatness of Terminal When the component is placed on the flat so	urface, the gap	from the connecting termina	al shall no	t exceed 0.05	mm.
		Gap : 0.05mm max.			
13. Reflow Profile		•			
-160	+260°C +220°C +180°C 1				
	Time				
1Preheat2Primary3Peak					
TITLE DSA321SDN TYPE SPECIFICATION		Remark			
Date 2017/06/05				Rev. –	Page 5/13

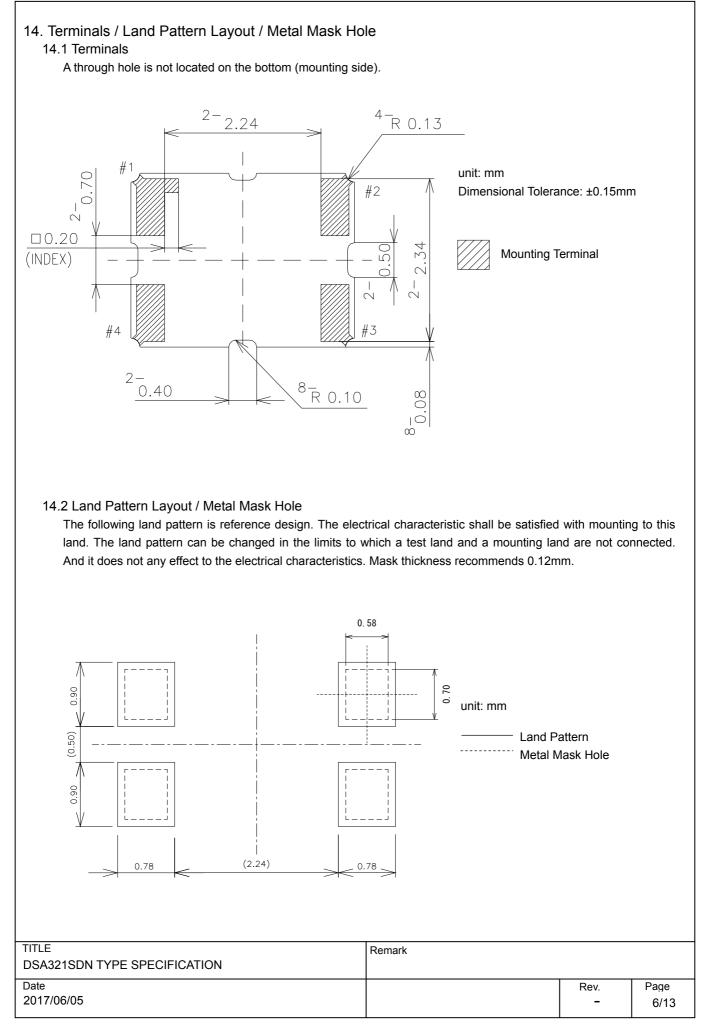

DM-Z0002: Style-010 Ver.1

.abel

ree

15. Packing Condition

- 15.1 Taping package
 - (1) Emboss tape format and dimensions See Fig.1
 - (2) Quantity on reel 2000pcs. max. / reel
 - (3) Taping specification
 - See Fig.2
 - No lack of a product.
 - (4) Reel specification See Fig.3
 - (5) Taping material list See right table.

15.2 Packing

The products packed in the antistatic bag.

*Moisture sensitivity level : IPC/JEDEC Standard J-STD-033 / Level 1

No dry pack required and baking after re-storage is unnecessary.

15.3 Packing box


Max 10 reels/packing box. However, in the case of less than 10 reels, It is contained by any boxes. The space in a box is fill up with a cushion.

15.4 Label detail

A Lot label is put on a reel and a shipping label and Pb-Free label is put on a packing box.

Lot label		Shipping label		Pb-free La
FREQ. Q'TY	(Model Name) (Spec. Number) (User's Parts Number) (Lot Number) (Nominal Frequency) (Quantity) DAISHINKU CORP.	ITEM SPEC DELIVERY DATE Q'TY NOTES DAISHINKU CORP	(Model Name) (Spec. Number) (Delivery Date) (Quantity) (User's Parts Number)	Ph Pb-fi

Lot label (Example)



Formation of a lot number

e.g. AH5101001			
_ <u>A</u> _	<u> H </u>	5101	001
Manufacturing site code	Product code	year/ month/ day	Serial No.

Taping material List

Emboss : PS (Conductivity)

Reel : PS (Conductivity)


Cover Tape : PET + Olefin Resin (Conductivity)

The notation method of a manufacture year, month, and day. (4digits alphanumeric character)


					-				- ·			
<u>YMDD</u> (4digits)				ts) e	e.g.) 20	01 <u>5</u> /0 <u>1</u>	/ <u>01</u> →	<u>5101</u>				
<u>Y</u> Year				1	digit (l	_ast di	git of Y	'ear)				
<u>M</u> Month				า 1	digit a	Iphanu	Imeric	symbo	ol			
<u>DD</u> Day			2	digits	numer	ical ch	aracte	ers of d	ay			
Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Symbol	1	2	3	4	5	6	7	8	9	0	Ν	D


TITLE DSA321SDN TYPE SPECIFICATION	Remark		
Date 2017/06/05		Rev. –	Page 7/13

Lot Label					
	Air Cu	shion			
Antistatic Bag	Pb-free	e Label			7
		ng Label			
The product is packed up with the method which	n does n	ot break in the handling by a sl	hippin	g agent.	
TLE SA321SDN TYPE SPECIFICATION		Remark			
ate				Rev.	Page
017/06/05				-	8/13

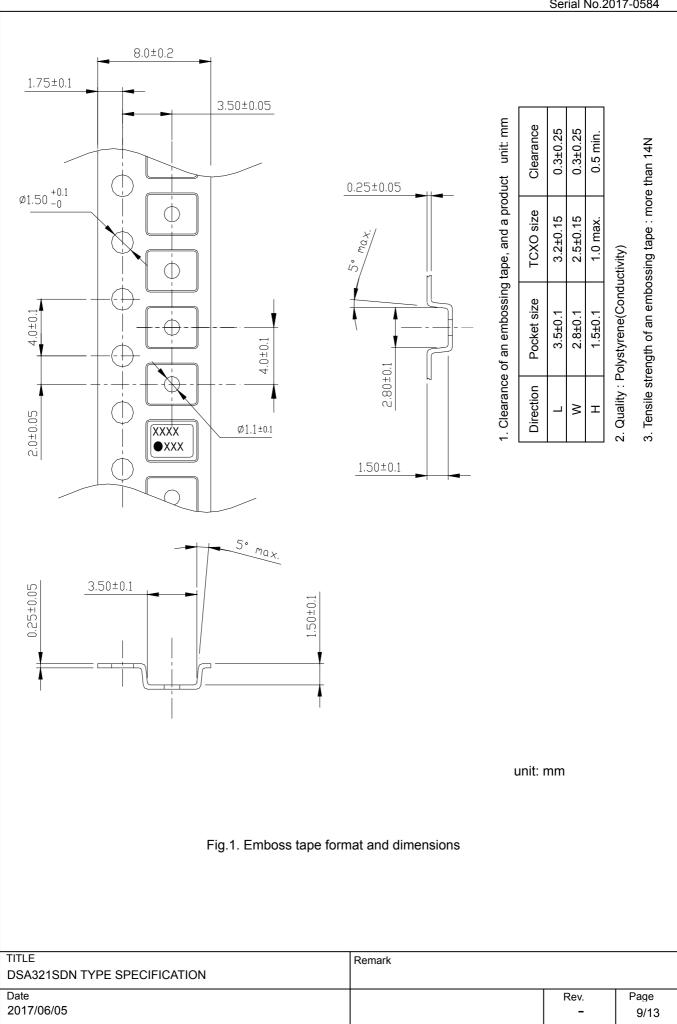

DM-Z0002: Style-010 Ver.1

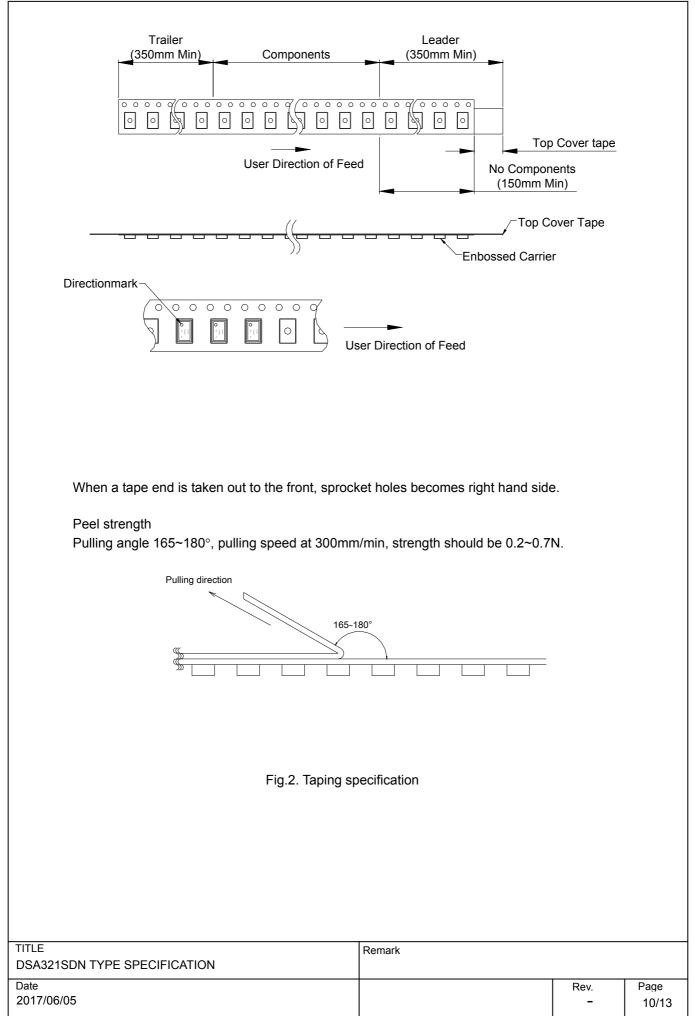

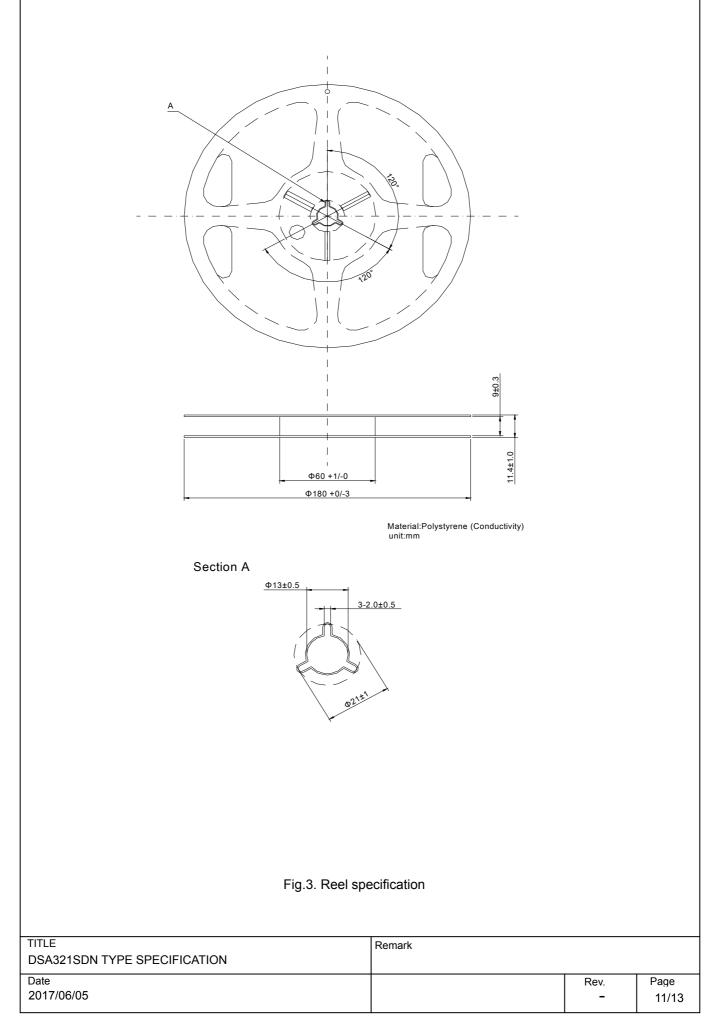

16. Notes on mounting and handling

16.1 Storage environment

- (1) The temperature and humidity of a storage place, Please give +5~+40°C and 40~85% as a standard.
- (2) Please use this product within one year from the packing label date of issue.
- (3) Please avoid the place which generates corrosive gas, and the place with much dirt.
- (4) Please keep it in a place with little temperature change.
- Dew condensation arises owing to a rapid temperature change and solderability becomes bad.
- 16.2 Be cautions to static electricity and high voltage.
- 16.3 This product has sufficient durability to fall and vibration. However, conditions may change to the fall after mounting to a PWB, and vibration. When you should drop on a floor the PWB which mounted the product or too much shock is added. Please use after a performance check.
- 16.4 Please check that the curvature of the substrate at the time of substrate cutting does not affect product. Moreover, especially when a product is near the position of a PWB guide pin, and the position of PWB break, be careful.
- 16.5 The part concerned does not correspond to washing.

16.6 Please repair at +260°C in 10s with hot air or +350°C in 5s with solder Iron.

17. Mandatory control

17.1 Ozone-depleting substance

It regulates by the U.S. air purifying method (November, 1990 establishment). ODS of CLASS1 and CLASS2 is not contained or used.

17.2 PBDE, PBBs

PBDE, PBBs are not contained into all the material currently used for this product.

17.3 RoHS

Following material restricted by RoHS (2011/65/EU) is not included or used. Lead, mercury, cadmium, hexavalent, chromium, PBB and PBDE.

17.4 Law Concerning Examination and Regulation of Manufacture, etc. of Chemical Substances

All the material currently used for this product is based on "Law Concerning Examination and Regulation of Manufacture, etc. of Chemical Substances". It is a registered material.

17.5 Lead

Leads, such as solder, are not used for this product. (Lead Free)

17.6 About the existence of silver and mercury use

The silver of very small quantity is contained in the conductive adhesives used for adhesion of Blank. Moreover, mercury is used. It does not get down.

18. The country of origin / factory name / address

Country of origin:	Japan
Factory name:	DAISHINKU Corp. Tottori Production Div.
Address:	7-3-21 Wakabadai minami, Tottori 689-1112

TITLE	Remark		
DSA321SDN TYPE SPECIFICATION			
Date		Rev.	Page
2017/06/05		-	12/13

2017-0584 REVERSION RECORD

Rev. No.	Date	Reason	Contents	Approved	Checked	Drawn
-	2017/06/05	-	Initial Release	A.Hishikawa	H.Takase	S.Fujihira