

# POLYMER PTC RESETTABLE FUSE




Part Number: TRB160-4

## 1、 Physical Dimensions

Unit:mm

Part Number	A	B	C	D	E	Lead
	Max	Max	TYP	Nor	Max	Φ
TRB160-4	9.2	15.2	5.1	4±1	3.1	0.60



Logo  
 B 160 Holding Current  
 Max.Interrupt voltage  
 XX Lot No.

## 2、 Electrical Characteristics


Part Number	I <sub>H</sub> (A)	I <sub>T</sub> (A)	V <sub>max</sub> (V)	I <sub>max</sub> (A)	T <sub>trip</sub> (Max time to trip)		Pd <sub>typ</sub> (W)	R <sub>min</sub> (Ω)	R <sub>max</sub> (Ω)	R1 <sub>max</sub> (Ω)
					Current(A)	Time(S)				
TRB160-4	1.60	3.2	30	40	8.00	8.0	0.90	0.030	0.095	0.160

I<sub>H</sub>: Holding Current: maximum current at which the device will not trip in 25°C still air.  
 I<sub>T</sub>: Tripping Current minimum current at which the device will trip in 25°C still air.  
 V<sub>max</sub>: Maximum voltage device can withstand without damage at rated current.  
 I<sub>max</sub>: Maximum fault current device can withstand without damage at rated voltage.  
 T<sub>trip</sub>: Maximum time to trip(s) at assigned current.  
 Pd<sub>typ</sub>: Rated working power.  
 R<sub>min</sub>: Minimum resistance of device prior to trip at 25°C.  
 R<sub>max</sub>: Maximum resistance of device prior to trip at 25°C.  
 R1<sub>max</sub>: Maximum resistance of device is measured one hours post reflow at 25°C.

## 3、 Thermal Derating

Part Number	Ambient Operating Temperature								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
TRB160-4	2.32	2.08	1.84	1.60	1.33	1.23	1.09	0.98	0.83

## 4、 Wave Soldering Parameters

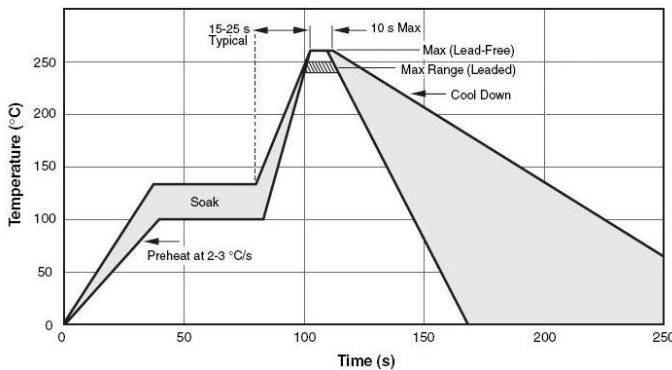

Profile Feature	Condition
Average Ramp-Up Rate (T <sub>max</sub> to TP)	4°C/second max.
Preheat	
-Temperature Min (T <sub>smin</sub> )	100°C
-Temperature Max (T <sub>smax</sub> )	125°C
-Time (T <sub>smin</sub> to T <sub>smax</sub> )	60-180 seconds
Peak Temperature (TP)	265°C
Max Time at Peak Temperature (t <sub>P</sub> )	5 seconds
Ramp-Down Rate	6 °C /second max.
Time 25°C to Peak Temperature	5 minutes max.
Storage Condition	0°C ~35°C, ≤ 70%RH, 2 Years

## 5、 Package Information

Packing quantity: 1000pcs/bag

Tape and Reel : 2000 pcs/reel

Tape and Reel Specifications: Devices taped using EIA468-B/IEC286-2 standards.

## 6、 Agency Recognition: TUV



Caution: Operation beyond the rated voltage or current may result in rupture electrical arcing or flame. Specifications are subject to change without notice.

TEL: 86-0769-3892 0554      FAX: 86-0769-8793 2077      E-mail: sales@tlcet.com.cn  
 Address: No.18, 5th GaoLi Road, TangXia Town, DongGuan, GuangDong, P.R China 523710